




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ³ : H01H 9/22	A1	(11) International Publication Number: WO 85/ 00073 (43) International Publication Date: 3 January 1985 (03.01.85)
(21) International Application Number: PCT/DK84/00055 (22) International Filing Date: 18 June 1984 (18.06.84) (31) Priority Application Numbers: 2797/83 1019/84 (32) Priority Dates: 17 June 1983 (17.06.83) 24 February 1984 (24.02.84) (33) Priority Country: DK (71) Applicant (for all designated States except US): AKTIE-SELSKABET LAUR. KNUDSEN, NORDISK ELEKTRICITETS SELSKAB [DK/DK]; Haraldsgade 53, DK-2100 Copenhagen OE (DK). (72) Inventors; and (75) Inventors/Applicants (for US only) : DENEKE, Albert [DK/DK]; Annexgaardsparken 53, DK-3500 Kirke Vaerloese (DK). PEDERSEN, Kurt, Flemming, Lindegaard [DK/DK]; Hjortespringet 1, DK-3400 Hilleroed (DK).	(74) Agent: BROCK-NANNESTAD, George; A/S LK-NES, Haraldsgade 53, DK-2100 Copenhagen OE (DK). (81) Designated States: AU, FI, JP, NO, US. Published With international search report.	

(54) Title: A MANUAL ACTUATING DEVICE FOR ENCLOSED ELECTRICAL SWITCHES

(57) Abstract

A manual device for operating an electrical switch. The handle is mounted in the door of the cubicle in which the switch is mounted. The device compensates for misalignment due to mounting tolerances and establishes a locking of the door in certain positions of the handle and switch. These functions are obtained by means of a misalignment compensating unit which is completely enclosed in a housing (10). The outer shape of the housing (10) interacts with a well (13) in the handle, and the rear part of the housing (10), one edge of which has a taper (18), interacts with a locking device in the shape of a slide (17).

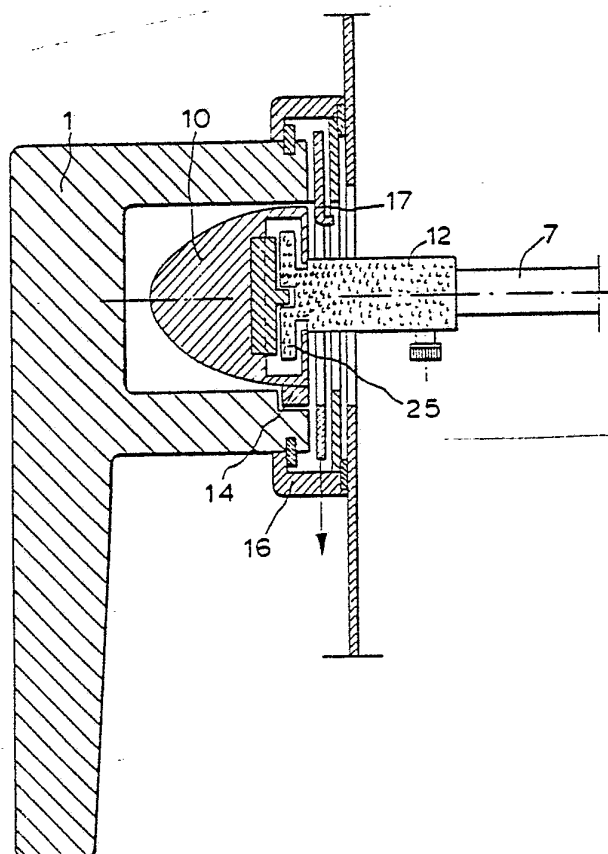

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	KR	Republic of Korea
AU	Australia	LI	Liechtenstein
BE	Belgium	LK	Sri Lanka
BG	Bulgaria	LU	Luxembourg
BR	Brazil	MC	Monaco
CF	Central African Republic	MG	Madagascar
CG	Congo	MR	Mauritania
CH	Switzerland	MW	Malawi
CM	Cameroon	NL	Netherlands
DE	Germany, Federal Republic of	NO	Norway
DK	Denmark	RO	Romania
FI	Finland	SD	Sudan
FR	France	SE	Sweden
GA	Gabon	SN	Senegal
GB	United Kingdom	SU	Soviet Union
HU	Hungary	TD	Chad
JP	Japan	TG	Togo
KP	Democratic People's Republic of Korea	US	United States of America

A manual actuating device for enclosed electrical switches.

The invention relates to a manual actuating device for an electrical switch which is built into a cubicle with the operating handle rotatably mounted in a door, of the kind that comprises misalignment-compensating means and with interlocks to prevent undesirable operation.

In order to enhance safety and for protection against the environment, industrial switches are frequently enclosed in cubicles. However, it is desirable to operate such switches without having to open the door of the cubicle, and the switch is supplied with an axle of a length suitable for the mounting of an operating handle on the outside of the door. However, it is important to be able to open the door in order to change fuses or the like, and the handle is therefore often supported in the door and connected to the switch axle by means of a claw coupling. However, safety requires that the door may only be opened when the switch is in its "off" position, and hence the handle is often connected with locking means for the door. There are further safety requirements that the handle shall only be connectable to the switch when the position of the handle and the position of the switch agree. In practical mounting of switches in cubicles and handles in doors certain misalignments are unavoidable, and hence there is a requirement that compensating means will allow friction-free operation in any case.

Several solutions to the above requirements are known. Common to them all is that they consist of loose parts that have to be mounted in correct mutual relationship on handle and switch axle respectively. This reduces security in that the possibility of errors increases and it also contributes to greater assembly time. In particular the locking of the door is complicated, and in most cases it is dependent on correct engagement of the locking device and the part that is connected to the switch axle.



These disadvantages are all avoided by means of the actuating device according to the invention which is characteristic in that the misalignment compensating means constitute an enclosed unit which is fastened to the switch axle and in that its outer shape and engagement with the handle which is mounted in the door control the logical functioning of the interlocks.

Claim 2 relates to a construction which ensures agreement between the indication of the handle and the position of the switch.

Claim 3 relates to the outer shape of the misalignment compensating means, which has the character of a "key" which is to correspond to a "keyhole" in the handle.

Claim 4 relates to the locking of the door in that action is taken on the outside of the misalignment compensating means.

Claim 5 relates to a detail in the door lock of claim 4.

Claim 6 relates to means for complete locking of door as well as of handle.

Claim 7 relates to means for obtaining secure engagement of the handle with the misalignment compensating means.

Claim 8 relates to means for ensuring correct in situ mounting of the misalignment compensating means in order that there is always agreement between the position of the handle and the position of the switch.

The invention is to be further described with reference to the drawing in which

Fig. 1 shows a construction according to the state of the art, and

Fig. 2 shows a construction according to the invention, and



Fig. 3 shows details in the construction of Fig. 2.

In Fig. 1 is shown the state of the art of a handle with misalignment compensating means for actuating a switch and with interlock to ensure that the door carrying the handle is locked when the switch is in the "on" position. A handle (1) is mounted on an axle (2) which is rotatably disposed in the door (not shown). The axle (2) carries a cross plate with projecting pins (3) which may engage slits (4) in an essentially circular disc (5). A further slit (6) is provided perpendicular to the first slits (4) surrounding the centre of the disc (5). In the slit is disposed the end of the actuating axle (7) of a switch. As the length of the slit (6) is greater than the width of the square axle (7) the disc (5) may perform a sideways motion on the switch axle (7). The disc (5) furthermore has a cut-out (8) covering part of the periphery. When using this, well-known, actuating device the length of the axle (7) has to be adjusted according to the mounting of the switch in the cubicle. The pins (3) and the slits (4) must get into engagement, and this can only occur when there is agreement between the position of the handle and the position of the switch. In case there is a certain misalignment between the directions of the axles (2) and (7) relative displacements between the pins (3) and the slits (4) and of the axle (7) in the slit (6) provide compensation during rotation of the handle, thus transmitting torque from the handle to the switch in order to let it operate. In order to obtain a locking action on the door when the switch is in the "on" position, a claw (9) which is mounted on the inside of the door projects in order that it grips the disc (5) unless it has a position corresponding to switch "off". In this position only, the claw is opposite the cut-out (8) in the disc (5).

It is apparent that an actuating device according to the state of the art as described above has certain mechanical weaknesses and disadvantages in use. In case the misalignment between the handle in the door and the switch in the cubicle is

large a large compensatory movement is required. This will increase wear, in particular in the slit (6) which again leads to undesirable slack in the movement. The claw (9) must have a large capture area in that it shall not only function properly in case of slack but also in case of full compensatory movement of the pins (3) in the slits (4) which gives the disc (5) a translatory movement as well as a rotation. The amount of compensation that this construction may give is limited by the fact that there is only a 90 degree movement involved in the actuation of most switches.

These disadvantages are completely avoided by the construction according to the invention shown in Fig. 2. A housing (10) which has a taper (11) contains the misalignment compensating means, and it is mounted on the switch axle (7) by means of a sleeve (12). The taper (11) eases introduction into and engagement with a well (13) in the handle (1). The handle (1) is rotatably mounted on the door which is not shown. The housing (10) for the misalignment compensating means carries on one of its sides a projection (14) which corresponds to a slot (15) in the well (13) of the handle (1) when the well (13) has the correct position with respect to the housing (10). In close proximity to the well (13) there is disposed a slide (17) carried in the bearing (16) of the handle, which slide is spring loaded as shown by the downwards pointing arrow of Fig. 3a. The slide (17) is forced aside when the housing (10) is introduced into the well (13), and upon completion of this operation the slide moves back by spring pressure and so prevents the pulling out of the housing (10). This function is used for locking the door in that the handle may not be separated from the switch axle (7) in this position (the "on" position). There is in practice a possibility of overriding the interlock by insertion of a special tool from the outside of the door, however this is not shown as it is a part of the state of the art. The door must be openable in the "off" position of the switch, and this is obtained by means of a tapered back edge (18) of the housing (10) which may push back the slide (17) and



so allow withdrawal of the housing (10) from the well (13). The major advantage of the interlocking obtained by means of the invention as compared to the state of the art is that the interlock acts on a part (10) of the actuating means that has already had its position mechanically corrected. This means that the interlocking means do not need to have a large capture area because they always have to act in the same place, and normal mechanical tolerances may be used in order to obtain easy introduction and withdrawal.

On Fig. 2 it may further be seen how it has been obtained that there is always the same relationship between the position of handle and switch as prescribed by the manufacturer. By means of the means indicated in claim 8 this may be obtained in those cases where the switch has a permanently fixed axle as well as in the case where an axle of square cross section is cut and pushed home in a hole provided in the switch. In the latter case there is the only requirement that there be provided in the hole a protusion or tab. The device thus functions in the following manner: the axle (7) with the slot or groove (22) is cut from stock and one end is put in the hole with a tab provided in the switch (not shown). This can only be performed one way. Subsequently the misalignment compensating means contained in the housing (10) are mounted on the axle (7) by means of the sleeve (12). Similarly this can only be performed one way because there is fitted an inwards projecting pin in the hole (24) so that the axle (7) can only be pushed into the sleeve (12) when the pin is allowed to slide in the groove (22). The sleeve is fixed to the axle by means of the screw shown. The door may be shut closed when the projection (14) is introduced in the slot (15) in the handle, and only under those circumstances. Hereby it is unambiguously ensured that one may read the position of the switch from the position of the handle with the door closed. In case a certain absolute requirements as to the position of the handle have to be adhered to (e.g. vertical signifies "on", horizontal signifies "off"), certain problems might occur if a switch can only be mounted one way for reasons of



space in the cubicle, and when the groove in the switch axle is disposed for the other way of mounting. In this case the pin in the hole (24) in the sleeve (12) may be driven out by a conscious use of tools and placed in the hole (23) instead, thus compensating for the changed mounting of the switch. There are typically 4 holes in the sleeve (12) corresponding to 4 different orientations of the groove (22) with which the pin has to cooperate.

In Fig. 3 is shown the heart of the misalignment compensating means enclosed in the housing (10). This is the part that compensates for the switch axle (7) not necessarily having the same axis of rotation as the handle (1), even though they may be parallel. It is a question of transmitting a rotational movement between two parallel axles, and from a kinematic point of view it is performed the same way as described in connection with known constructions. That is, use is made of two sliding movements in directions perpendicular to each other. According to the invention this is obtained by means of the part shown in Fig. 3b consisting of a plate (19) carrying tongues (20) and (21) perpendicular to each other. These interact with grooves in the housing (10) and in that part of the sleeve (12) which extends into the housing and which carries a collar (25) which is larger than the hole allowing the extension into the housing (10). The part shown in Fig. 3b transmits the movement of the handle (1) which drives the housing (10) of the misalignment compensating means, to the switch axle (7) through the sleeve (12). This is shown by means of different hatchings on Fig. 3a. The grooves are longer than the tongues (20) and (21) in order to permit the sideways movement in perpendicular directions. It should again be pointed out that kinematically the part shown in Fig. 3b performs the same action as the circular disc (5) in Fig. 1. However it is not to act as a door interlock as in the state of the art. In the present invention door interlock is performed on the hindmost part of an element, the position of which has already been compensated for.

Because the locking of the door occurs by means of a slide moving in parallel to the door, it is a simple matter to obtain both locking of the door as well as locking of the movement of the handle by means of a pin which is controlled from the outside of the handle. This pin is pushed in parallel with the axis of rotation of the handle in order to engage holes at selected places in slide and in door. A pin of this kind may be locked by means of a padlock which ensures that only authorized access to activation or opening of the door can occur.

The following advantages accrue from the actuating device according to the invention having the misalignment compensating means permanently mounted on the switch axle: the construction is smaller, lubrication is permanent, the weight and parts count are smaller, and the mounting of the handle in the door is greatly simplified in that there is no need for careful mounting of interlocking means.



P A T E N T C L A I M S

1. A manual actuating device for an electrical switch which is built into a cubicle with the operating handle rotatably mounted in a door, of the kind that comprises misalignment compensating means and with interlocks to prevent undesirable operation, c h a r a c t e r i s t i c i n that the misalignment compensating means constitute an enclosed unit (10) which is mounted on the switch axle (7), and
that the outer shape of the misalignment compensating means (10) and its engagement with the handle (1) control the logical functioning of the interlocks.
2. A manual actuating device according to claim 1, c h a r a c t e r i s t i c i n that the misalignment compensating means (10) can only engage the handle (1) when there is an unambiguous agreement between the position of the switch and the position of the handle.
3. A manual acuating device according to claim 2, c h a r a c t e r i s t i c i n that the outer shape of the misalignment compensating means (10) is non-rotationally symmetric and complementary to the receiving well (13) of the handle (1).
4. A manual actuating device according to claim 1, c h a r a c t e r i s t i c i n that in normal use the misalignment compensating means (10) may only be pulled out of the well (13) in the handle (1) when the switch is in the "off" position.
5. A manual actuating device according to claim 4, c h a r a c t e r i s t i c i n that a slide (17) in the



bearing (16) of the handle (1) only permits the extraction of the misalignment compensating means (10) by interaction of a taper (18) on only one of the rear-facing edges of the misalignment compensating means (10).



6. A manual actuating device according to claim 5, characteristic in that the slide (17) in the bearing (16) of the handle (1) may be locked by special means operated and locked from the front of the handle.

7. A manual actuating device according to claims 1 through 3, characteristic in that the front part (11) of the misalignment compensating means (10) has a taper to facilitate introduction into the receiving well (13) of the handle (1).

8. A manual actuating device according to claim 1, characteristic in that the switch axle (7) has a longitudinal slot (22), and that the sleeve (12) of the misalignment compensating means has at least two radial bores (23) and (24) in one of which an inwards protruding pin is placed for interaction with the longitudinal slot (22) upon introduction of the axle (7) in the sleeve (12).



1-2

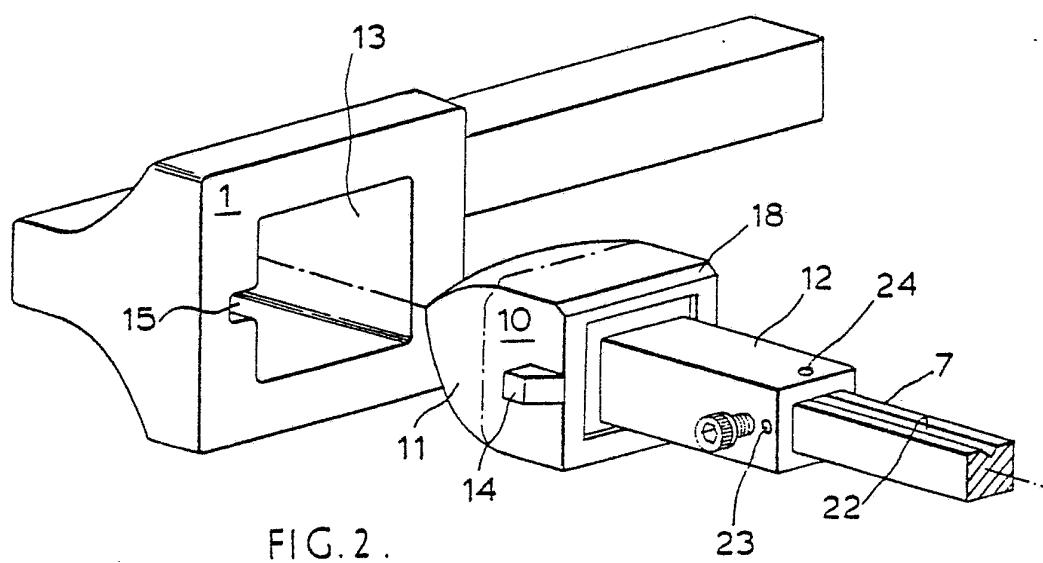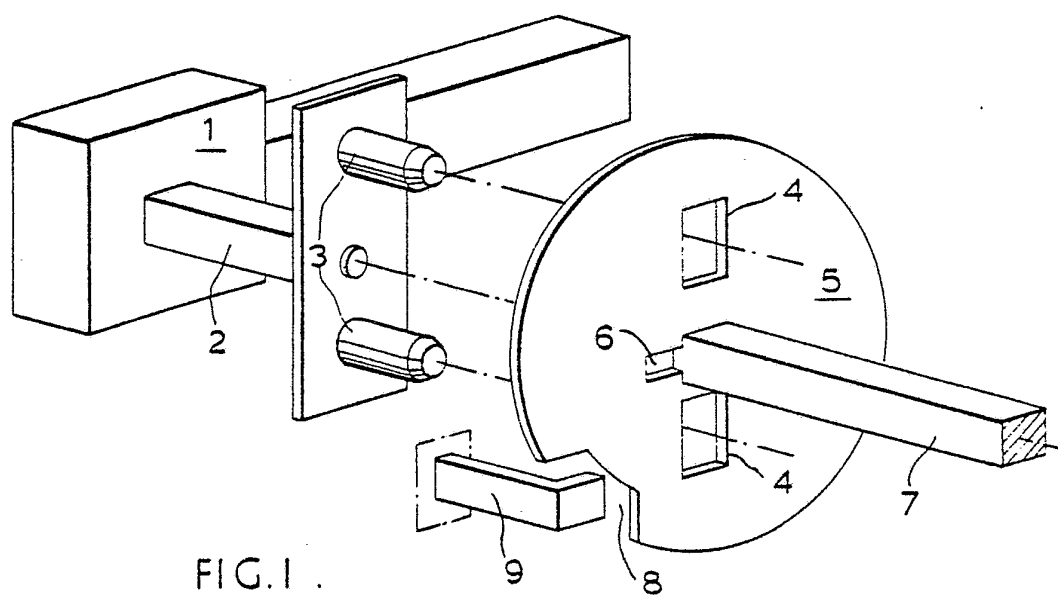

SUBSTITUTE



2-2

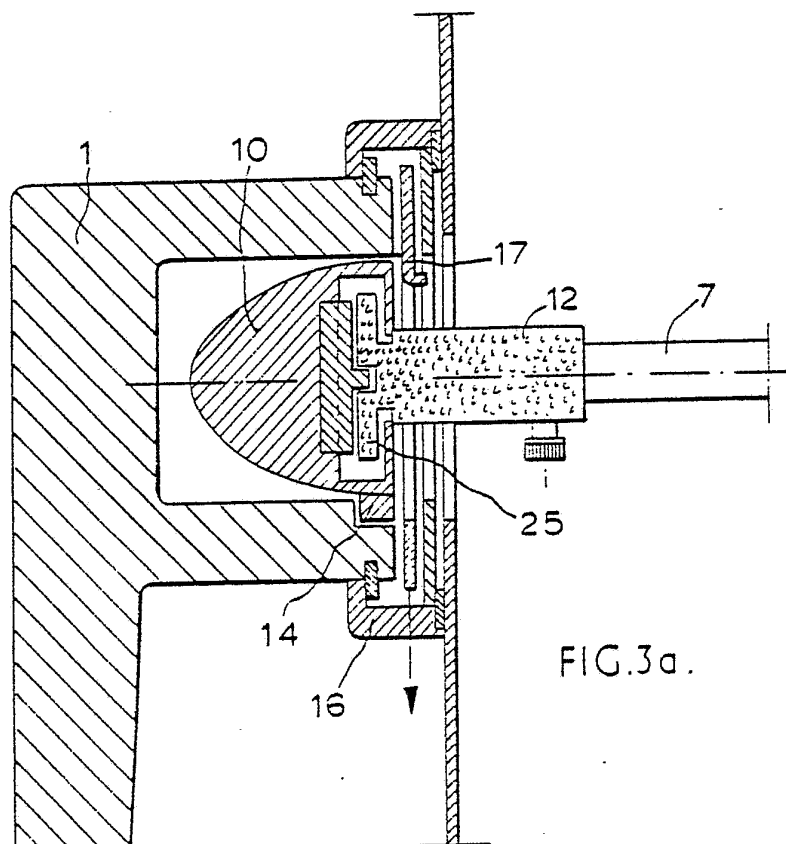


FIG. 3a.

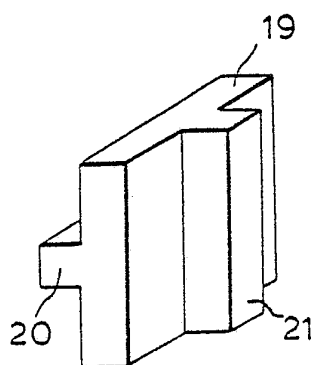


FIG. 3b.

INTERNATIONAL SEARCH REPORT

International Application No PCT/DK84/00055

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ³
 According to International Patent Classification (IPC) or to both National Classification and IPC **3**
 H 01 H 9/22

II. FIELDS SEARCHED
 Minimum Documentation Searched ⁴

Classification System	Classification Symbols
IPC 3	H 01 H 3/00-10, 54, 58, 9/00, 20-28, 31/00-10
Nat C1	21c:40/50, 41/01
US C1	200:50, 332, 335, 336, 338; 361:343, 344

 Documentation Searched other than Minimum Documentation
 to the Extent that such Documents are Included in the Fields Searched ⁵

SE, NO, DK, FI classes as above

III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁴		
Category ⁶	Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁴
X	US, A, 2 698 361 (E F MEKELBURG) 28 December 1954	1
X	US, A, 2 885 502 (C D EICHELBERGER ET AL) 5 May 1959	1
A	DE, A, 1 805 220 (CALOR-EMAG ELEKTRIZI- TÄTS-AKTIENGESSELLSCHAFT) 6 May 1970	
A	DE, A, 1 951 640 (SIEMENS AG) 8 July 1971	

* Special categories of cited documents: ¹⁸
 "A" document defining the general state of the art which is not considered to be of particular relevance
 "E" earlier document but published on or after the international filing date
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
 "O" document referring to an oral disclosure, use, exhibition or other means
 "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
 "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step
 "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
 "G" document member of the same patent family

IV. CERTIFICATION

Date of the Actual Completion of the International Search ¹
 1984-09-25

Date of Mailing of this International Search Report ¹
 1984-09-26

International Searching Authority ¹
 Swedish Patent Office

Signature of Authorized Officer ¹⁰

 Bertil Nordenberg