



(11) (21) (C) **2,197,038**
(22) 1997/02/07
(43) 1997/08/09
(45) 2000/04/25

(72) KALINA, Alexander I., US

(72) RHODES, Lawrence B., US


(73) EXERGY, INC., US

(51) Int.Cl.⁶ F01K 27/02, F01K 7/02

(30) 1996/02/09 (08/598,950) US

(54) **PROCEDE DE CONVERSION DE CHALEUR EN ENERGIE
UTILE**


(54) **CONVERTING HEAT INTO USEFUL ENERGY**

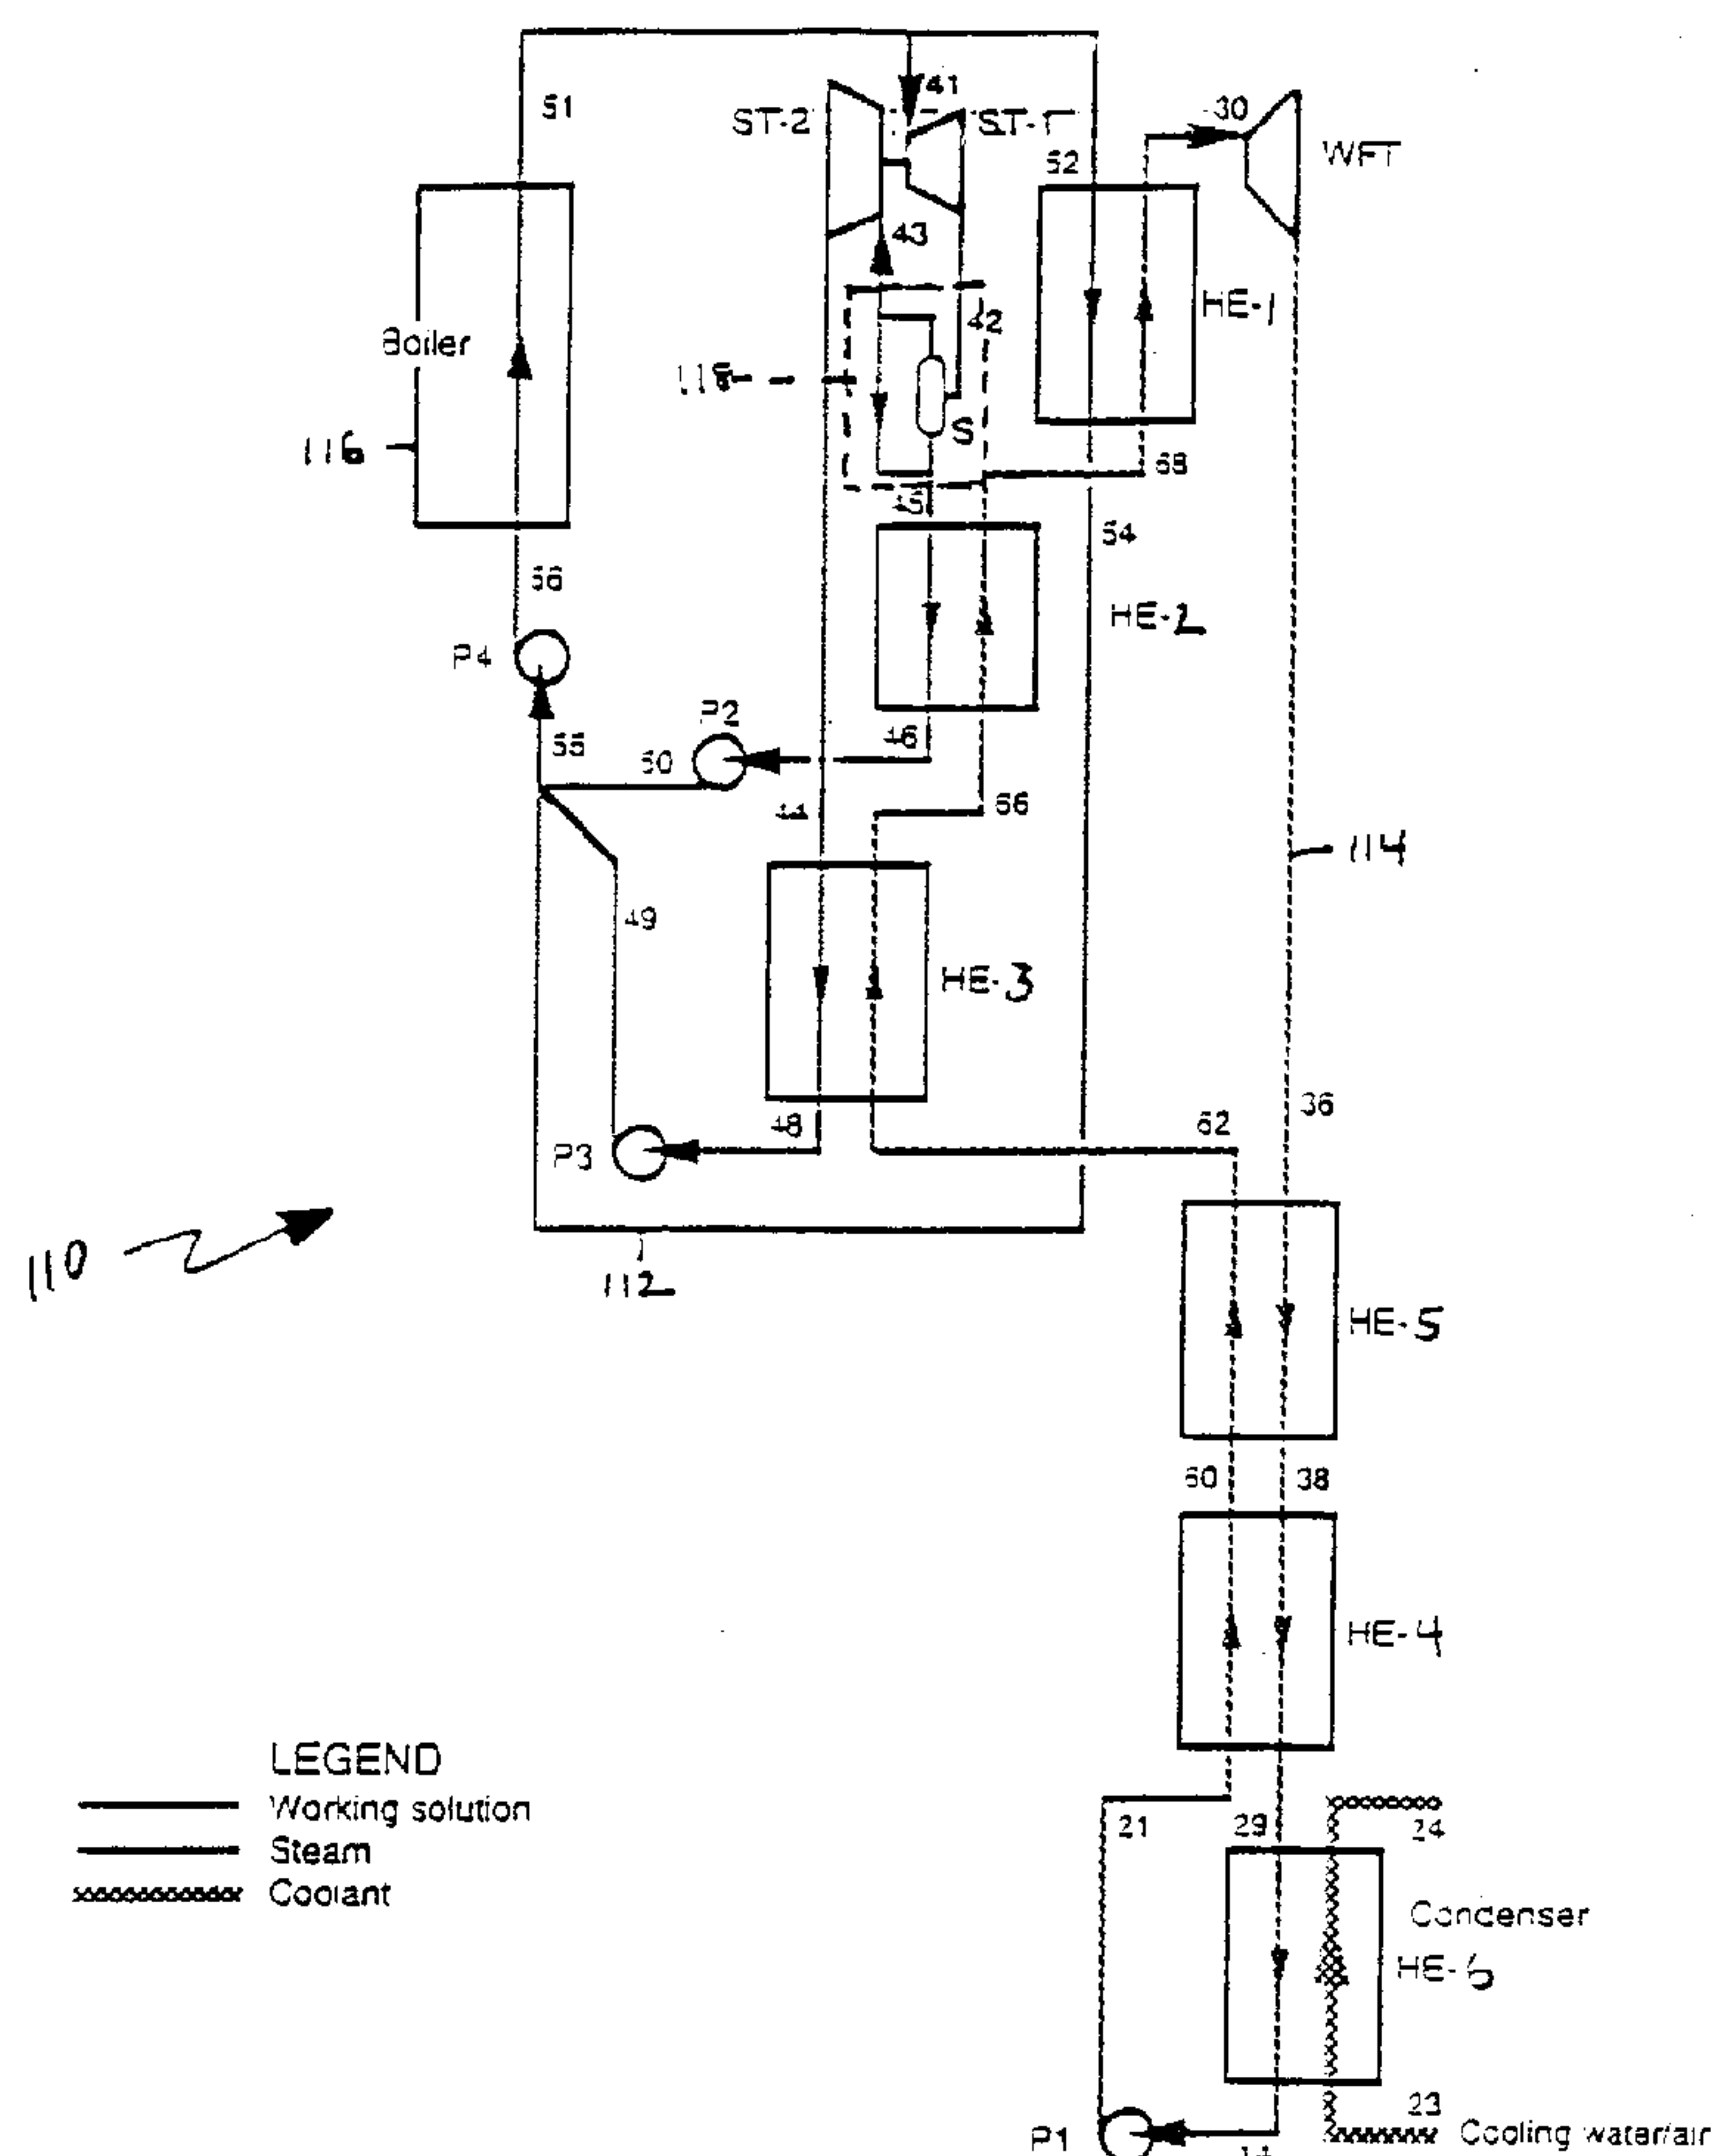

(57) L'invention concerne un procédé de conversion de la chaleur contenue dans un fluide primaire (de la vapeur, par exemple) en énergie utile par dilatation multi-étagée du fluide primaire, chauffage d'un fluide travail à

(57) Converting heat in a primary fluid (e.g., steam) to useful energy by multistage expansion of the primary fluid, heating of a multicomponent working fluid in a separate closed loop using heat of the primary fluid, and



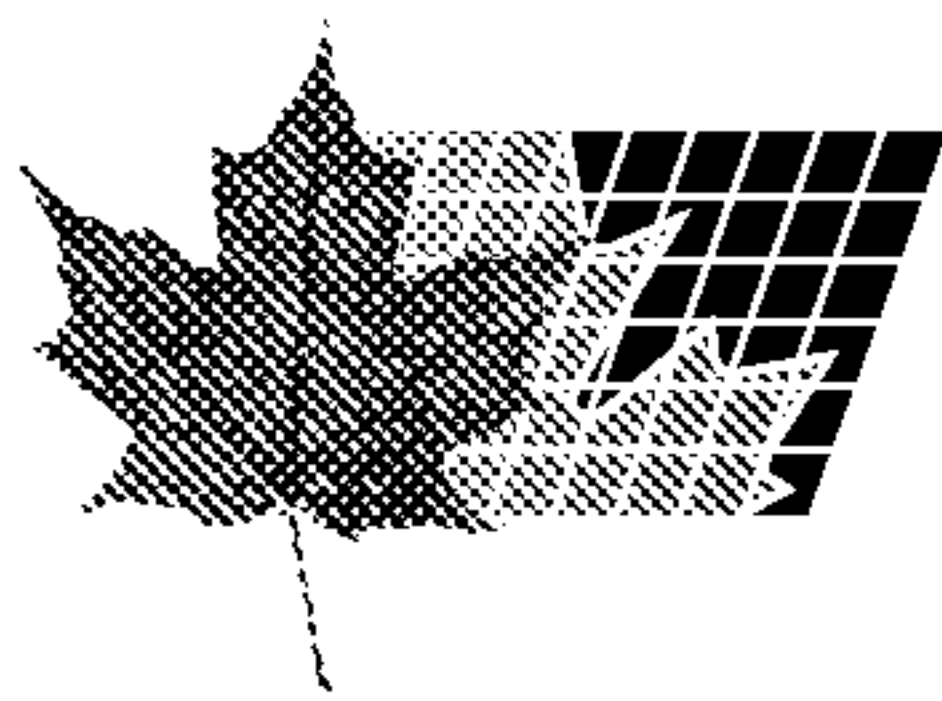

(11) (21) (C) **2,197,038**
(22) 1997/02/07
(43) 1997/08/09
(45) 2000/04/25

plusieurs composants dans un circuit fermé distinct en utilisant la chaleur du fluide primaire, et dilatation du fluide de travail à plusieurs composants. Le fluide primaire en phase vapeur est dilaté dans un dilatateur de premier étage pour obtenir de l'énergie utile et produire un fluide primaire partiellement dilaté. Le courant de fluide primaire partiellement dilaté est ensuite séparé en composants liquides et gazeux, et subdivisé en courant gazeux (qui est dilaté dans un dilatateur de deuxième étage) et en un autre courant de fluide primaire (qui sert à chauffer le fluide de travail à plusieurs composants).

expansion of the multicomponent working fluid. The primary fluid in a vapor state is expanded in a first stage expander to obtain useful energy and to produce a partially expanded primary fluid. The partially expanded primary fluid stream is then separated into liquid and vapor components and split into a vapor stream (which is expanded in a second stage expander) and a further primary stream (which used to heat the multicomponent working fluid).



2197038

CONVERTING HEAT INTO USEFUL ENERGY

Abstract of the Disclosure

Converting heat in a primary fluid (e.g., steam) to
5 useful energy by multistage expansion of the primary fluid,
heating of a multicomponent working fluid in a separate
closed loop using heat of the primary fluid, and expansion
of the multicomponent working fluid. The primary fluid in
a vapor state is expanded in a first stage expander to
10 obtain useful energy and to produce a partially expanded
primary fluid. The partially expanded primary fluid stream
is then separated into liquid and vapor components and
split into a vapor stream (which is expanded in a second
stage expander) and a further primary stream (which used to
15 heat the multicomponent working fluid).

163299.b11

CONVERTING HEAT INTO USEFUL ENERGYBackground of the Invention

The invention relates to converting thermal energy
5 (e.g., heat produced by the combustion of toxic and/or
corrosive fuels such as municipal waste or heat from
geofluid) into useful (e.g., mechanical and electrical)
energy.

In the process of combustion of fuels which generate
10 toxic and/or corrosive flue gases, it is necessary to
maintain the temperature of the boiler's tubes below some
temperature level in order to prevent rapid corrosion of
these tubes. This is usually achieved by circulating
boiling water through these tubes and producing, as a
15 result, saturated or slightly superheated steam.
Conventionally, this steam is then subjected to expansion
in a steam turbine, in order to produce useful power.
However, because this steam is usually saturated or
superheated only slightly, expansion of it causes the
20 turbine to work in the wet region, which drastically
reduces efficiency and longevity of the steam turbine.
Because the steam turbine cannot operate in conditions
where wetness of the vapor exceeds 12-13%, it is therefore
often necessary to stop the expansion in the middle of the
25 expansion and separate and remove the liquid and thereafter
continue further expansion.

Useful energy can also be obtained from geofluid
containing steam and brine, as described, e.g., in U.S.
Patent No. 5,440,882.

30 Summary of the Invention

In one aspect, the invention features, in general,
converting heat in a primary fluid (e.g., steam) to useful
energy by multistage expansion of the primary fluid,
heating of a multicomponent working fluid in a separate
35 closed loop using heat of the primary fluid, and expansion

of the multicomponent working fluid. The primary fluid in a vapor state is expanded in a first stage expander to obtain useful energy and to produce a partially expanded primary fluid stream. The partially expanded primary fluid stream is then separated into liquid and vapor components and split into a vapor stream (which is expanded in a second stage expander) and a further primary stream (which used to heat the multicomponent working fluid).

In preferred embodiments, spent multicomponent working fluid (that has been expanded) is condensed at a condenser and passed through a recuperative heat exchanger in which heat from the spent multicomponent working fluid is used to recuperatively heat the condensed multicomponent working fluid. The primary fluid can be heated in a boiler or can be steam from a geofluid.

In another aspect, the invention features, in general, converting heat to useful energy by using two closed loops. One closed loop contains a primary working fluid that is heated by an external source of heat (e.g., in a boiler combusting corrosive or toxic fuel) and then split into two streams. The first stream is expanded to obtain useful energy (e.g., in a turbine), and the second stream is used at a first heat exchanger to heat a multicomponent working fluid in the second closed loop. The heated multicomponent working fluid is then also expanded to obtain further useful energy (e.g., in a second turbine).

In preferred embodiments the first stream is split into two streams, one of which is a vapor stream that is expanded to obtain useful energy, and both of the additional streams are used to also heat the multicomponent working fluid at two further heat exchangers.

In another aspect, the invention features, in general, a power system for converting heat in a geofluid containing steam and brine to useful energy. The steam is

separated from the brine and expanded, and heat in the steam is used to heat a multicomponent working fluid in a separate closed loop at a first heat exchanger. The separated brine is used to further heat the multicomponent
5 working fluid at a second heat exchanger, and is then discharged from the system. The multicomponent working fluid is then expanded to obtain further useful energy.

In preferred embodiments the spent multicomponent working fluid is condensed at a condenser and passed
10 through a recuperative heat exchanger in which heat from the spent multicomponent working fluid is used to recuperatively heat the multicomponent working fluid after being condensed at the condenser. The heat used to heat the multicomponent working fluid in the first heat
15 exchanger is obtained from steam that has been expanded and then split into two streams. One stream is a vapor that is expanded to obtain useful energy, and the other stream passes through the first heat exchanger, and is thereafter throttled and recombined with the expanded stream.

20 Other advantages and features of the invention will be apparent from the following description of particular embodiments thereof and from the claims.

Brief Description of the Drawings

Fig. 1 is a schematic representation of one
25 embodiment of the invention in which heat is obtained from combustion of fuel.

Fig. 2 is a schematic representation of a second embodiment of the invention in which heat is obtained from geofluid containing steam and brine.

- 4 -

Description of Particular Embodiments of the Invention

Referring to Fig. 1, there is shown apparatus 110 for converting heat into mechanical energy. Apparatus 110 includes first and second closed loops 112, 114. Loop 112 includes water as a primary working fluid. Loop 114 includes a water/ammonia mixture as a multicomponent working fluid. Systems with multicomponent working fluids are described in Alexander I. Kalina's U.S. Patents Nos. 4,346,561; 4,489,563; 4,548,043; 4,586,340; 4,604,867; 4,732,005; 4,763,480; 4,899,545; 4,982,568; 5,029,444; 5,095,708; 5,440,882; 5,450,821; 5,572,871 and 5,588,298.

In closed loop 112, condensed liquid water with parameters as at point 56 is sent through tubes into boiler 116, which combusts corrosive and/or toxic fuels. In the tubes in boiler 116, water boils, producing dry, saturated steam with parameters as at point 51. Steam with parameters as at point 51 is divided into first and second primary streams having parameters as at points 41 and 52, respectively. The stream of steam with parameters as at point 41 is sent into the first stage of steam turbine ST-1, which is a first expander where the steam expands to an intermediate pressure, producing power and leaving ST-1 with parameters as at point 42. This steam, already wet, is sent into separator S in separator/splitter 118, where the liquid in the expanded first primary stream is separated from the vapor. Part of the separated vapor having parameters as at point 43 makes up a third primary stream that is sent into the second stage, ST-2 (a second expander) of the steam turbine. The remainder of the steam and all of the liquid leaving separator S are combined to create a fourth primary stream with parameters as at point 45. The third primary stream of steam having parameters as at point 43 (see above) is expanded in the second stage of

steam turbine ST-2, producing power and obtaining parameters as at point 44. As a result, second, third, and fourth primary streams of saturated or wet steam are created having parameters as at points 52, 44, and 45, respectively. The second primary stream with parameters as at point 52 has the highest pressure and temperature. The fourth primary stream with parameters as at point 45 has intermediate pressure and temperature, and the third primary stream with parameters as at point 44 has the lowest pressure and temperature, respectively. Steam in the second primary stream with parameters as at point 52 is sent into heat exchanger HE-1 where it is condensed and then subcooled, releasing heat and leaving HE-1 with parameters as at point 54. Steam in the fourth primary stream with parameters as at point 45 is sent into second heat exchanger HE-2 where it is condensed and subcooled, releasing heat and leaving third HE-2 with parameters as at point 46. This fourth primary stream is then pumped by pump P-2 up to a pressure equal to that of steam in the second primary stream having parameters as at point 54 (see above) and obtains parameters as at point 50. Steam in the third primary stream with parameters as at point 44 is sent into third heat exchanger HE-3 where it is condensed and subcooled, releasing heat and leaving heat exchanger HE-3 with parameters as at point 48. This third primary stream is then pumped by pump P-3 to a pressure equal to that of the second and fourth primary steams having parameters as at points 54 and 50 (see above) and obtains parameters as at point 49. Thereafter, second, third, and fourth primary streams having parameters as at points 54, 49, and 50, respectively, are combined to create a stream with parameters as at point 55. This stream is then pumped by pump P-4 to the required pressure, acquiring parameters as at point 56 (see above), and is sent into boiler 116.

35 In second closed loop 114, a fully-condensed

multicomponent working fluid having parameters as at point 14 is pumped to the required high pressure by pump P-1 and obtains parameters as at point 21. Thereafter, a stream of multicomponent working fluid with parameters as at point 21
5 passes through fourth heat exchanger HE-4 where it is heated and obtains parameters as at point 60. Preferably the state of the working fluid at point 60 is a saturated liquid. Thereafter, the stream of multicomponent working fluid with parameters as at point 60 is passed through
10 recuperative fifth heat exchanger HE-5 where it is partially vaporized, obtaining parameters as at point 62. A stream with parameters as at point 62, thereafter, is sent into third heat exchanger HE-3 (see above) where it is further heated and vaporized by heat released in third heat
15 exchanger HE-3 and obtains parameters as at point 66. Thereafter, a stream of working fluid having parameters as at point 66 is sent into second heat exchanger HE-2 where it is further heated and fully vaporized by heat released in second heat exchanger HE-2. A stream of multicomponent
20 working fluid leaving heat exchanger HE-2 with parameters as at point 68 (preferably in the state of saturated vapor), enters first heat exchanger HE-1 where it is superheated by heat released in heat exchanger HE-1 and leaves with parameters as at point 30. A stream of
25 multicomponent working fluid with parameters as at point 30 passes through working fluid turbine WFT (a second expander) where it is expanded, producing power and leaving WFT as a spent multicomponent working fluid with parameters as at point 36. The spent multicomponent working fluid
30 with parameters as at point 36 passes through recuperative heat exchanger HE-5 where it is cooled and partially condensed, releasing heat (see above) and leaves HE-5 with parameters as at point 38. Thereafter, a stream of multicomponent working fluid with parameters as at point 38
35 enters recuperative heat exchanger HE-4 where it is further

cooled and condensed, releasing heat (see above) and leaves HE-4 with parameters as at point 29. A stream of a partially condensed multicomponent working fluid having parameters as at point 29 passes through a condenser HE-6 where it is fully condensed by a stream of cooling water or cooling air 23-24 and obtains, as a result, parameters as at point 14.

All specific parameters of all key points of the described process are presented in Table 1.

10 Apparatus 110 provides effective conversion of heat produced by combustion of toxic and corrosive fuels. A summary of performance of the proposed Fig. 1 system is presented in Table 2 and shows a net thermal efficiency of 28.14%. In a traditional system based on direct expansion 15 of the steam, steam leaving the boiler with the identical parameters as at point 51 would produce a net efficiency of 21%. As a result, the Fig. 1 system increases efficiency of heat conversion and power generation by 33%.

Referring to Fig. 2, there is shown power system 210 20 designed for utilization of heat from geofluid consisting of steam and brine. The high mineralization of brine limits the extent to which it can be practically cooled and results in conditions that are similar in some respects to the Fig. 1 system designed for utilization of corrosive and 25 toxic fuels. The similarity of conditions permits some of the same principles to be utilized in geofluid power system 210.

In geofluid power system 210, geofluid comprising steam and mineralized brine having parameters as at point 30 151 enters separator S-1 where it is separated into a stream of saturated steam having parameters as at point 141 and stream of mineralized liquid brine having parameters as at point 152. Stream of steam having parameters as at point 141 enters into the high pressure steam turbine ST-1, 35 where it is expanded to intermediate pressure obtaining

parameters as at point 142. Steam with parameters as at point 142 is wet and enters into separator S-2 in separator/splitter 212, where the liquid in the expanded steam is separated from the vapor and split into a first
5 stream with parameters as at point 143 and a second stream with parameters as at point 146. Steam exiting separator S-2 is divided into two substreams with parameters as at point 143 and point 145, respectively. Thereafter, the first stream (steam with parameters as at point 143) is
10 sent into the low pressure steam turbine ST-2 where it is expanded to a low pressure and produces useful energy. High pressure steam turbine ST-1 and low pressure steam turbine ST-2 are first and second stage expanders, respectively, for the steam. After expansion at low
15 pressure turbine ST-2, the first stream obtains parameters as at point 144. Stream of steam with parameters as at point 145 is mixed with the liquid removed from separator S-2 and creates the second stream with parameters as at point 146. The second stream passes through first heat
20 exchanger HE-1, where it is condensed and subcooled, exiting this heat exchanger with parameters as at point 148. Thereafter, stream of condensate with parameters as at point 148 is throttled at throttle valve TV to the pressure equal to the pressure of the stream from ST-2
25 having parameters as at point 144 and is mixed with this stream. As a result of such a mixing, the stream of a partially condensed steam having parameters as at point 149 is created. The stream having parameters as at point 149 passes through steam condenser HE-6, where it is cooled by
30 cooling water or air, and fully condenses, obtaining the parameters as at point 150. The condensed stream is then discharged from system 210.

Liquid brine removed from separator S-1 and having parameters as at point 152 (see above) passes through
35 second heat exchanger HE-2, where it is cooled and obtains

parameters as at point 154. Heat released from the brine in heat exchanger HE-2 is transferred to a working fluid of the binary cycle which is described below. The cooled brine is thereafter discharged from system 210 at an acceptable temperature.

Working fluid of a binary cycle which is fully condensed and having parameters as at point 114 is pumped by pump P-1 and obtains parameters as at point 121. Thereafter, the stream of working fluid with parameters as at point 121 passes through recuperative heat exchanger HE-3, where it is heated and obtains parameters as at point 160. The state of working fluid with parameters as at point 160 preferably is saturated liquid. Thereafter, the stream with parameters as at point 160 passes through heat exchanger HE-4 where it is partially boiled and obtains parameters as at point 166. Thereafter, the stream of working fluid having parameters as at point 166 passes through first heat exchanger HE-1, where it is heated by heat from the second stream from separator/splitter 212 and is fully vaporized, leaving heat exchanger HE-1 with parameters as at point 168. Multicomponent working fluid having parameters as at point 168 passes through second heat exchanger HE-2 where it is superheated by heat released in the process of cooling liquid geothermal brine. As a result of heating in heat exchanger HE-1, working fluid obtains parameters as at point 130 with which it enters the working fluid turbine WFT. In turbine WFT, working fluid is expanded producing work and obtaining parameters as at point 136. Thereafter, spent multicomponent working fluid having parameters as at point 136 passes through recuperative heat exchanger HE-4 where it is partially condensed and leaves this heat exchanger with parameters as at point 138. Heat released in heat exchanger HE-4 is utilized for initial evaporation of the working fluid (between points 160 and 166). Thereafter,

working fluid having parameters as at point 138 passes through heat exchanger HE-3 where it is further condensed obtaining parameters as at point 129. Heat released in heat exchanger HE-3 is utilized for preheating of an
5 oncoming stream of working fluid (between points 121 and 160) as described above. Stream of working fluid having parameters as at point 129 is further sent into condenser HE-5, where it is fully condensed by cooling water or air obtaining parameters as at point 114. The cycle of the
10 working fluid is closed.

In power system 210, heat of condensation of steam after the second stage of a turbine (ST-2) is not used for heating and vaporizing working fluid in the binary cycle (as in system 110 in Fig. 1) but rather is rejected to the
15 ambient. This is because such heat is of a very low temperature and does not contain the potential to generate power.

Power system 210 shown on Fig. 2, being applied to the utilization of geothermal energy, provides increased
20 efficiency of approximately 30% compared with the conventional systems in which steam is expanded fully to the lowest possible pressure, and liquid is throttled to produce additional steam which, as well, is expanded to the lowest possible pressure.

25 The parameters of all streams in power system 210 at all of the key points are presented in Table 3, and the summary of performance of this system is presented in Table 4.

Both described systems 110, 210 employ multi-stage
30 expansion of steam which is used as a heat source with utilization of heat of condensation for heating and vaporizing a multicomponent working fluid in the closed binary cycle. Also, in both cases, the multicomponent working fluid in the binary cycle is a mixture of at least
35 two components. The composition of components in the

multicomponent working fluid is chosen in such a way as to provide that the initial temperature of condensation of a working fluid, after expansion, is higher than the initial temperature of boiling of the same working fluid before
5 expansion. This, in turn, provides for recuperative initial boiling of oncoming working fluid.

Other embodiments of the invention are within the scope of the appended claims. For example, it is possible in the system presented on Fig. 1, to use as a source of
10 heat not steam but a mixture of steam and liquid and use the heat released by cooling this liquid for superheating the working fluid of a binary cycle.

Table 1

#	PpsiA	X	T°F	H BTU/lb	G/G30	Flow lb/hr	Phase	
5	14	115.93	.7338	86	-15.96	1	93,701	SatLiquid
	21	534	.7338	87.46	-13.64	1	93,701	Liq 1 0°
	29	116.23	.7338	160.12	375.03	1	93,701	Wet .4203
	30	495	.7338	590	974.33	1	93,701	Vap 237°
	36	117.53	.7338	354.53	851.83	1	93,701	Vap 9 °
10	37	116.83	.7338	257.18	796.41	1	93,701	SatVapor
	38	116.53	.7338	201.10	497.89	1	93,701	Wet .3001
	41	1529.67	Steam	599	1166.81	.6106	57,213	SatVapor
	42	664	Steam	497.37	1116.46	.6106	57,213	Wet .12
	43	664	Steam	497.37	1202.61	.4137	38,767	SatVapor
15	44	161.13	Steam	364.16	1109.19	.4137	38,767	Wet .1009
	45	664	Steam	497.37	935.26	.1969	18,446	Wet .3724
	46	664	Steam	497.37	484.38	.1969	18,446	SatLiquid
	48	146.13	Steam	277.12	246.23	.4137	38,767	Liq 79°
	49	1514.67	Steam	280.20	252.05	.4137	38,767	Liq 317°
20	50	1514.67	Steam	501.26	488.66	.1969	18,446	Liq 96°
	51	1529.67	Steam	599	1166.81	.7064	66,186	SatVapor
	52	1529.67	Steam	599	1166.81	.0958	8,973	SatVapor
	54	1514.67	Steam	497.37	484.13	.0958	8,973	Liq 100°
	55	1514.67	Steam	374.55	349.45	.7064	66,186	Liq 223°
25	56	1559.67	Steam	374.66	349.63	.7064	66,186	Liq 227°
	60	524	.7338	195.70	109.22	1	93,701	SatLiquid
	61	519	.7338	251.78	407.74	1	93,701	Wet .4732
	62	514	.7338	268.12	463.16	1	93,701	Wet .4029
	66	509	.7338	355.16	820.19	1	93,701	SatVapor
30	68	502	.7338	488.37	908.95	1	93,701	Vap 134°
	23	•	Air	68	8.75	64.1617	6,012,004	
	24	•	Air	93.08	14.84	64.1617	6,012,004	

2197038

Table 2

Performance Summary KCS23

	Heat to Steam Boiler	15851.00 kW	577.22 BTU/lb
	Heat Rejected	10736.96 kW	390.99 BTU/lb
5	Σ Turbine Expansion Work	5269.74 kW	191.90 BTU/lb
	Gross Electrical Output	4900.86 kW	178.47 BTU/lb
	Cycle Pump Power	166.12 kW	6.05 BTU/lb
	Cooling Air Fans	139.98 kW	5.10 BTU/lb
	Plant Net Output	4594.76 kW	167.32 BTU/lb
10	Gross Cycle Efficiency	29.87 %	
	Net Thermal Efficiency	28.99 %	
	First Law Efficiency	33.25 %	
	Second Law Efficiency	68.22 %	
	Second Law Maximum	48.73 %	
15	Turbine Heat Rate	11771.21 BTU/kWh	
	Water-Ammonia Flow Rate	93700.80 lb/hr	

- 14 -

Table 3

	#	PpsiA	X	T°F	H BTU/lb	G/G30	Flow lb/hr	Phase
5	14	130.95	.7102	96.80	-9.16	1	394,231	SatLiquid
	21	614.50	.7102	98.22	-6.81	1	394,231	Liq 116j
	29	131.25	.7102	176.70	384.01	1	394,231	Wet .4328
	30	588.50	.7102	404.60	858.49	1	394,231	Vap 32j
	36	132.55	.7102	262.96	758.47	1	394,231	Wet .0575
10	38	131.55	.7102	217.40	513.95	1	394,231	Wet .3053
	41	276.62	Steam	410	1202.84	.8152	321,374	SatVapor
	42	52.40	Steam	284	1096.43	.8152	321,374	Wet .0854
	43	52.40	Steam	284	1175.14	.6673	263,089	SatVapor
	44	2.50	Steam	134.29	1009.19	.6673	263,089	Wet .1083
15	45	52.40	Steam	284	1175.14	.0783	30,852	SatVapor
	46	52.40	Steam	284	741.16	.1478	58,285	Wet .4707
	48	52.40	Steam	262.95	232.04	.1478	58,285	Liq 21j
	49	2.50	Steam	134.29	868.24	.8152	321,374	Wet .2468
	50	2.50	Steam	134.29	102.05	.8152	321,374	SatLiquid
20	51	•	Brine	410	385.56	3.2336	1,274,773	
	54	•	Brine	284	257.04	3.2336	1,274,773	
	60	599.50	.7102	212	123.12	1	394,231	SatLiquid
	66	594.50	.7102	257.55	367.64	1	394,231	Wet .557
	68	589.50	.7102	278.60	442.91	1	394,231	Wet .4559
25	23	•	Water	87.80	55.80	24.6244	9,707,684	
	59	•	Water	132.85	100.85	8.7270	3,440,442	
	58	•	Water	127.09	95.09	15.8974	6,267,242	
	24	•	Water	129.13	97.13	24.6244	9,707,684	

Table 4

Performance Summary KCS21

	Heat in	151693.12 kW	1312.93 BTU/lb
	Heat rejected	117591.11 kW	1017.77 BTU/lb
5	Turbine enthalpy drops	34373.80 kW	297.51 BTU/lb
	Turbine Work	33514.45 kW	290.07 BTU/lb
	Feed pump Δ H 2.35, power	288.77 kW	2.50 BTU/lb
	Feed +Coolant pump power	632.05 kW	5.47 BTU/lb
	Net Work	32882.40 kW	284.60 BTU/lb
10	Gross Output	33514.45 kWe	
	Cycle Output	33225.68 kWe	
	Net Output	32882.40 kWe	
	Net thermal efficiency	21.68 %	
	Second law limit	30.80 %	
15	Second law efficiency	70.37 %	
	Specific Brine Consumption	38.77 lb/kW hr	
	Specific Power Output	25.79 Watt hr/lb	

- 16 -

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A method of converting heat to useful energy
comprising

expanding a primary fluid in a vapor state in a
first stage expander to obtain useful energy and to produce
5 a partially expanded primary fluid stream having vapor and
liquid components,

separating said partially expanded primary fluid
stream into liquid and vapor components and splitting said
stream into a vapor stream and a further primary stream
10 including liquid,

expanding said vapor stream in a second stage
expander to obtain useful energy,

using heat in said partially expanded primary fluid
stream to heat a multicomponent working fluid in a separate
15 closed loop at a primary heat exchanger, and

expanding said multicomponent working fluid in a
further expander in said separate closed loop to obtain
useful energy and produce a spent multicomponent working
fluid.

20 2. The method of claim 1 wherein said spent
multicomponent working fluid is condensed at a condenser
and passed through a recuperative heat exchanger in which
heat from said spent multicomponent working fluid is used
to recuperatively heat said multicomponent working fluid
25 after being condensed at said condenser.

3. The method of claim 1 wherein said primary fluid
in a vapor state is steam.

4. The method of claim 3 wherein said steam is
generated by heating said primary fluid in a primary closed
30 loop in a boiler.

5. The method of claim 4 wherein said heating
includes burning corrosive or toxic fuels.

6. The method of claim 5 wherein said primary fluid in a vapor state is split into a first primary stream that is expanded at said first stage expander and a second primary stream that is used to further heat said 5 multicomponent working fluid before it is expanded.

7. The method of claim 6 wherein said further primary stream is used to heat said multicomponent working fluid before it is heated at said primary heat exchanger.

8. The method of claim 3 wherein said primary fluid 10 in a vapor state is obtained from a geofluid.

9. The method of claim 8 further comprising separating said steam from brine in said geofluid, and using said brine to further heat said multicomponent working fluid before it is expanded.

10. Apparatus for converting heat to useful energy comprising

a first stage expander in which a primary fluid in a vapor state is expanded to obtain useful energy and to
5 produce a partially expanded primary fluid stream having vapor and liquid components,

a separator/splitter that separates said partially expanded primary fluid stream from said first stage expander into liquid and vapor components and splits said
10 stream into a vapor stream and a further primary stream including liquid,

a second stage expander in which said vapor stream from said separator/splitter is expanded to obtain useful energy,

15 a primary heat exchanger connected to use heat in said partially expanded primary fluid stream to heat a multicomponent working fluid, and

a separate closed loop containing said multicomponent working fluid, said second closed loop
20 including flow passages in said primary heat exchanger, said second closed loop including a further expander in which said multicomponent working fluid is expanded to obtain useful energy and produce a spent multicomponent working fluid.

25 11. The apparatus of claim 10 wherein said separate closed loop includes a condenser at which said spent multicomponent working fluid is condensed and a recuperative heat exchanger in which heat from said spent multicomponent working fluid is used to recuperatively heat
30 said multicomponent working fluid after being condensed at said condenser.

12. The apparatus of claim 10 wherein said primary fluid in a vapor state is steam.

13. The apparatus of claim 12 wherein said steam is generated by heating a primary working fluid in a closed loop in a boiler.

14. The apparatus of claim 13 wherein said boiler
5 burns corrosive or toxic fuels.

15. The apparatus of claim 14 further comprising a stream splitter at which said primary fluid in a vapor state is split into a first primary stream that is expanded at said first stage expander and a second primary stream
10 that is used to further heat said multicomponent working fluid before it is expanded.

16. The apparatus of claim 15 wherein said further primary stream is connected to heat said multicomponent working fluid before it is heated at said primary heat
15 exchanger.

17. The apparatus of claim 12 wherein said primary fluid in a vapor state is obtained from a geofluid.

18. The apparatus of claim 17 further comprising a separator at which said steam is separated from brine in
20 said geofluid, and a further heat exchanger in which heat from said brine is used to further heat said multicomponent working fluid before it is expanded.

19. A method of converting heat to useful energy comprising

heating a primary working fluid in a first closed loop with an external source of heat,

5 splitting said heated primary working fluid into a first primary stream and a second primary stream,

expanding said first primary stream in a first expander to obtain useful energy,

using heat in said second primary stream to heat a
10 multicomponent working fluid in a second closed loop at a first heat exchanger, and

expanding said multicomponent working fluid in a second expander to obtain useful energy.

20. The method of claim 19 wherein said heating
15 includes combusting corrosive or toxic fuels.

21. The method of claim 20 wherein said primary working fluid is steam.

22. The method of claim 19 wherein heat in said first primary stream is used to heat said multicomponent
20 working fluid in a second heat exchanger after expansion in said first expander.

23. The method of claim 22 wherein said first primary stream is separated into liquid and vapor components and is split into third and fourth primary
25 streams after expansion in said first expander, said third primary stream being a vapor that is expanded in a third expander to obtain useful energy, said fourth primary stream passing through said second heat exchanger.

24. The method of claim 23 wherein heat in said third primary stream is used to heat said multicomponent working fluid in a third heat exchanger after expansion in said third expander.

5 25. The method of claim 24 wherein said second, third, and fourth primary streams are combined to provide said primary working fluid that is heated by said heater.

10 26. The method of claim 25 wherein said first primary stream is separated into liquid and vapor phases at a separator after expansion in said first expander, part of said vapor phase providing said third primary stream and part of said vapor phase being joined with said liquid phase to provide said fourth primary stream.

15 27. The method of claim 19 wherein said multicomponent working fluid is condensed at a condenser, after expansion at said second expander, and passed through a fourth heat exchanger in which heat from said multicomponent working fluid prior to condensing is used to recuperatively heat said multicomponent working fluid after
20 being condensed at said condenser.

28. Apparatus for converting heat to useful energy comprising

a first closed loop containing a primary working fluid and including a heater for heating said primary
5 working fluid, and a first stream splitter that splits said heated primary working fluid into a first primary stream and a second primary stream, said first closed loop also including a first expander in which said first primary stream is expanded to obtain useful energy, said first
10 closed loop also including a flow passage through a first heat exchanger to transfer heat from said second primary stream to a multicomponent working fluid, and

a second closed loop containing said multicomponent working fluid, said second closed loop including a flow
15 passage through said first heat exchanger, said second closed loop including a second expander in which said multicomponent working fluid is expanded to obtain useful energy.

29. The apparatus of claim 28 wherein said heater
20 is a boiler in which corrosive or toxic fuels are combusted.

30. The apparatus of claim 28 wherein said primary working fluid is steam.

31. The apparatus of claim 28 wherein said first
25 closed loop and said second closed loop include passages in a second heat exchanger in which heat from said first primary stream is used to heat said multicomponent working fluid.

32. The apparatus of claim 31 wherein said first closed loop includes a separator/splitter that separates said first primary stream into liquid and vapor phases and splits said first primary stream into third and fourth
5 primary streams after expansion in said first expander, said third primary stream being a vapor, said first closed loop also including a third expander thorough which said third primary stream passes and in which said third primary stream is expanded, said fourth primary stream passing
10 thorough said second heat exchanger.

33. The apparatus of claim 32 wherein said first closed loop and said second closed loop include passages in a third heat exchanger in which heat from said third primary stream is used to heat said multicomponent working
15 fluid.

34. The apparatus of claim 33 wherein said first closed loop includes a stream combiner at which said second, third, and fourth primary streams are combined to provide said primary working fluid that is heated by said
20 heater.

35. The apparatus of claim 32 wherein said separator/splitter includes a separator that separates said first primary stream into liquid and vapor phases and a second stream splitter at which said vapor phase is split
25 into said third primary stream and a further stream, and wherein said separator/splitter further comprises a stream combiner that combines said further stream and said liquid phase into said fourth primary stream.

36. The apparatus of claim 28 wherein said second closed loop includes a condenser in which said multicomponent working fluid is condensed and a fourth
5 heat exchanger in which heat from said multicomponent working fluid prior to condensing is used to recuperatively heat said multicomponent working fluid after being condensed at said condenser.

10 37. A method of converting heat in a geofluid containing steam and brine to useful energy in a power system comprising

separating said steam from said brine in said geofluid,

15 expanding said steam in a first expander producing a stream of expanded steam,

using heat from said steam that has been expanded in said first expander to heat a multicomponent working fluid in a separate closed loop at a first heat
20 exchanger,

using said brine to further heat said multicomponent working fluid from said first heat exchanger at a second heat exchanger,

25 discharging said brine from said second heat exchanger from the system, and

expanding said multicomponent working fluid in a second expander in said separate closed loop to obtain useful energy and produce a spent multicomponent working fluid, wherein said spent multicomponent working fluid is
30 condensed at a condenser and passed through a recuperative heat exchanger in which heat from said spent multicomponent working fluid is used to recuperatively heat said multicomponent working fluid after being condensed at said condenser; and

35 wherein said stream of expanded steam is separated into liquid and vapor components and is split into first and second streams after expansion in said first

expander, said first stream being a vapor that is expanded in a third expander to obtain useful energy, said second stream passing through said first heat exchanger.

5

38. The method of claim 37 wherein said second stream is throttled after passing through said first heat exchanger and combined with said first stream after said first stream has been expanded in said third expander.

10

39. The method of claim 38 wherein the combined first and second streams are condensed and discharged from the system.

15

40. Apparatus for converting heat in a geofluid containing steam and brine to useful energy in a power system comprising

a separator that separates said steam from said brine in said geofluid,

20

a first expander that expands said steam to obtain useful energy and produces a stream of expanded steam,

25

a separate closed loop containing a multicomponent working fluid, said second closed loop including flow passages in a first heat exchanger in which heat from said steam that has been expanded in said first expander is used to heat said multicomponent working fluid, said second closed loop including flow passages in a second heat exchanger in which said brine further heats said multicomponent working fluid from said first heat exchanger, said second closed loop including a second expander in which said multicomponent working fluid from said second heat exchanger is expanded to obtain useful energy and produce a spent multicomponent working fluid, said separate closed loop further including a condenser in which said spent multicomponent working fluid is condensed and a recuperative heat exchanger in which heat from said spent multicomponent working fluid is used to

30

35

recuperatively heat said multicomponent working fluid after being condensed at said condenser,

an outflow line connected to discharge said brine from said second heat exchanger from the system, and


5 a separator/splitter that separates said stream of expanded steam into liquid and vapor components and splits said stream of expanded steam into first and second streams, said first stream being a vapor, and further comprising a third expander through which said
10 first stream passes and in which said first stream is expanded to obtain useful energy, said second stream passing through said first heat exchanger.

41. The apparatus of claim 40 further comprising a
15 throttle valve in which said second stream is throttled after passing through said first heat exchanger and a junction at which said second stream from said throttle valve is combined with said first stream after said first stream has been expanded in said third expander.

20

42. The apparatus of claim 41 wherein the combined first and second streams are condensed and discharged from the system.

25

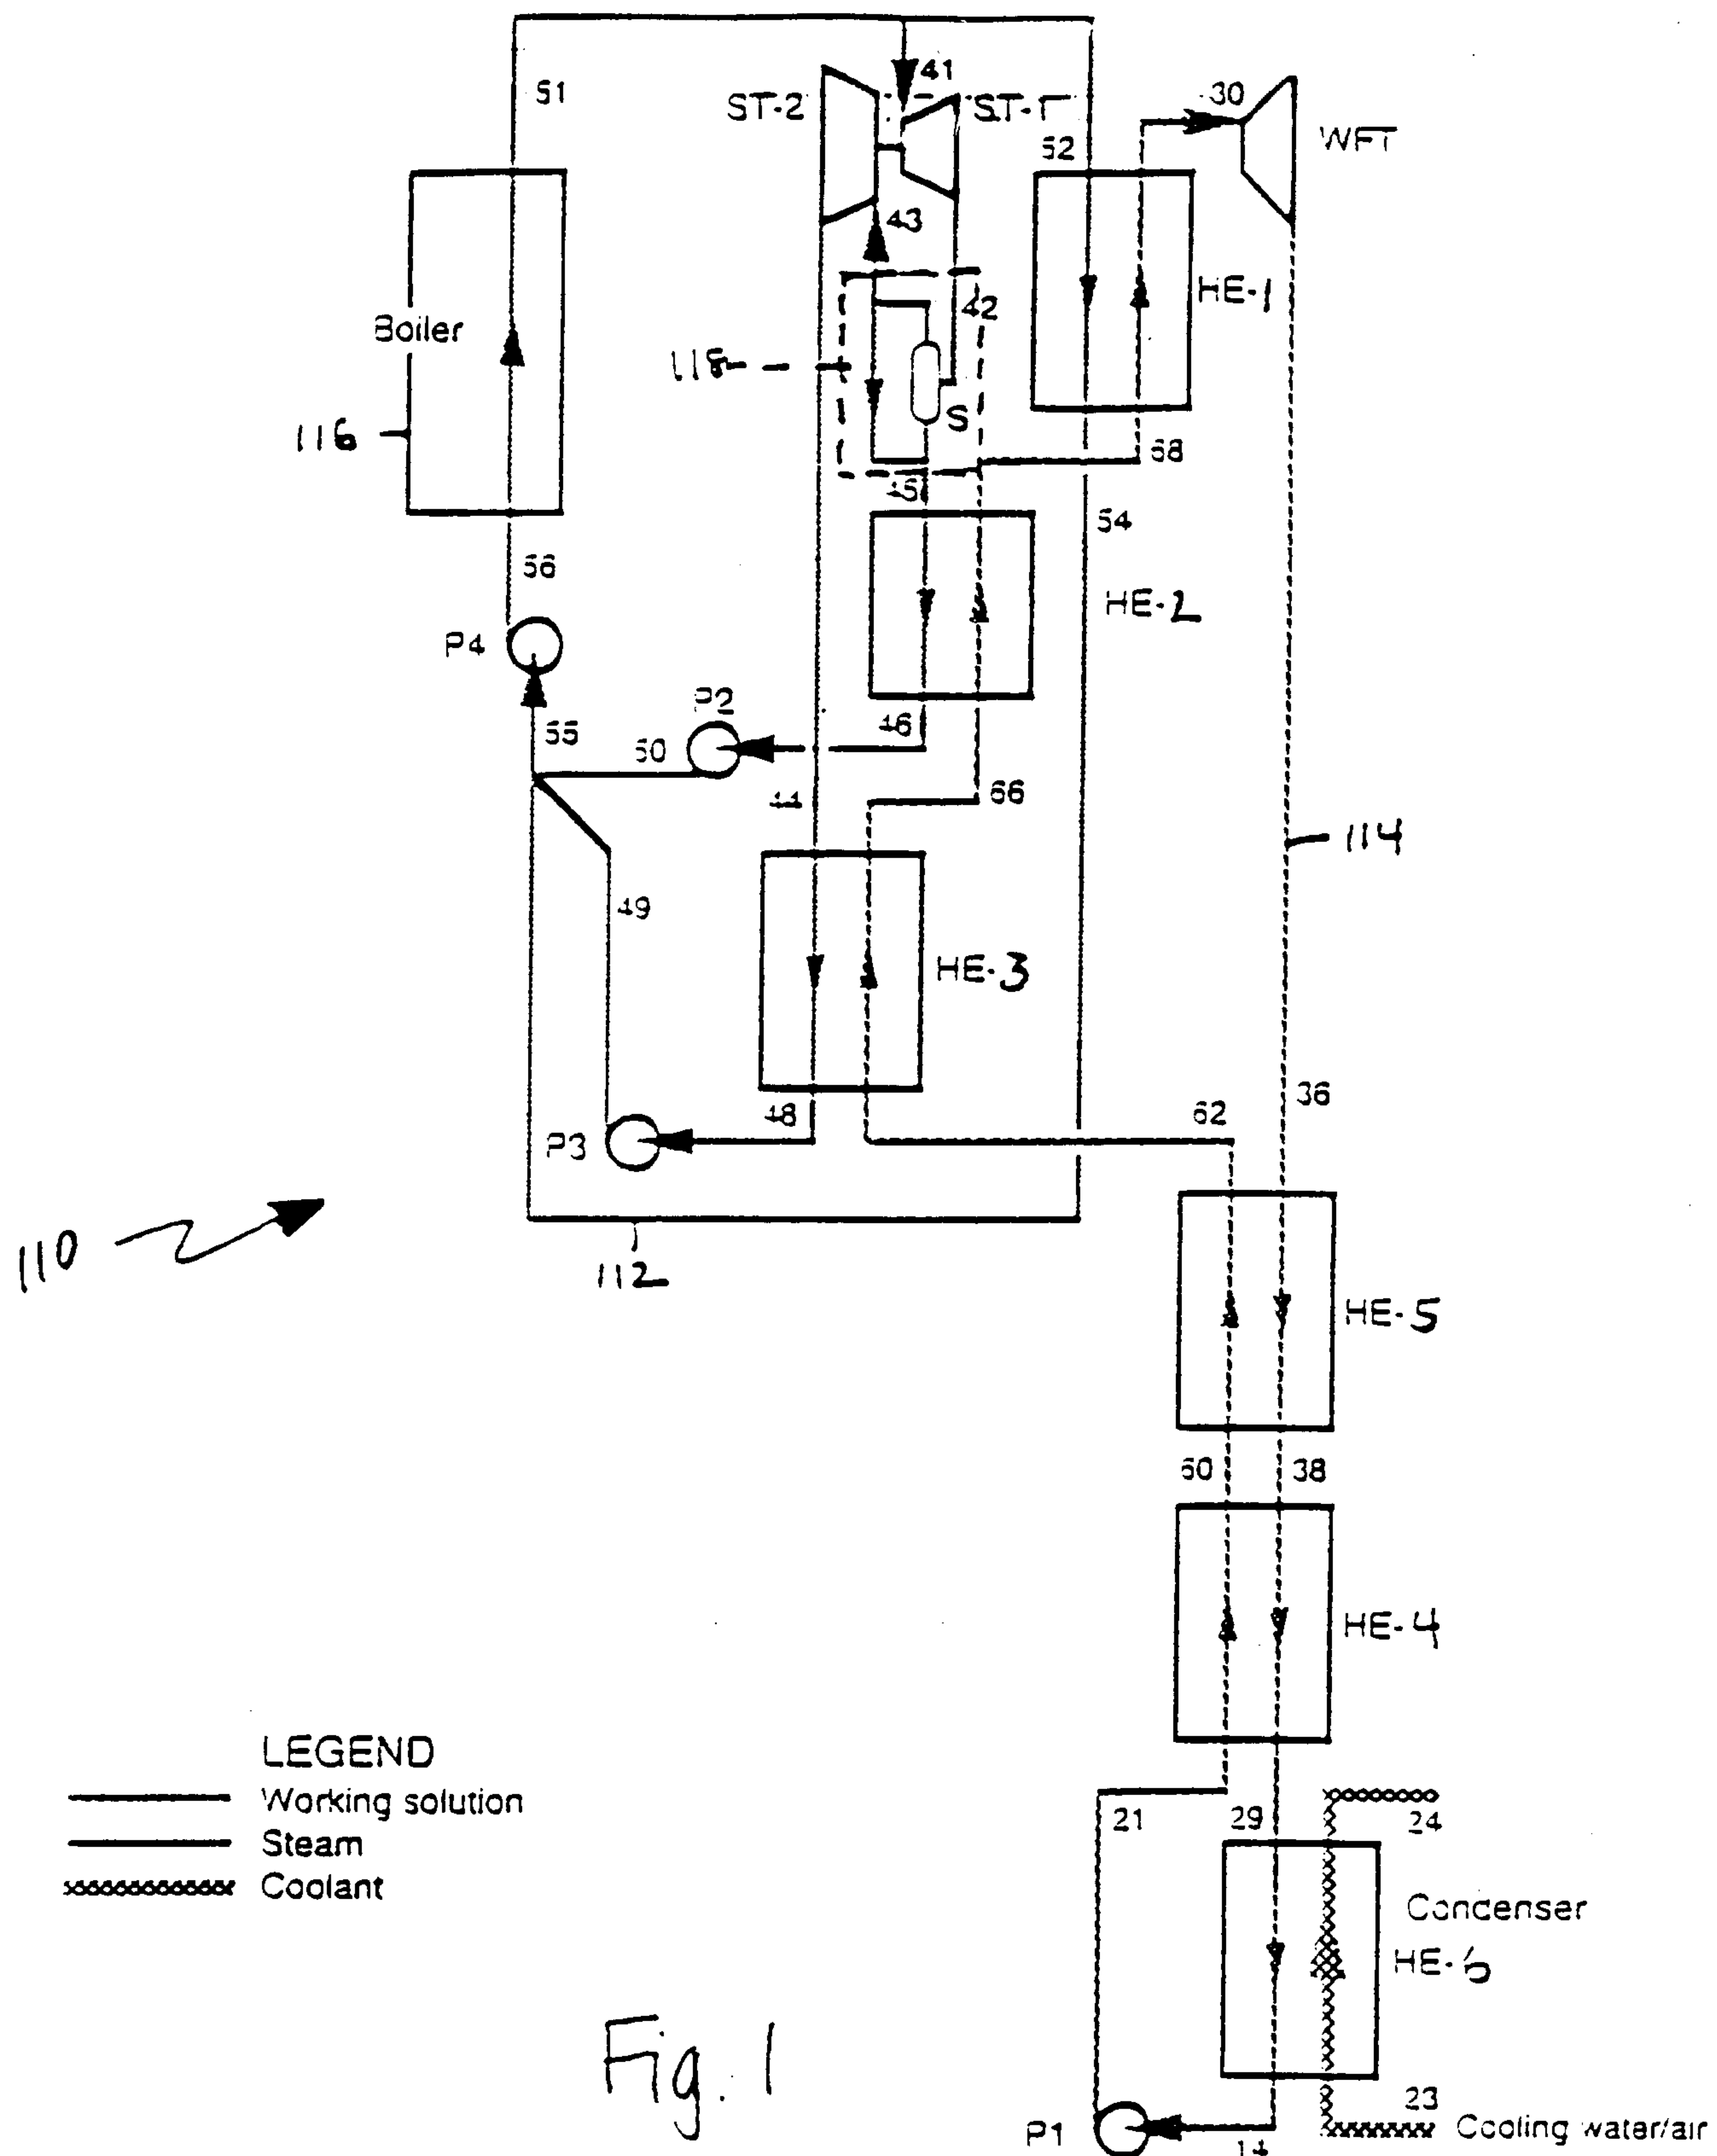

2197038

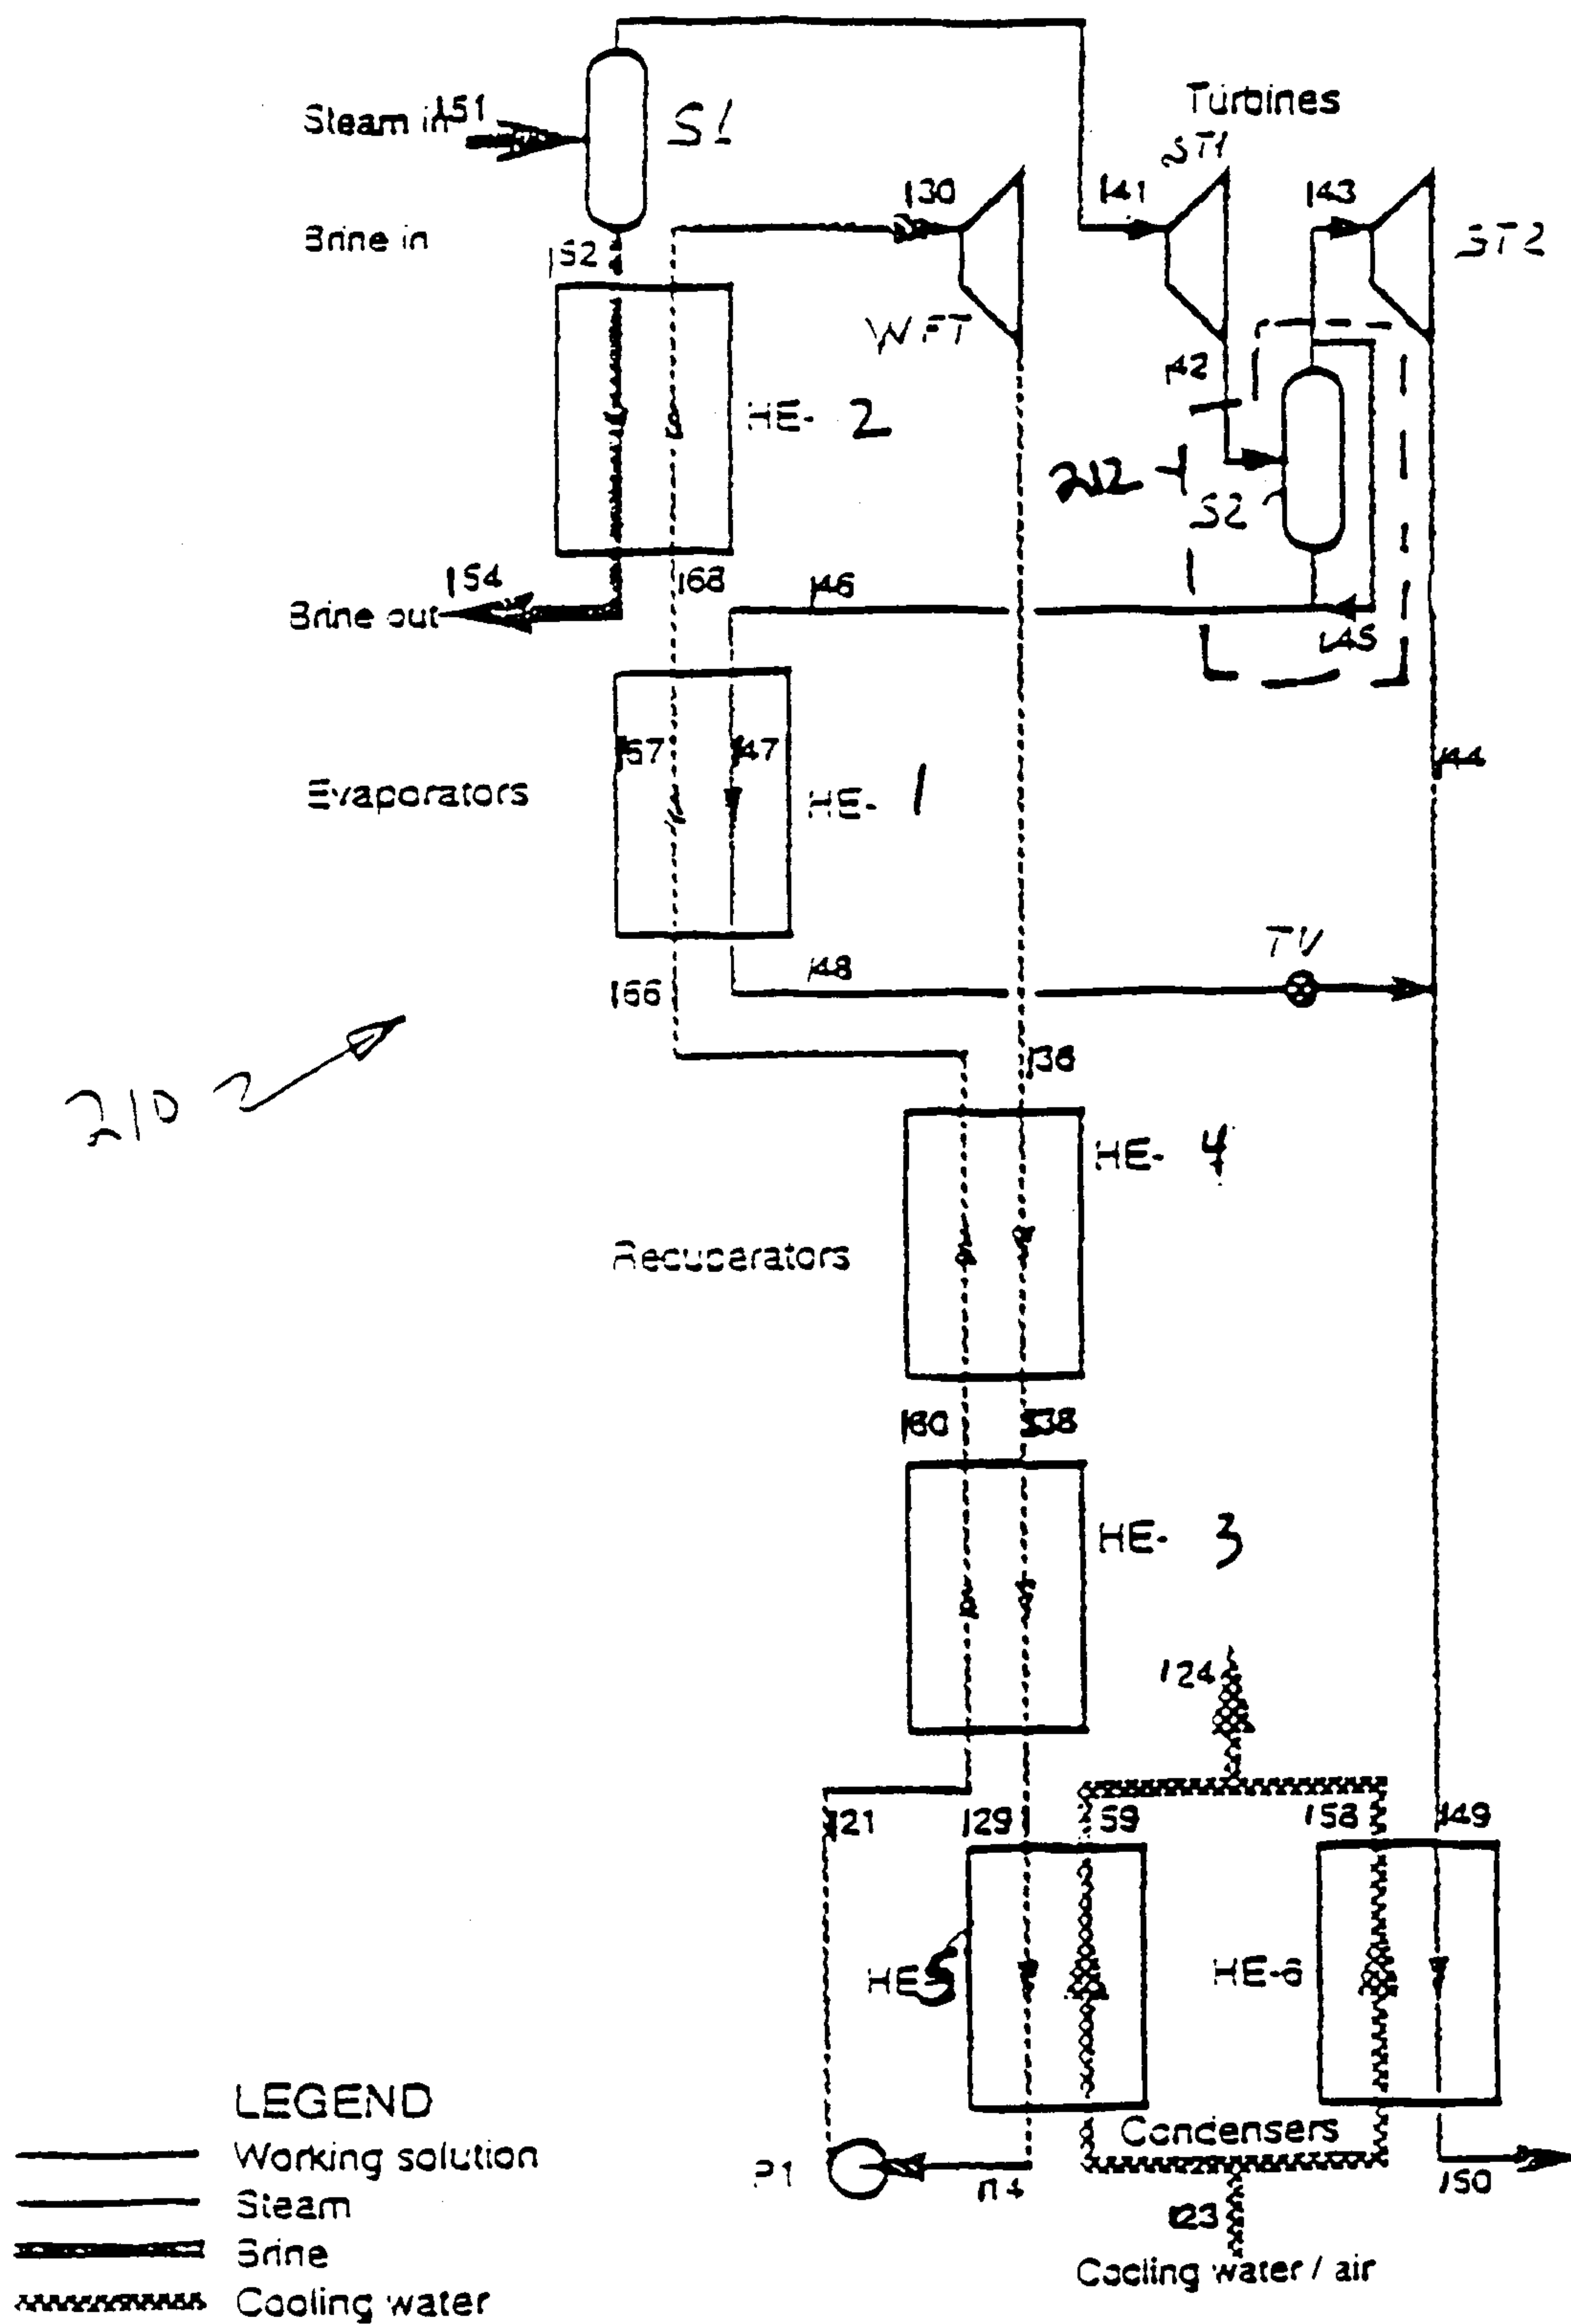


Fig. 2