




(86) Date de dépôt PCT/PCT Filing Date: 1992/09/04  
(87) Date publication PCT/PCT Publication Date: 1993/04/01  
(45) Date de délivrance/Issue Date: 2004/05/25  
(85) Entrée phase nationale/National Entry: 1994/03/03  
(86) N° demande PCT/PCT Application No.: GB 1992/001625  
(87) N° publication PCT/PCT Publication No.: 1993/005956  
(30) Priorité/Priority: 1991/09/06 (9119132.0) GB

(51) Cl.Int.<sup>5</sup>/Int.Cl.<sup>5</sup> B31D 1/00, B42C 11/02  
(72) Inventeur/Inventor:  
MCDONALD, GEORGE WALLACE, GB  
(73) Propriétaire/Owner:  
MCDONALD, GEORGE WALLACE, GB  
(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : PROCEDE ET DISPOSITIF PERMETTANT DE COLLER DES ELEMENTS DE RENFORT ET DES FEUILLES  
PLIEES

(54) Title: FOLDED SHEET ARTICLES AND RELATED AND OTHER APPLICATIONS

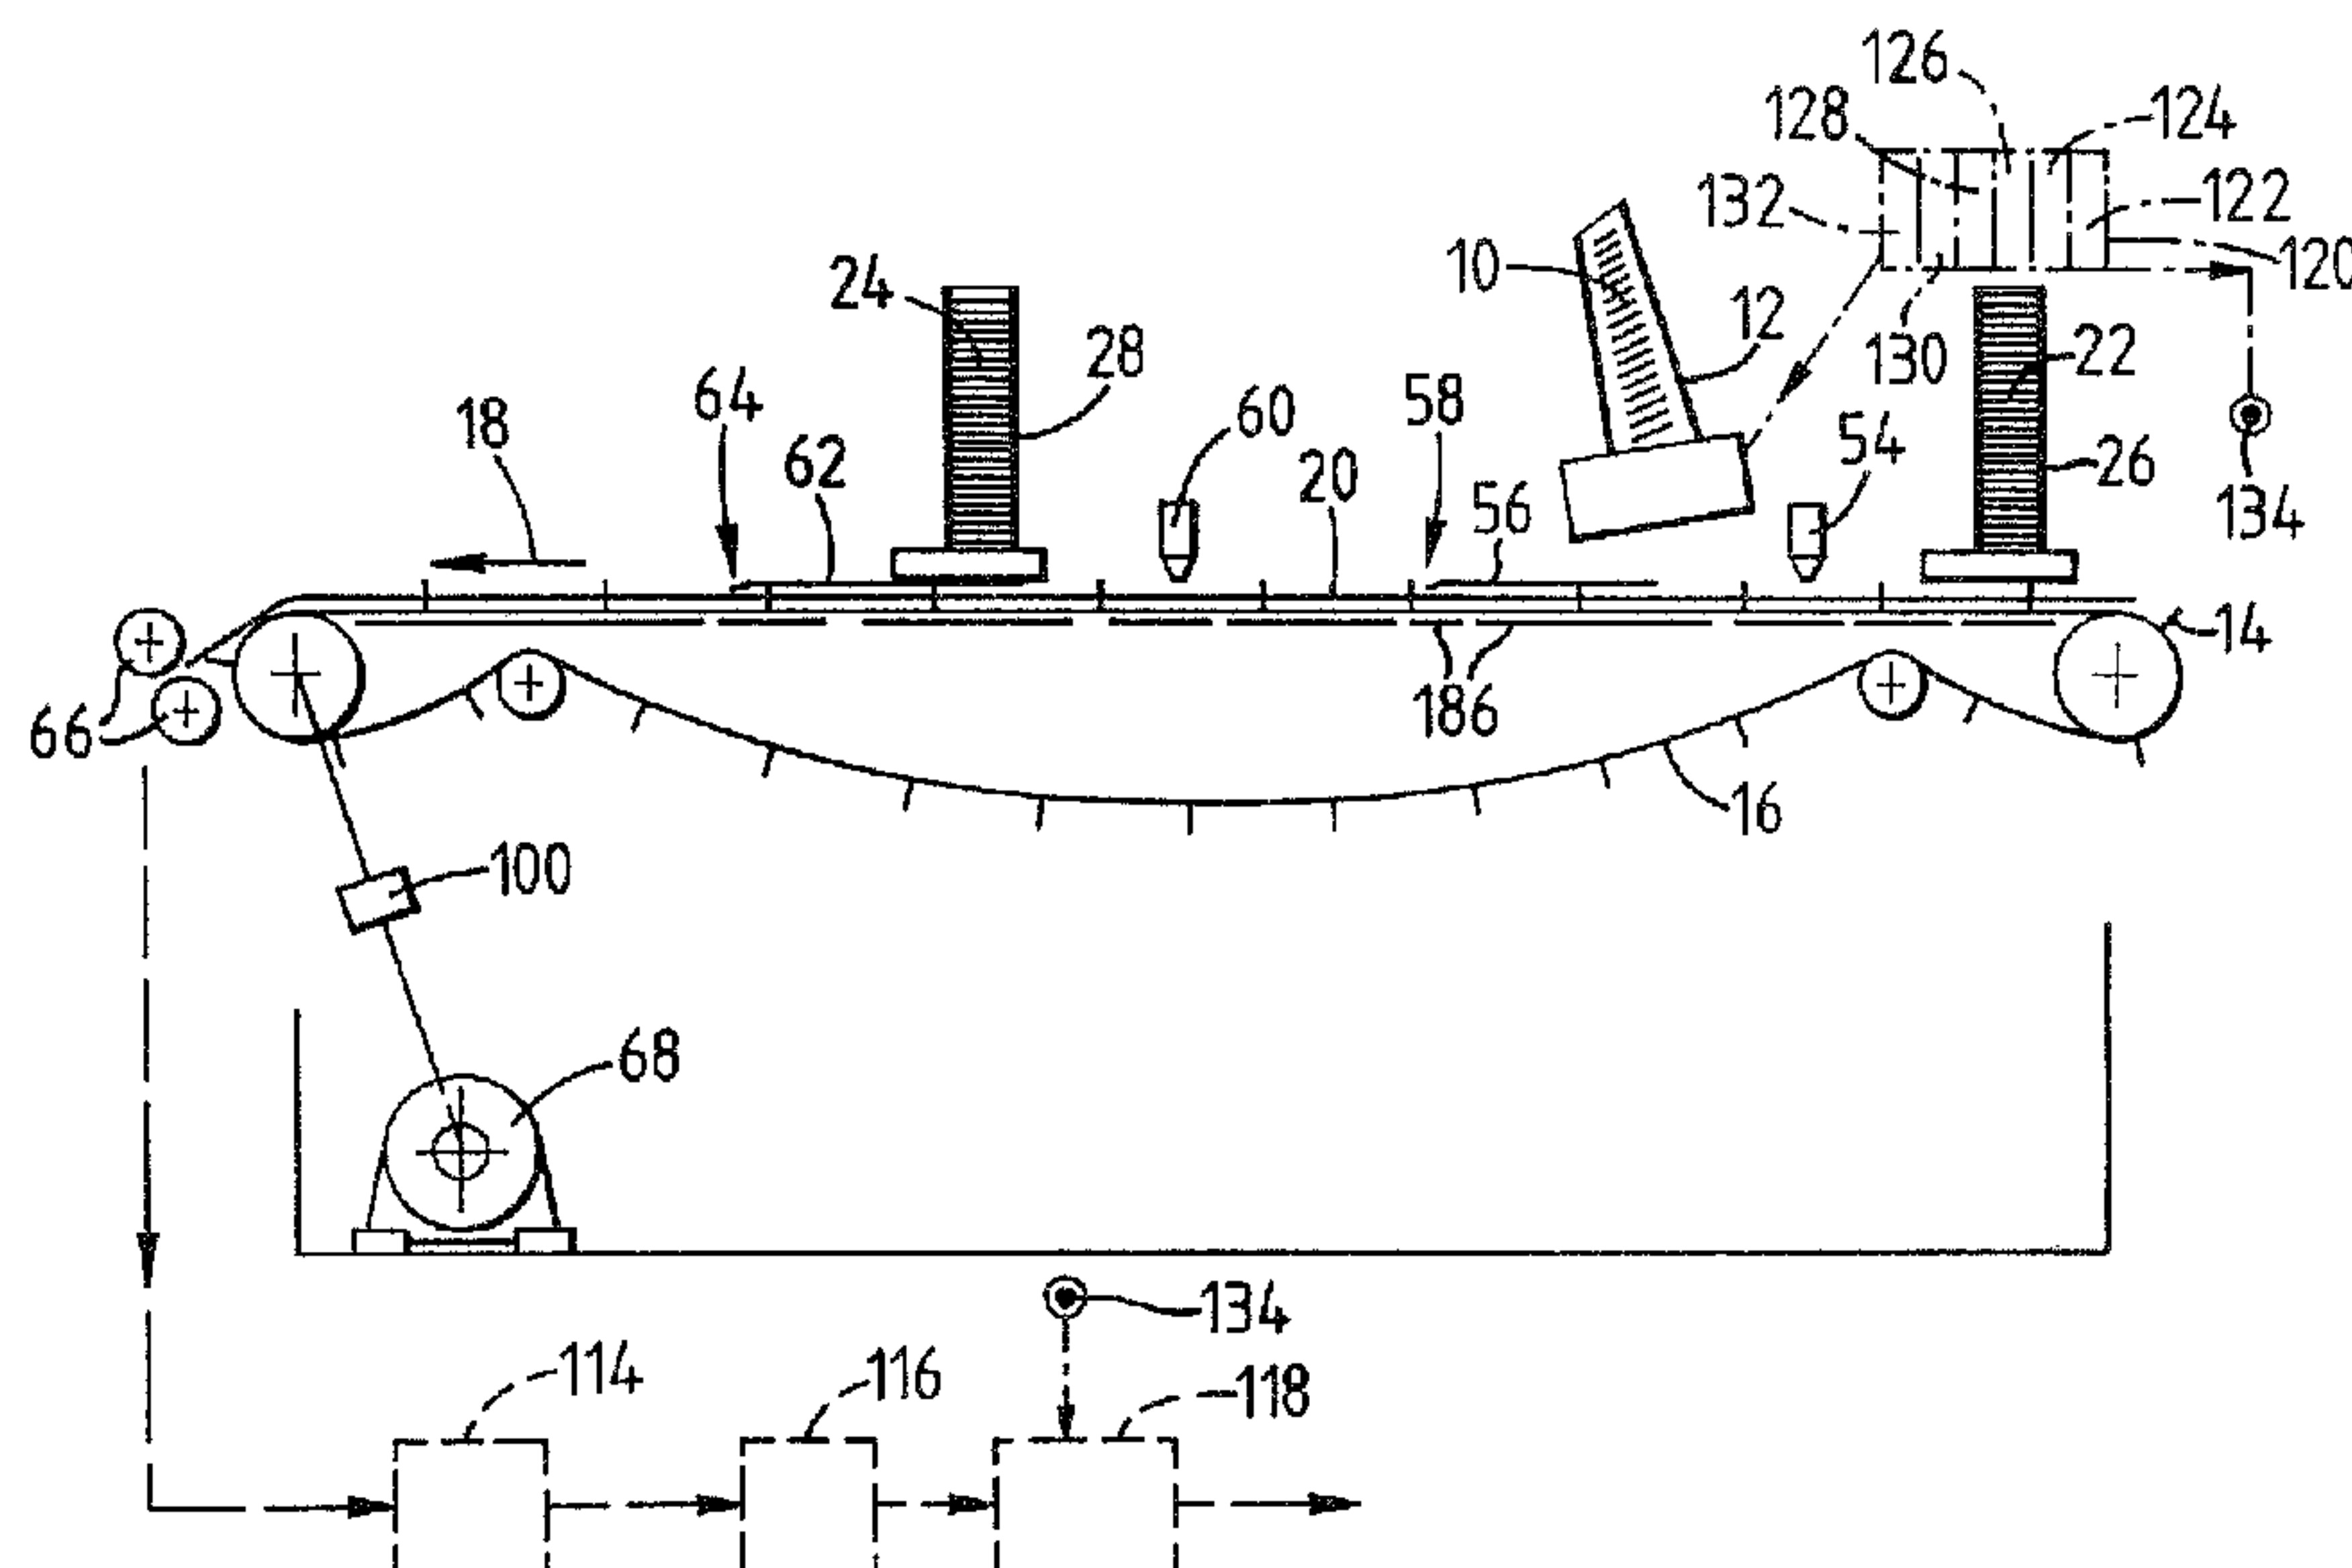

(57) Abrégé/Abstract:

Apparatus for use in producing articles (136), each comprising a sheet (10) folded with a first set of concertina folds and transverse to these a second set of concertina folds (180) and two stiff portions (22, 24) attached to opposite outer segments (166) of the folded sheet (10), comprises means (26, 12, 28, 20) to supply the folded sheet (10) and stiff portions (22, 24) and attach them together and maintain the sheet (10) folded before, and/or during at least a part of, the attaching step, the guide means (20) cooperating with flights (14) to push the elements of articles (136) therealong, the flights controlling the mutual relative position of the separate elements by being stepped and guide means (20) being shaped to vary the positions of the elements relative to the flights (14) during the movement. Supply means for cards (22, 24) are arranged to reciprocate and supply cards alternately from two stores (26, 27). Gluing stops short of all edges of the folded sheet (10). Means (20, 87, 88, 89) control relative positions laterally or longitudinally between said elements during attaching them together to enable precise repetition of their mutually relative positions after attachment. A plurality of channels for simultaneously producing articles (136) have a common motive source (68) and respective means (100) to switch off source (68) from each channel independently, and plug and/or other quick release means (102) to allow quick release and removal of an operative unit (e.g. 12) from one channel with minimum downtime for the other channels.






## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification 5 :</b>  <b>B31D 1/00, B42C 11/02</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 93/05956</b>  <b>(43) International Publication Date:</b> 1 April 1993 (01.04.93) <b>2116963</b>
<b>(21) International Application Number:</b> PCT/GB92/01625 <b>(22) International Filing Date:</b> 4 September 1992 (04.09.92)  <b>(30) Priority data:</b> 9119132.0                      6 September 1991 (06.09.91)    GB  <b>(71)(72) Applicant and Inventor:</b> McDONALD, George, Wallace [GB/GB]; Mon Cachet, Rue de la Cache, Castel, Guernsey (GB).  <b>(74) Agent:</b> DEAN, Michael, Brian; M. Dean, 37 Glanleam Road, Stanmore HA7 4NW (GB).  <b>(81) Designated States:</b> AT, AU, BB, BG, BR, CA, CH, CS, DE, DK, ES, FI, GB, HU, JP, KP, KR, LK, LU, MG, MN, MW, NL, NO, PL, RO, RU, SD, SE, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, SN, TD, TG).		<b>Published</b> <i>With international search report.</i> <i>With amended claims and statement.</i>

**(54) Title:** METHOD AND APPARATUS FOR LAMINATING STIFFENERS WITH FOLDED SHEETS**(57) Abstract**

Apparatus for use in producing articles (136), each comprising a sheet (10) folded with a first set of concertina folds and transverse to these a second set of concertina folds (180) and two stiff portions (22, 24) attached to opposite outer segments (166) of the folded sheet (10), comprises means (26, 12, 28, 20) to supply the folded sheet (10) and stiff portions (22, 24) and attach them together and maintain the sheet (10) folded before, and/or during at least a part of, the attaching step, the guide means (20) cooperating with flights (14) to push the elements of articles (136) therealong, the flights controlling the mutual relative position of the separate elements by being stepped and guide means (20) being shaped to vary the positions of the elements relative to the flights (14) during the movement. Supply means for cards (22, 24) are arranged to reciprocate and supply cards alternately from two stores (26, 27). Gluing stops short of all edges of the folded sheet (10). Means (20, 87, 88, 89) control relative positions laterally or longitudinally between said elements during attaching them together to enable precise repetition of their mutually relative positions after attachment. A plurality of channels for simultaneously producing articles (136) have a common motive source (68) and respective means (100) to switch off source (68) from each channel independently, and plug and/or other quick release means (102) to allow quick release and removal of an operative unit (e.g. 12) from one channel with minimum downtime for the other channels.

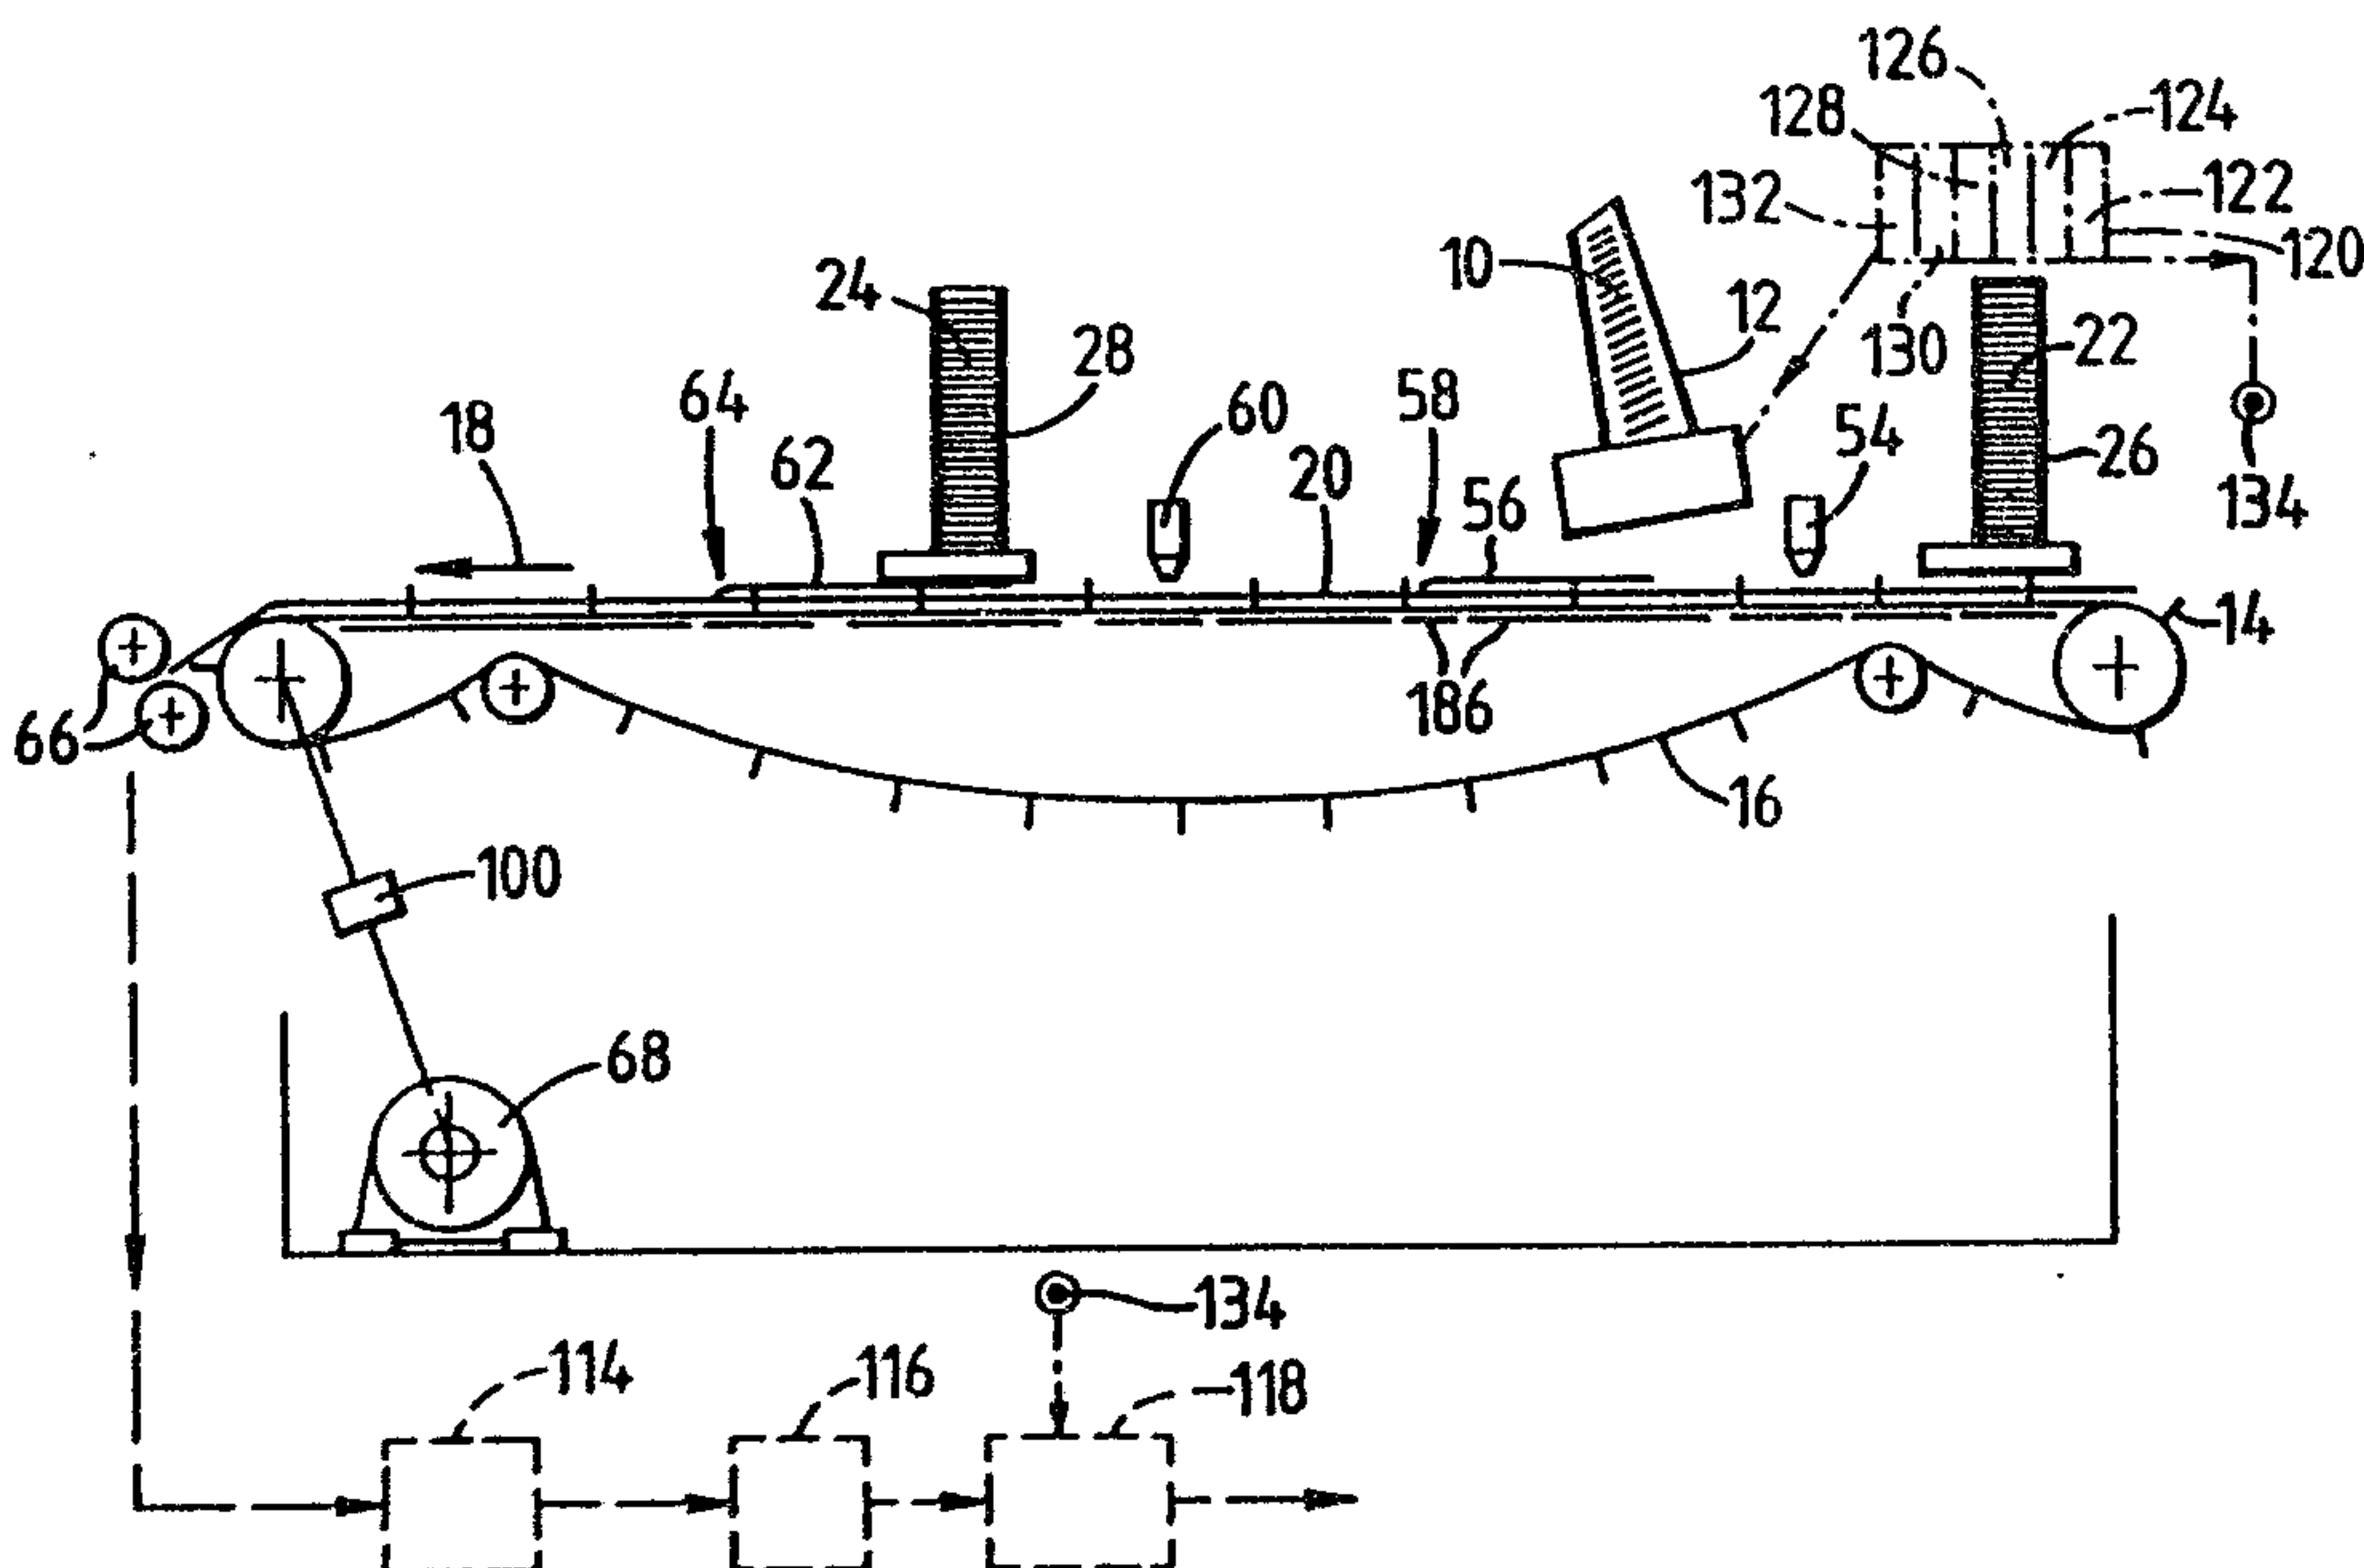



29201-3

1

METHOD AND APPARATUS FOR LAMINATING STIFFENERS WITH FOLDED  
SHEETS

Background to the Invention

This invention relates to articles each comprising  
5 a sheet folded with a first set of concertina folds and so  
as to be transverse to these a second set of concertina  
folds. It also relates to improved apparatus and processes  
for producing such articles. Certain features or  
combinations of features of the apparatus and processes are  
10 thought to have independent value and the invention  
therefore extends to such features and combinations and to  
corresponding articles.

The present inventor has experimented to produce  
the first-mentioned articles with finishing of them, by  
15 attaching outer stiff portions to the folded sheet, being  
done by hand. In attempting to produce apparatus for  
carrying out this process and further steps of processing  
such articles, there have been encountered much  
inconsistency in production, very slow maximum speeds of  
20 production and various other snags.

Summary of the Invention

After some years of research, the inventor  
discovered that all of these faults could be attributed to  
incorrect or inadequate control of the folded sheet being  
25 processed and more particularly discovered a need to  
maintain the sheets folded during such processing or at  
least certain parts thereof.

Accordingly one aspect of the invention provides apparatus  
for use in producing articles each comprising a sheet folded

29201-3

2

with concertina folds which can be unfolded, characterised in that the article comprises at least one stiff portion attached to an outer segment of the folded sheet, and the apparatus comprises means to supply the folded sheet and  
5 stiff portion and attach them together and maintain the sheet folded during at least part of the approach to the attaching step.

According to another aspect there is provided apparatus for use in producing articles each comprising a  
10 sheet folded with a first set of concertina folds which can be unfolded and transverse to these a second set of concertina folds which can be unfolded, characterised in that the article comprises two stiff portions attached to opposite outer segments of the folded sheet, and the  
15 apparatus comprises means to supply the folded sheet and said stiff portions and attach them together and maintain the sheet folded during at least part of the approach to the attaching step.

In a specific embodiment the apparatus comprises  
20 means to effect said attaching step and to include gluing and attaching as parts of such step, which means comprise a gluing station followed by an attaching station and means to maintain the sheet folded at or in the region of such a station.

25 The apparatus may comprise means to effect said attaching step and to include gluing and attaching as parts of such step, which means comprise means substantially to maintain the sheet folded before and throughout the attaching step.

29201-3

3

The sheet may be maintained folded by various means including an air jet or a spring-loaded member but a particularly advantageous arrangement utilises guide means adapted to bear against the folded sheet to maintain it  
5 folded during passage of the folded sheet past the guide means, which means can also be used as an integral part of handling and positioning means of the apparatus. A much improved product is obtained by use of pinch rollers to consolidate the folds after the attaching step.

10 A particularly advantageous embodiment further comprises guide means and flights arranged to move along the guide means and thereby push said objects therealong, the flights being constructed and arranged to control the mutual relative position of separate elements of each said object  
15 during such movement.

In one aspect, the flights are constructed and arranged to position corresponding edges of the elements mutually relatively displaced in the direction of said movement.

20 The flights may be stepped and the guide means may be shaped to vary the position of the objects relative to the flights during the movement.

Furthermore, the guide means may be shaped to enable the flights to control the mutual relative position  
25 of an object and a further separate element during the movement.

According to one embodiment the guide means comprise a first introductory guide portion for a first said element, and a second introductory guide portion for a  
30 second said element, said portions being constructed and



29201-3

3a

arranged to allow said flights to entrain such elements separately and then enable them to meet.

The guide means may also comprise a third introductory portion for a third said element, such portions  
5 being constructed and arranged to allow said flights to entrain said third element separately from said first and second elements and, after the meeting of said first and second elements, to enable a meeting between an object comprising these first and second elements on the one hand  
10 and said third element on the other hand.

A particularly successful form of production apparatus comprises spray gluers and each of said flights comprises an upper and a lower forwardly facing portion of which the upper portion projects slightly forward of the  
15 lower portion, and said guide means comprise a runner adapted to position a first said stiff portion at an upper position adjacent the nozzle of a said spray gluer to be firstly glued thereby and thereafter lower the stiff portion to said lower portion of the flight, a second runner adapted  
20 to receive said folded sheet at the level of the upper portion of the flight and lower the same to contact the firstly glued upper surface of said first stiff portion while still being positioned by the upper portion of said flight and pass the folded sheet, maintained folded and  
25 attached to the first stiff portion, close to the nozzle of a said spray gluer to be secondly glued thereby and thereafter lower the attached sheet and first stiff portion to be wholly within the lower portion of the flight, and a third runner arranged to receive a second said stiff portion  
30 and lower the same to the lower portion of said flight to contact the secondly glued surface of said folded sheet.

29201-3

3b

Description of Particular Embodiments

Reference will now be made by way of example to the accompanying drawings, in which:-

2116963

Figure 1 is a schematic side elevation of a first example of apparatus embodying the invention;

Figure 2 is a perspective view of a detail of Figure 1;

Figure 3 is a perspective view of another detail of Figure 1;

5 Figure 4 is a view corresponding to Figure 1 of a second example of apparatus embodying the invention;

Figure 5 is a perspective view of a detail of Figure 4;

Figure 6 is a side elevation of a flight of the Figure 4 embodiment;

10 Figure 7 is a schematic side elevation of details of the Figure 4 embodiment just after station 58;

Figure 8 is a view corresponding to Figure 7 showing operation of the process at station 58;

Figure 9 is a view corresponding to Figure 8 to illustrate the process at station 64;

Figure 10 shows the action at pinch rollers 66;

15 Figure 11 is a perspective view of a detail of the Figure 4 embodiment showing how a spray head nozzle cooperates with guide means 20;

Figure 12 is a view corresponding to Figure 8 showing an alternative arrangement of a bar 10 of guide means 20;

20 Figure 13 is a view corresponding to Figure 12 showing the orientation of a folded sheet 10 in the process;

Figure 14 shows where the glue is applied to a card 22;

Figure 15 shows where the glue is applied to a folded sheet 10;

Figure 16 is a perspective view showing details of the spray heads 54, 60;

Figure 17 is an end view of a three-channel embodiment corresponding to Figure 4;

25 Figure 18 is a view corresponding to Figure 17 of a two-channel embodiment corresponding to Figure 4;

Figure 19 is a view corresponding to Figures 17 and 18 showing in detail an end view of a single channel of the Figure 4 embodiment;

30 Figure 20 is a schematic part cross-sectional view of hopper 12 of the Figure 4 embodiment together with associated delivery mechanism;

Figure 21 is a schematic view of a reciprocating mechanism operable with hopper means such as 26, 28, seen as an end view corresponding to Figure 19;



Figure 22 is a perspective view of the reciprocating mechanism shown in Figure 21;  
and

Figures 23-30 show examples of articles made embodying the invention.

In one example of apparatus embodying the invention, as illustrated in Figures 1 to 3,  
5 sheets 10 each folded with a first set of concertina folds and perpendicular to these a  
second set of concertina folds are fed from a hopper 12, being entrained one at a time  
from the bottom thereof by flights 14 on a belt 16 moving in the direction of arrow 18,  
each entrained folded sheet 10 resting on, and being pushed along, guide means 20 in the  
form of two rails on either side of flights 14, as seen in Figure 2. Stiff portions 22, 24 in  
10 the form of cards of plastics material like credit cards (3.4" x 2.1" = 85mm x 55mm) are  
supplied from hoppers 26, 28 to drums 30, 32, being taken off one at a time from the  
bottom of the hoppers by recesses 34, Figure 3, with the aid of vacuum ports 36. The  
drums 30, 32 rotate in the direction of arrows 38, 40 and their ports 36 maintain vacuum  
except in the shaded quarter 42 of their circumference. The drums move the captured  
15 single cards past gluing drums 44, 46 supplied from glue baths 48, 50. As a glued card  
22 in a recess 34 reaches the bottom of drum 30, it is synchronised with a folded sheet  
10 and carries this off the belt 16 along an upward projection 52 of guide means 20,  
adhering to folded sheet 10. The combination of folded sheet 10 and card 22 glued  
thereto then reaches the pinch between drums 30, 32 at which it is synchronised with a  
20 glued card 24 carried in a recess 34 in drum 40 and at that point the card 24 is attached  
to the other side of the folded sheet 10. Without guide portion 52 to maintain the sheet  
folded, the apparatus could work slowly but not reliably and not fast. Also, if the  
apparatus stopped and was then restarted, flights 14 tended to jerk folded sheets 10  
irregularly, and inconsistent results were obtained.

25 An alternative example embodying the invention is shown in Figures 4 to 20. The  
same reference numerals are used for corresponding parts of different embodiments. A  
bottom card 22 is slid off the bottom of hopper 26 by a flight 14 and carried to a gluer  
spray head 54 constituting a gluing station by moving along guide means 20. A folded  
sheet 10 is supplied by hopper 12 to a first upper portion 56 of guide means 20 and is  
30 entrained by a flight 14 so that it moves along guide means 20 above a glued card 22.  
Guide means portion 56 is shaped so that this folded sheet 10 descends as it is pushed  
along by its flight 14 and eventually meets the corresponding glued card 22 and therefore



2116963

- 6 -

becomes attached to that at the end of portion 56 which therefore constitutes an attaching station 58. The combination of card 22 and folded sheet 10 attached thereto passes beneath a second gluer spray head 60 at which the uppermost surface of the folded sheet 10 is sprayed suitably with glue and the combination proceeds beneath hopper 28 from which the flight 14 entrains a card 24 resting on a second upper portion 62 of guide means 20 above the combination of card 22 and folded sheet 10 until, due to the shape of portion 62, card 24 descends and meets the combination at a point 64 where it is attached by the last gluing to the said combination, which point 64 therefore constitutes a second attaching station. The resulting article then proceeds to pinch rollers 66. All of the moving parts are driven from a single motive source 68.

In more detail, a flight 14 comprises a spacer 70 with a thickness of about 3mm in the horizontal direction as seen in Figure 6. This controls the spacing between bottom card 22 and folded sheet 10, e.g. as shown in Figure 7 which is a view after they have been attached together at station 58, the action at which station can be seen from Figure 8, which also shows a single central circular bar 72 employed to maintain sheet 10 folded and located just above flights 14 at certain parts of the path along guide means 20 of which bar 72 is a portion. These parts are especially below the spray stations 54, 60 because air comes out from these at quite a high pressure of approximately 40 p.s.i. and would otherwise blow open the folded sheets 10 if it were not for the bar 72 maintaining them folded, for a distance of perhaps 15cm (6") before and after each of stations 54, 60 and at attaching stations 58, 64, where the change in level and attitude of elements 22, 10, 24 and the contact of folded sheets 10 with cards 22, 24 also might tend to open folded sheets 10 if it were not for bars 72 maintaining them folded. The bar 72 could be extended along the whole path length of the apparatus from hopper 26 to just before pinch rolls 66 but it is considered that more accurate guidance of the elements 22, 10, 24 of the objects travelling along the conveyer means comprising belt 16, flights 14 and guide means 20 for positioning of these elements can be provided by guide means 20 and for maintaining sheets 10 folded. At spray head 54, a pair of nozzles 74, 76, Figure 16, spray a pair of lines 78, 80, Figure 14 on card 22 and at spray head 60 a pair of nozzles similarly sprays a pair of lines of glue 82, 84, Figure 15, onto folded sheet 10 so as to stop short of the edges of the folded sheet 10. As seen in Figure 9, guide portion 62 is sufficiently lower than spacer 70 of flight 14 for card 24 to be correctly located exactly over card 22 of the

combination with folded sheet 10. Figure 9 then shows how guide 62 goes even lower to terminate at station 64 at which point card 24 meets folded sheet 10 and is attached thereto by the glue lines 82, 84. After a suitable further period (to allow drying) of transport to pinch rolls 66, these consolidate the folds (and gluing) of the article formed of cards 22, 24 and folded sheet 10, see Figure 10.

As seen in Figure 11, guide means 20 may extend to almost the centre of a card 22 and be provided with a cut out 86 to allow spray to issue from nozzle 74 and reach card 22, and likewise with nozzle 76. Figure 13 shows the preferred orientation of folded sheet 10 with respect to its second set of folds and its direction of motion 18, in order to reduce its tendency to open due to its forward motion or due to flight 14 hitting its back end if it restarts to move. Figure 12 shows an alternative arrangement in which the flights have a recessed top centre and bar 72 can then be put lower in order to maintain sheets 10 folded. The preferred method of shaping the lower, As seen in Figure 19, portion of guide means 20 is to provide a recess 88 at each side so as to maintain sheet 10 folded throughout its path. (For clarity, Figure 19 does not show lower card 22, which is in fact present below sheet 10.) Alternatively, the recessed shape of the lower portion of guide means 20 may not extend to certain positions at which bar 72 is used instead. In another alternative, item 10, Figure 19, is replaced by card 22 surmounted by folded sheet 10 shown in dashed lines and an upper part of the lower portion of guide 20 defines a further recess to maintain sheet 22 folded.

Figure 20 shows details of one arrangement of hopper 12 in which a pile of the cards 10 slide down past a shoe 90 helped by means of roller and belts mechanism 92 moving in the directions of the arrows shown and are presented at position 94 to a sensor 96 cooperating with a sensor 98 sensing the front of a card 22 to start and stop the motion of feed mechanism 92 in order to present sheets 10, accurately positioned in relation to cards 22, to upper portion 56 of guide means 20 to be entrained by flights 14.

While Figure 4 shows one channel, there may be a plurality of channels, for example two as shown in Figure 18 or three as shown in Figure 17, each channel having substantially the appearance shown in Figure 19. The various channels may be operated from a single motive source 68, Figure 4, with means 100 to switch it off from each channel independently and each of the various units, e.g. hopper 12 with its associated



2116963

- 8 -

mechanisms, Figure 20, has quick release means 102 enabling it to be unplugged and quickly removed for repair or replacement.

As seen in Figures 21 and 22, supply means for cards 22 or 24, e.g. shown as hoppers 26, 27, are arranged to include means to reciprocate and supply cards alternately from each store 26, 27. Such supply means have a supply member 104 with two recesses 106, 108 each able to take a single card 22, arranged to reciprocate between a first position in which it is adapted to receive a card from store 27 (as shown in Figure 21) in recess 106 and supply a card 22 from the other recess 108 to a take off point (in the form of a gap 110 in a stationary member 112), and a second position at which it is adapted to receive a card 22 from the other store 26 in the other recess 108 and supply a card 22 from said one recess 106 to said point 110 over which recess 106 is located in said second position. The member 104 is reciprocated by means of a pneumatic cylinder 114.

The action of the pinch rollers 66, Figure 4, serves also to apply a firm pressure for a short period to ensure a good bond due to the glue and to reduce any tendency for the folded sheet insert 10 to wrinkle or bubble. It will be apparent that the ways in which the various processes are carried out can be varied widely to make use of proprietary/known equipment or equipment specifically devised for the purpose. For example, the cards 22, 24 and inserts 10 can be stacked, e.g. manually, between vertical or horizontal guides and fed into the apparatus shown in Figure 4 or onto another feeder feeding into this apparatus by the use of belts and rollers. Again, they may be fed by use of vacuum means, reciprocating gates or rotary drums. The cards 22 and folded sheets 10 (which might for example be maps) may also be fed into the apparatus by hand. The glue can be applied to any or all of the insert 10 and cards 22, 24. The glue can be water based, solvent based, hot melt or any other suitable material and can be applied by roller, spray bar, spray nozzle, ball tip, slot coat, screen print or any other suitable device. Either cards 22 or cards 24 may be omitted. Transport of cards 22, folded sheets 10, and assemblies thereof, through the process can be effected using plain or flighted belt conveyers, conveyers with applied air suction, rollers, or by the use of a rotating drum or carousel. A "pick and place" mechanism can also be used. Any such devices can be used alone or in combination. The cards 22 and inserts 10 may be located on runners, belts or rollers, in pockets or by any other suitable devices. They may be restrained from upward and/or sideways motion by means of runners, bars, belts, rollers or any other suitable

device, alone or in any combination. In place of pinch rollers 66, there may be used a reciprocating press platten, pinch belts, air pressure or suction on a foraminous belt or table and/or by any other suitable means. Pressure for the purposes mentioned in connection with rollers 66 may be applied at this point alone or may be applied after station 58 and again after station 64. Overall control of the process can be by means of a single overall programmable logic controller, or a series of controllers, one for each operation. Information for such controllers can be based on the movement and position of the cards 22, 24 and inserts 10 or any other moving unit or other machine component (e.g. the flights 14) and can be collected using any proprietary/known sensing device which may be either a contact or a non-contact variety. Alternatively, a completely integrated mechanised system can be devised using any of the above features, as will be apparent to one skilled in the art. Equally, a completely different process can be devised based on pre-coating of cards 22, 24 and inserts 10 with a suitable bonding agent which is activated after assembly together of the elements 22, 24, 10 using heat, pressure, radiation or otherwise. Again, there can be used a two-component adhesive system, with one component on each of the elements to be attached together, the components cross-linking together to provide the required attachment. It may be possible to pinch, activate or otherwise process two or more, e.g. a stack, of the articles together.

It should be noted that the width (in the horizontal direction seen in Figure 6) of a spacer 70 is half the difference in length between a card 22 and an insert 10 for symmetrical mutual relative displacement thereof in the forward direction. However, this may be altered if an asymmetrical arrangement is required. An extra function of slot 86, Figure 11, is to allow excess adhesive to drop through. The position of the object along its path is detected by sensors (not shown) which, for example, switch on spray-carrying air to spray-heads 54, 60 just before arrival of the object and switch it off just after departure thereof and, by timing or position-sensing, switch on the supply of glue for the right period to start and stop short of the leading and trailing edges of the folded insert 10, both at spray head 54 (where it is pre-calculated where the insert 10 will lie) and at spray head 60. One example of the whole apparatus shown in full lines in Figure 4 is about 3.5 metres long and the objects travel at about two per second with a pitch (interval between flights 14) of 125mm. The glue is chosen so that, at the resulting speed of the objects, the glue will quickly become tacky and avoid slippage of the various elements of



the object by the time they pass through pinch rollers 66, which run approximately 20% faster than the conveyer flights 14. The inserts 10 shown are Z-shaped in respect of their second set of concertina folds, as seen in a direction looking at Figures 4 and 13, with a fold line uppermost and foremost. This orientation allows the extra weight at the top front to help maintain the insert 10 folded, it gives a smoother passage through the runner system which guide means 20 comprise, and it aids feeding from hopper 12, especially when this is provided with the details shown in Figure 20. Speeds on this apparatus to produce one article per second or more are considered to be high speeds, at which the process is enabled or substantially improved by maintaining the folded sheets folded. It will be appreciated that the apparatus described is capable of ready adjustment to accommodate different thicknesses and size of cards 22, 24 and inserts 10, as well as different relative positioning therebetween.

The full-line embodiment of Figure 4 may be extended as indicated by the schematic, flow diagram type, dashed lines, in which means 114 serve to enclose the article received from pinch rollers 66 in an envelope, for example by flo-wrapping the object in polypropylene from a reel, either as a sleeve or as an envelope e.g. formed from the sleeve crimped closed at both ends. The article may then pass to means 116 for attaching it removably adhesively to another sheet, already or subsequently bearing information, e.g. a compliments slip, and may then pass to yet other means 118 to put the object emerging from means 116 into an envelope and provide from a mailing list stored in means 118 selected addressee details on the outside of the last envelope or on the compliments slip visible through a window in such envelope. Alternatively, means 114 may function directly as just described of means 118 to provide a mailing envelope directly enclosing the article emerging from pinch rolls 66.

In a further possibility, shown in chain-dotted lines in Figure 4, means 120 serve to store unfolded sheets 10, store information, select among the stored information (e.g. in response to a keyboard input) print a sheet with the selected information, fold the sheet with the necessary concertina folds and expel the same in the same manner as hopper 12. The full-line features of Figure 4 then provide stiff portions to the folded sheet 10. The means 120 may be specifically adapted to fold the sheet with both a first set of concertina folds and at right angles to these a second set of concertina folds and the



full-line features of Figure 4 can then attach a stiff portion 22, 24 to each of the two opposite outer segments of the folded sheet. Any of means 114, 116, 118 may also be included.

5 The flights 14 are stepped by means of spacers 70, Figure 6, but could be stepped in other configurations for other purposes, e.g. to provide cards 22, 24 mutually relatively displaced along the direction of travel. Whatever the requirement, a suitable combination of guide means 20 and flights 14 can be designed. As explained, particularly with reference to Figures 8 and 9, the guide means 20 are shaped to vary the position (vertically) of each object comprising one or more of cards 22, 24 and an insert 10 relative to the flights 14 during the movement along guide means 20. The flights 14 control the mutual relative position of a sub-assembly of a card 22 and insert sheet 10 and a further separate element in the form of a card 24 during such movement. The guide means 20 comprise a first introductory guide portion (the right hand end of means 20 as seen in Figure 4) for the first element 22, a second introductory guide portion 56 for the second element comprising a folded sheet 10, these portions being constructed and arranged to allow said flights 14 to entrain such elements separately and then enable them to meet at station 58. Guide means 20 comprise a third introductory portion 62 for a third element comprising card 24, the portions being constructed and arranged to allow the flights 14 to entrain the third element 24 separately from the first and second elements 22, 10 and, after the meeting of said first and second elements at station 58, to enable a meeting at station 64 between the sub-assembly comprising these first and second elements 22, 10 on the one hand and said third element 24 on the other hand. These first, second and third portions of guide means 20 constitute runners along which the elements run when pushed by flights 14. These runners position stiff portion 22 at an upper position adjacent the nozzles of spray gluer 54 to be firstly glued thereby and thereafter lower stiff portion 22 to the level of the lower portion 71, Figure 6, of flight 14. An upper portion of second runner 56 receives said folded sheet 10 at the level of the upper portion 70 of flight 14 and lowers the same at station 58 to contact the firstly glued upper surface of the first stiff portion 22 while the latter is still positioned by the upper portion 70 of said flight 14, and a lower continuation of the guide means 20, still forming part of the said second runner, passes the folded sheet 10, maintained folded and attached to the first stiff portion 22, close to the nozzles of spray gluer 60 to be secondly glued thereby, and thereafter lowers

2116963

- 12 -

the sub-assembly comprising the sheet 10 and first stiff portion 22 attached together so that this sub-assembly is wholly within (the height of) the lower portion 71 of flight 14. Third runner 62 is arranged to receive a second said stiff portion 24 and, at station 64, lower the same to the level of the lower portion of said flight to contact the secondly glued surface of said folded sheet 10.

In the course of movement of the folded sheet and stiff portions along the path defined by guide means 20, in Figure 4, means 87, 88, 89, Figure 19, (which guide means 20 comprise) due to their shape and arrangement serve to maintain predetermined lateral relative positions between the folded sheet 10 and stiff portion 22 while attaching them together and flights 14 maintain predetermined longitudinal relative positions between the same while attaching them together, whereby the same predetermined positions for all of the articles produced are repeated with considerable accuracy.

By suitably constructing and arranging rollers 66 and means 114, 116 and 118, these means serve to maintain the sheet 10 folded while means 114 provide a separate envelope or sleeve around the folded sheet 10 that will maintain the same folded and/or while the means 116 attach sheet 10 to another sheet and/or while means 118 provide a mailing envelope around the folded sheet 10 and provide to the combination details of an addressee suitably visible for postal purposes. Means 120 may comprise as standard industrial units separate means to store unfolded sheets 10, store relevant information to be printed thereto, input a selection among such information, print the selected information to said sheets, fold the printed sheets, and expel them to guide means 20, these being indicated respectively as units 122, 124, 126, 128, 130, 132. Apparatus comprising means 120 together with means 114, 116, 118, may be used with an alternative to the apparatus shown in Figure 4 in full lines, namely comprising a guide means 20 to receive the expelled folded sheet 10 from means 132 and spray means 60 adapted to spray not glue but a coating for impregnation of the upper outer segment of the folded sheet and means 28 could then be not a hopper but curing means for said coating or impregnation. Means 60 and 28 would then, if desired, be effective on both the upper and lower outer segments of the folded sheet expelled from means 132. Alternatively again, means 60 could be omitted and means 28 could be such as to provide lamination of said upper and/or lower outer segments of folded sheet 10. It may yet again be desirable for such coating or impregnation to be printed onto unfolded sheet 10 by means 128,



preferably to stiffen a portion only of said sheet which, upon folding by means 130, will be one or both opposite outer segments of the sheet 10. Means 128 may instead also effect the curing to harden such portion. Alternatively again, means 126 may effect lamination to stiffen a said portion of said sheet which portion, after the folding, will  
5 comprise the opposite outer segments thereof. In all such cases of stiffening, the essence of the process is to add matter which is itself non-stiff but, in cooperation with the sheet (e.g. in laminating) or upon curing (after said coating or impregnating) such matter together with the sheet is effective to stiffen the same at a relevant portion only thereof, comprising the two opposite corner segments of the sheet. While lamination of a whole  
10 sheet is known and stiffening by coating and impregnation have previously been proposed by the present inventor, it is believed that any such stiffening of a portion only of a sheet (whether folded or not) is novel and inventive. Throughout this specification including the appended claims, the term "stiffening" is intended to refer to such use of a non-stiff material to produce eventually stiffening of the sheet and use of the term "stiff portion"  
15 is intended to refer to a portion which is itself stiff and stiffens the sheet by attachment thereto, e.g. by means of glue (which term itself is intended to refer to any suitable adhesive) unless the context otherwise requires.

In a further alternative to the function of the means 120 already described, such means may comprise means 122 to store sheets, means 124 to view individual frames from a  
20 strip or the like of film, laser printer means 128 including any necessary features to receive and locate images from said individual frames, and optionally means 130 to fold the sheet with mutually perpendicular concertina fold lines separating said images on said sheet and optionally the full-line features of the Figure 4 embodiment to attach stiff portions to opposite outer segments of the folded sheet while maintaining the sheet  
25 folded, possibly with the addition of any of means 114, 116, 118 and possibly a connection 134 between means 124 and means 118 in order to transmit and enclose the strip or the like of film in the envelope with the printed sheet and possibly together with charging documentation, advertising material and/or fresh (unexposed) film. The term "strip or the like of film" is intended to include, but not be limited to, film cassettes or sequences of  
30 film frames around the circumference of a flat circular card or indeed any other format in which frames are contained in a predetermined order.



The use of stiff portions comprising material that is at least partly transparent in any of these processes enables the number of steps to be reduced by omitting at least a step of printing such transparent material since the substrate formed by the sheet 10 thereat can have the necessary information on it. This allows such processes to be more economically and simply automated and likewise the corresponding apparatus.

In the article 136, shown partly unfolded in Figure 23 for the sake of clarity, to which the inventor first turned his attention, it is to be noted that this has an odd number of concertina fold lines longitudinally and an even number of concertina fold lines across its longitude and the adhesive is in an area 82, 84 that stops short of all edges of the folded sheet 10. In the article 138, Figure 24, the attachment is with the aid of an adhesive system comprising two components 140, 142, one on each of the folded sheet 10 and the stiff portion 22, cross-linked together. In the article 144, Figure 25, there is a separate envelope 146 in which the sheet 10 (and in this case cards 22, 24) is contained in order to maintain the sheet 10 folded due to the envelope being sufficiently small and/or stiff. If the envelope 146 is not crimped together as shown at the ends 148, it constitutes simply a sleeve. In the article 150, Figure 26, an article 144 is attached to a sheet comprising a compliments slip bearing information in the form of addressee details 154 intended to show through the window 158 of a window envelope 160 suitably visible for postal purposes and perhaps other descriptive or advertising information 156. Stiff portions 22 and/or 24 and/or envelope 146 may comprise transparent material. Article 162, Figure 27, comprises a sheet 10 folded with concertina folds (but shown opened out for clarity) and having stiffening of a portion 166, 166 only of the sheet 10 by means of addition thereto of non-stiff matter 164 in the form of lamination or hardened coating or hardened impregnation 164. Article 168, Figure 28, comprises a sheet 10 having a first set of five concertina folds and perpendicular to these a second set of two concertina folds with the segments 170 thus defined of the sheet 10 bearing laser-printed copies 172 of respective individual frames 174 of a strip 176 of film, the sheet 10 being provided with stiff portions 22, 24 which are transparent so that there can be a total of thirty-six images 172 on the front and back segments together, corresponding to the number of frames on a standard thirty-six exposure film. The images 172 are arranged in the same order as on the film 176 so that, to provide serially related sets of images, as shown along each row in Figure 23, it is only necessary to take them in the corresponding order on the film 176. To produce article 168, there may be used colour

laser-printer means 124. In article 178, Figure 29, (shown for clarity unfolded, as also article 168), at least a part 182 of the mutually perpendicular sets of lines 180 of the concertina folds is perforated so that segments such as 184 (e.g. constituting discount vouchers) can be detached while still allowing concertina folding action of the remainder of the sheet 10.

In article 136, the number of folds in either or both directions may vary, as also the area and/or arrangement of adhesive, and even whether adhesive or other joining is used for the stiffening, and/or other stiffening means are used.

An article such as 136 has particular advantages in that it can be opened fully, very quickly and easily and possibly using only one hand and can also be refolded very quickly and easily. As mentioned, the production by machine of such articles occasions great difficulties and some of the features herein described for overcoming these difficulties can have other applications.

It is sometimes found that the folded sheets 10, when obtained from an outside source, are not flat but bowed. In such case, a suitable form of guide means 20 can be used to flatten the folded sheets 10 sufficiently for them not adversely to affect the process being carried out by the apparatus of Figure 4. The features which enable guide means 20 to maintain sheets 10 folded can serve also maintain folded sheets 10 flat. The difficulty arises mainly if the folded sheets 10 are bowed from end to end, in which case a shape of guide means 20 such as shown in dashed lines at 87, 88, 89 in Figure 19 will be effective to flatten them.

While the addressee details may be provided on the folded sheet 10 or stiff portion 22 or 24 in order to show through a window of envelope 160, these details may alternatively be printed direct to envelope 160, or preferably to an adhesive label affixed by means 118 to envelope 160 as item 158. This particularly facilitates speeding up production since the printing of addresses direct to sheets 10 is much slower than to sheets 152 or to labels. It might only be advantageous to have printing means 124 print also the addressee details if the printing on sheets 10 varies from one sheet 10 to the next, depending on the addressee. Means 114 or 118 may comprise, for adding addressee details, security coding or the like, an ink-jet printer controlled by a tachogenerator to ensure that it prints at the correct position on each article. Alternatively, means 60 may alternatively be a printer or there may be a printer in a similar position above an appropriate part of guide means 20, either at the position shown of means 60 or, for example, just after station 64.



2116963

While, as shown in Figure 4, the upper part of belt 16 with its flights 14 is arranged to move strictly along the level, e.g. by means of a supporting bed under the upper part of belt 16, any adjustment to the flights would need to be carried out on each one individually. A more sensible arrangement is to provide variable height means 186 set into the table at appropriate portions thereof. This also avoids any need to adjust the guide means 20.

Reference above to maintaining sheet 10 folded includes reference to preventing it from opening more than an amount which is unimportant in the circumstances.

Further methods of maintaining the sheet 10 folded include use of a gravity-operated member or again hook means 188, Figure 30, exemplified as being provided on a transport drum 30, e.g. for use in the Figure 1 embodiment. Of course, any combination of fold-maintaining means may be employed.

Thus, it will be seen that a universal production apparatus, or at least finishing machine, can be provided which can be readily and speedily adapted to provide any combination of a wide variety of the various optional features mentioned, and adjustments of them.

The information which may be selected by the user via means 126 may, for example, be a highlighting of the positions of all cinemas, car parks or other sites of interest on a map. In a development of means 120, its means 122 are adapted to store stiff portions such as 22, 24 and its means 132 are adapted to expel two of said stiff portions separately with the folded sheet 10. Such an arrangement is not followed by the full-line features of the Figure 4 embodiment and may be useful, for example, in a free-standing machine at an airport which produces a map with selected details to order and is coin-freed, its output being the folded sheet and two stiff portions which may be self-adhesive or bear a component of a two-component adhesive system of which the other component is borne by the folded sheet 10, for the user to affix said stiff portions himself to said folded sheet to produce an article 136. The apparatus may alternatively expel a said sheet without folding it, leaving it to the user to fold it. Usually, the user will then simply peel a backing layer off the stiff portions and then attach them to the sheet.

Regarding the use of at least partly transparent stiff portions or cards 22, 24, the following points should be noted:-



1. The use of such a card enables all of the printing to be done on the sheet and none, or perhaps only standard information or design, on the card, which cards can then be used without change for a variety of different jobs.

2. Machines to print onto plastic card are very limited in the number of them available  
5 and their total capacity, so that large runs need months of advance booking.

3. Plastic cards are normally printed 56 cards to view, i.e. printed at once, in order to provide economic production but this is very expensive on artwork since it then requires a layout with 55 repetitions of the artwork of a single card.

4. Printing done onto plastic quickly becomes scuffed in normal handling, but artwork  
10 printed onto the sheet itself is protected by a transparent cover (the card) and therefore use of this produces a functionally better-looking product.

5. Plastic cards when printed are not readily stackable because of drying time and other factors, e.g. scuffing. To stop scuffing requires lamination of the printed plastic cards and such lamination too needs time to dry. Thus, printing onto plastic cards is very  
15 slow.

6. If cards having different artwork are printed at the same time on a sheet before cutting, they tend to become mixed up when the sheets are cut up and are difficult to sort.

7. If the folded sheets 10 are obtained externally, the folded sheets in a stack sometimes have different orientations because of inconsistency in packing them and need  
20 to be sorted before printed plastic cards 22, 24 are affixed to them so that these shall be in the correct positions out of some 16 possibilities.

For all these reasons, it is highly advantageous to use stiff portions comprising transparent material, especially with a doubly concertina-folded sheet 10.

With reference to the use of a plurality of channels, as exemplified in connection with  
25 Figures 17 and 18, the units mentioned, referring to Figure 4, may severally be the first feeder 26 for cards 22, the first glue head 54 for these, the second feeder 12 for inserts 10, the second glue head 60 for these, the third feeder 28 for cards 24. The quick-release mechanism may be applied to disconnecting pneumatic power.

In a variation of the Figure 4 embodiment, means 130 may comprise a plurality of  
30 folders acting in parallel to enable faster production to avoid this stage being a bottleneck.

It will be appreciated that use of a two-component adhesive system which requires cross-linking of the components for adhesion allows the whole of cards 22, 24 to be

29201-3

18

coated with a component and possibly the whole of an outer segment of the folded sheet 10 to be coated with the other component without these being sticky or adhering to anything that they should not. Such adhesive systems are well known.

5           The aforementioned stiffening by applying a coating that can be cured may require several layers of the coating depending upon the material used and the thickness of varnish. This may be normally printed in a single pass to a thickness of 2 to 5 grammes per square metre at a rate  
10 of 5000 units being printed per hour. The thickness can be increased by use of a screen printer to 12 to 15 grammes per square metre in a single pass. The system is used with a UV curing lacquer and a continuous UV curing (e.g. drying) system. The composition of the coating material can be  
15 adjusted according to requirements of any particular process. For example, lithographic printing can produce a coating some 80 microns (metric) thick which can be cured in 1/1000 second by ultraviolet light to produce a stiffening which is sufficient for many purposes. These compositions  
20 can also be used for penetrating the material of sheet 10, hereinbefore called impregnation. An alternative is to use a so-called two-pot system in which a first coating or impregnation with one component is followed by a second application with a second component and these then cross-  
25 link automatically (self-curing) and the system may perhaps be enhanced by using overlacquer.

          It will be apparent to those skilled in the art that features of the different embodiments may be combined and different features or combinations of features may be  
30 novel in their own right and independently of other features or combinations of features so that invention is considered



29201-3

19

to reside in any new and unobvious features or combinations  
of features herein disclosed. In case of doubt, the claims  
are to be interpreted in the most beneficial sense to give  
the maximum protection consistent with not covering anything  
5 known or obvious.

**CLAIMS**

1. Apparatus for use in producing articles each comprising a sheet folded with concertina folds which can be unfolded, characterised in that the article comprises at least one stiff portion attached to an outer segment of the folded sheet, and the apparatus  
5 comprises means to supply the folded sheet and stiff portion and attach them together and maintain the sheet folded during at least part of the approach to the attaching step.

2. Apparatus for use in producing articles each comprising a sheet folded with a first set of concertina folds which can be unfolded and transverse to these a second set of concertina folds which can be unfolded, characterised in that the article comprises two  
10 stiff portions attached to opposite outer segments of the folded sheet, and the apparatus comprises means to supply the folded sheet and said stiff portions and attach them together and maintain the sheet folded during at least part of the approach to the attaching step.

3. Apparatus as claimed in claim 1 or 2, characterised in that it comprises means to  
15 effect said attaching step and to include gluing and attaching as parts of such step, which means comprise a gluing station followed by an attaching station and means to maintain the sheet folded at or in the region of such a station.

4. Apparatus as claimed in claim 1, 2 or 3, characterised in that it comprises means to effect said attaching step and to include gluing and attaching as parts of such step,  
20 which means comprise means substantially to maintain the sheet folded before and throughout the attaching step.

5. Apparatus as claimed in any one of claims 1 to 4, characterised in that it comprises guide means that are adapted to bear against the folded sheet to maintain it folded during passage of the folded sheet past the guide means.

25 6. Apparatus as claimed in any one of claims 1 to 5, characterised in that it comprises apparatus for conveying objects, comprising guide means and flights arranged to move along the guide means and thereby push said objects therealong, the flights being constructed and arranged to control the mutual relative position of separate elements of each said object during such movement.

30 7. Apparatus as claimed in claim 6, characterised in that the flights are constructed and arranged to position corresponding edges of the elements mutually relatively displaced in the direction of said movement.

8. Apparatus as claimed in claim 6 or 7, characterised in that the flights are stepped.



9. Apparatus as claimed in claim 6, 7 or 8, characterised in that the guide means are shaped to vary the position of said objects relative to the flights during said movement.

10. Apparatus as claimed in any one of claims 6 to 9, characterised in that the guide means are shaped to enable the flights to control the mutual relative position of a said object and a further separate element during said movement.

11. Apparatus as claimed in any one of claims 6 to 10, characterised in that the guide means comprise a first introductory guide portion for a first said element, and a second introductory guide portion for a second said element, said portions being constructed and arranged to allow said flights to entrain such elements separately and then enable them to meet.

12. Apparatus as claimed in claim 11, characterised in that the guide means comprise a third introductory portion for a third said element, such portions being constructed and arranged to allow said flights to entrain said third element separately from said first and second elements and, after the meeting of said first and second elements, to enable a meeting between an object comprising these first and second elements on the one hand and said third element on the other hand.

13. Apparatus as claimed in any one of claims 6 to 12, characterised in that it comprises spray gluers and each of said flights comprises an upper and a lower forwardly facing portion of which the upper portion projects slightly forward of the lower portion, and said guide means comprise a runner adapted to position a first said stiff portion at an upper position adjacent the nozzle of a said spray gluer to be firstly glued thereby and thereafter lower the stiff portion to said lower portion of the flight, a second runner adapted to receive said folded sheet at the level of the upper portion of the flight and lower the same to contact the firstly glued upper surface of said first stiff portion while still being positioned by the upper portion of said flight and pass the folded sheet, maintained folded and attached to the first stiff portion, close to the nozzle of a said spray gluer to be secondly glued thereby and thereafter lower the attached sheet and first stiff portion to be wholly within the lower portion of the flight, and a third runner arranged to receive a second said stiff portion and lower the same to the lower portion of said flight to contact the secondly glued surface of said folded sheet.

2116963

14. Apparatus as claimed in any one of claims 1 to 13, characterised in that it comprises means to maintain the sheet folded while the means provide a separate envelope or sleeve around the folded sheet that will maintain the same folded.

5 15. Apparatus as claimed in any one of claims 1 to 14, characterised in that it contains means to stiffen a portion only of said sheet by an addition thereto of non-stiff matter and possibly curing the same.

10 16. Apparatus as claimed in any one of claims 1 to 15, characterised in that it contains means to stiffen a portion only of said sheet by an addition thereto of non-stiff matter and possibly curing the same and said means are adapted to impregnate said portion with a curable composition of said matter and to cure said composition to effect stiffening of said portion.

15 17. A process for producing articles, by means of apparatus as claimed in any one of claims 1 to 16, each article comprising a sheet folded with concertina folds and at least one stiff portion attached to an outer segment of the folded sheet, characterised in that the folded sheet and stiff portion are moved along a predetermined path with their corresponding edges mutually relatively displaced in the direction of such movement and with the sheet maintained folded, during which movement said sheet and portion are initially separate from each other and then attached together.

20 18. A process as claimed in claim 17, characterised in that after the aforesaid attachment the folded sheet and a second said stiff portion are moved along a predetermined path with their corresponding edges mutually relatively displaced in the direction of such movement and with the sheet maintained folded, during which movement said sheet and second portion are initially separate from each other and then attached together.

25 19. A process for producing articles by means of apparatus as claimed in any one of claims 1 to 16, or a process as claimed in claim 17 or 18, each article comprising a sheet folded with concertina folds and at least one stiff portion attached to an outer segment of the folded sheet, characterised in that said stiff portions for said articles are obtained alternately from two stores.

30 20. A process for producing articles by means of apparatus as claimed in any one of claims 1 to 16, or a process as claimed in any one of claims 17 to 19, each article comprising a sheet folded with concertina folds and at least one stiff portion attached to



29201-3

34

an outer segment of the folded, sheet, characterised in that in order to attach a said stiff portion to said folded sheet glue is applied to said folded sheet only within an area that stops short of all edges of the folded sheet.

5 21. An article comprising a sheet folded with concertina folds and at least one stiff portion provided to the sheet, characterised in that the stiff portion comprises transparent material.

10 22. An article according to claim 21, comprising a sheet folded with a first set of concertina folds and transverse to these a second set of concertina folds, characterised in that the article has stiffening of two opposite outer segments of the folded sheet by means of addition thereto of non-stiff matter.

15 23. An article according to claim 21 or claim 22, characterised in that the stiffening comprises lamination.

24. An article according to claim 21 or claim 22, characterised in that the stiffening comprises a hardened coating.

20 25. An article according to claim 21 to claim 22, characterised in that the stiffening comprises a hardened impregnation.

25 26. A process for producing an article as claimed in claim 21, characterised in that the process comprises the step of providing at least one stiff portion comprising material that is at least partly transparent to a sheet folded with concertina folds.

27. A process according to claim 26, characterised in that it comprises folding the sheet with a first set of

29201-3

35

concertina folds and transverse to these a second set of concertina folds and attaching to each of two opposite outer segments of the folded sheet stiff portions comprising material that is at least partly transparent.

5 28. A sheet article comprising a sheet of material comprising a portion only which is stiffened by addition of non-stiff matter.

29. Apparatus for use in producing an article comprising a sheet of material, characterised in that it  
10 contains means to stiffen a portion only of said sheet by an addition thereto of non-stiff matter.

30. Apparatus as claimed in claim 29, wherein the means to stiffen the portion comprise means to stiffen a portion only by an addition thereto of non-stiff matter and  
15 curing the same.

31. Apparatus as claimed as claim 29, characterized in that said means are adapted to laminate said portion on one or both sides.

32. Apparatus as claimed in claim 29, characterised in  
20 that said means are adapted to coat said portion with a curable composition of said matter and to cure said composition to effect stiffening of said portion.

33. Apparatus as claimed in claim 29, characterised in that said means are adapted to impregnate said portion with  
25 a curable composition of said matter and to cure said composition to effect stiffening of said portion.

34. Apparatus as claimed in claim 28 or claim 29, characterised in that said means are adapted to stiffen as aforesaid two opposite corners portions of said sheet.



29201-3

36

35. Apparatus as claimed in claim 34, characterised in that it comprises means to fold said sheet with a first set of concertina folds and transverse to these a second set of concertina folds with the outer opposite segments of the  
5 folded sheet being the aforesaid corner portions.

36. Apparatus as claimed in claim 35, characterized in that the stiffening means are arranged to stiffen said portions as aforesaid after the folding.

37. A process for producing articles as claimed in  
10 claim 28, characterised in that the process comprises the step of stiffening of a portion only of the sheet material by use of non-stiff matter.

38. A process as claimed in claim 37 further comprising the step of curing the non-stiff matter.

15 39. A process as claimed in claim 37, characterised in that the stiffening comprises laminating said portion with said matter.

40. A process as claimed in claim 37, characterised in that the stiffening comprises coating said portion with said  
20 matter and curing the coating.

41. A process as claimed in claim 37, characterised in that the stiffening comprises impregnated said portion with said matter and curing the impregnation.

42. A process as claimed in any one of claims 37 to  
25 41, characterised in that it comprises stiffening as aforesaid of two opposite corner portions of said sheet.

43. A process for producing articles, each comprising a sheet of material, characterised in that it comprises

29201-3

37

folding the sheet with a first set of concertina folds and transverse to these a second set of concertina folds and stiffening, by the addition of non-stiff matter and curing the same, two outer opposite segments of the folded sheet.

5 44. An article comprising a sheet folded with concertina folds, characterised in that the article has stiffening of a portion only of the sheet by means of addition thereto of non-stiff matter.

10 45. An article comprising a sheet folded with a first set of concertina folds with transverse to these a second set of concertina folds, characterised in that the article has stiffening of two opposite outer segments of the folded sheet by means of addition thereto of non-stiff matter.

15 46. An article as claimed in claim 44 or claim 45, characterised in that the stiffening comprises lamination.

47. An article as claimed in claim 44 or claim 45, characterised in that the stiffening comprises a hardened coating.

20 48. An article as claimed in claim 44 or claim 45, characterised in that the stiffening comprises a hardened impregnation.

FETHERSTONHAUGH & CO.

OTTAWA, CANADA

PATENT AGENTS













3/10

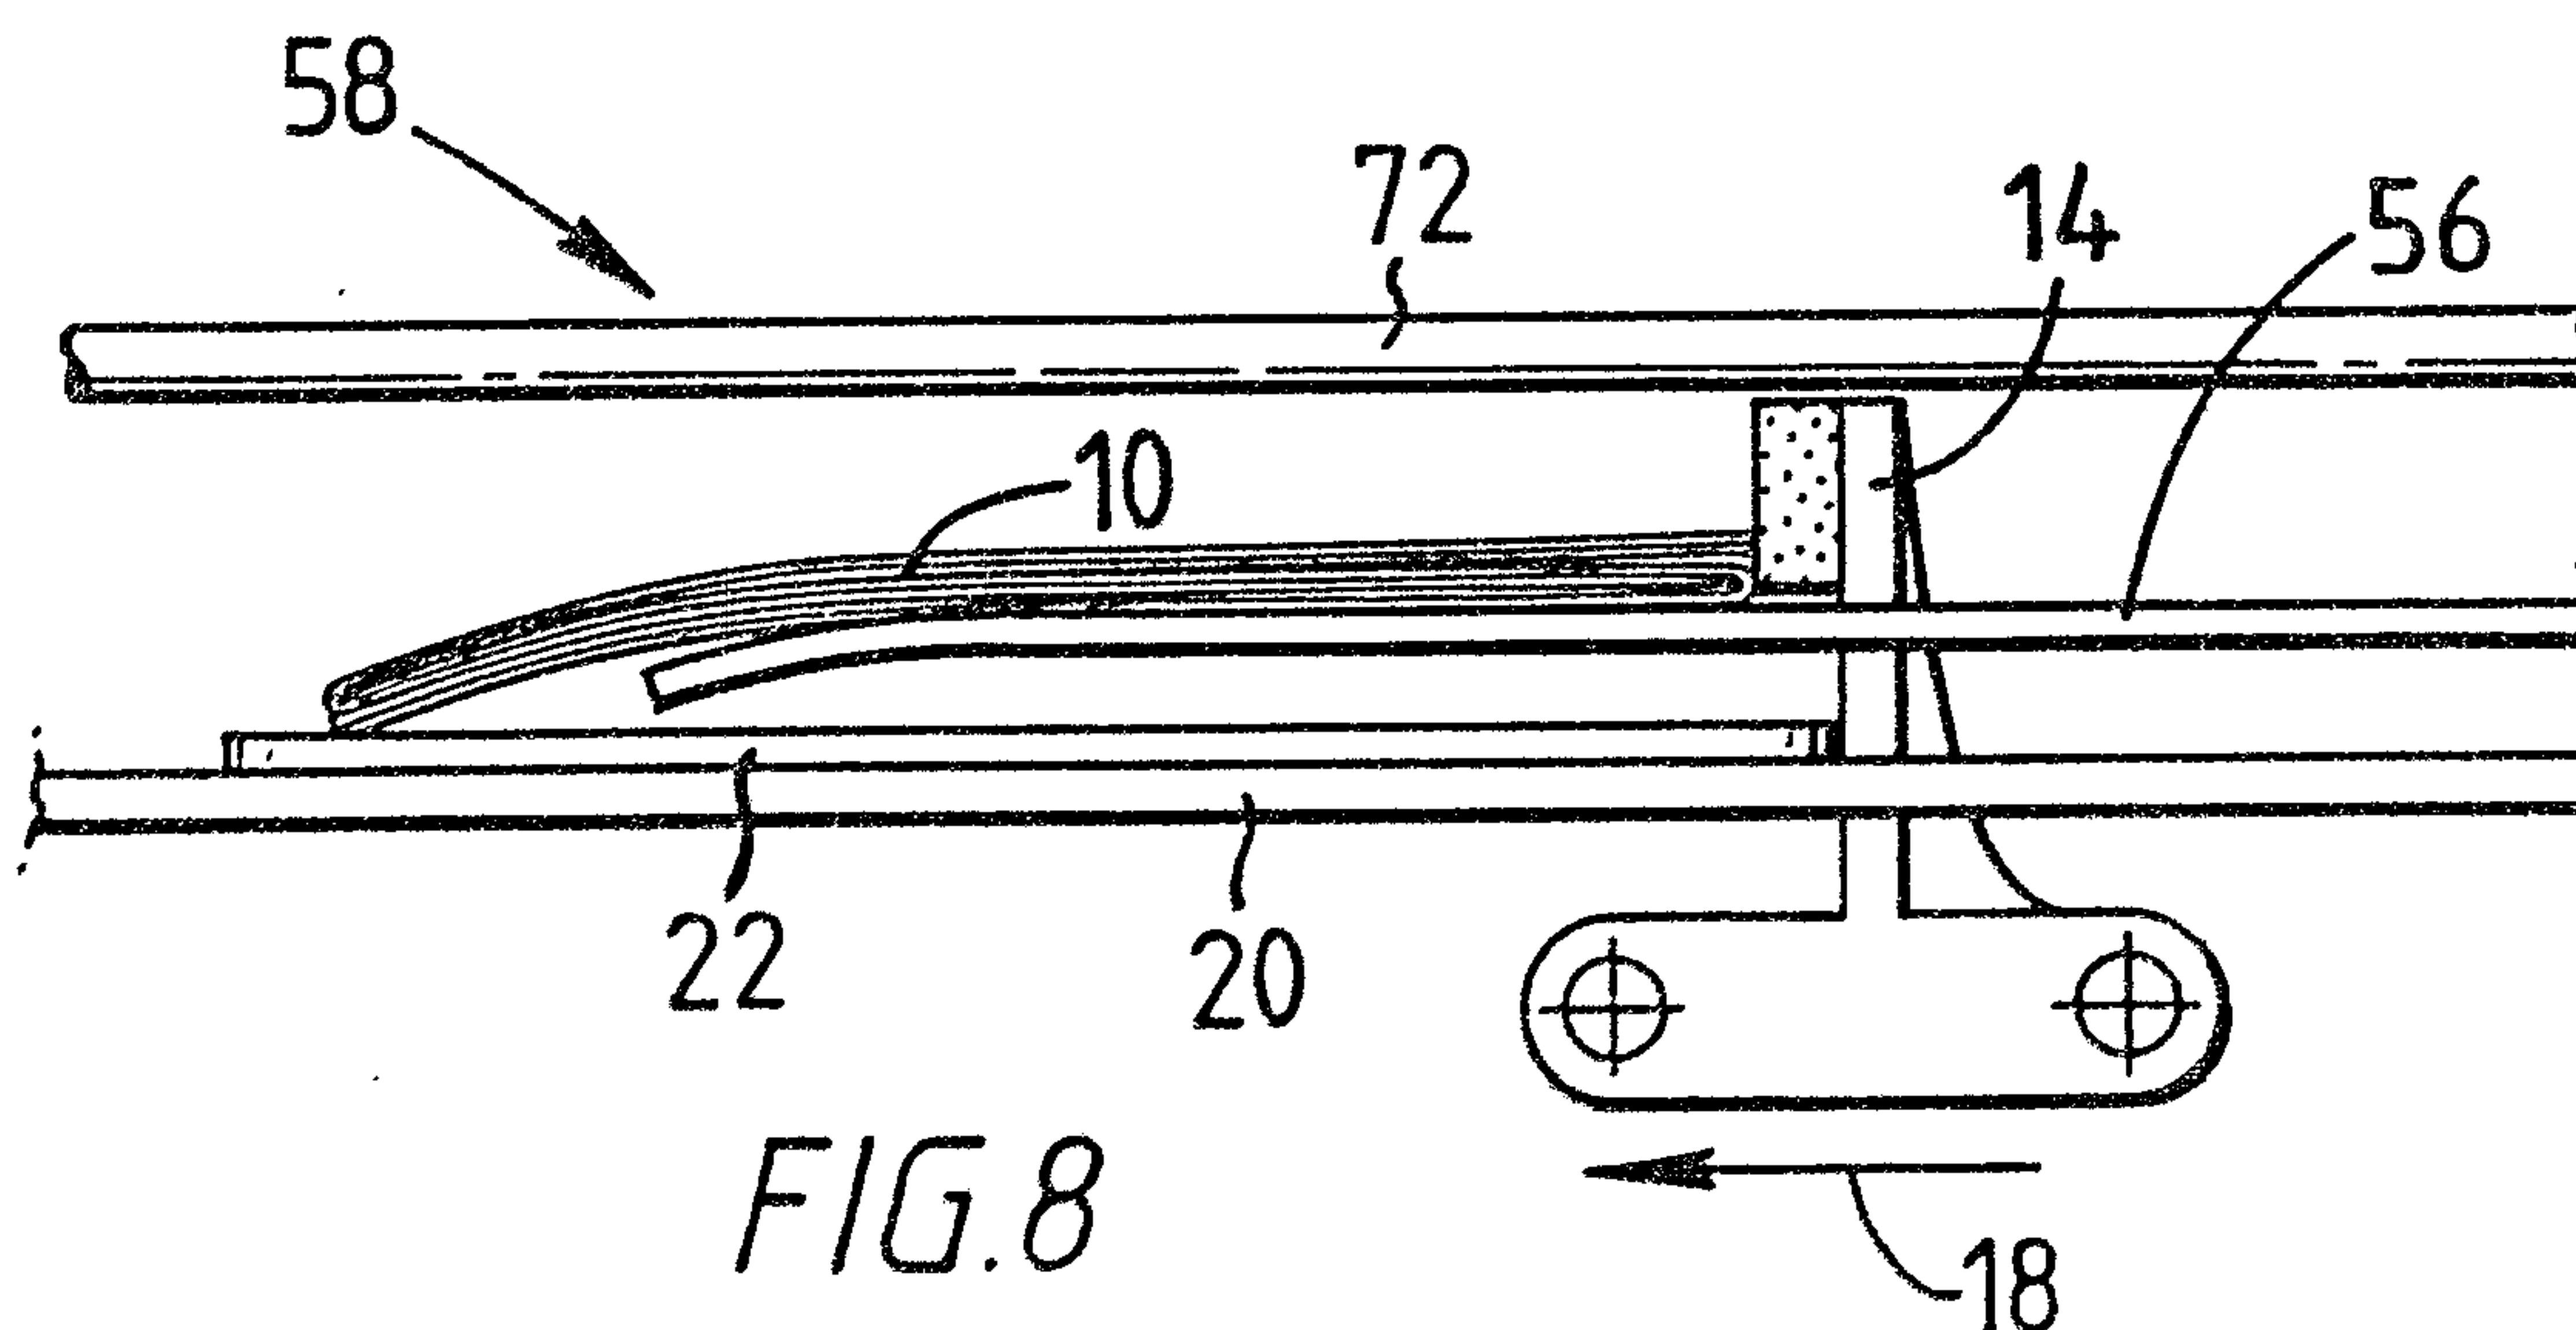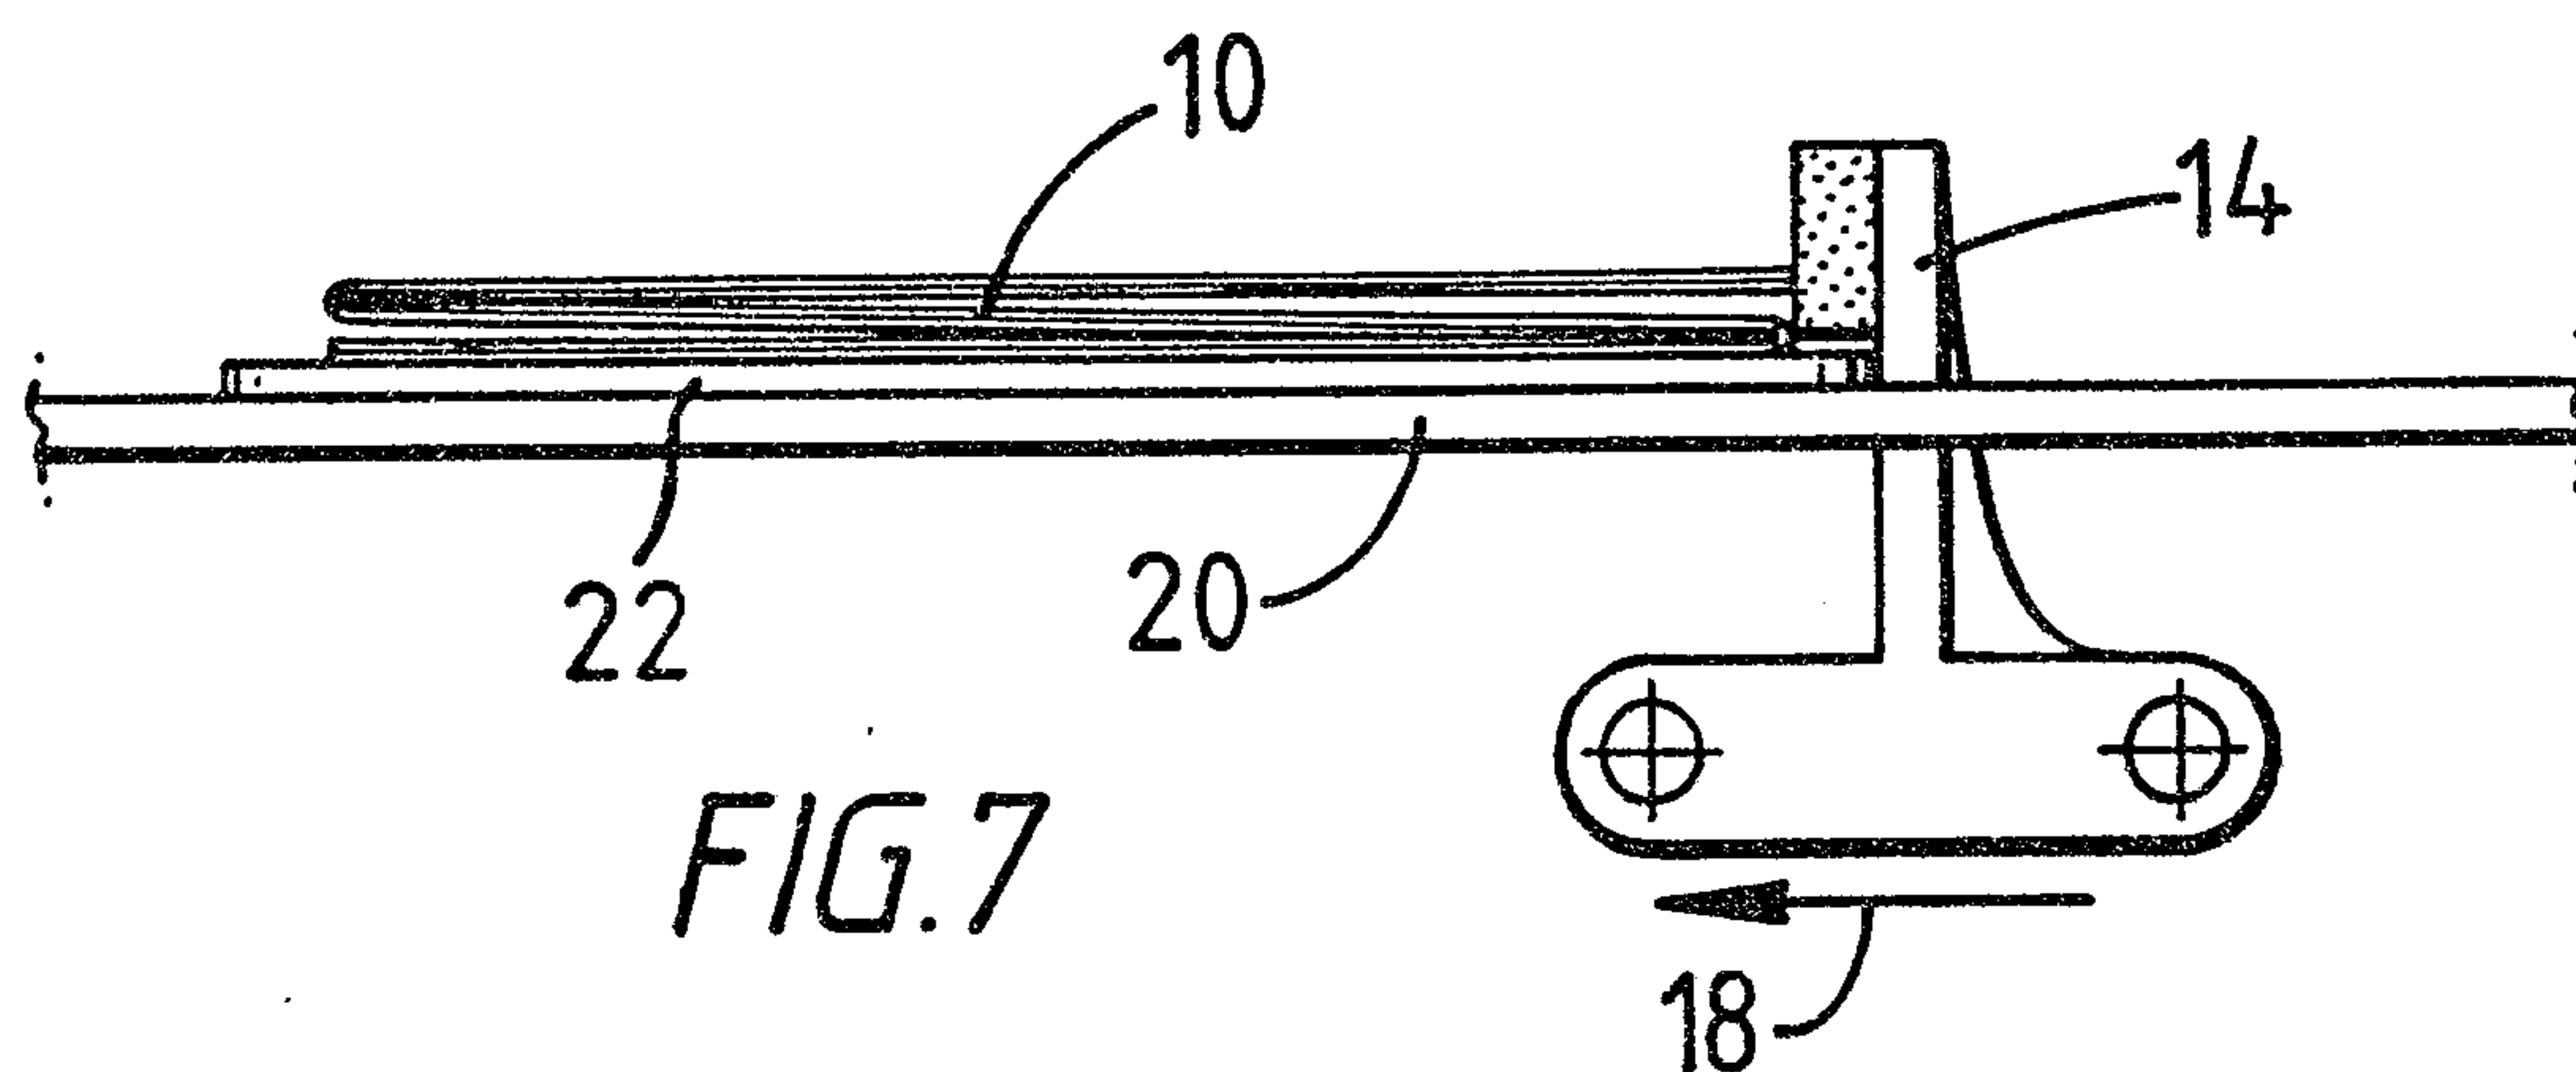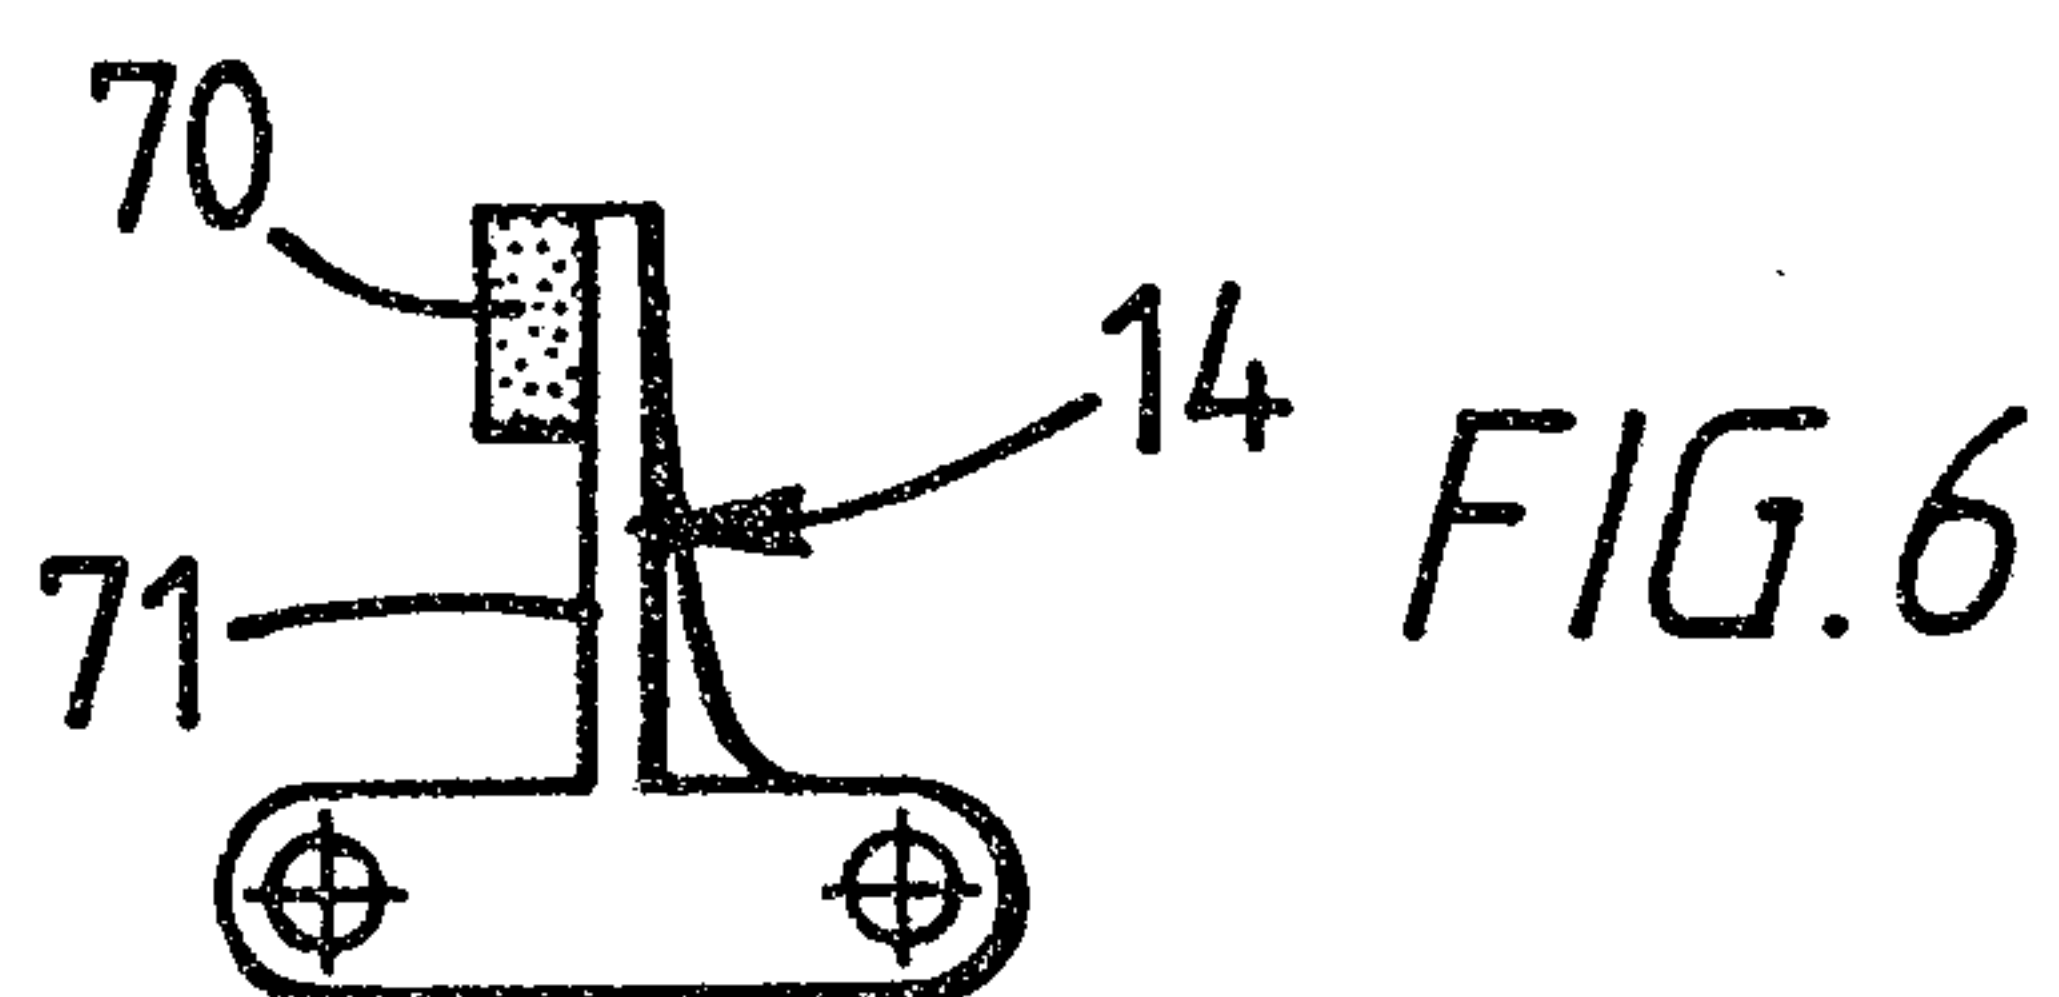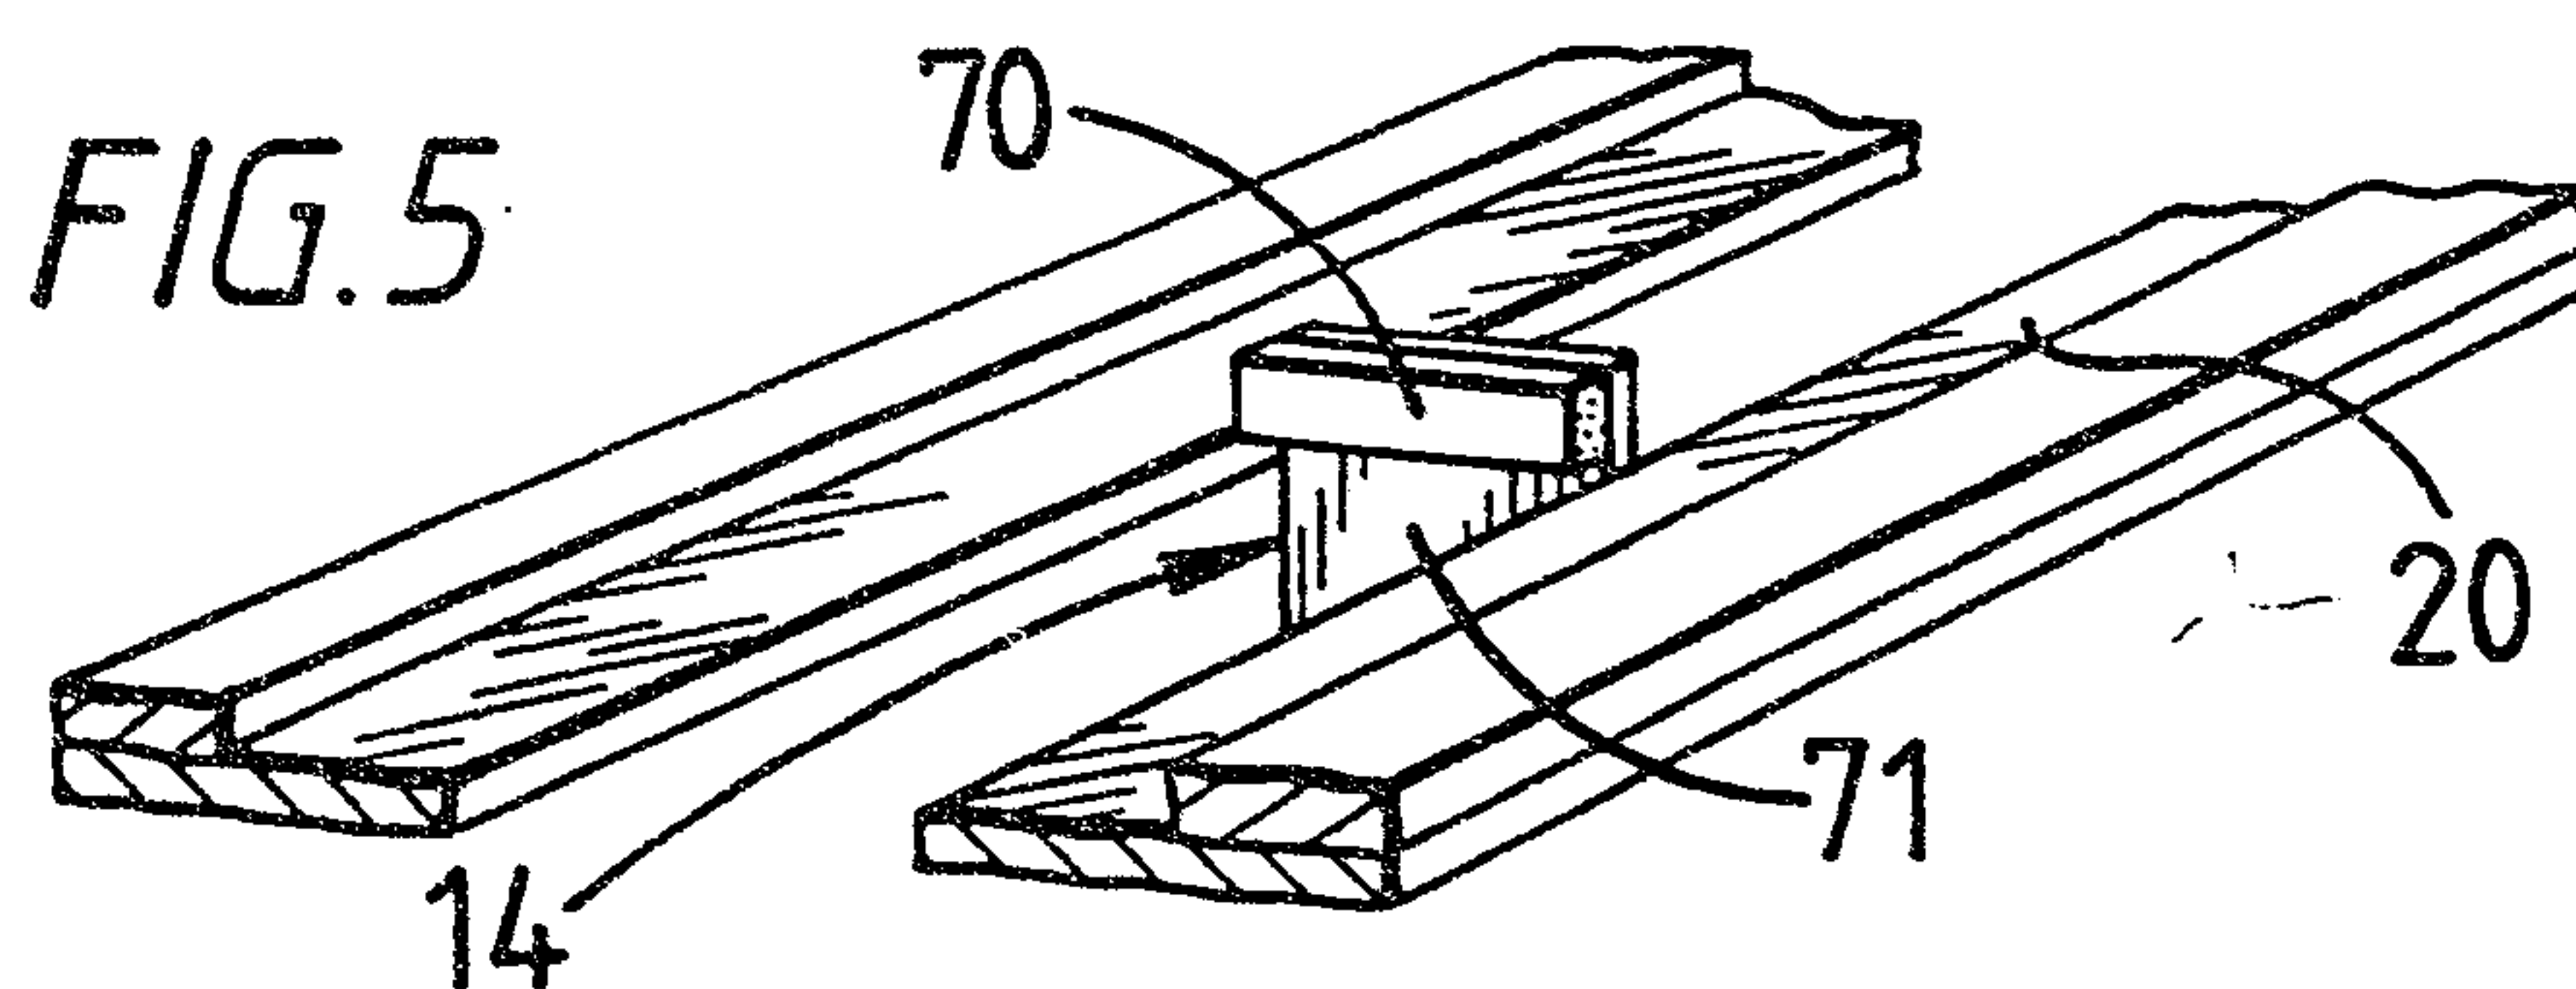

4/10

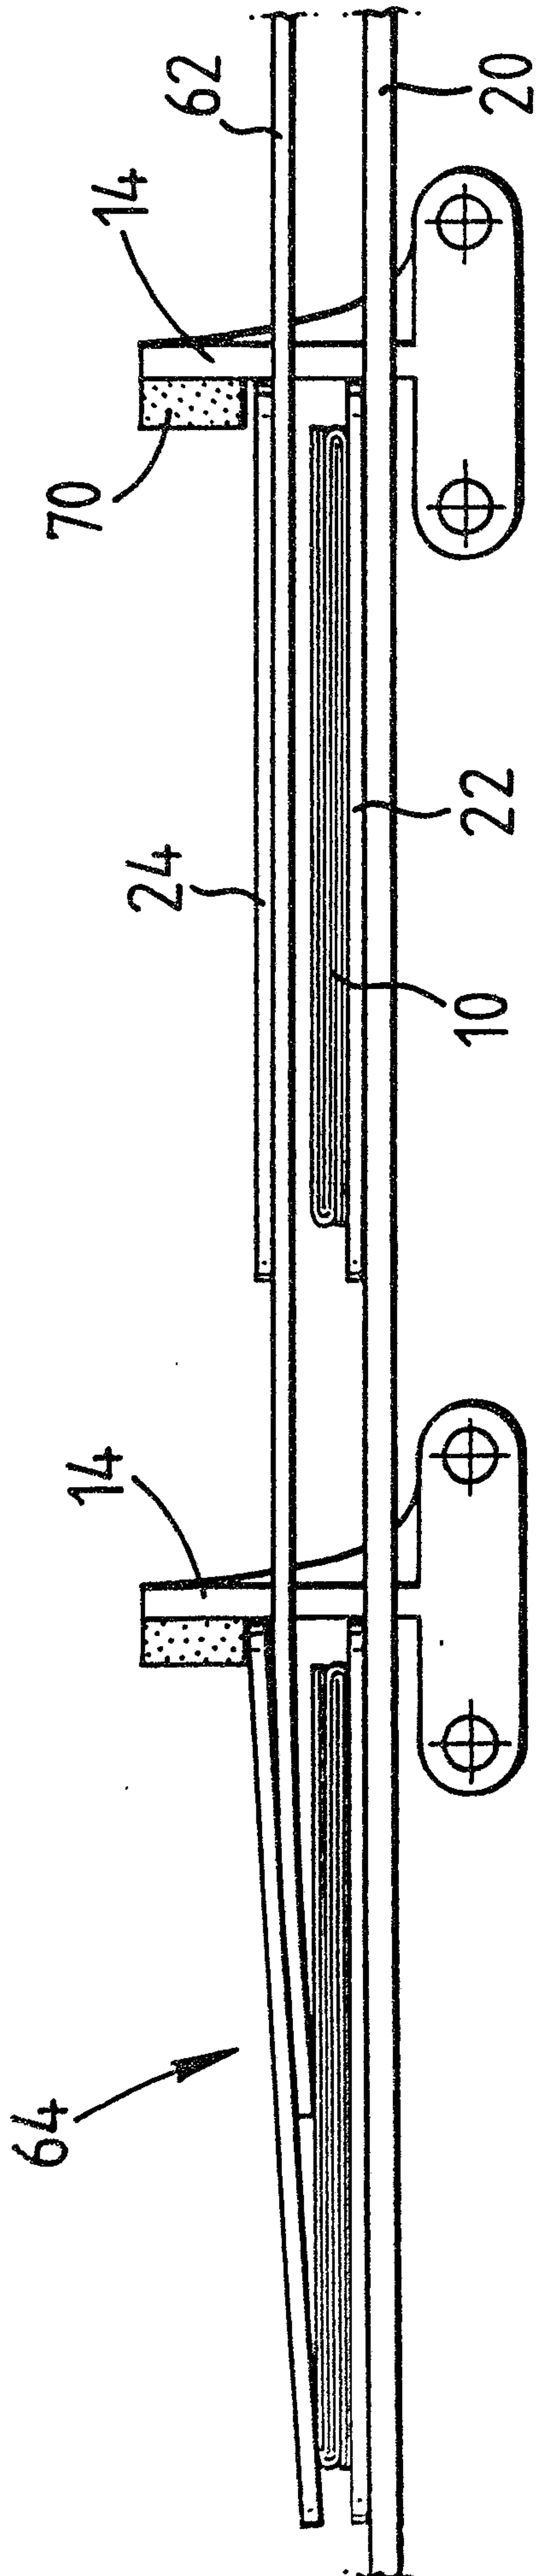


FIG. 9

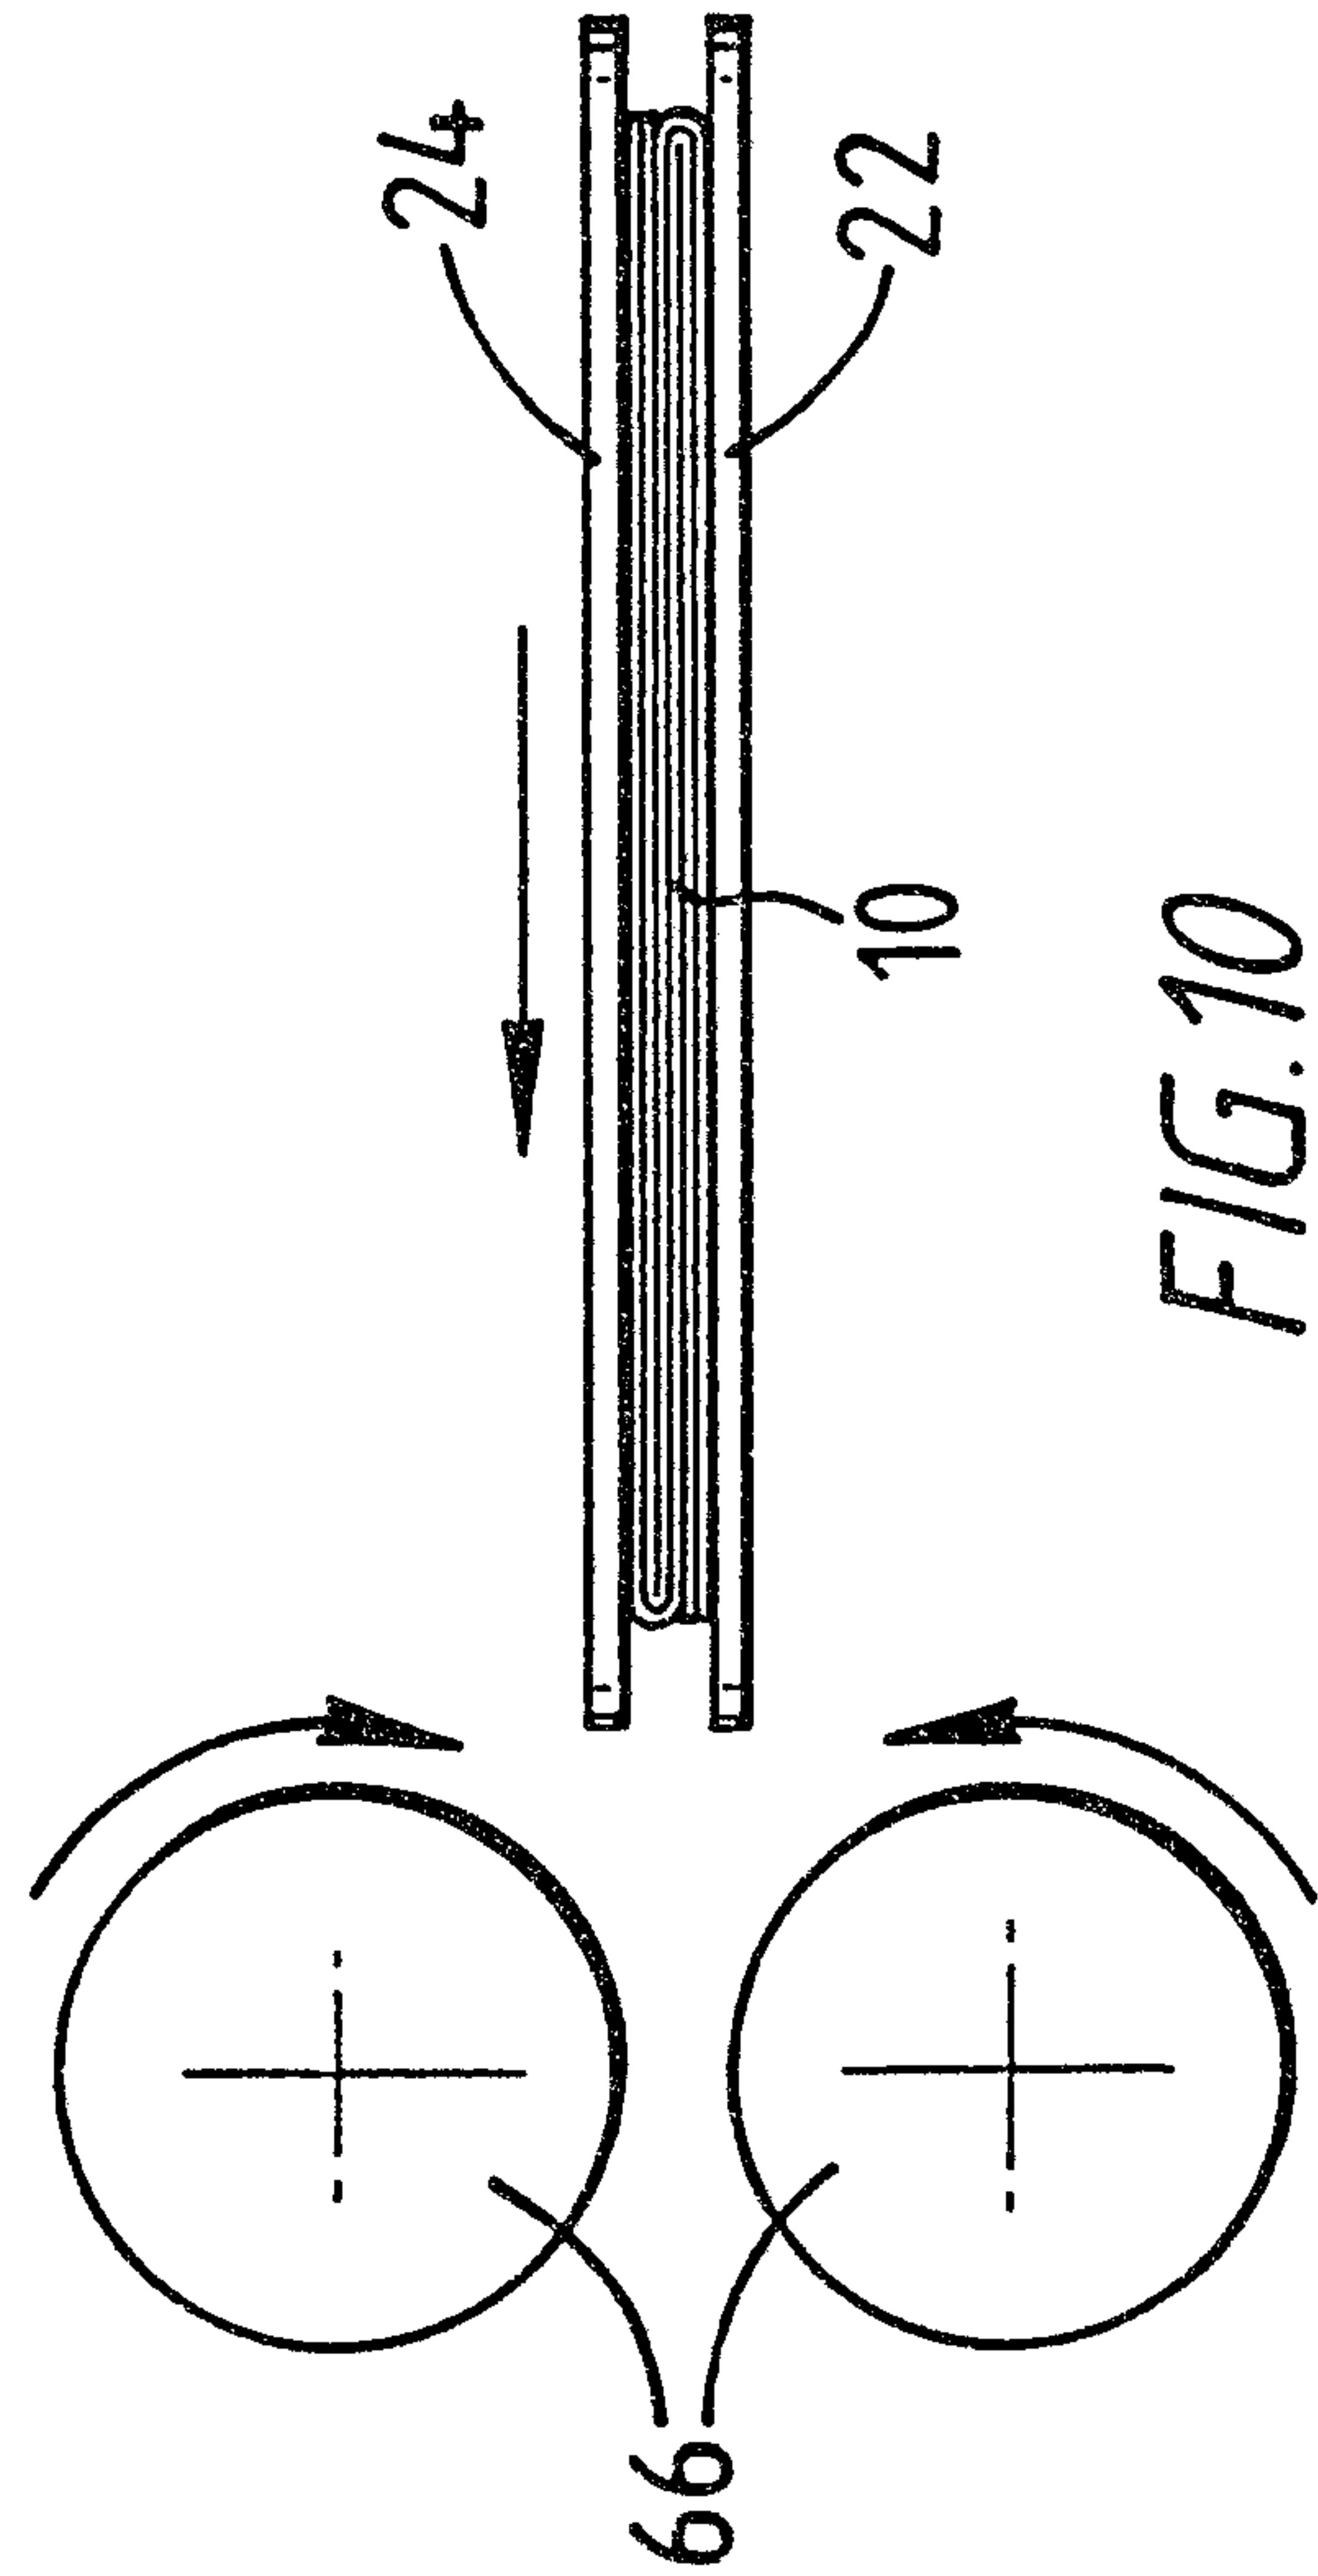


FIG. 10



5/10

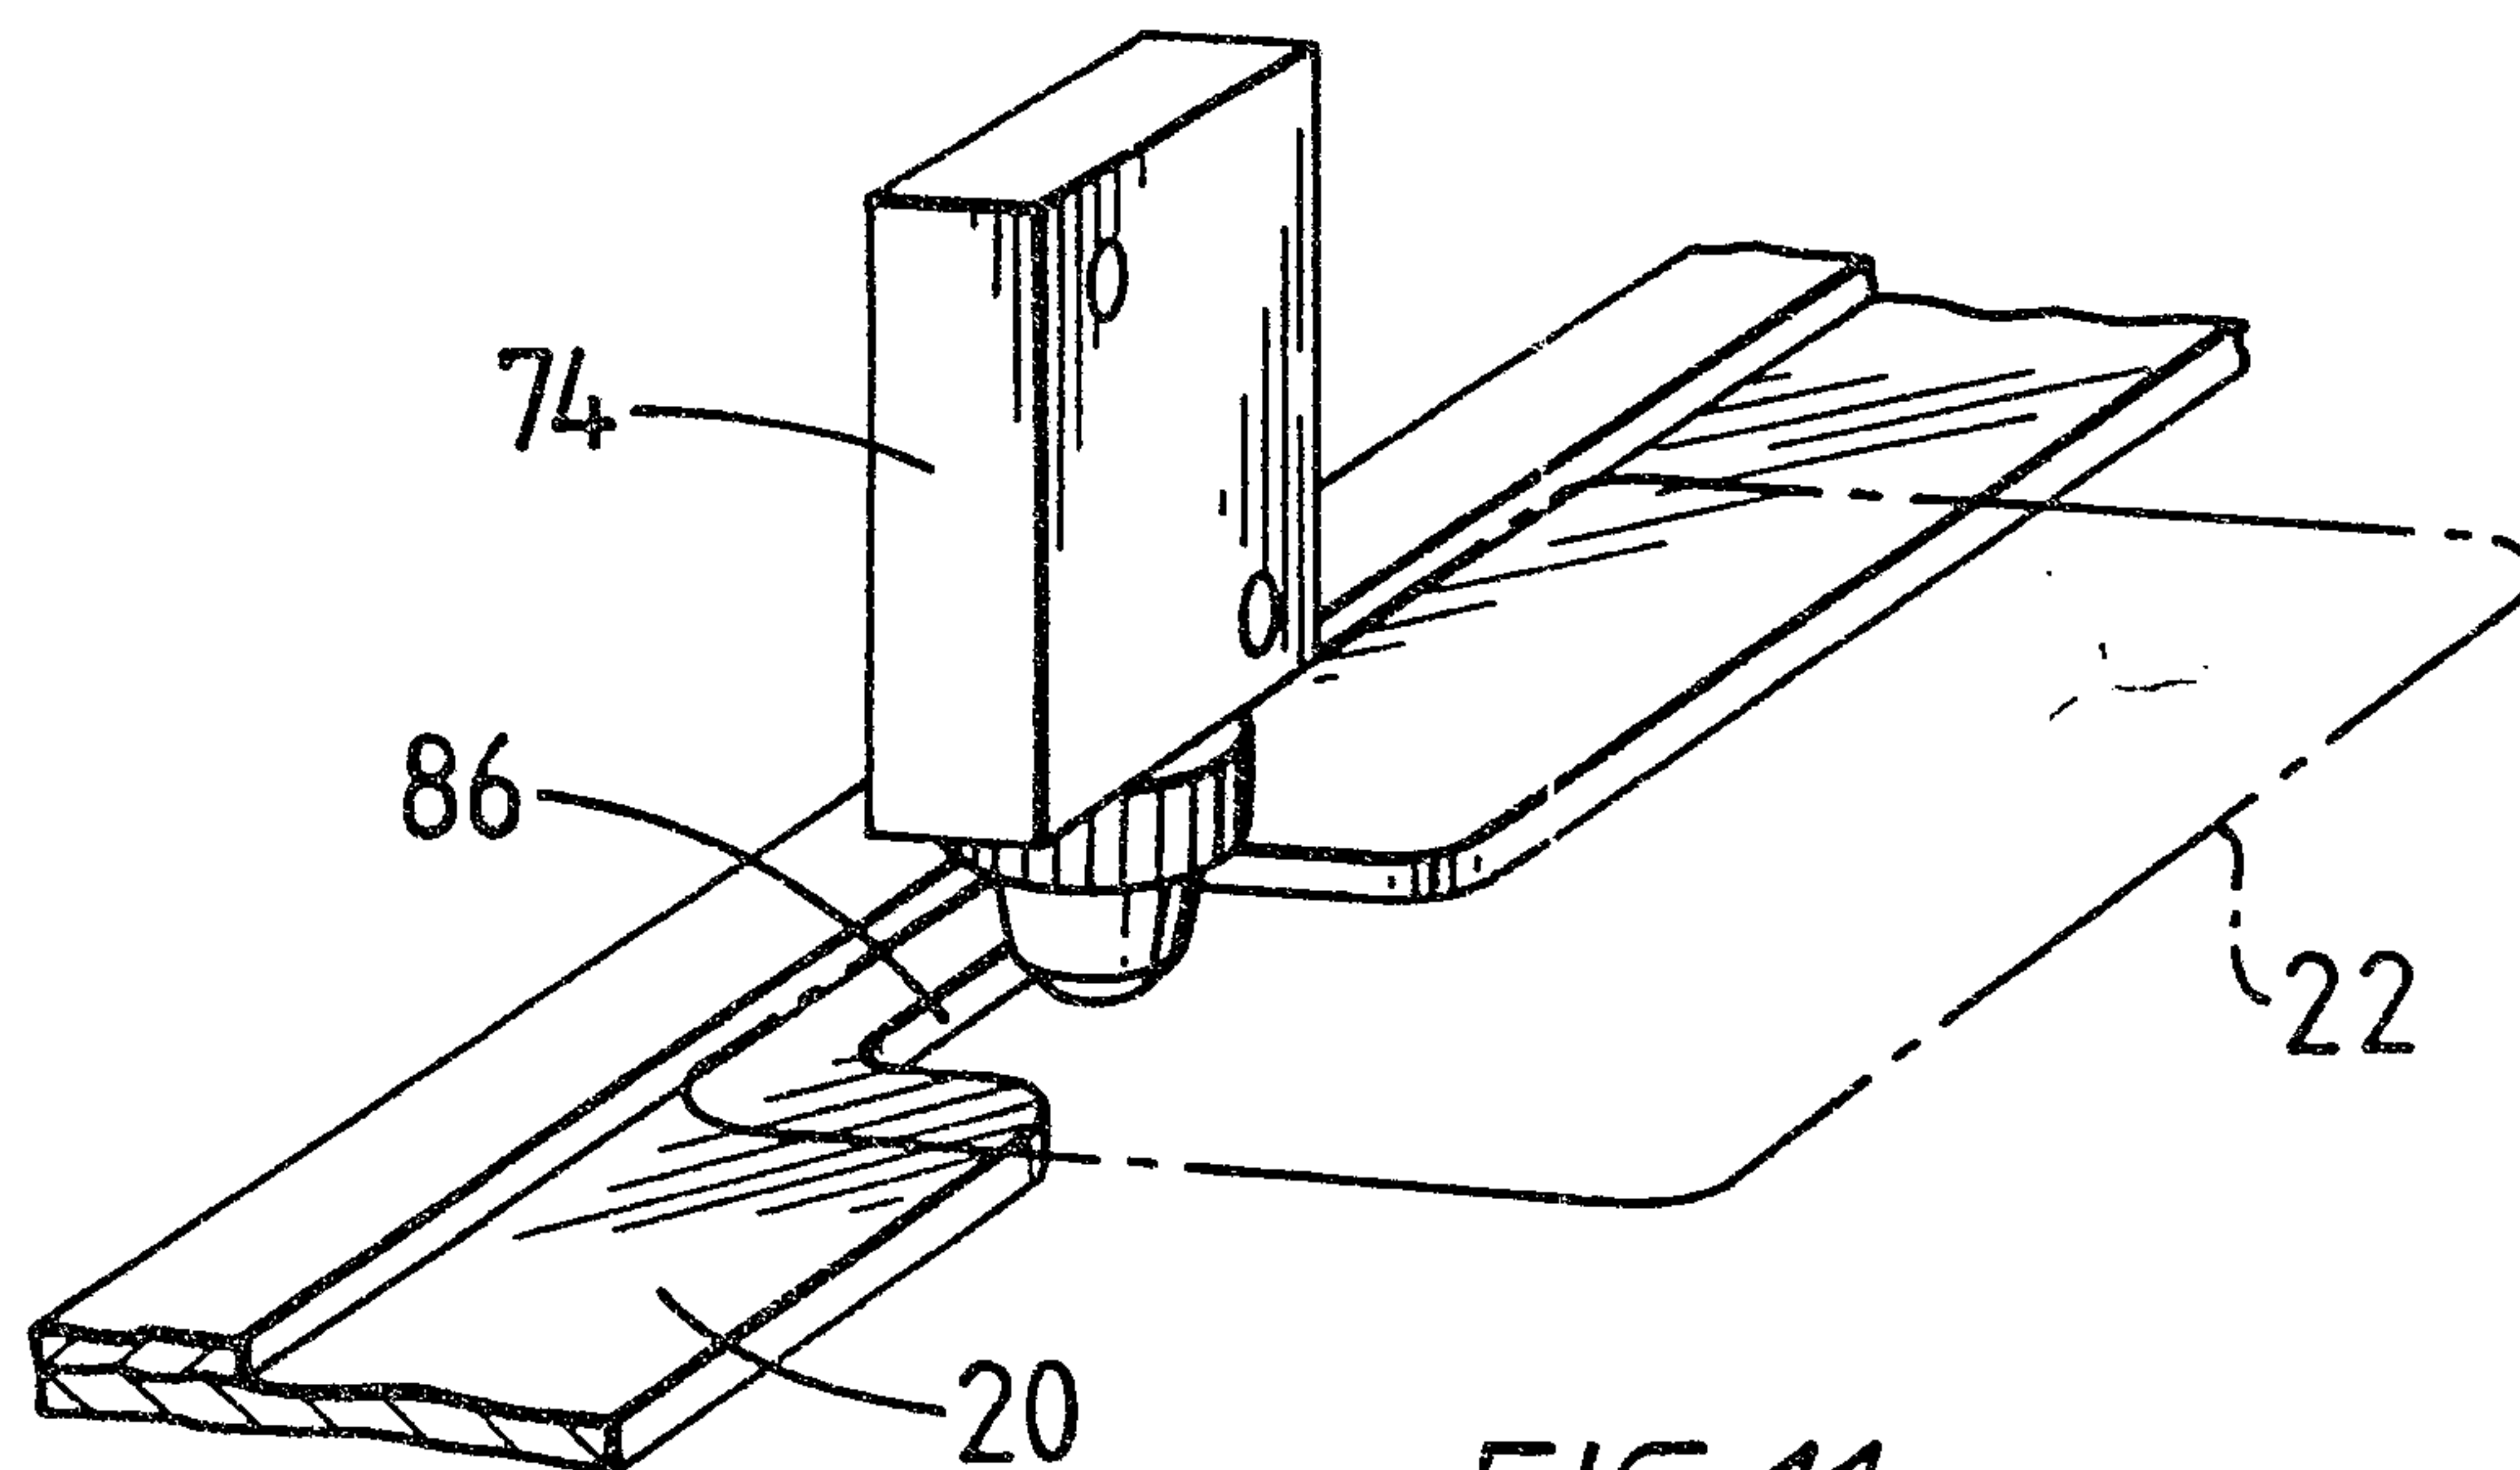


FIG. 11

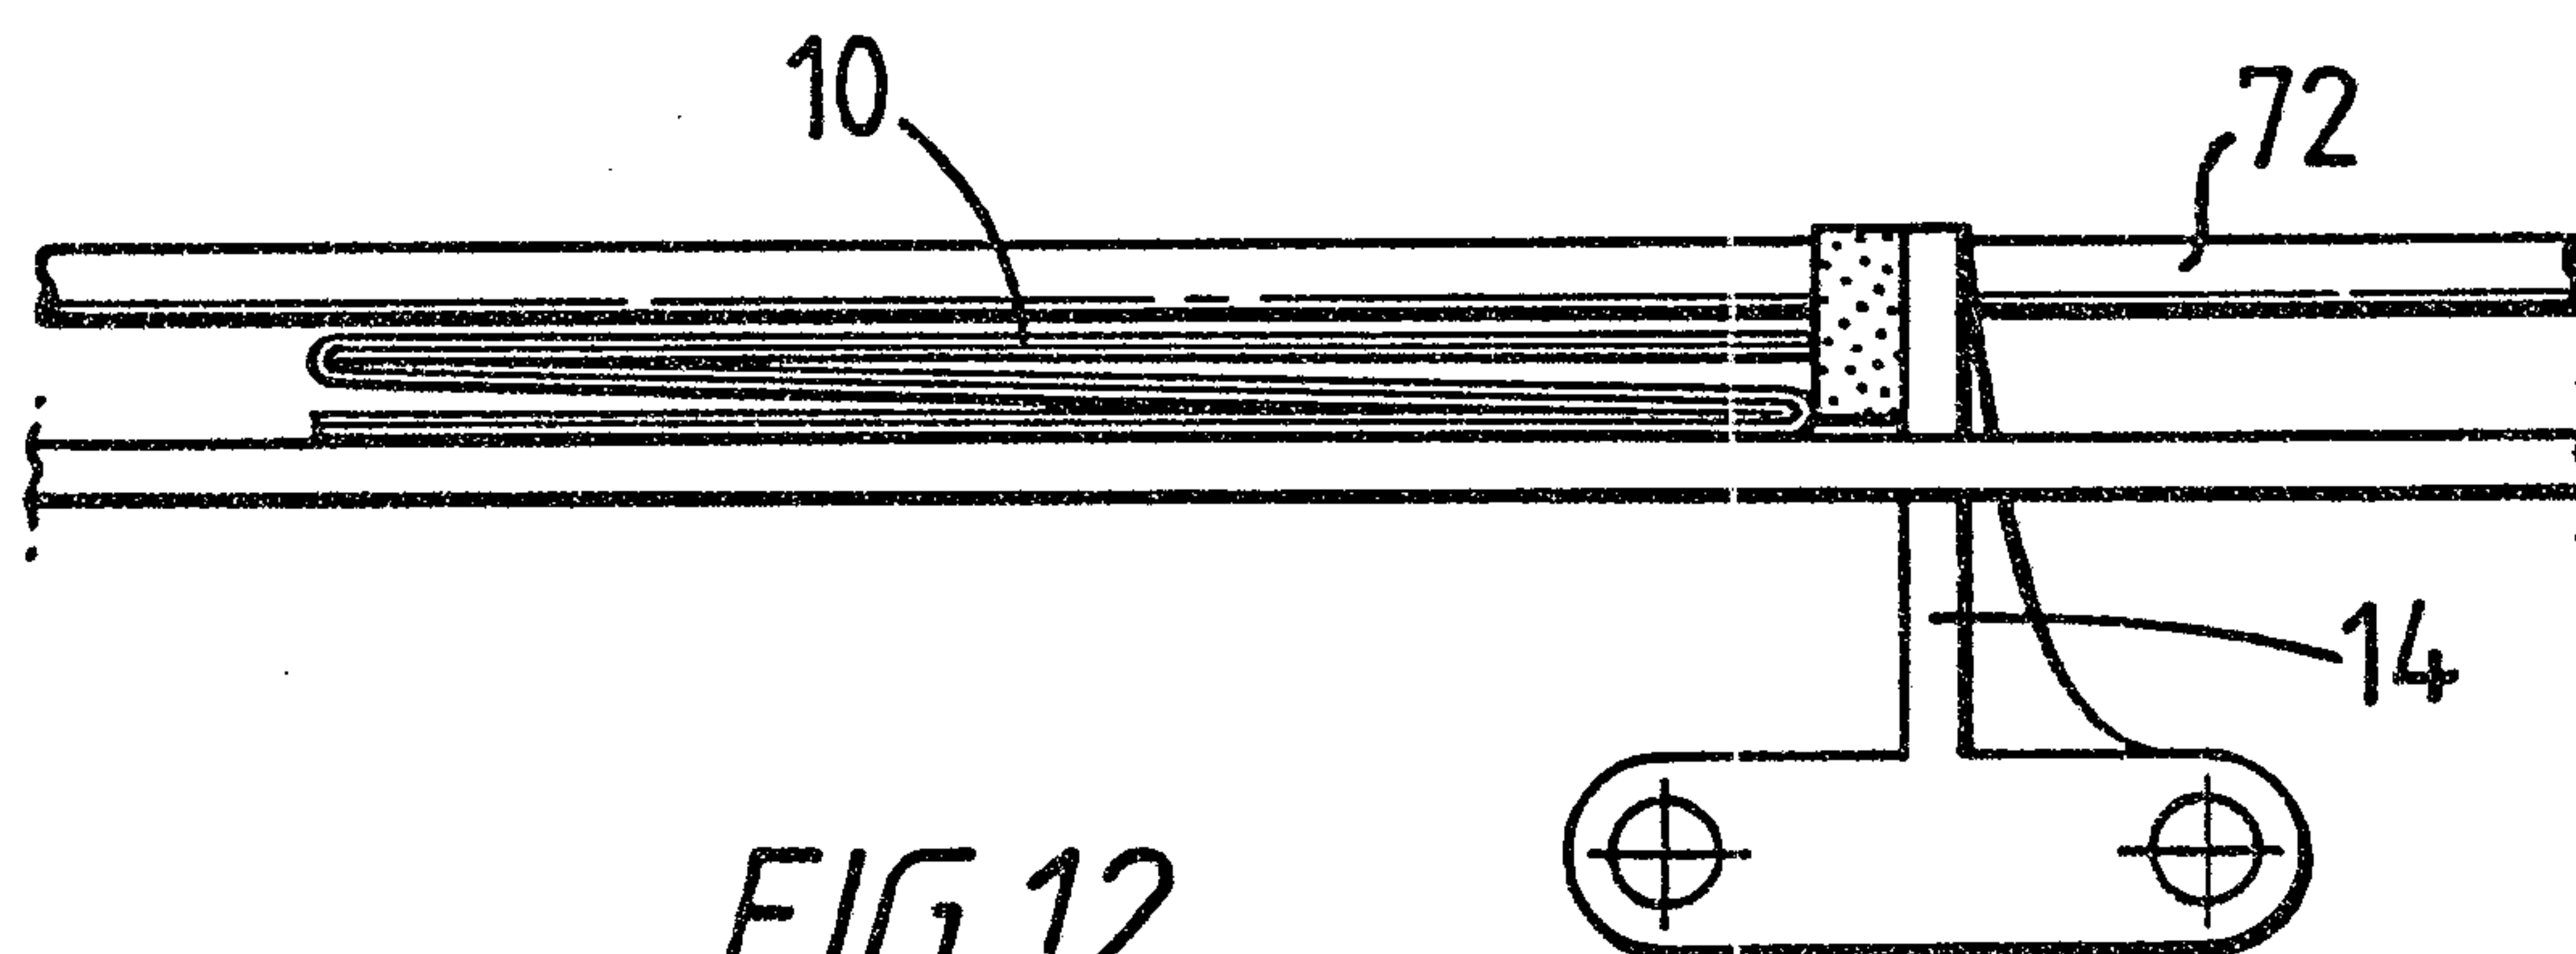


FIG. 12




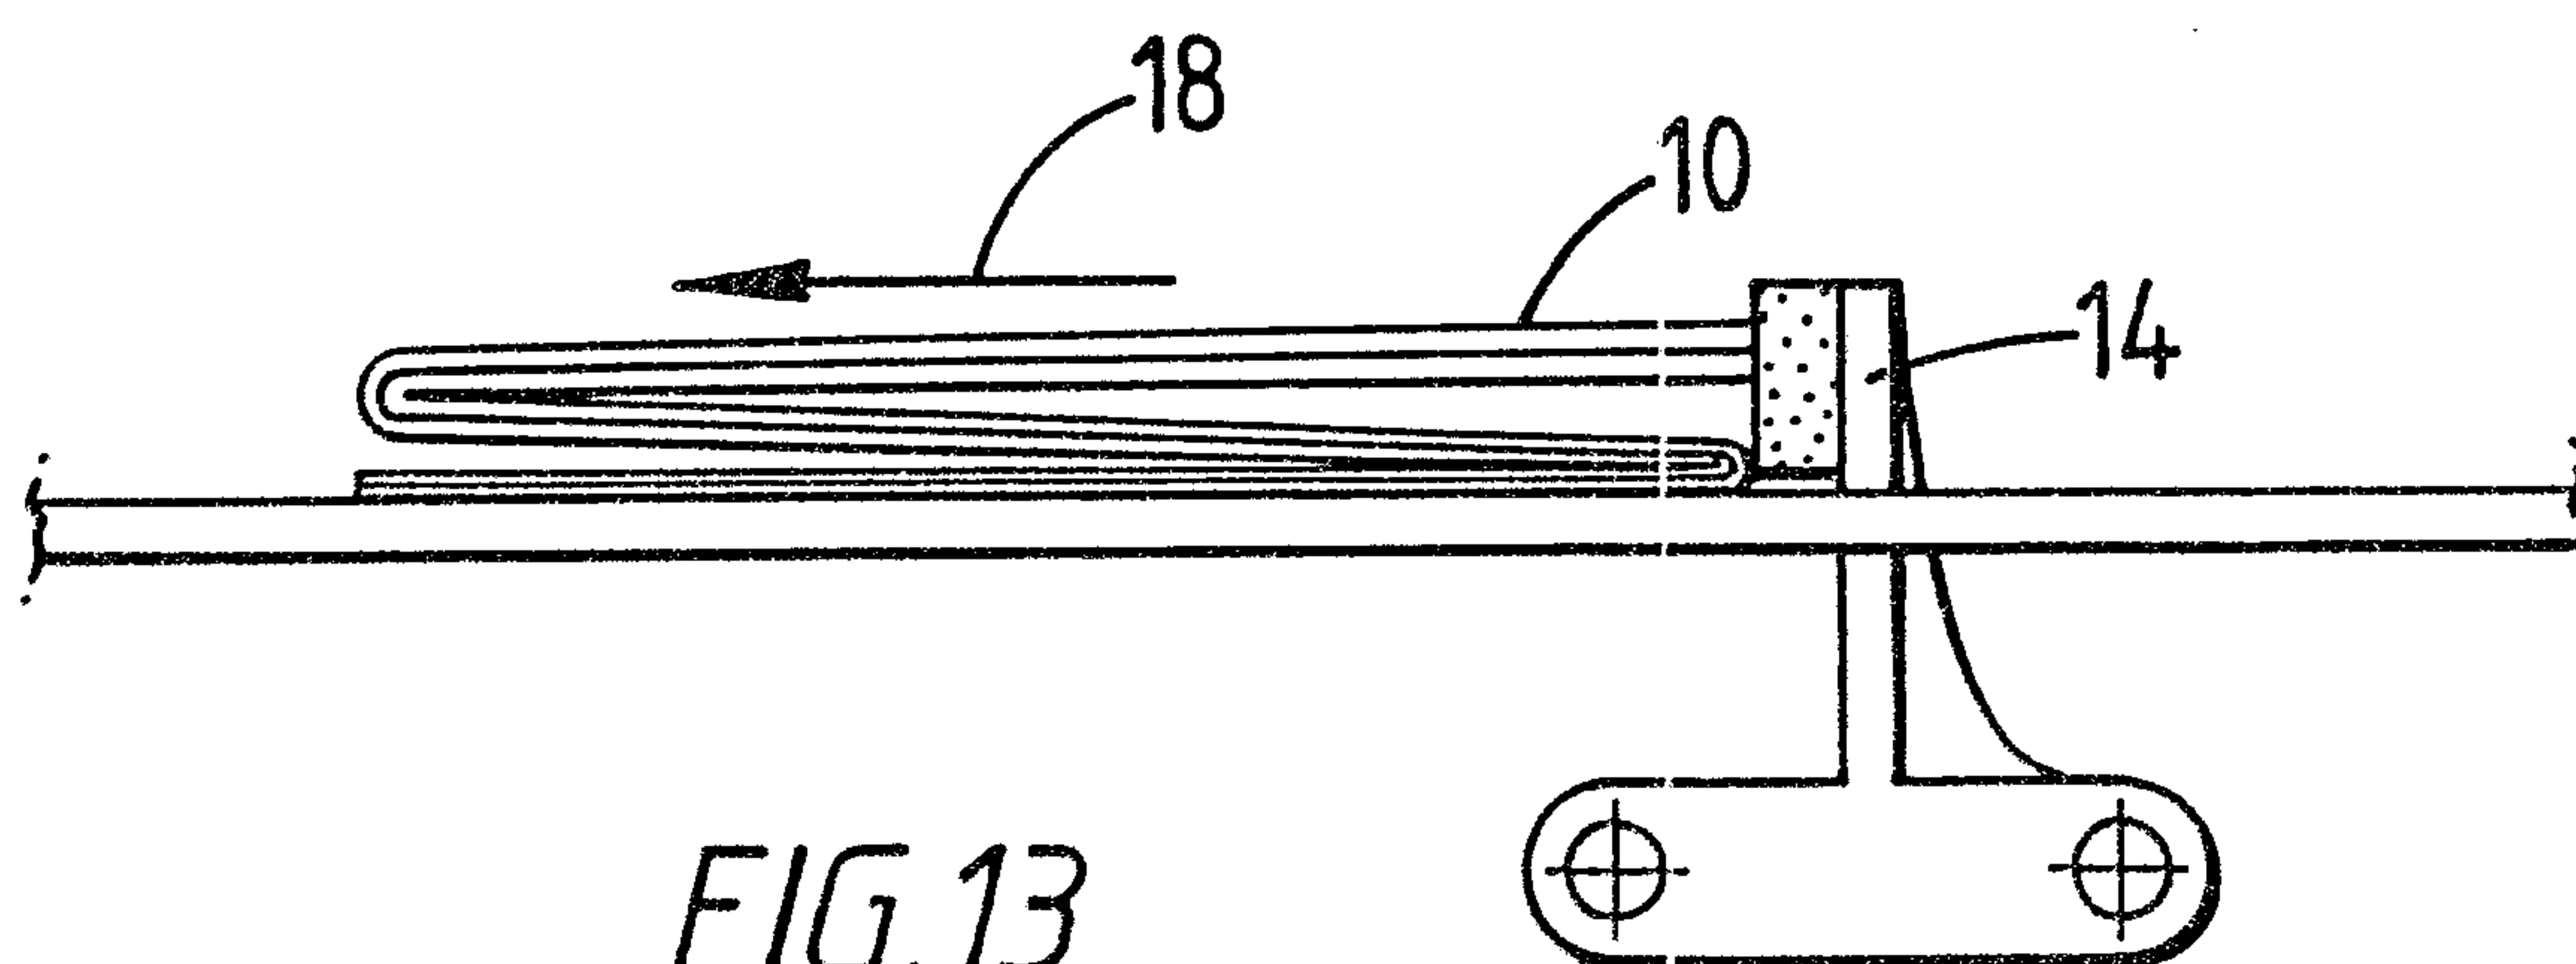


FIG. 13

6/10

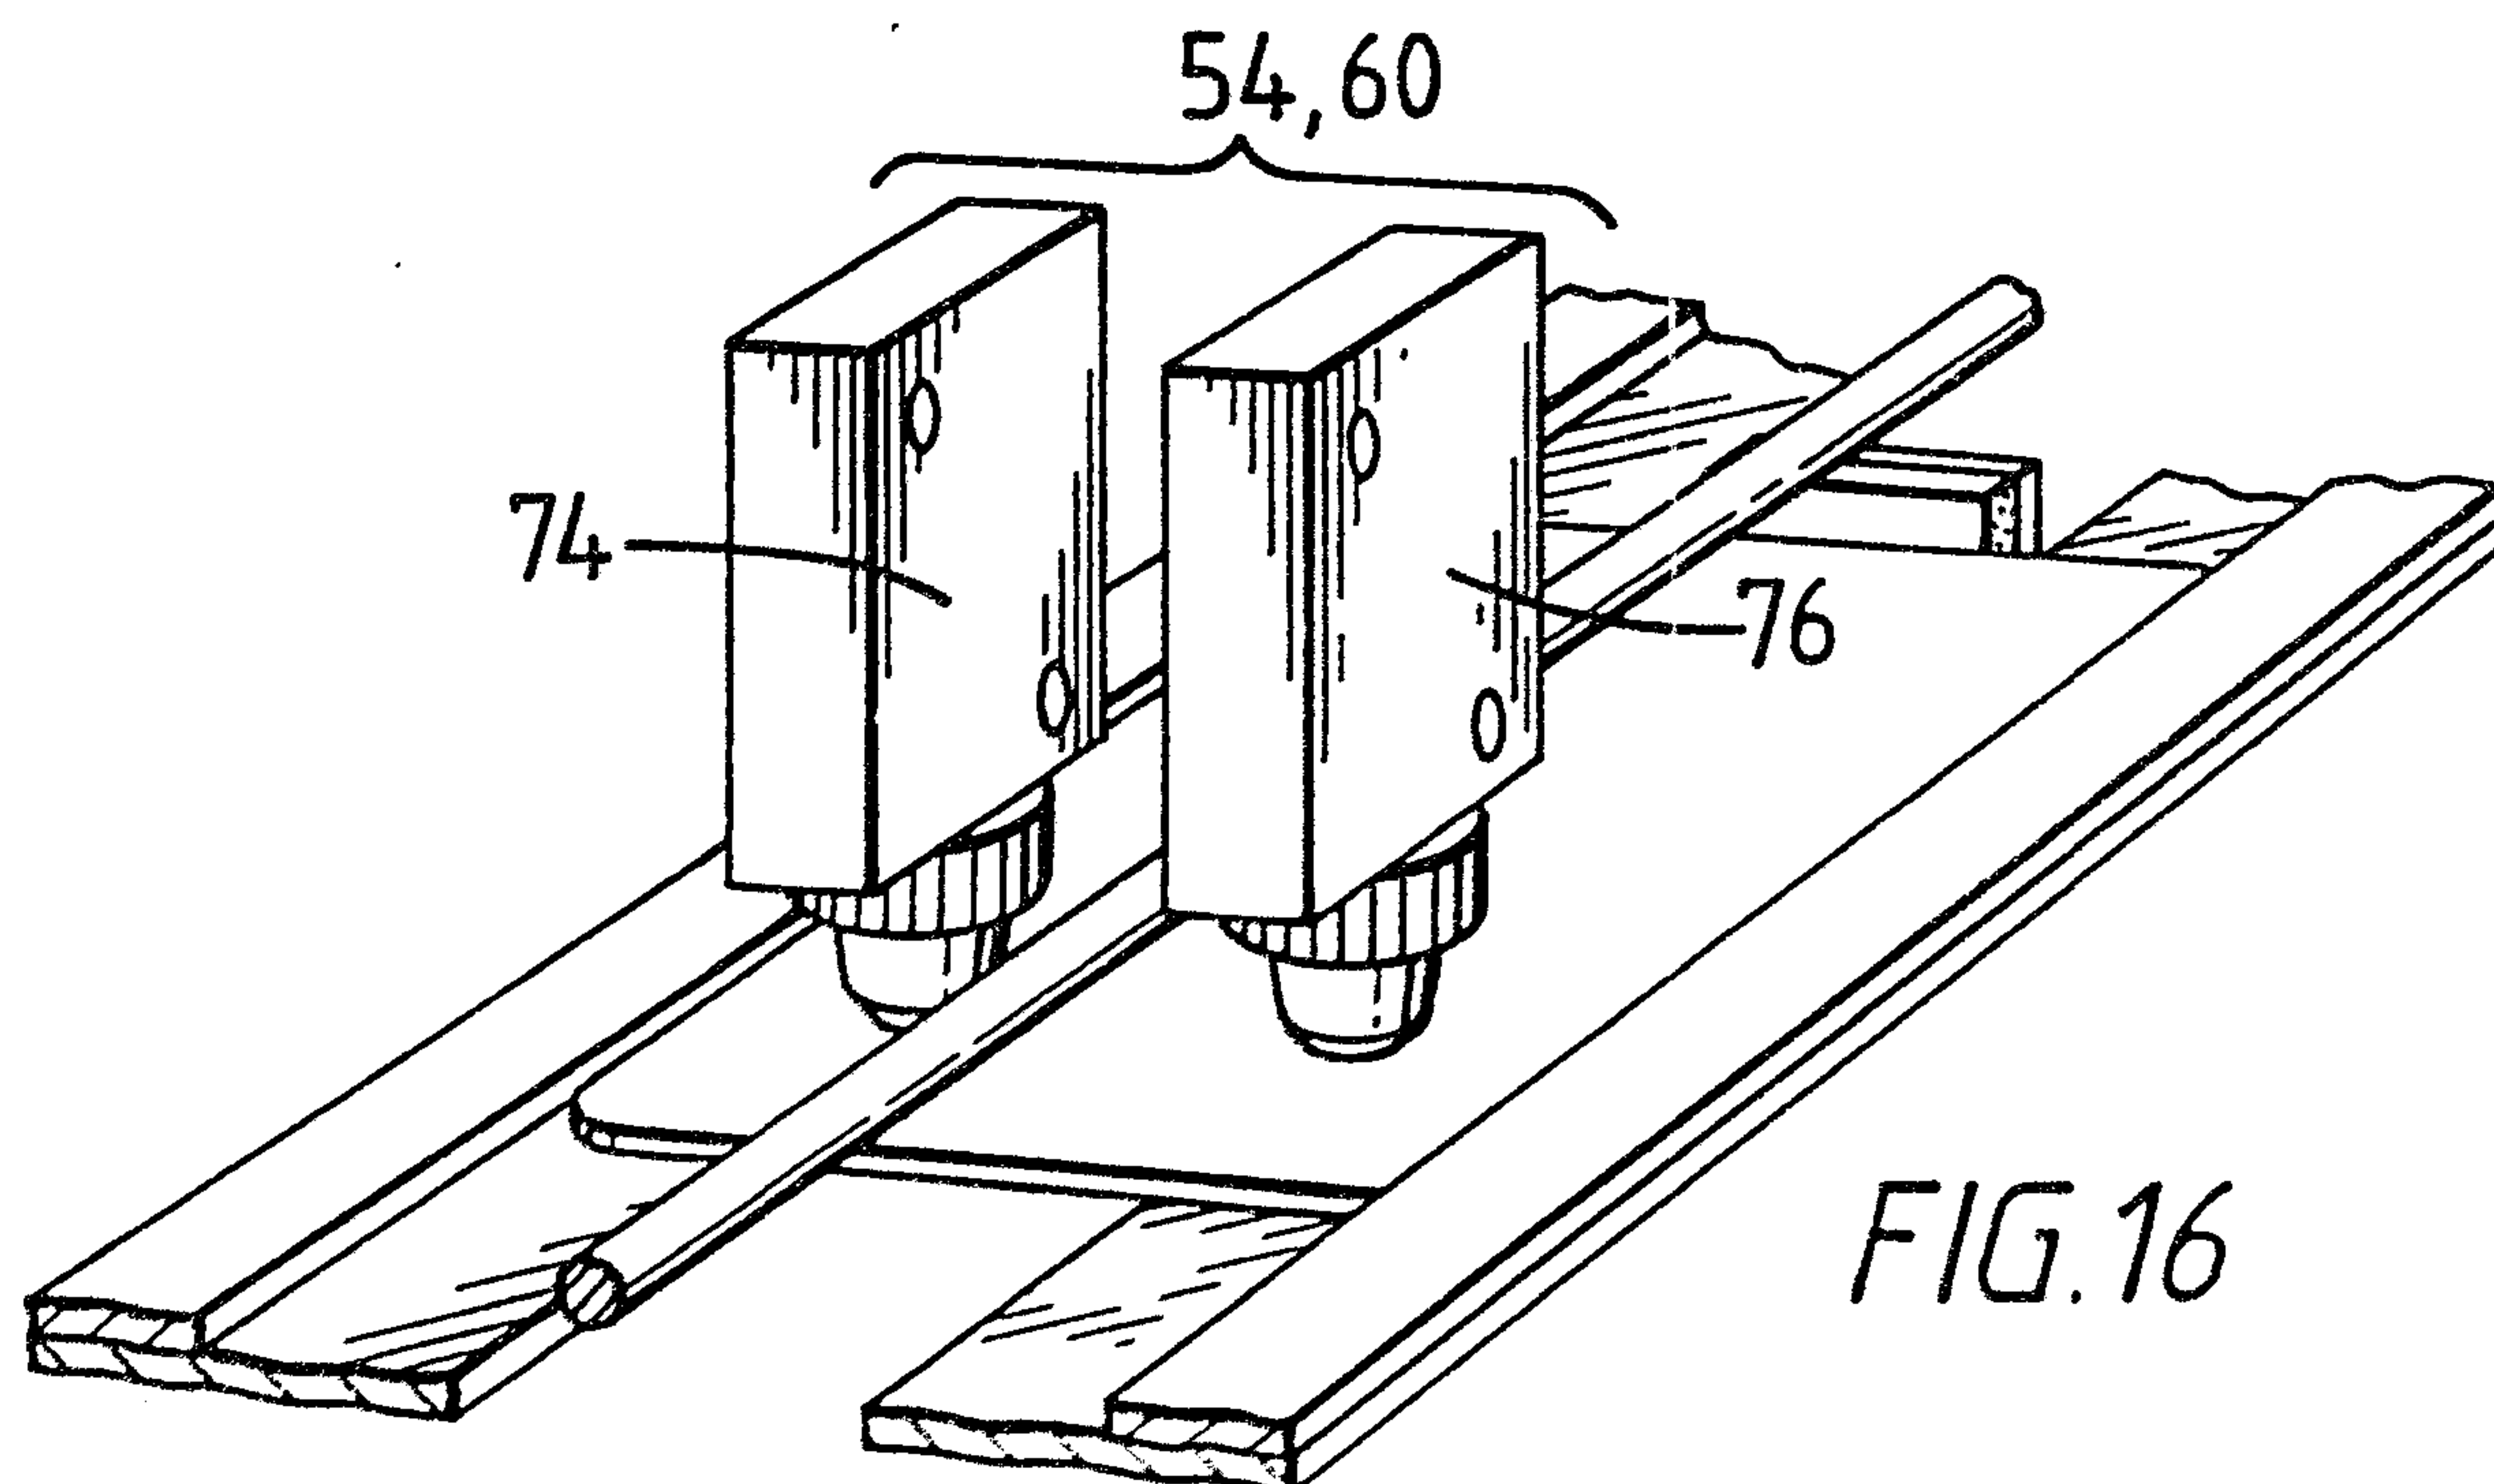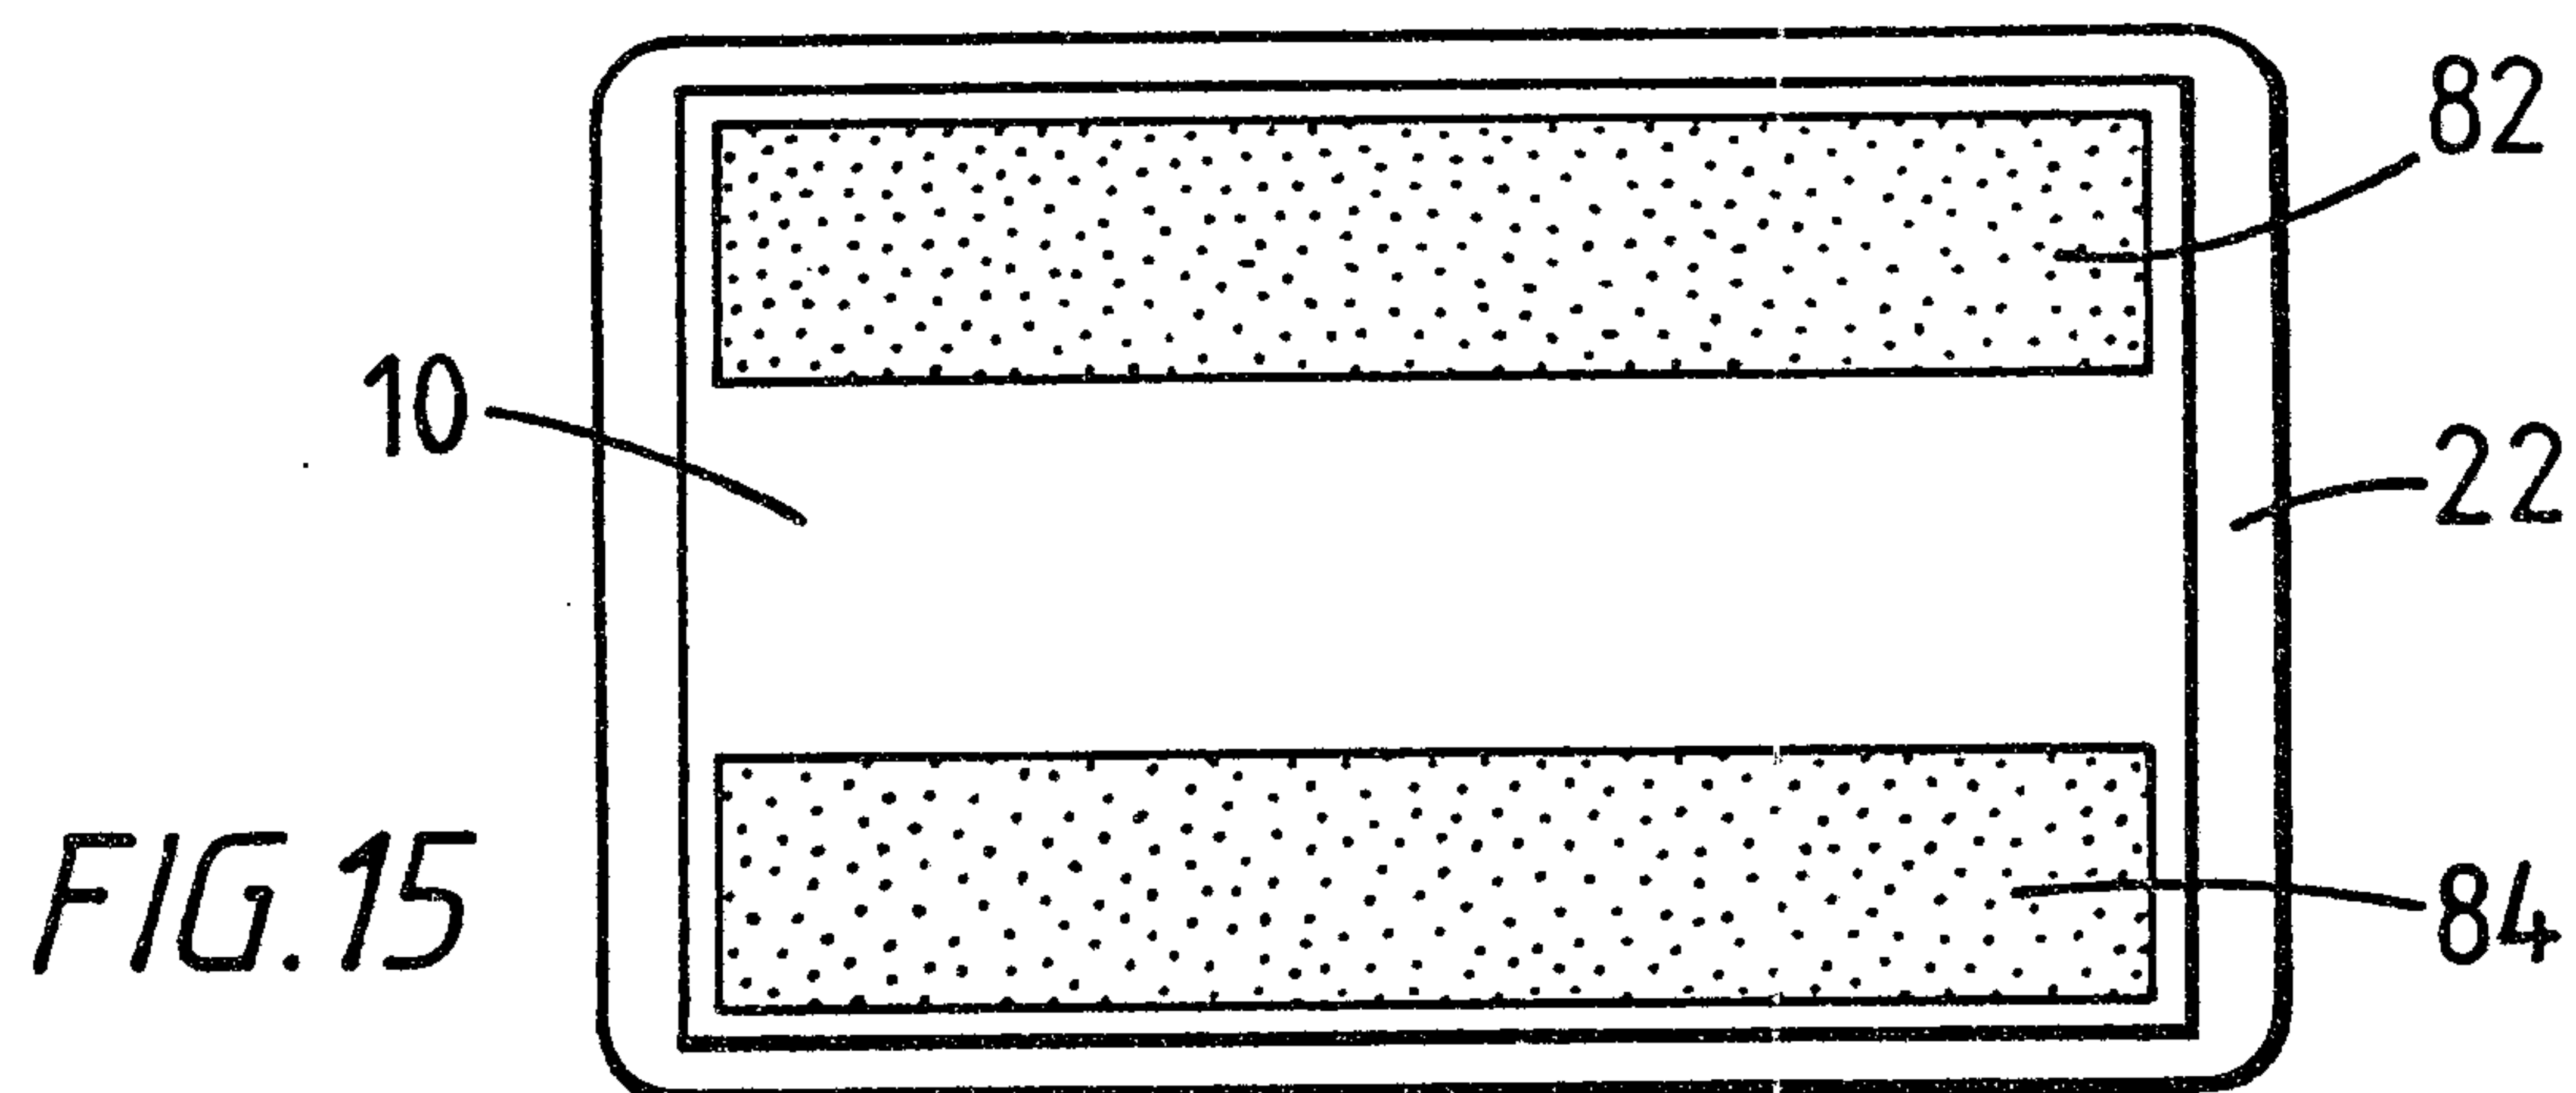

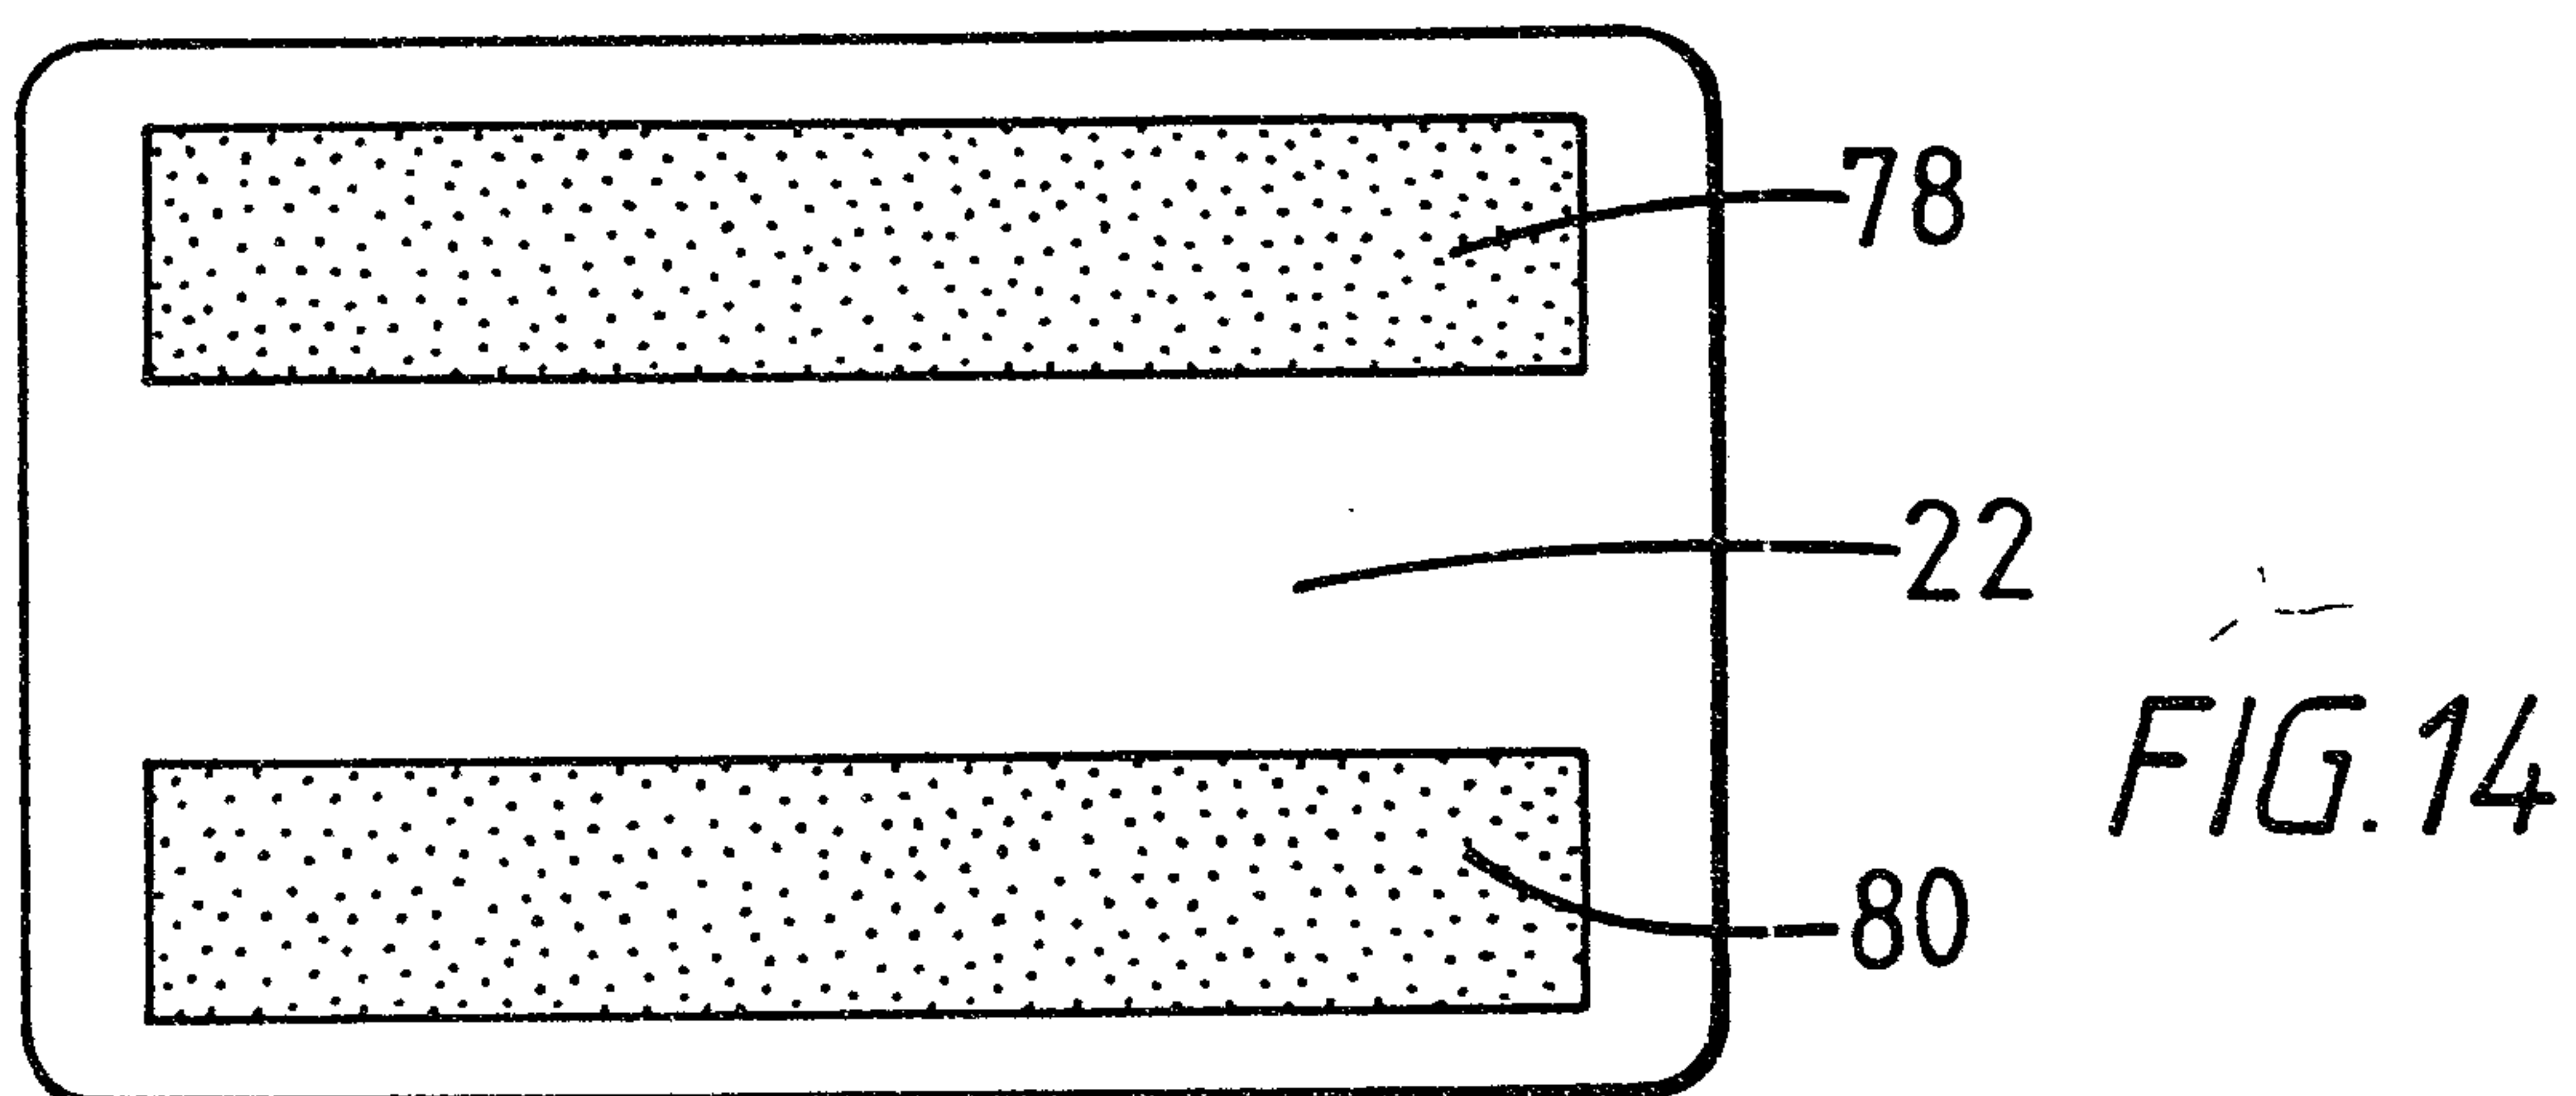

7/10

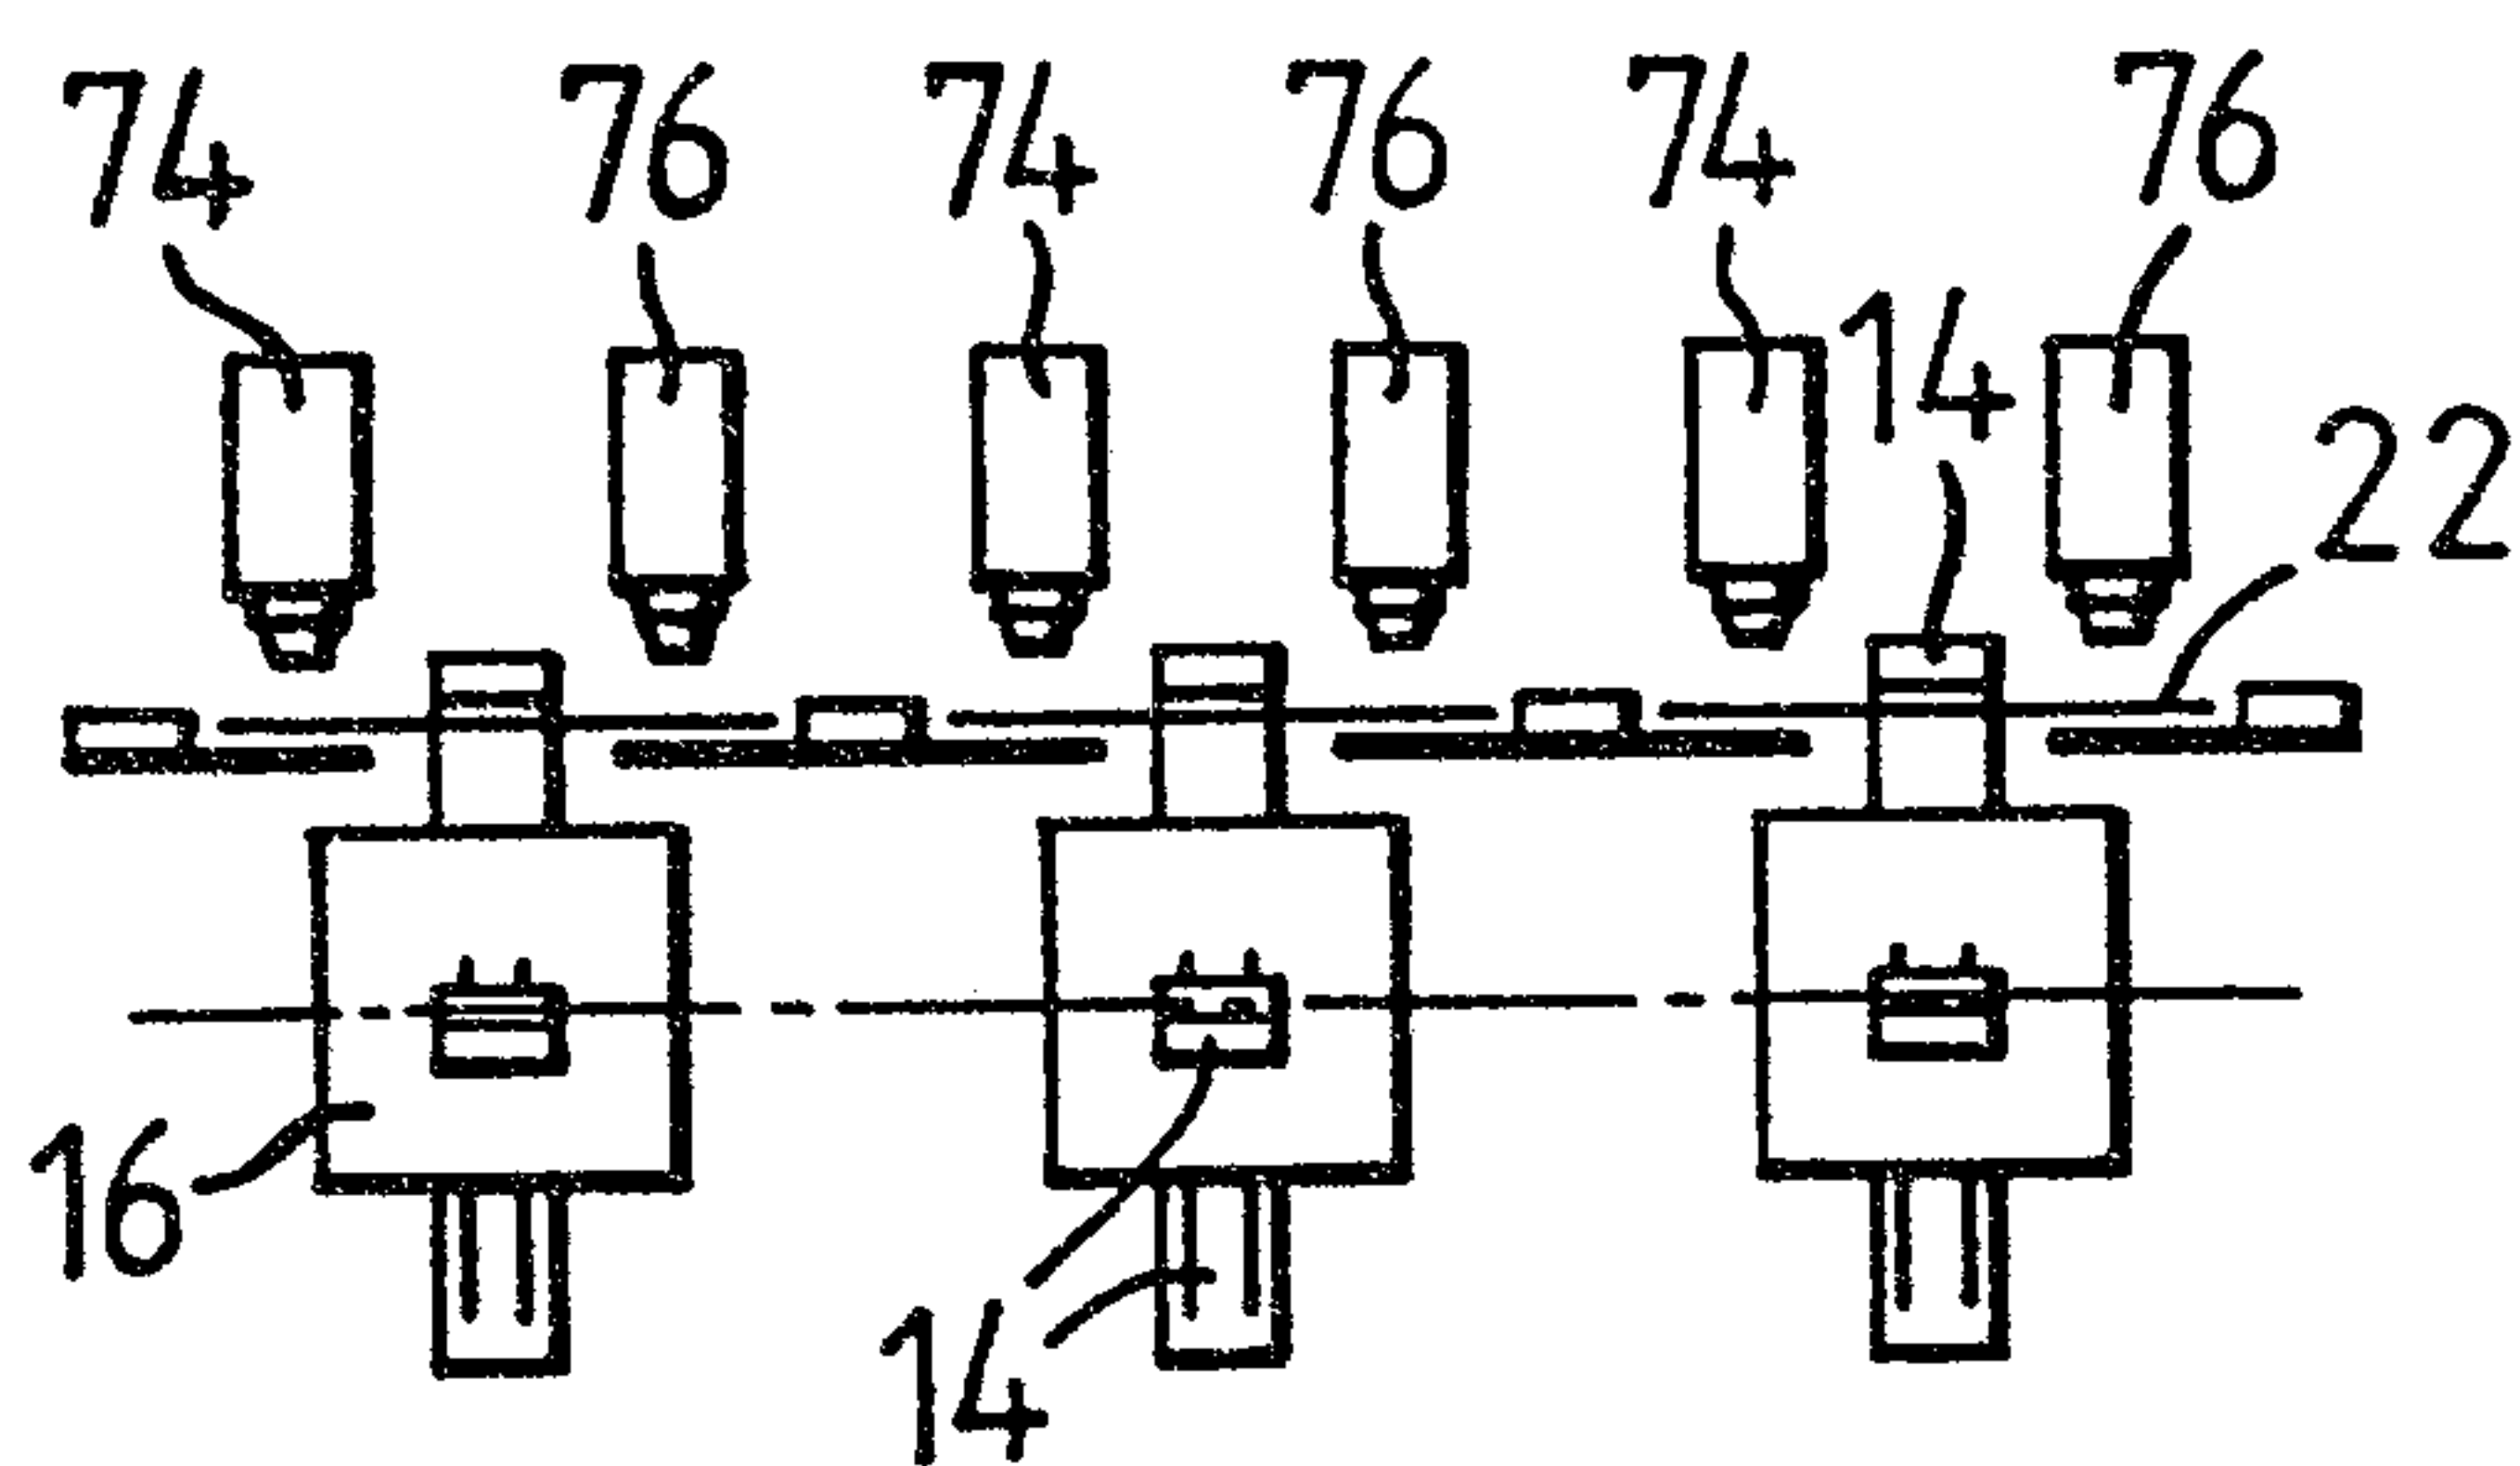


FIG. 17

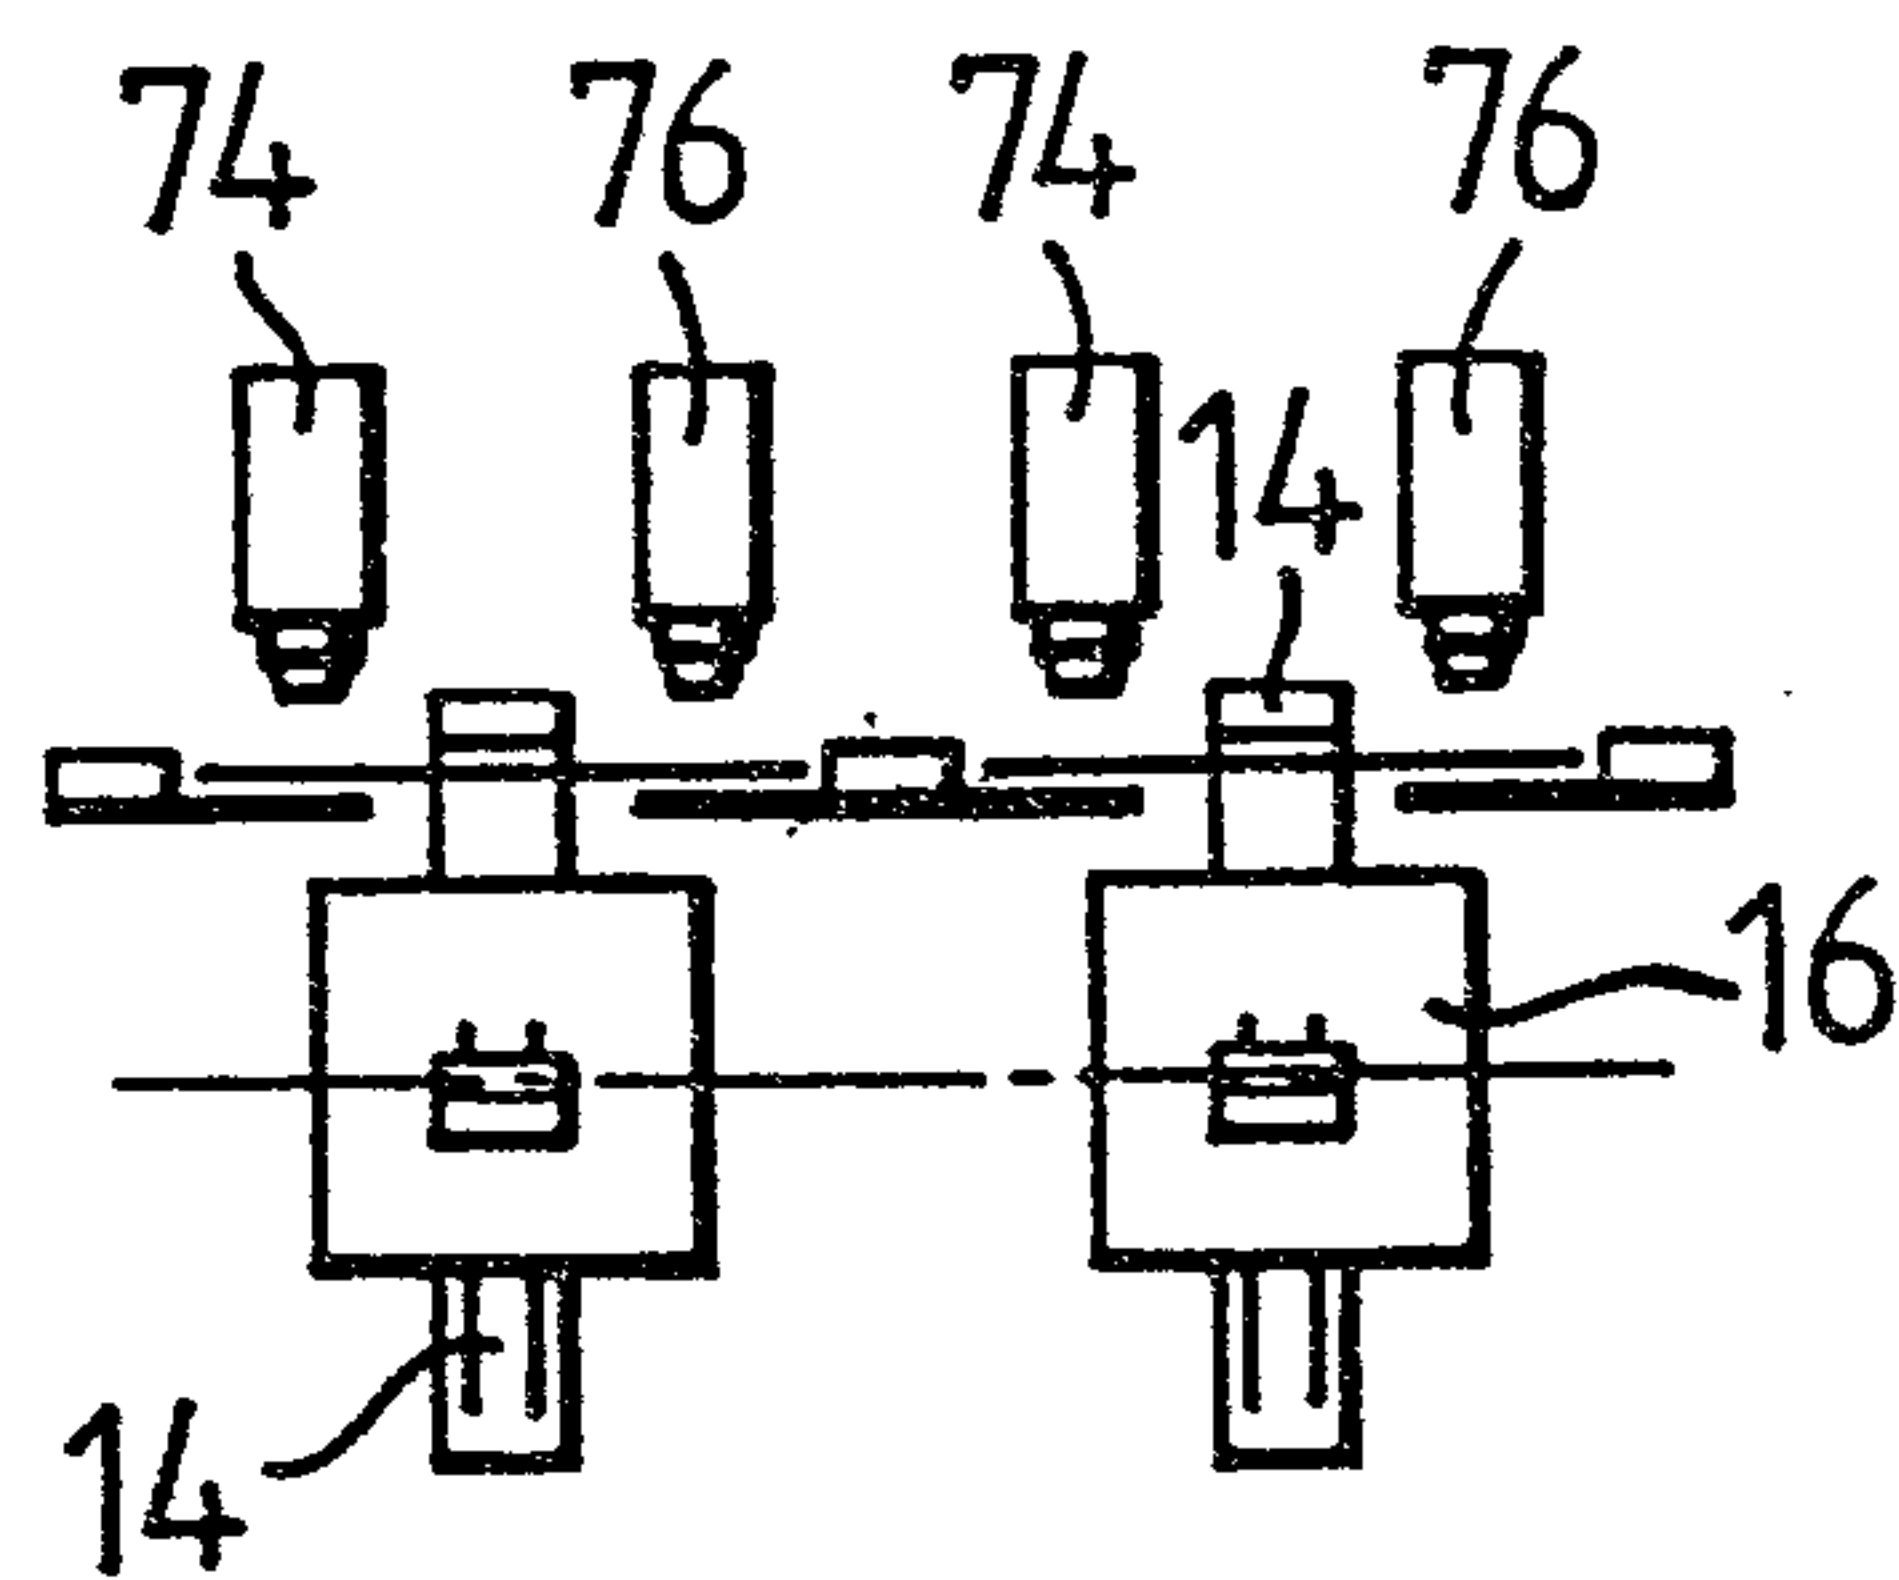


FIG. 18


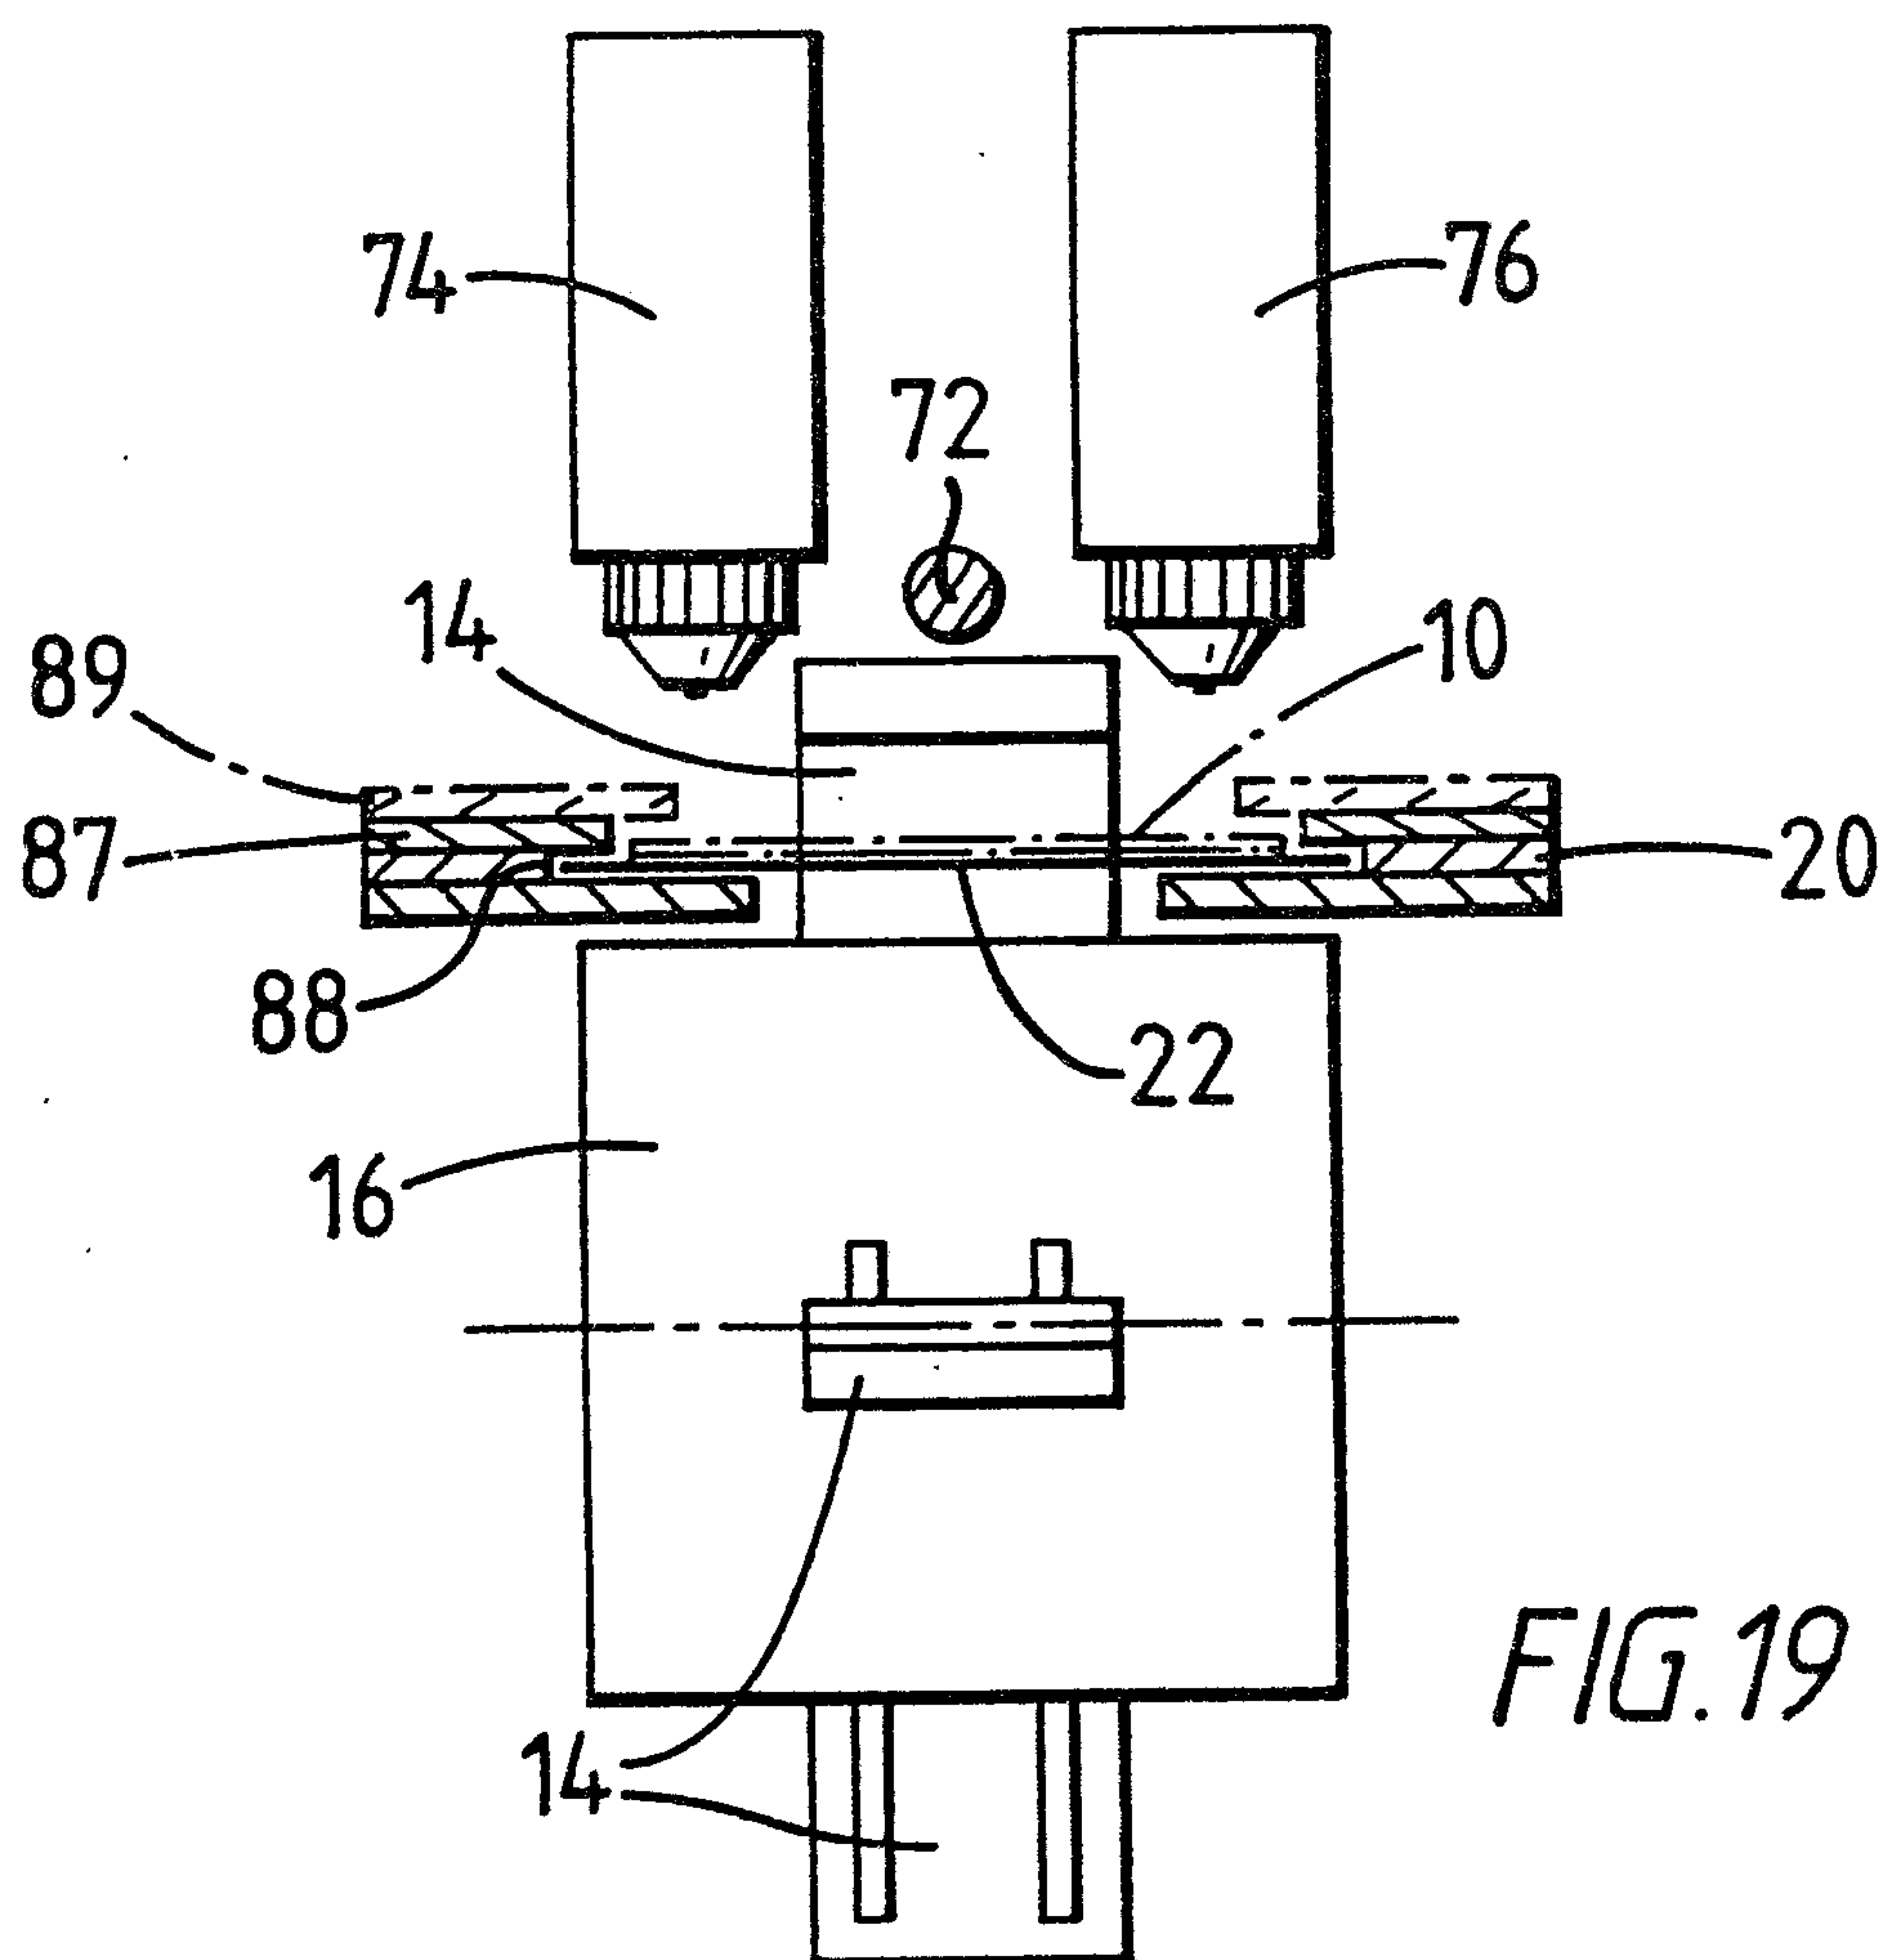


FIG. 19

8/10

FIG. 20



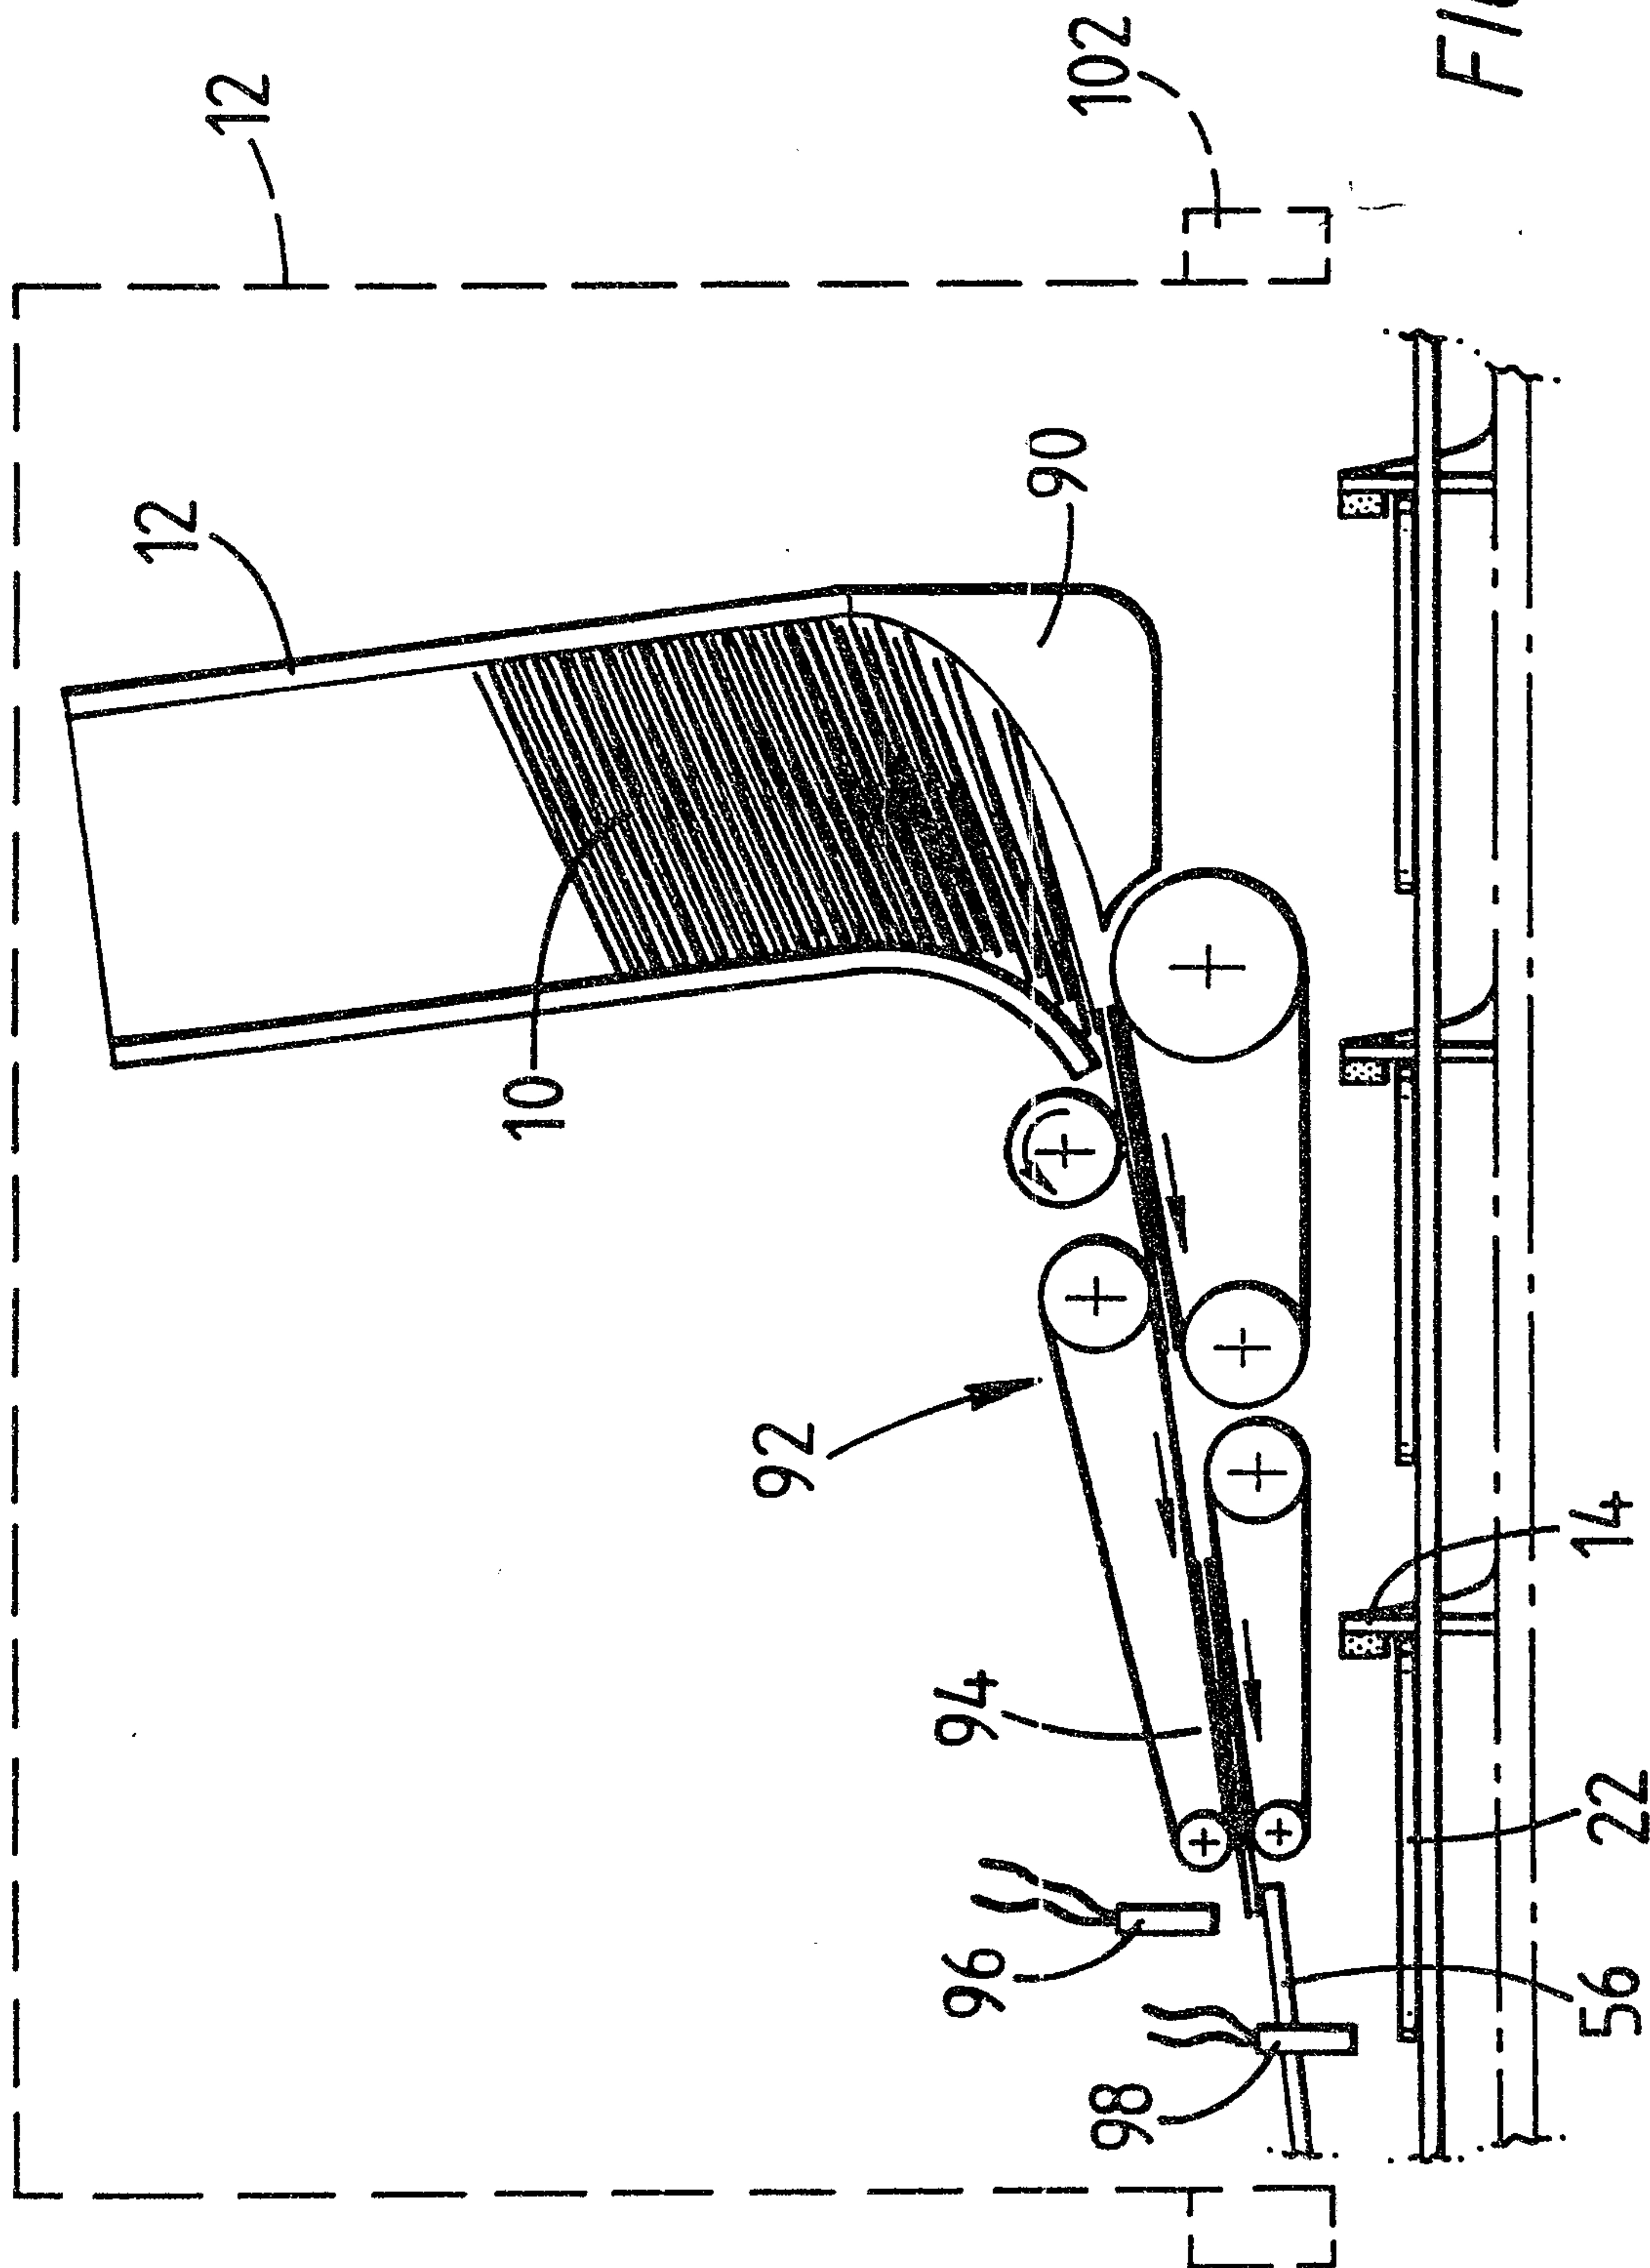

9/10

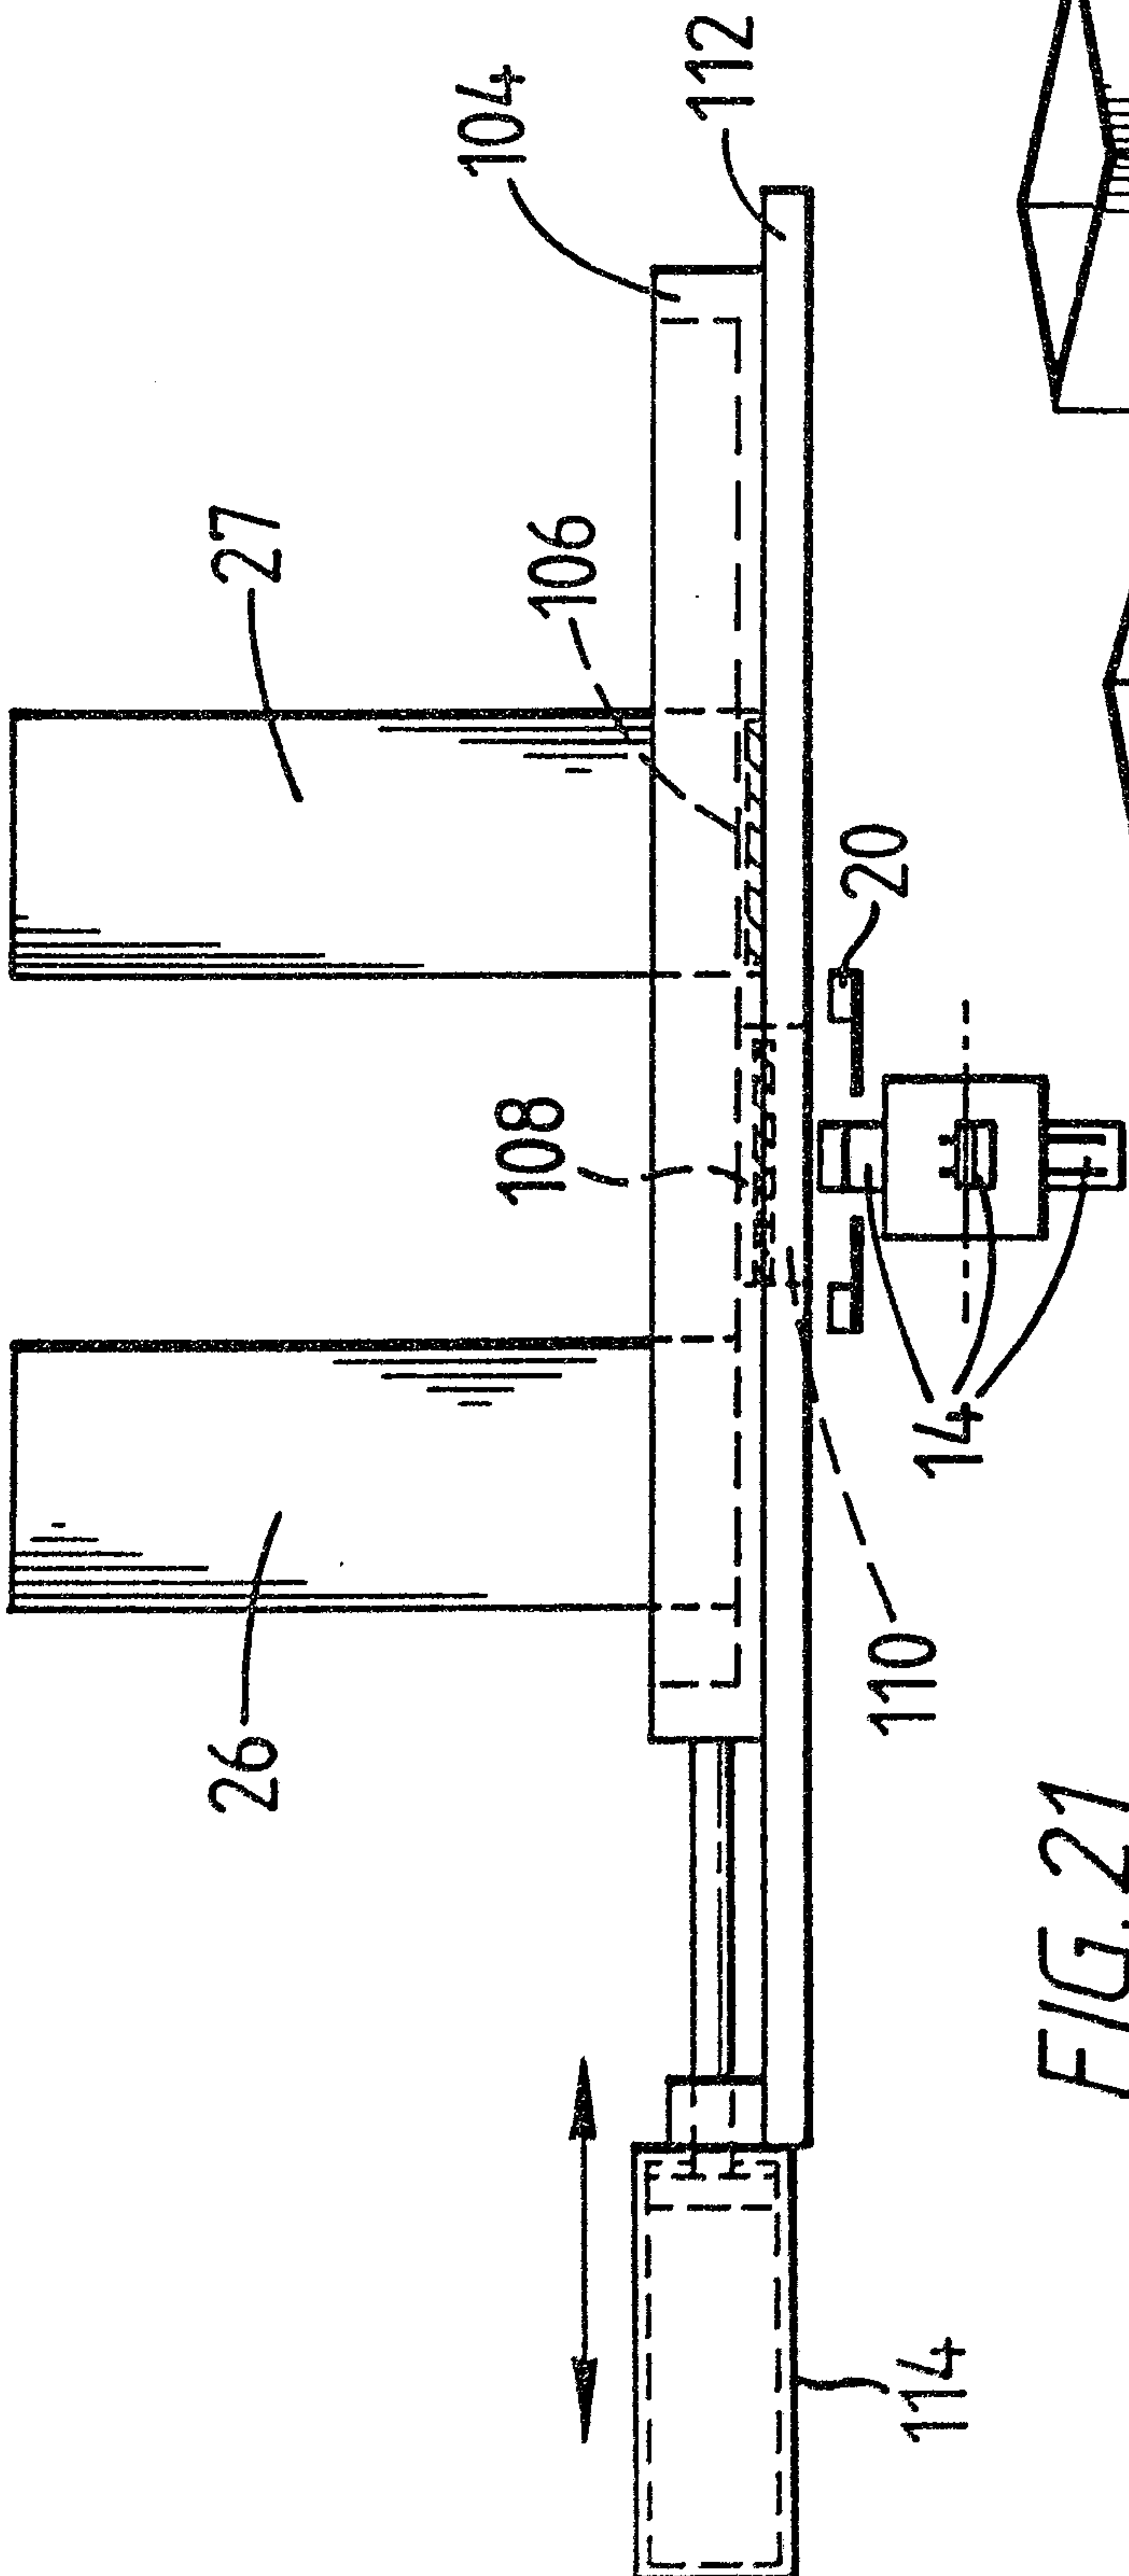


FIG. 21

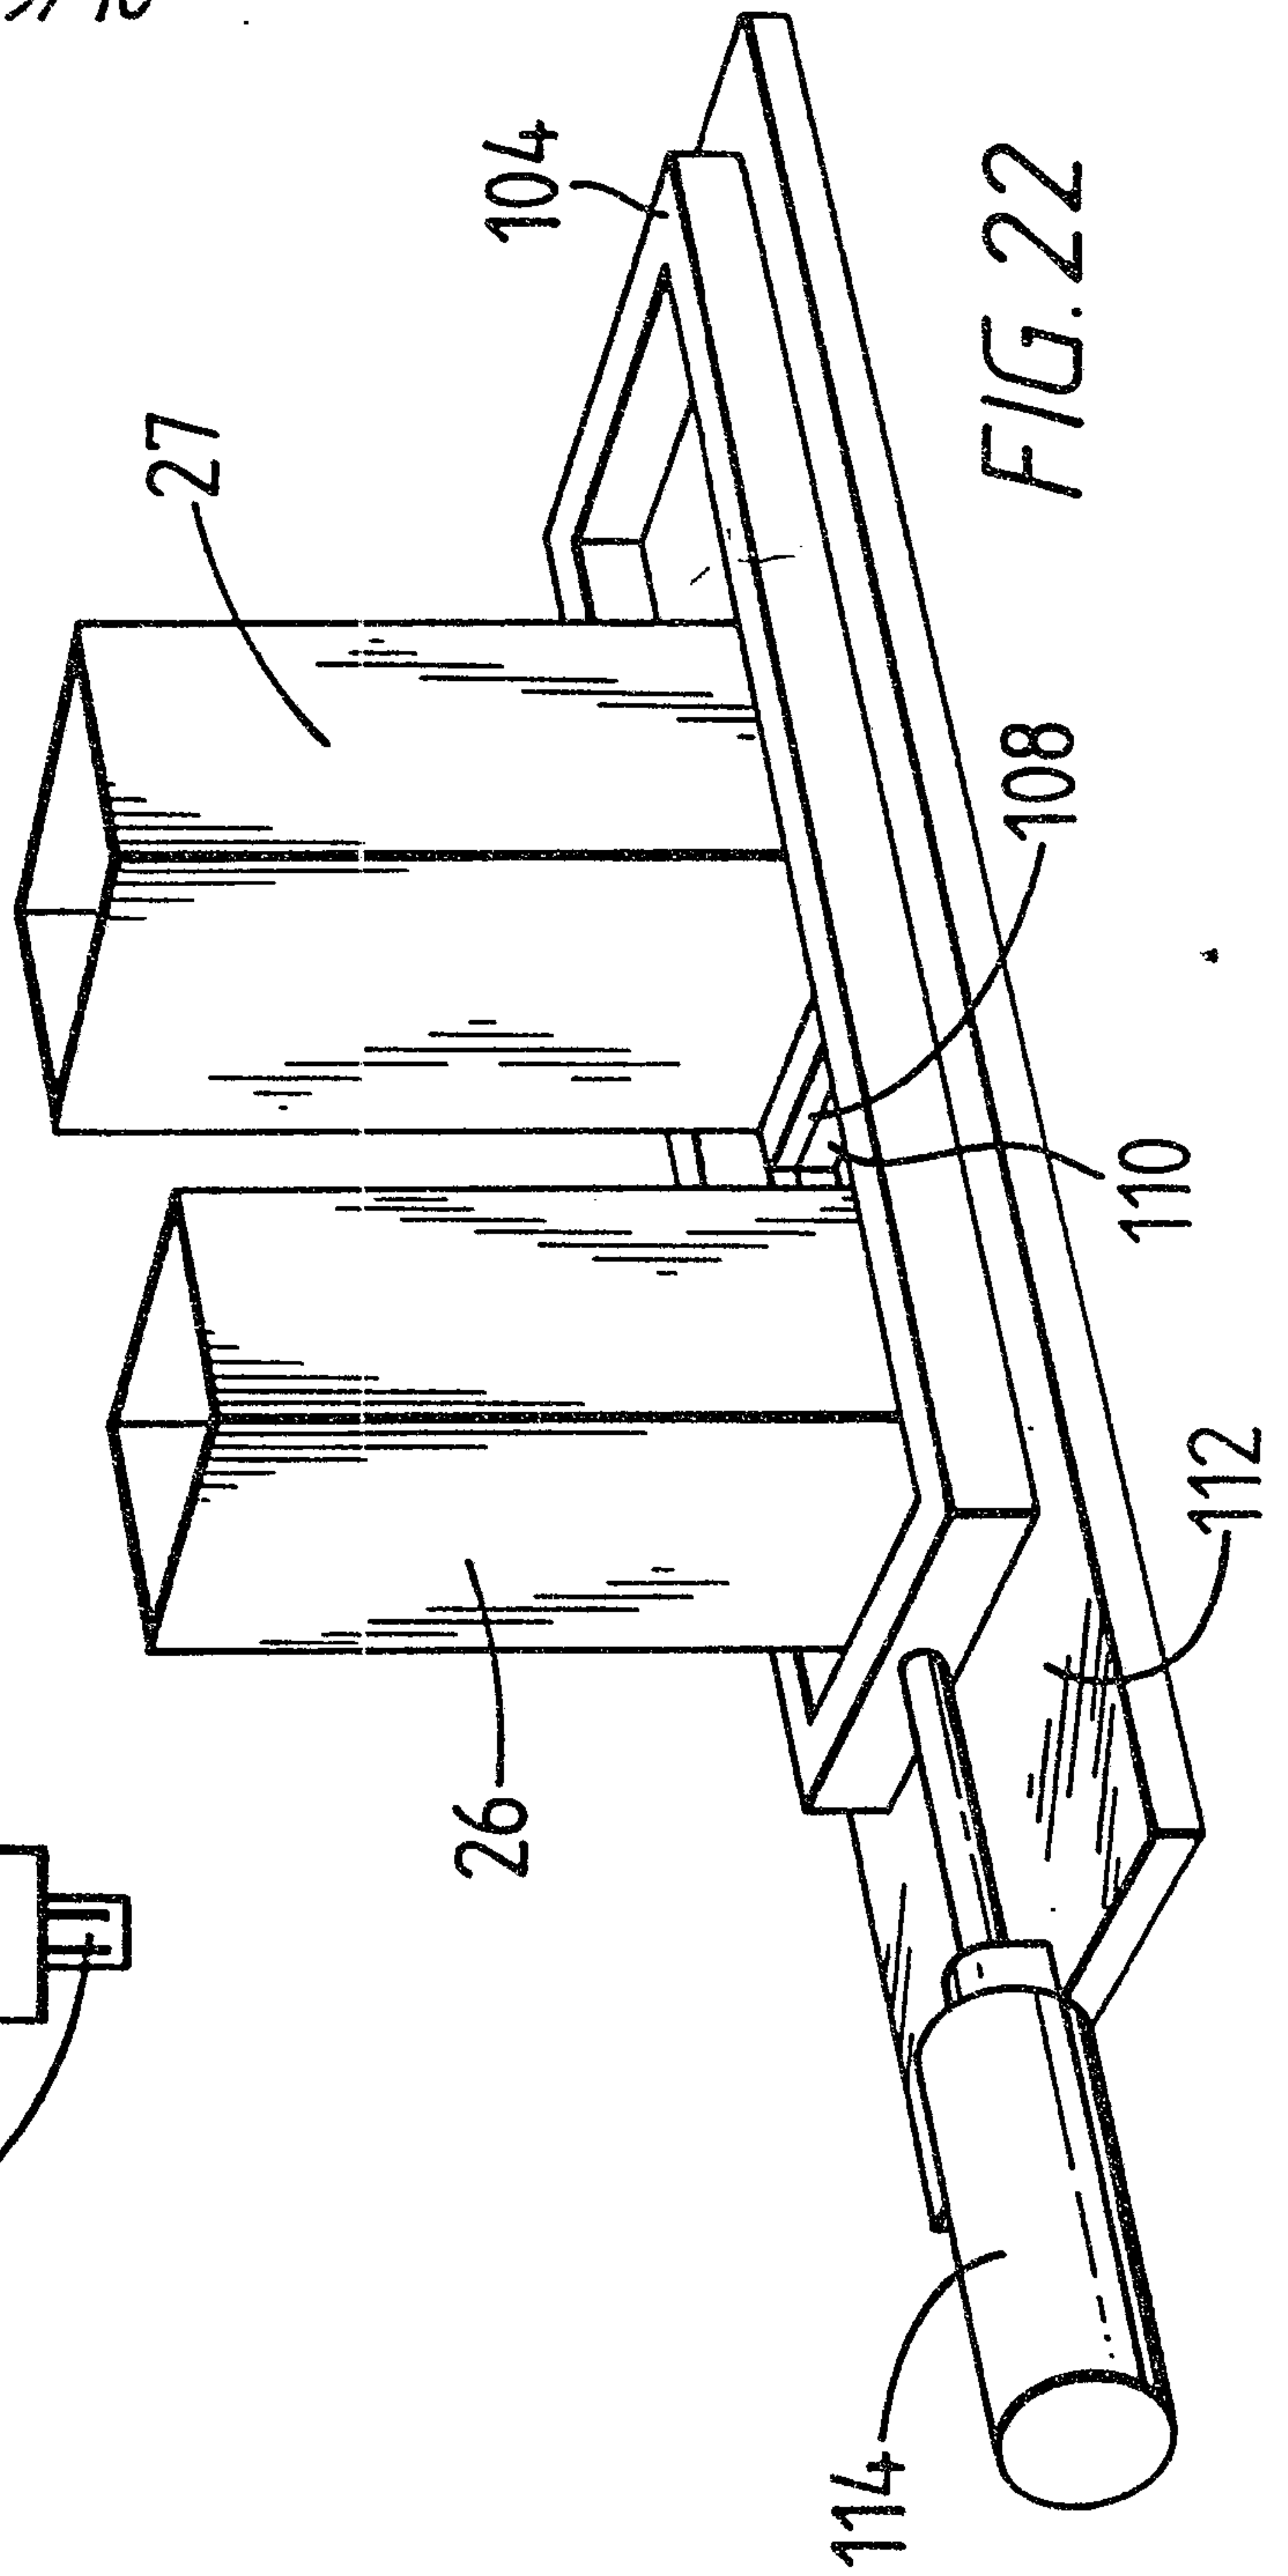


FIG. 22

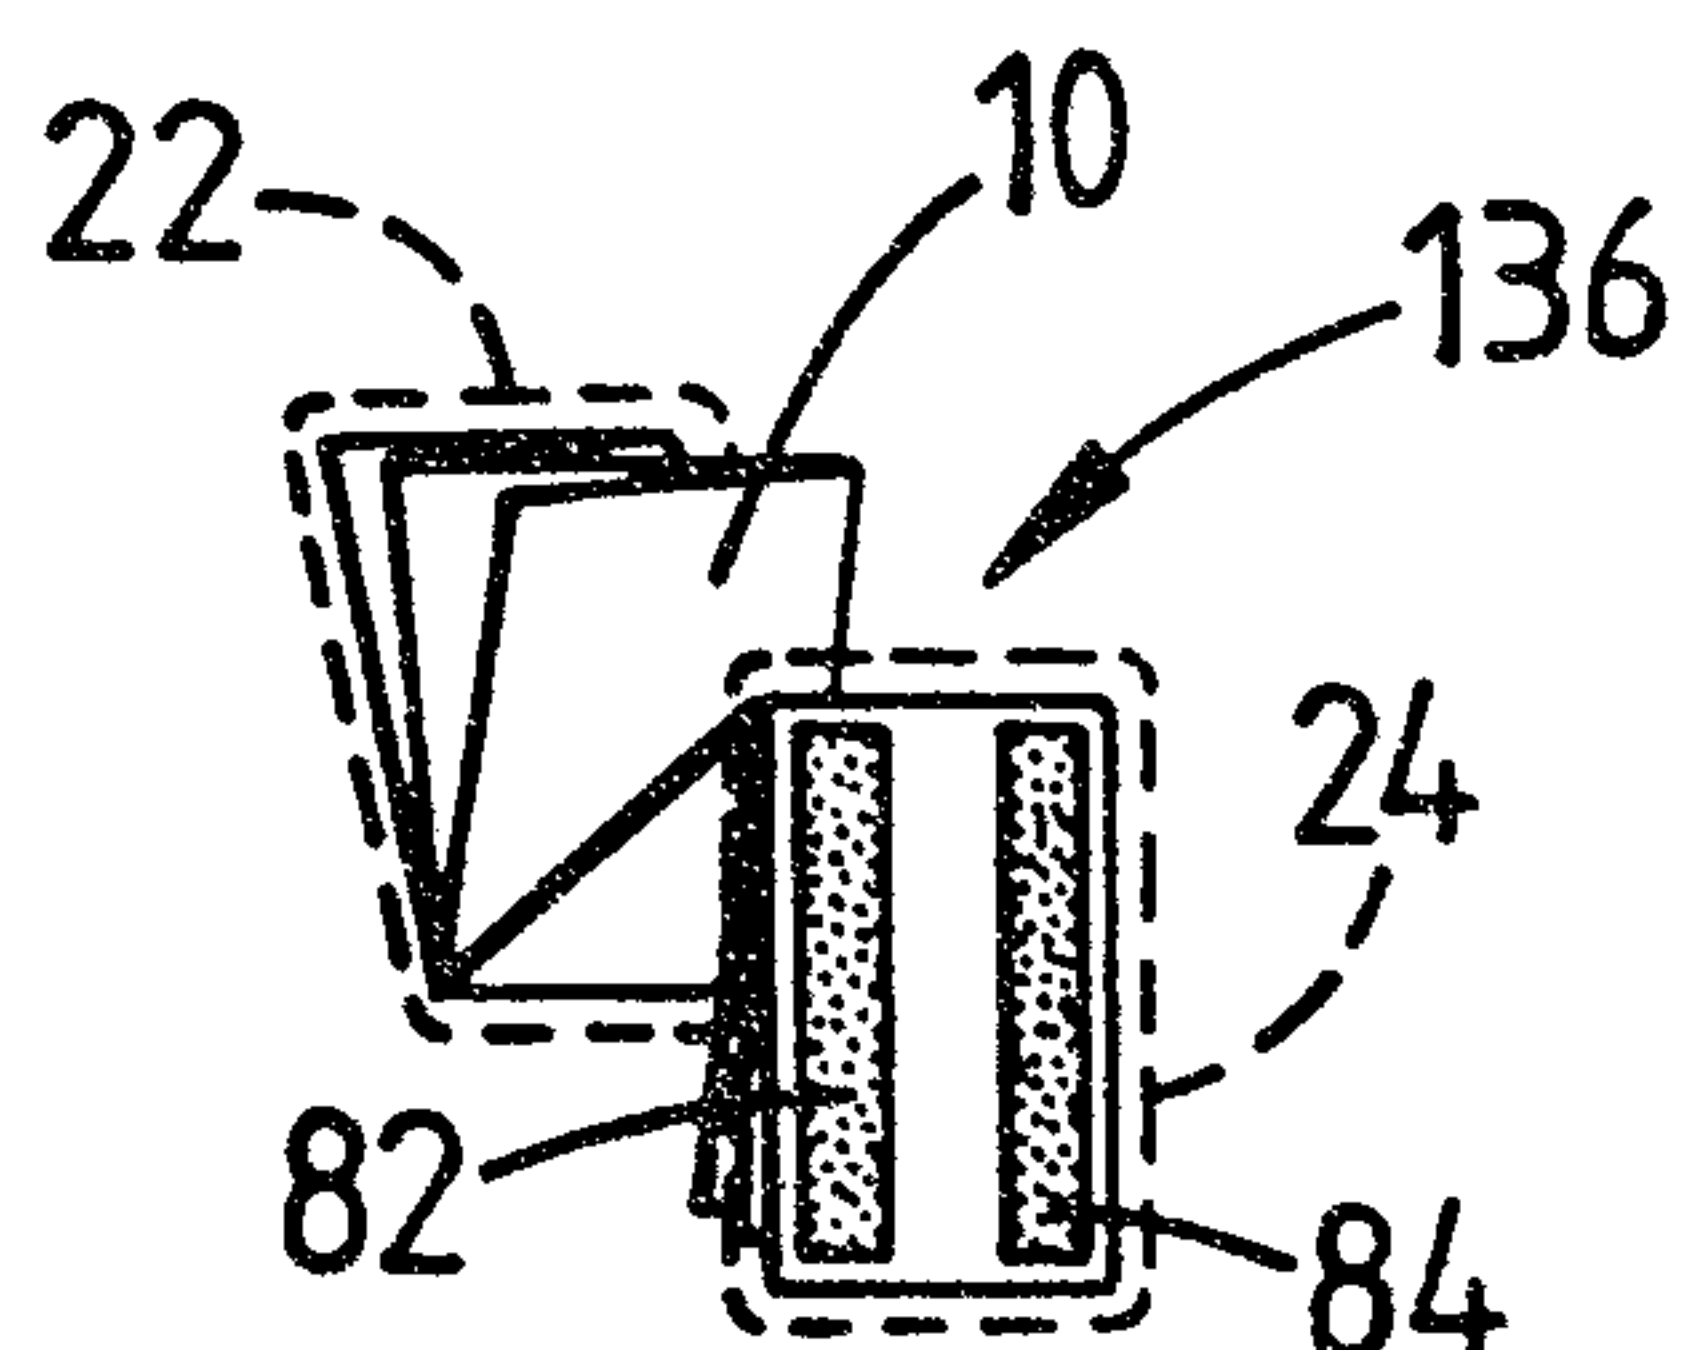


FIG. 23

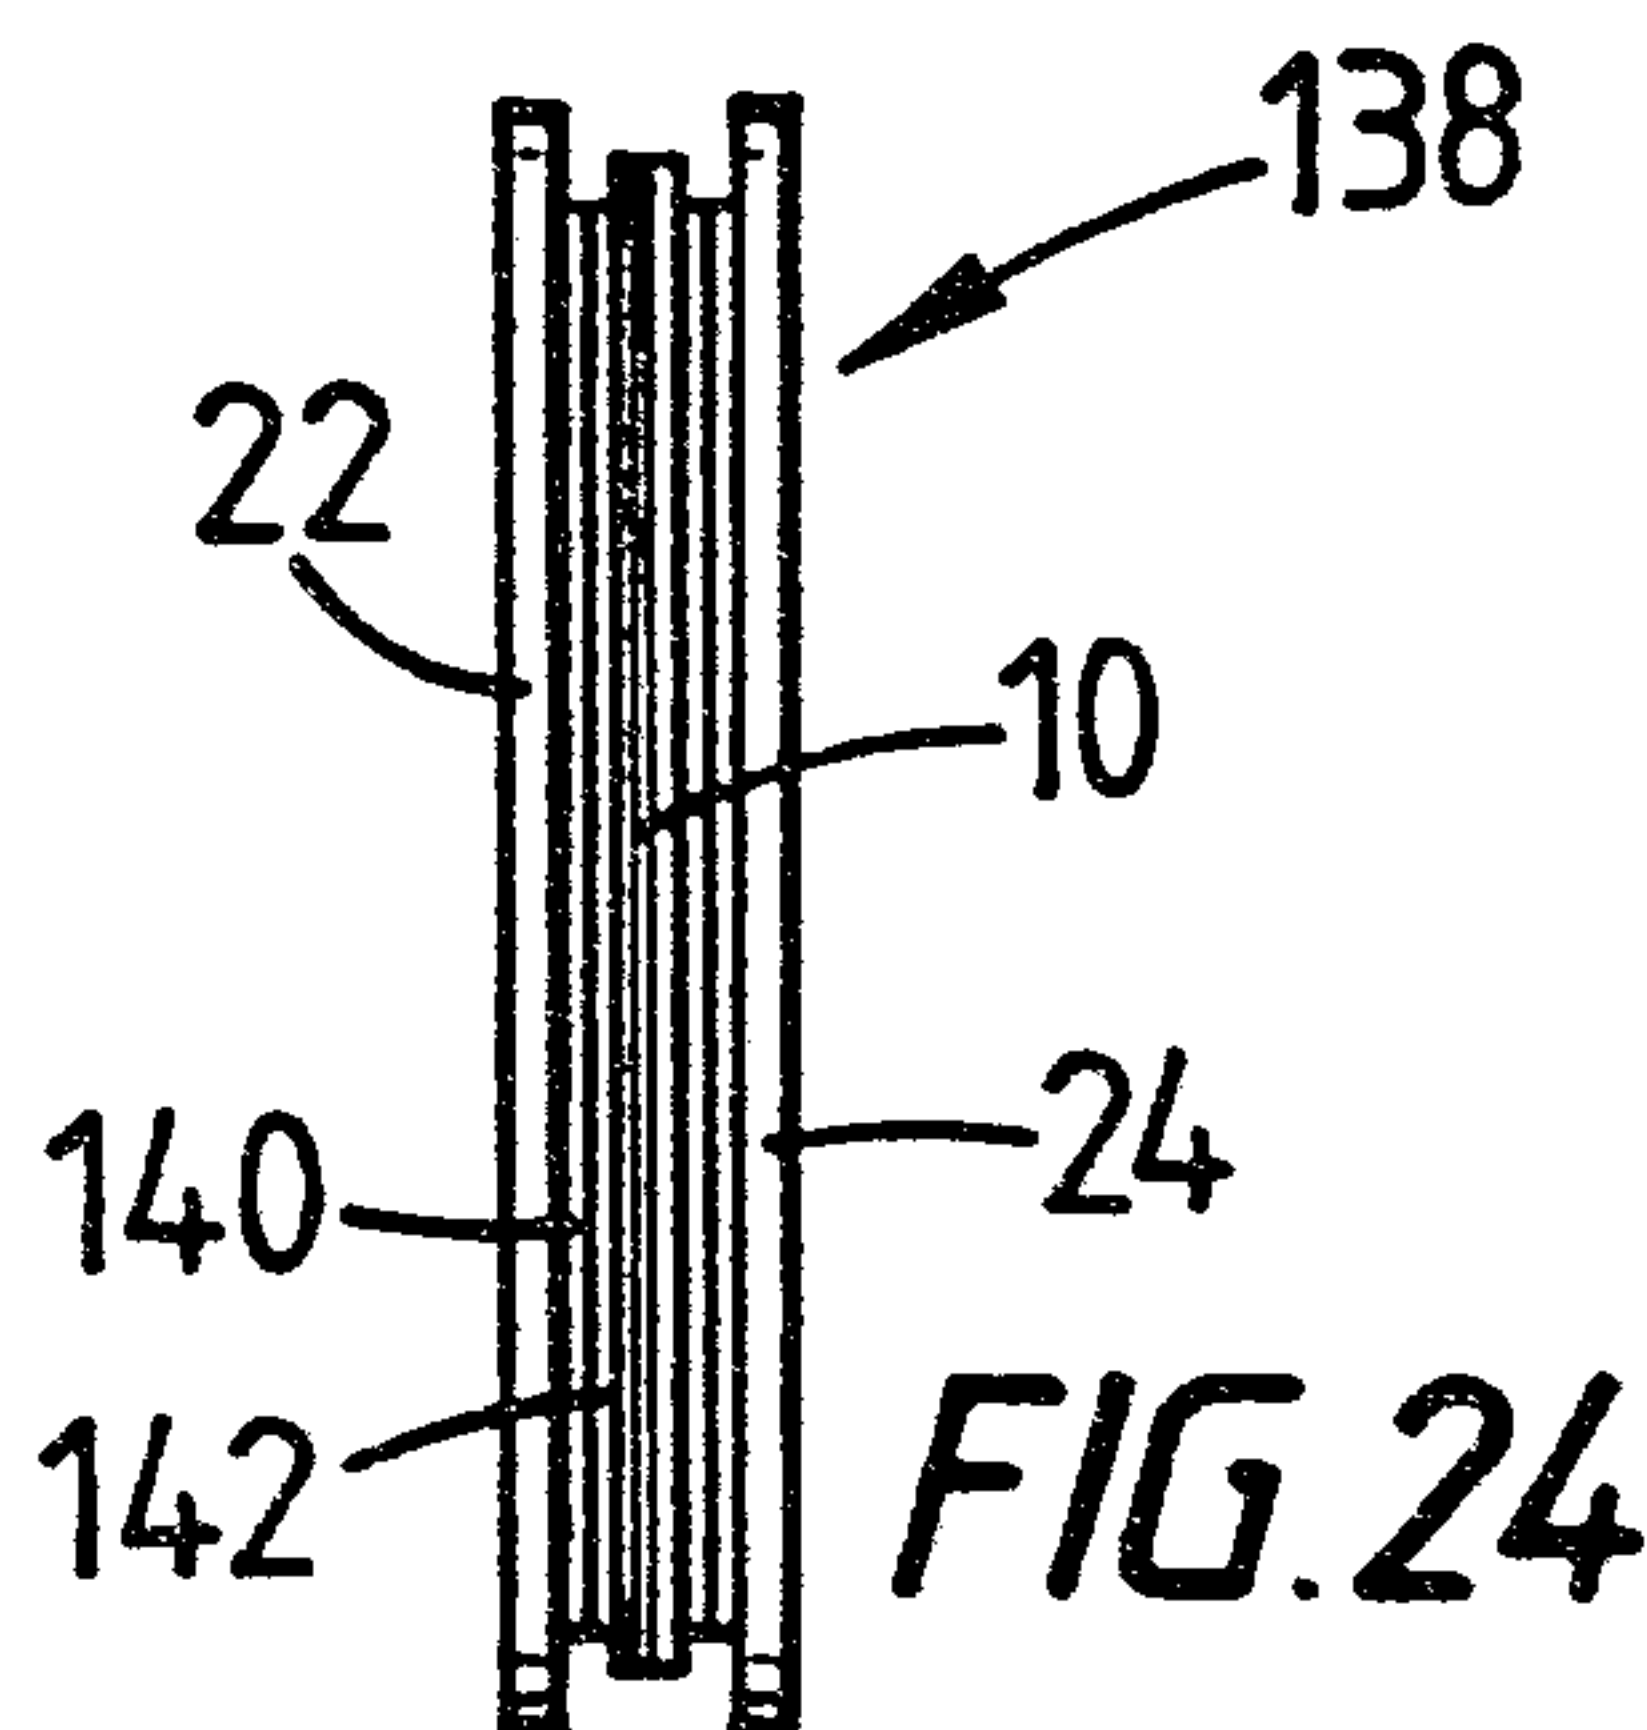


FIG. 24

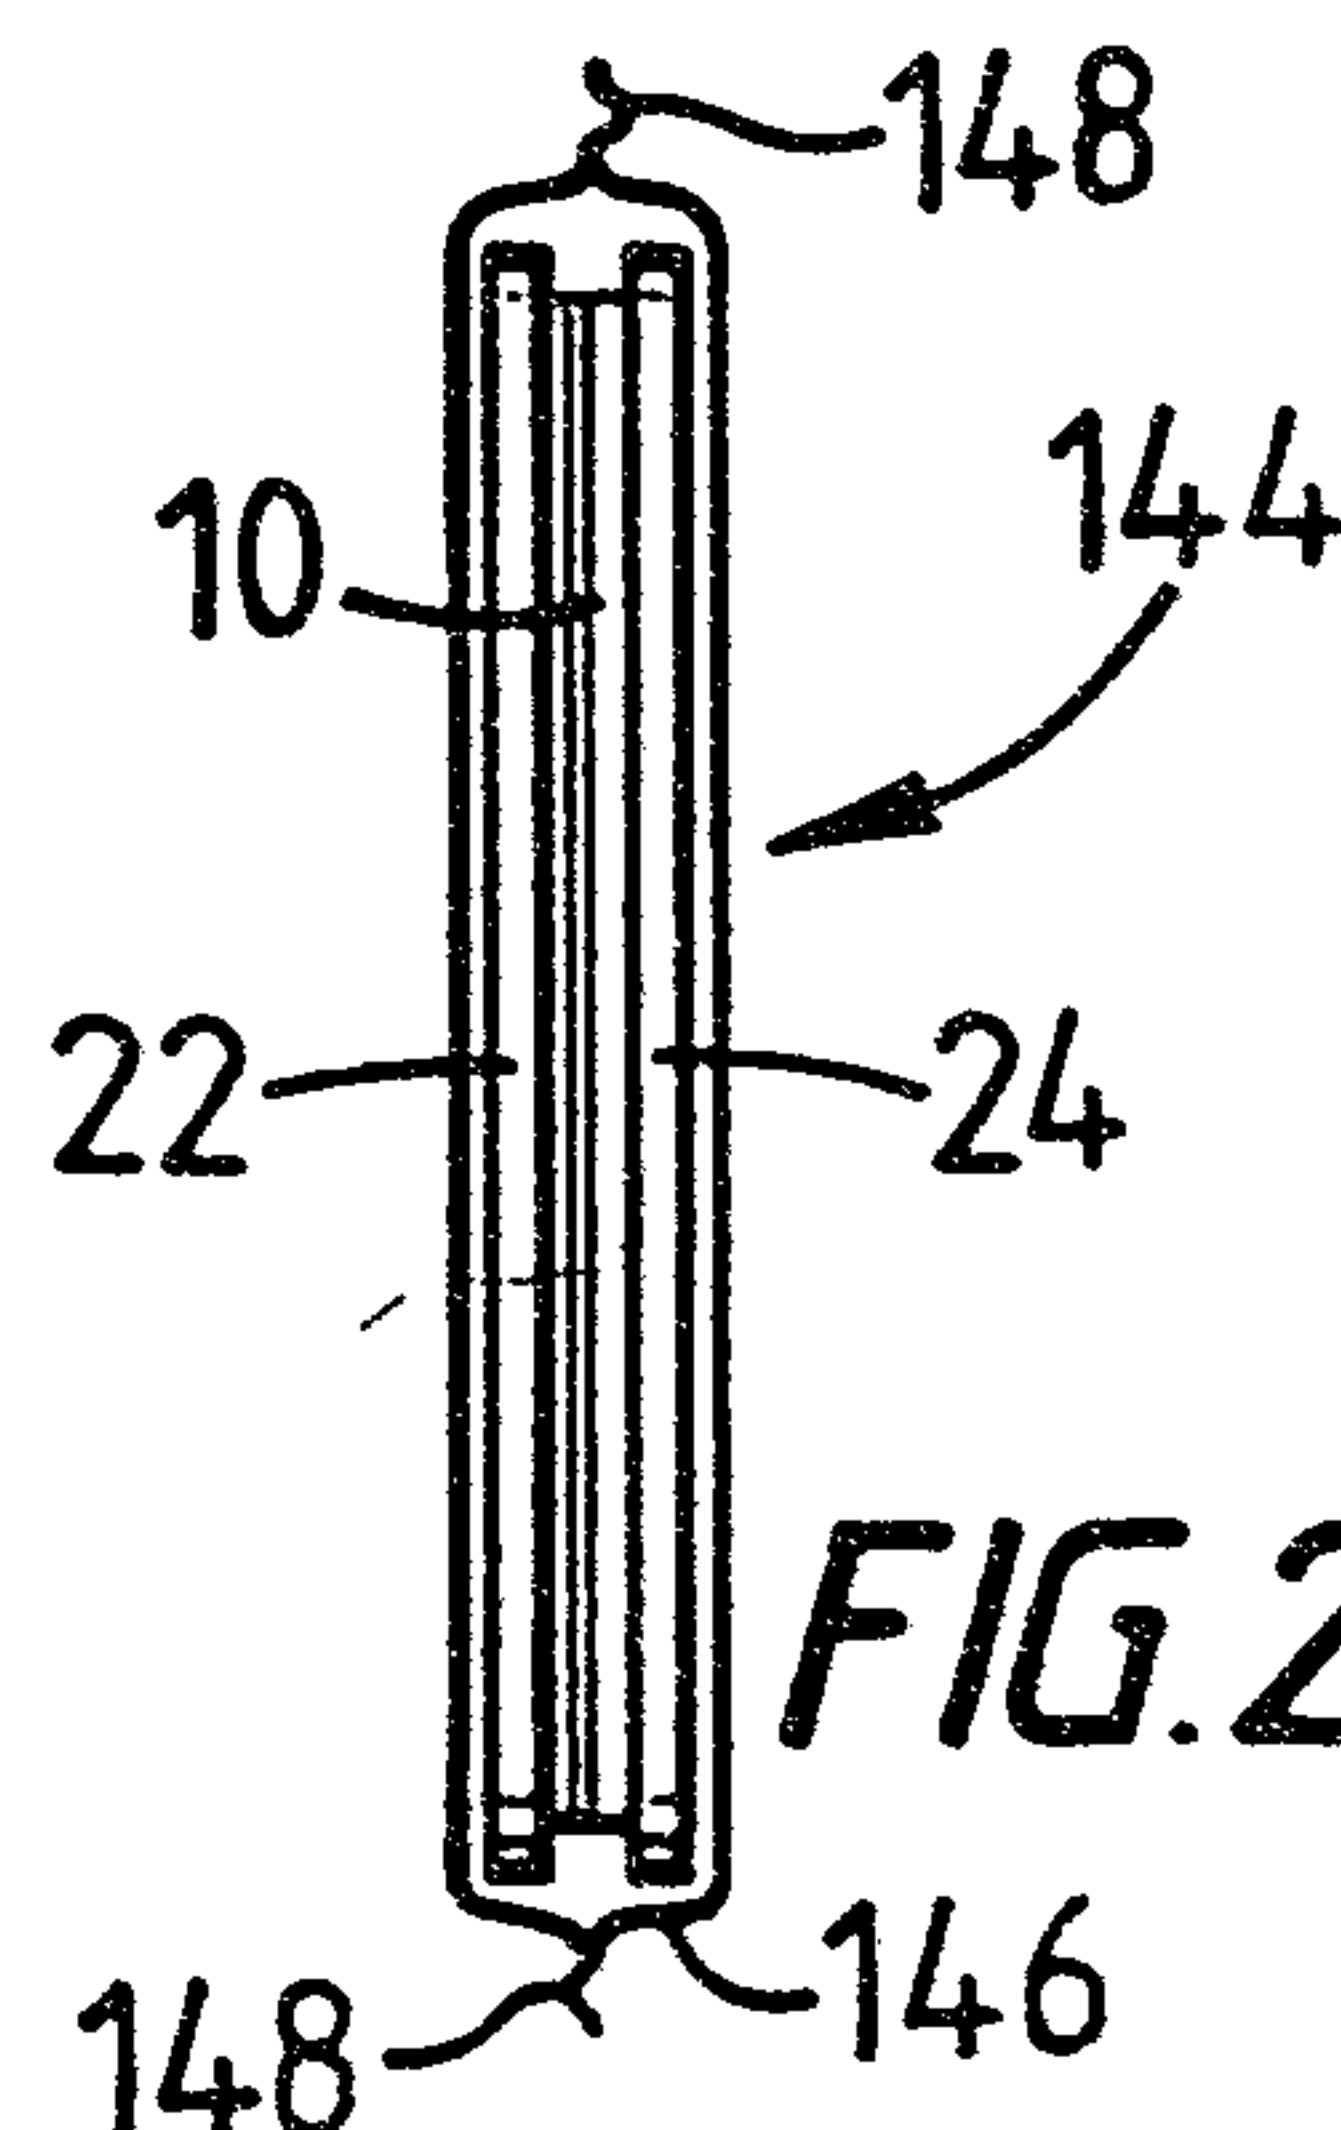


FIG. 25

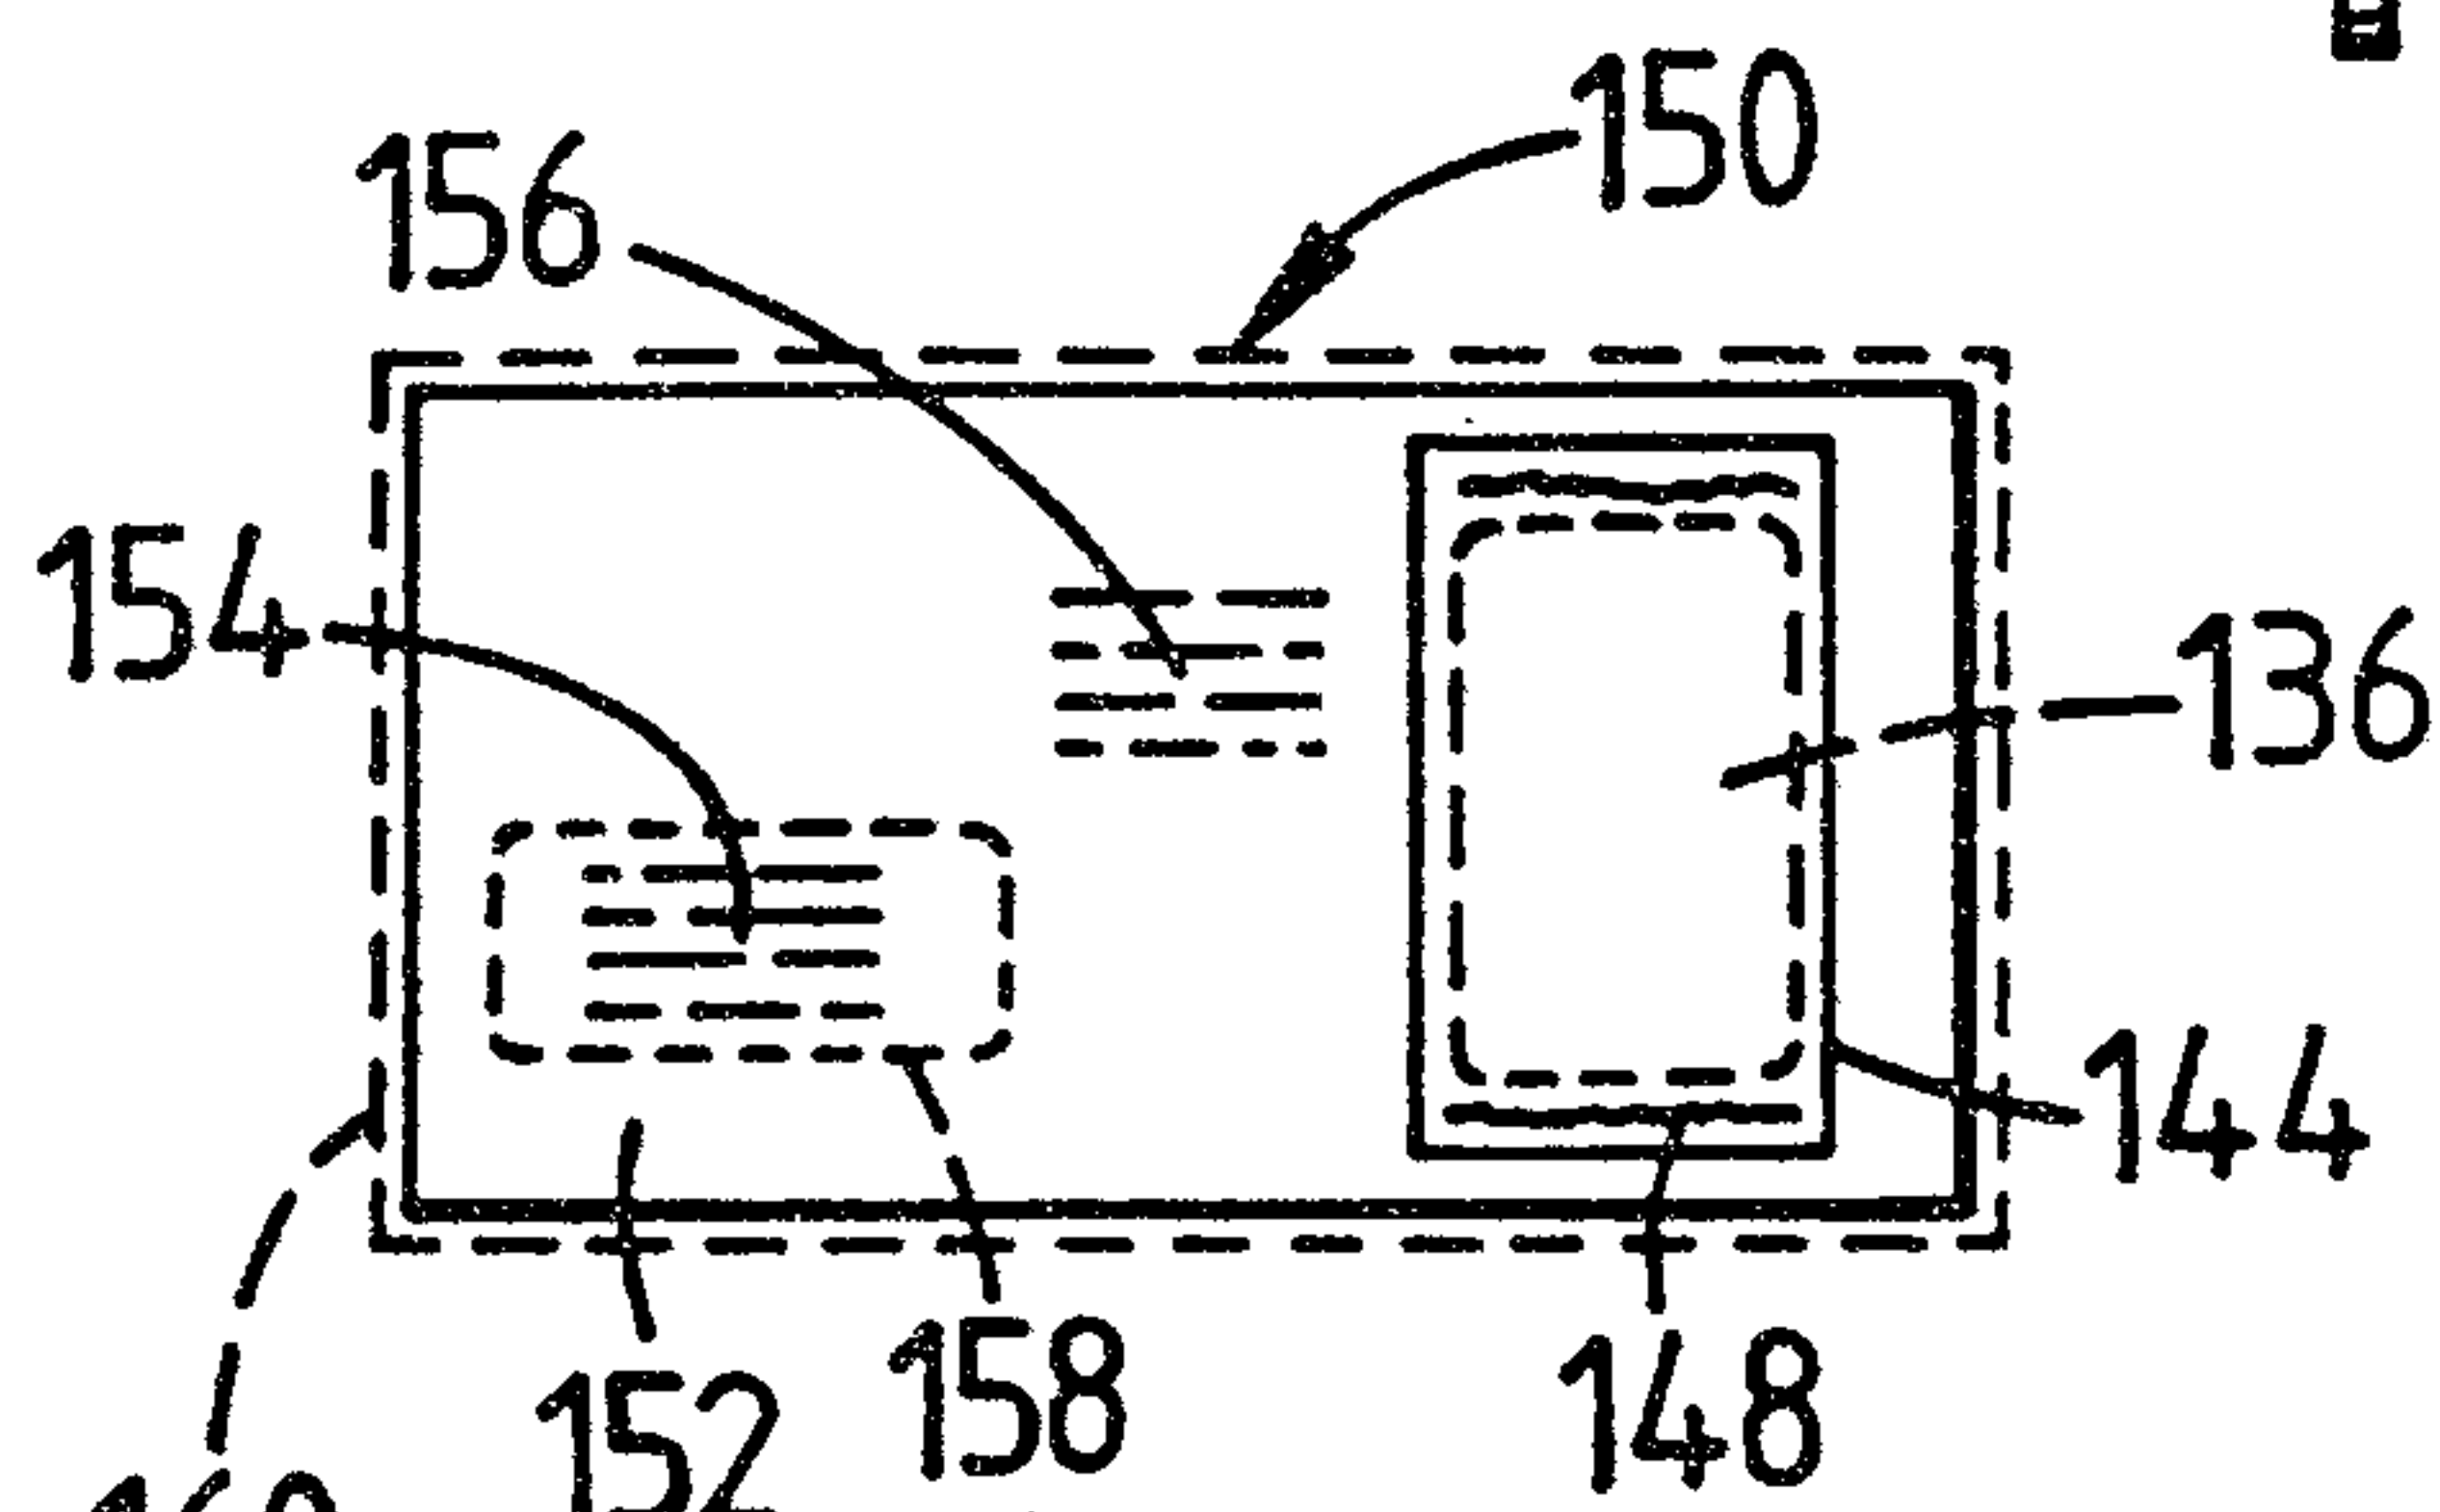


FIG. 26

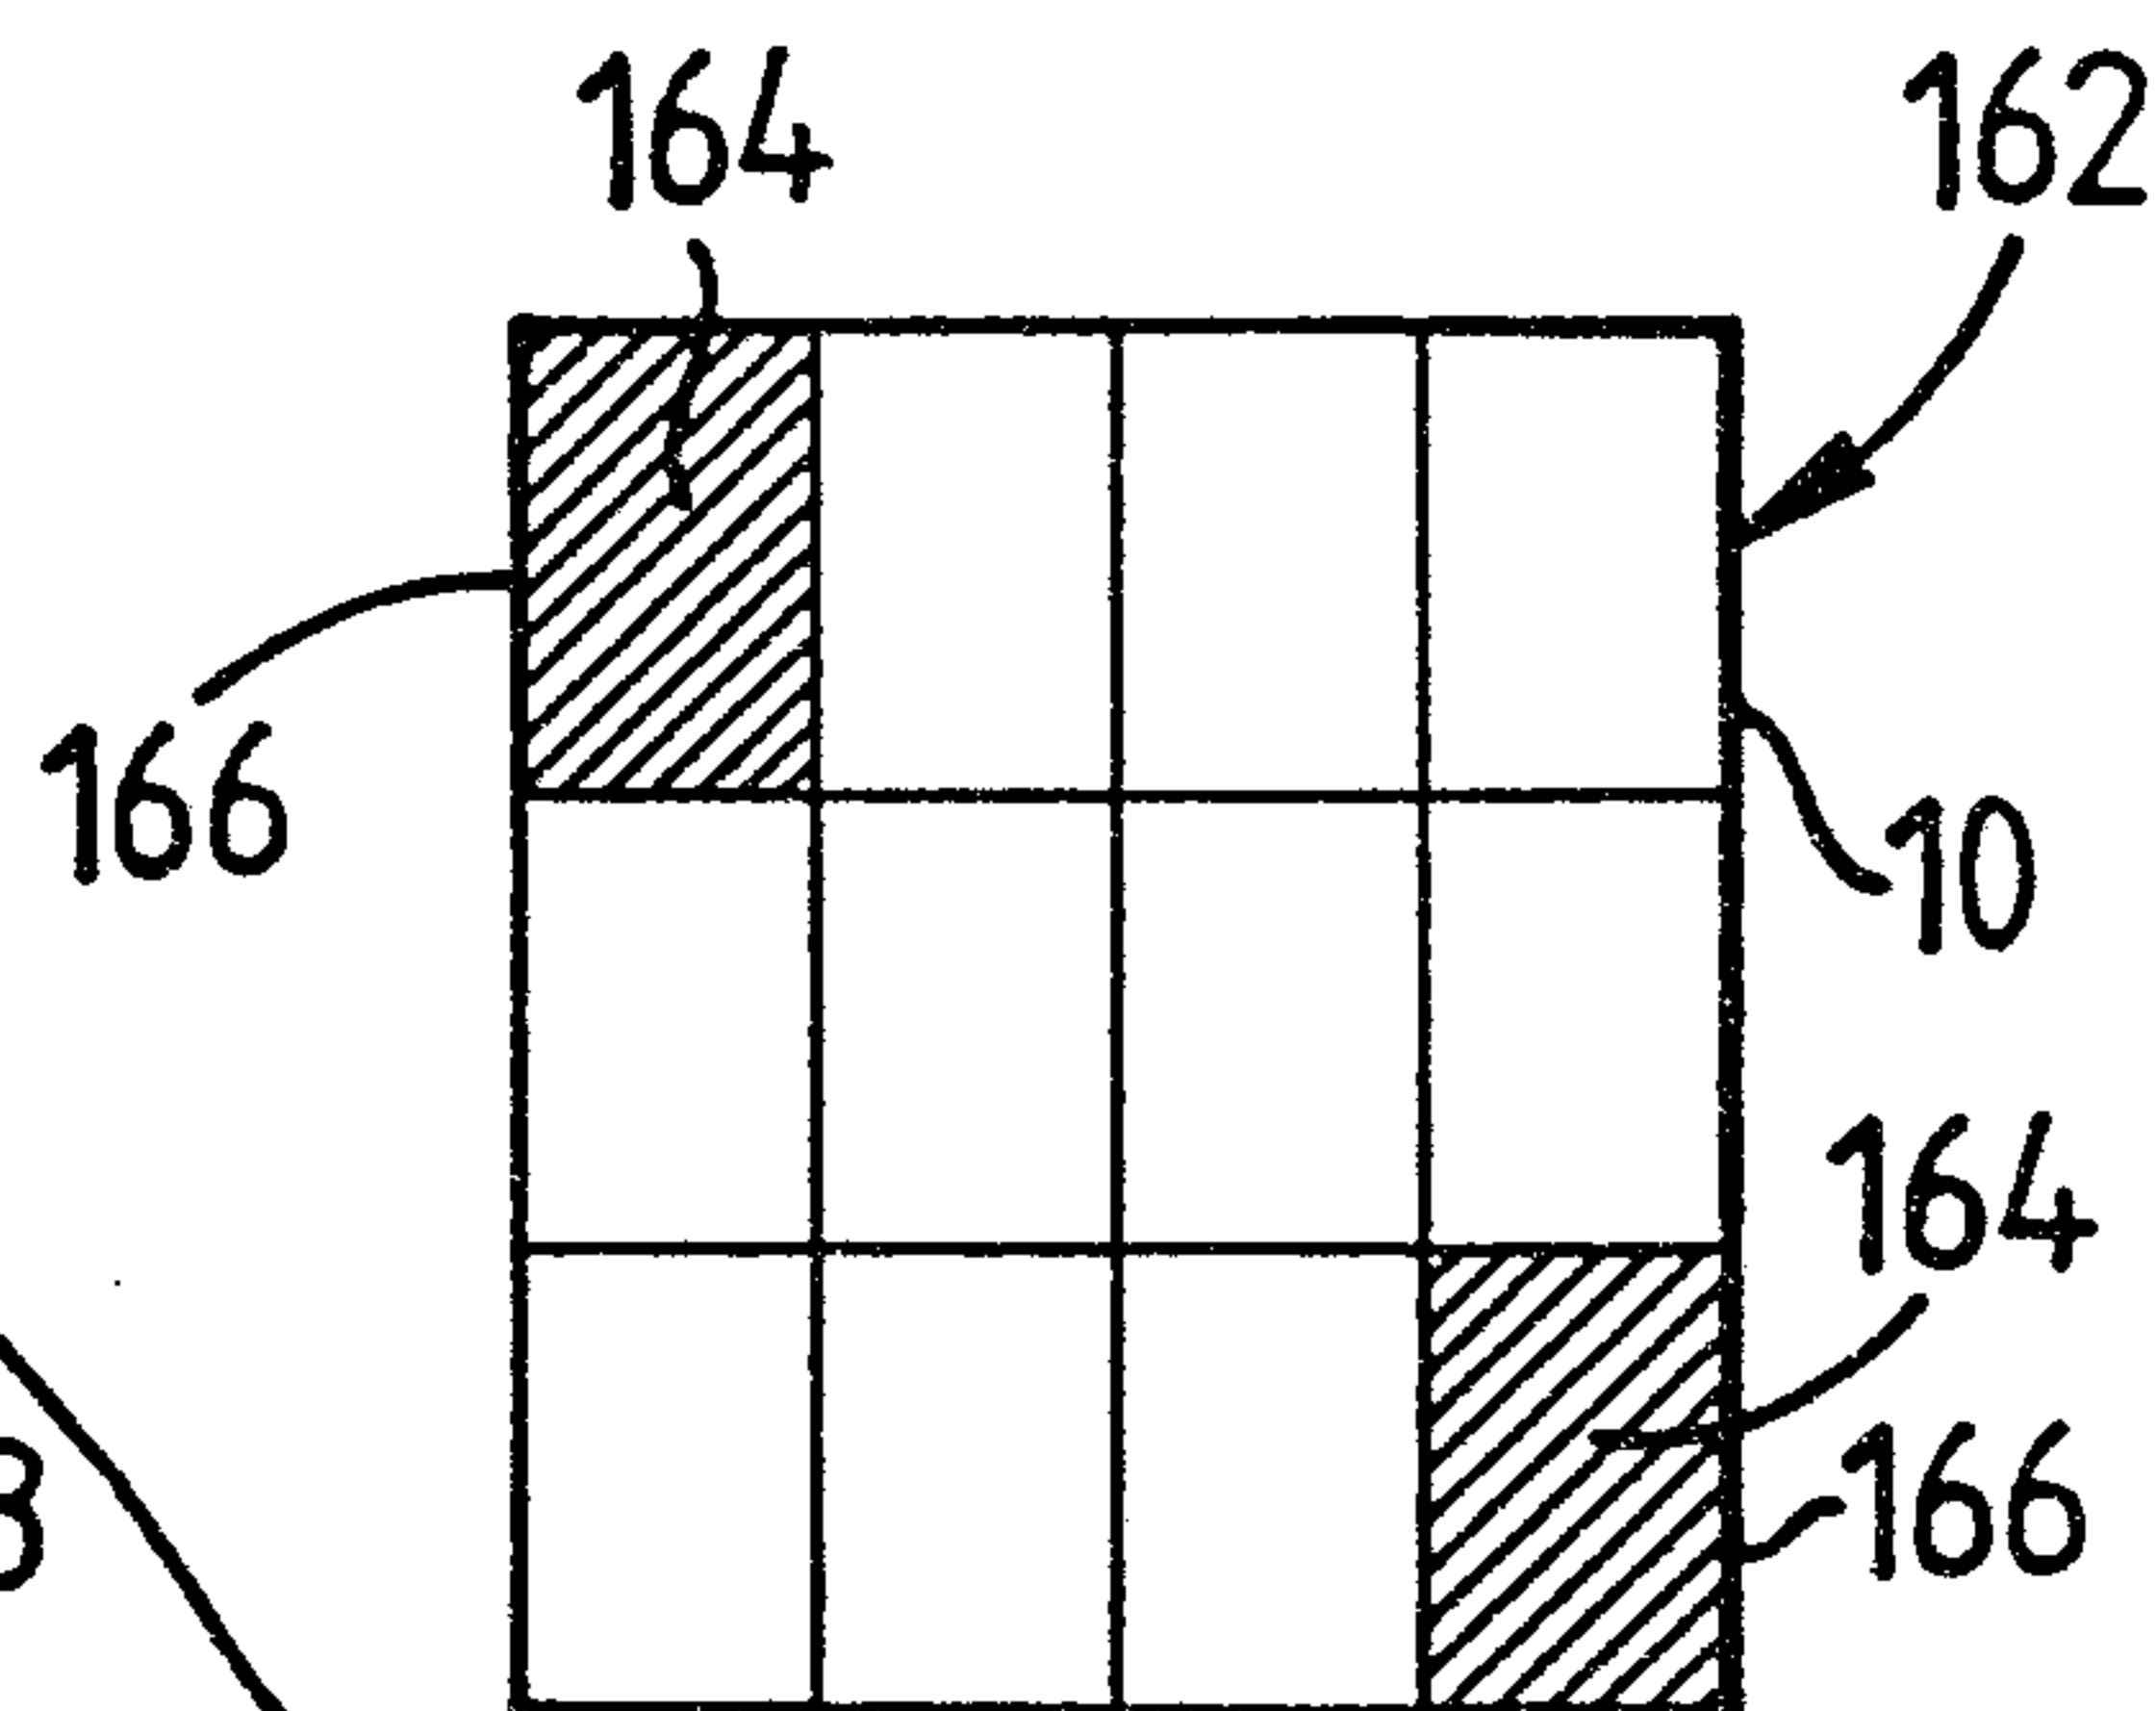


FIG. 27

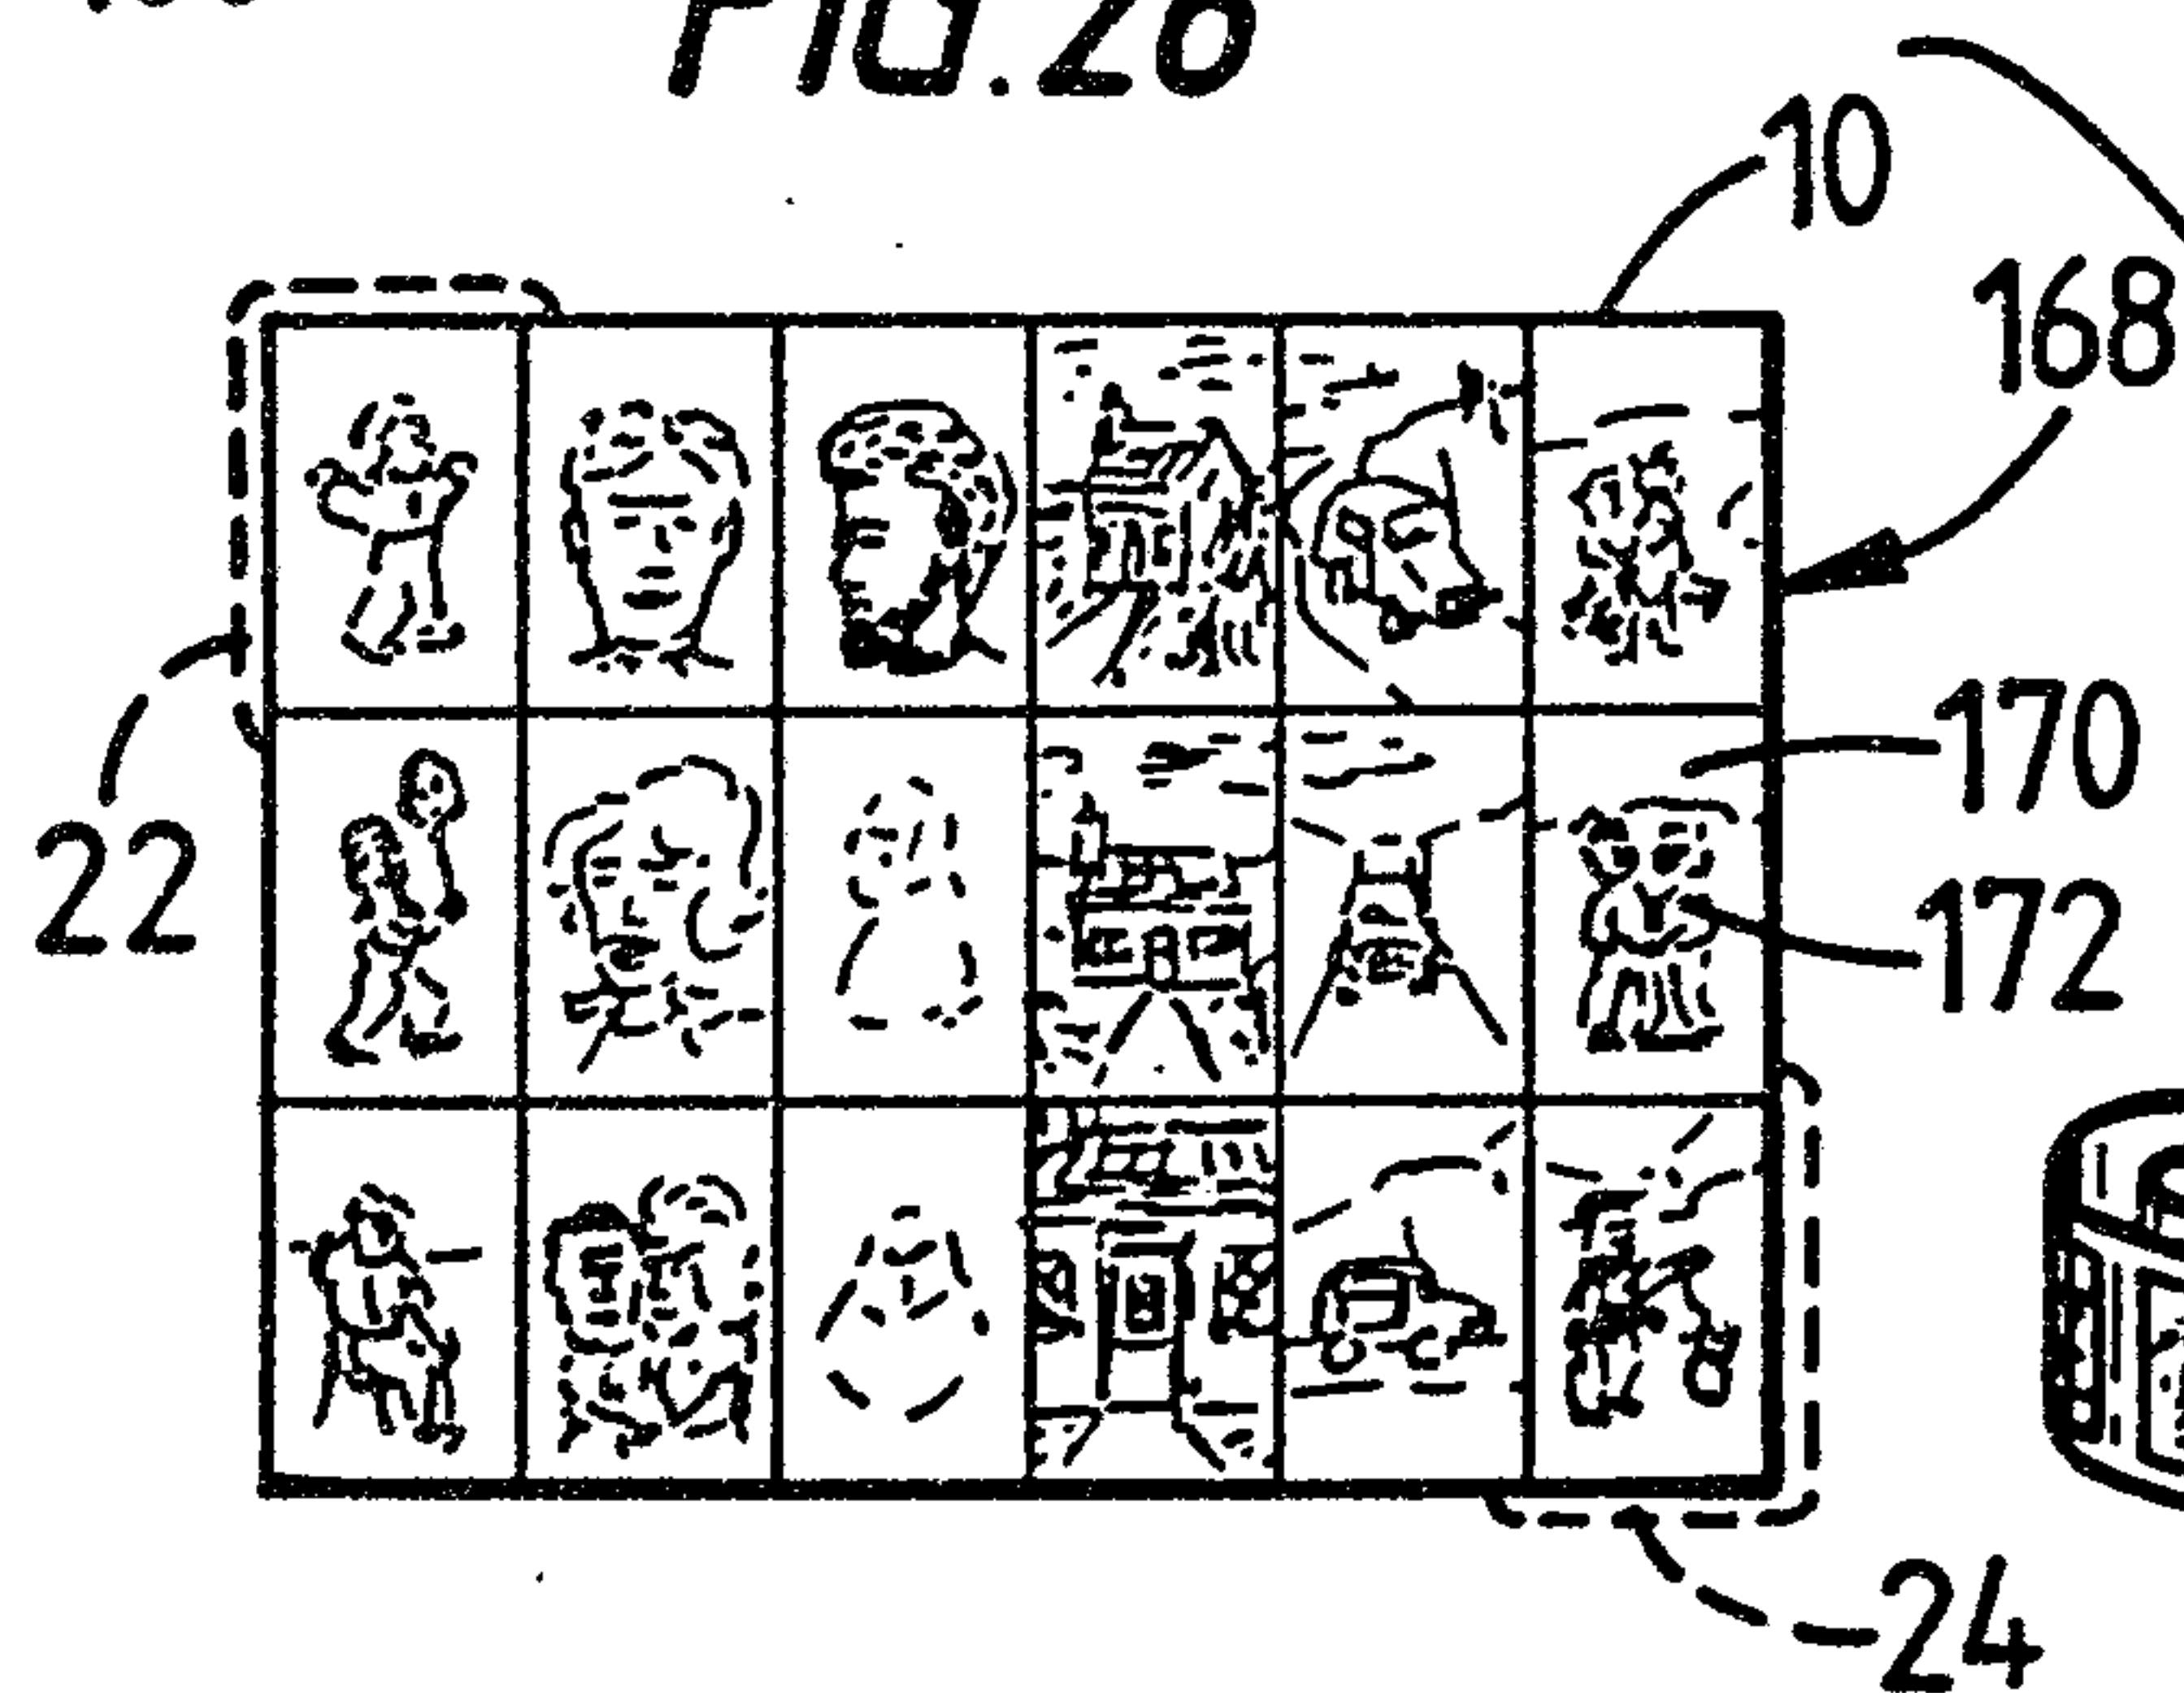


FIG. 28

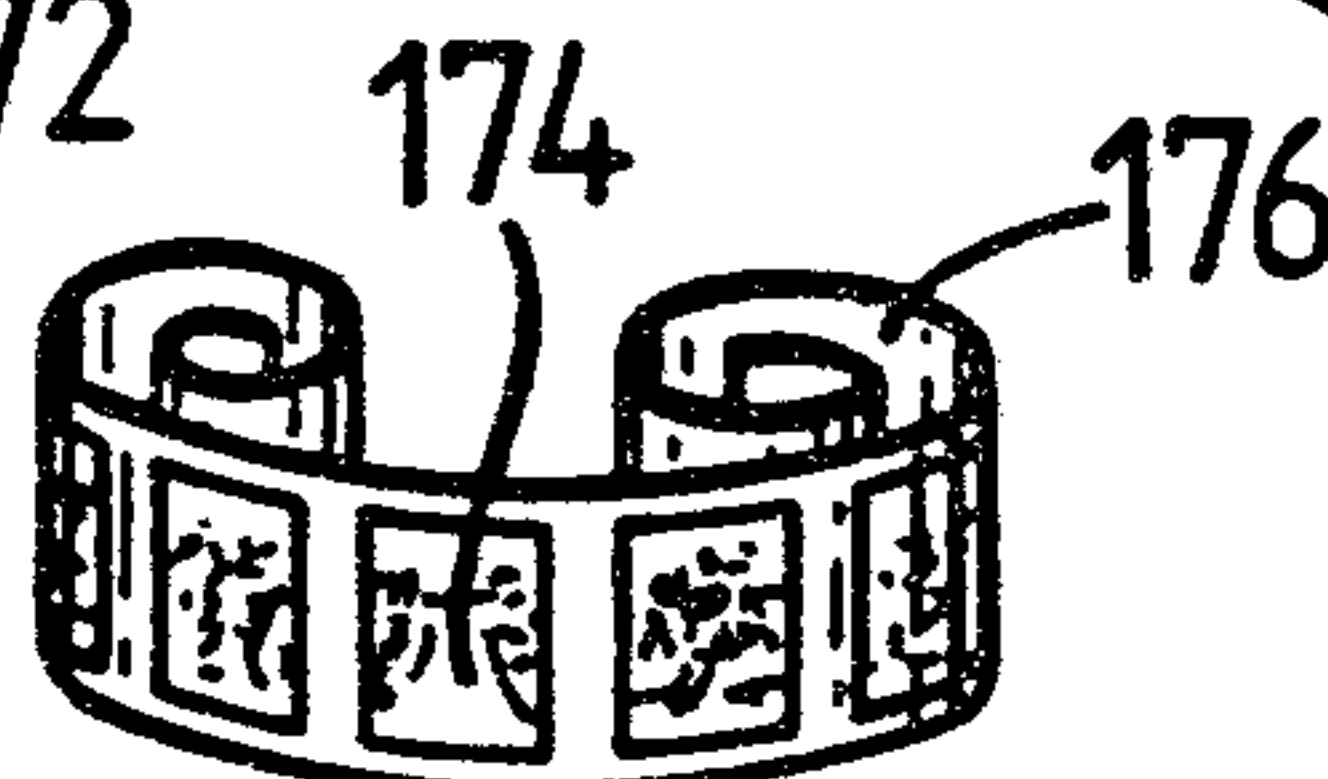


FIG. 29


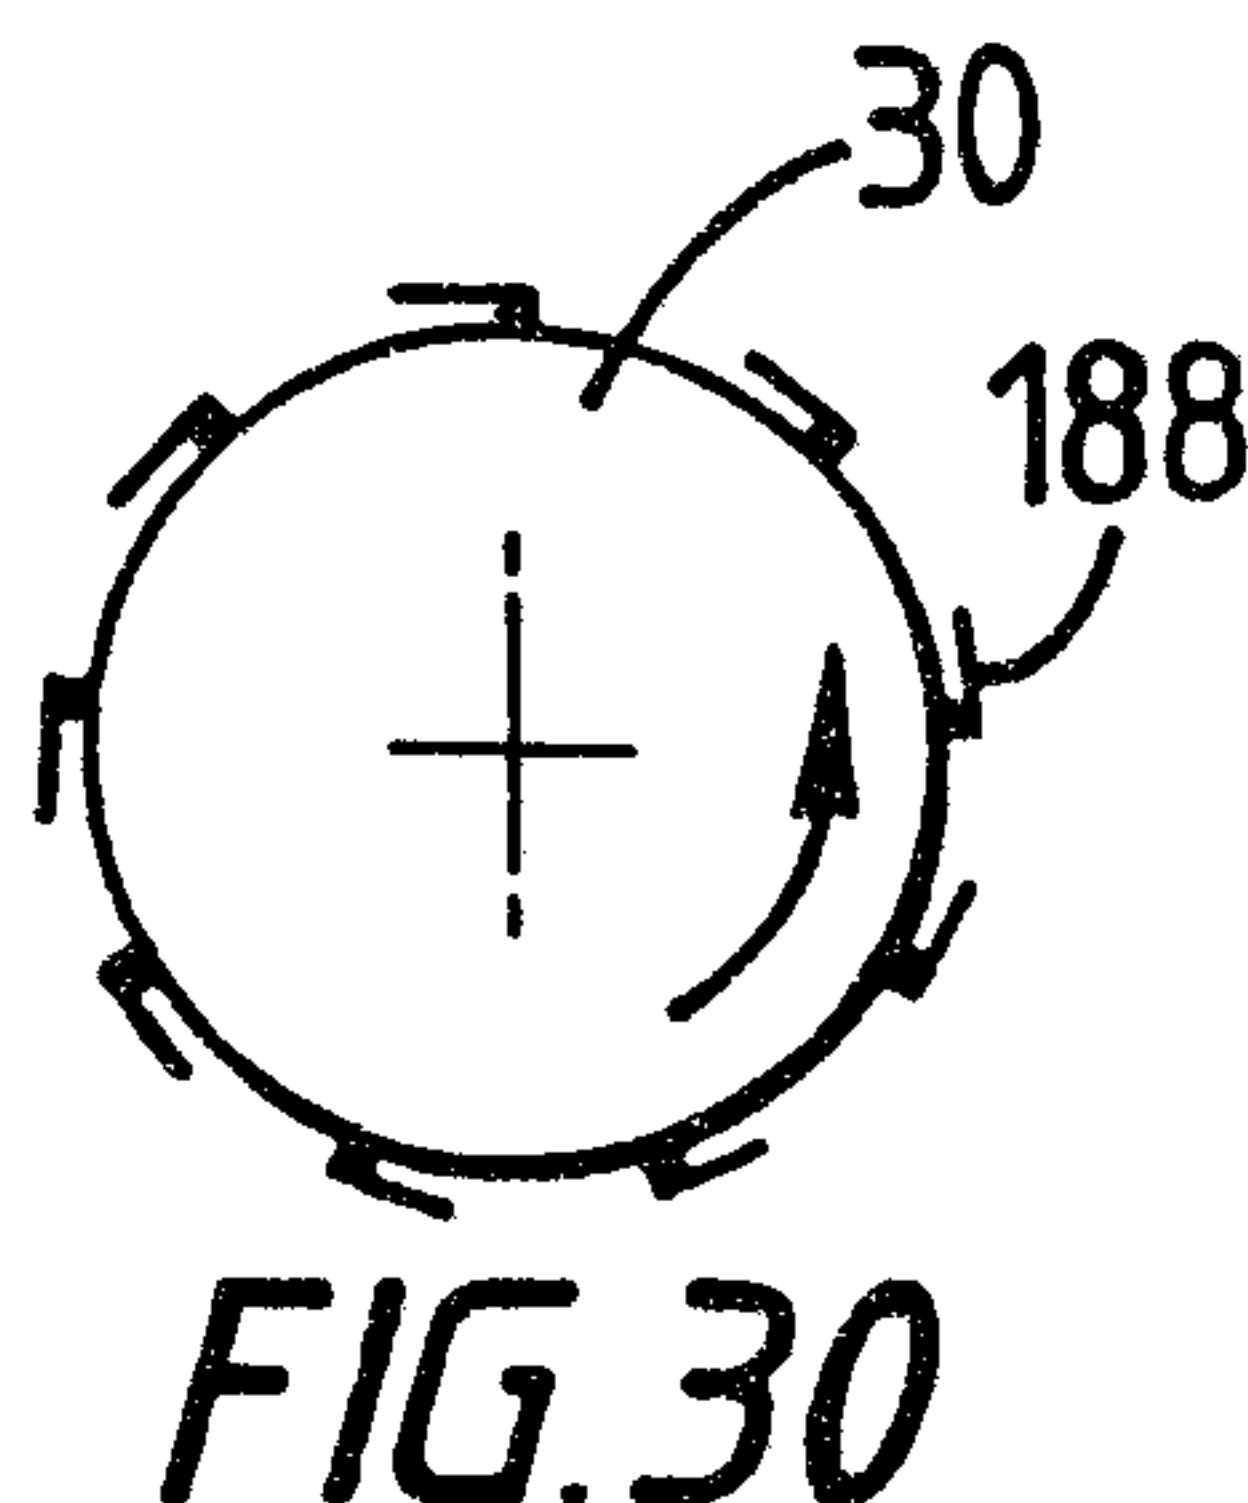


FIG. 30



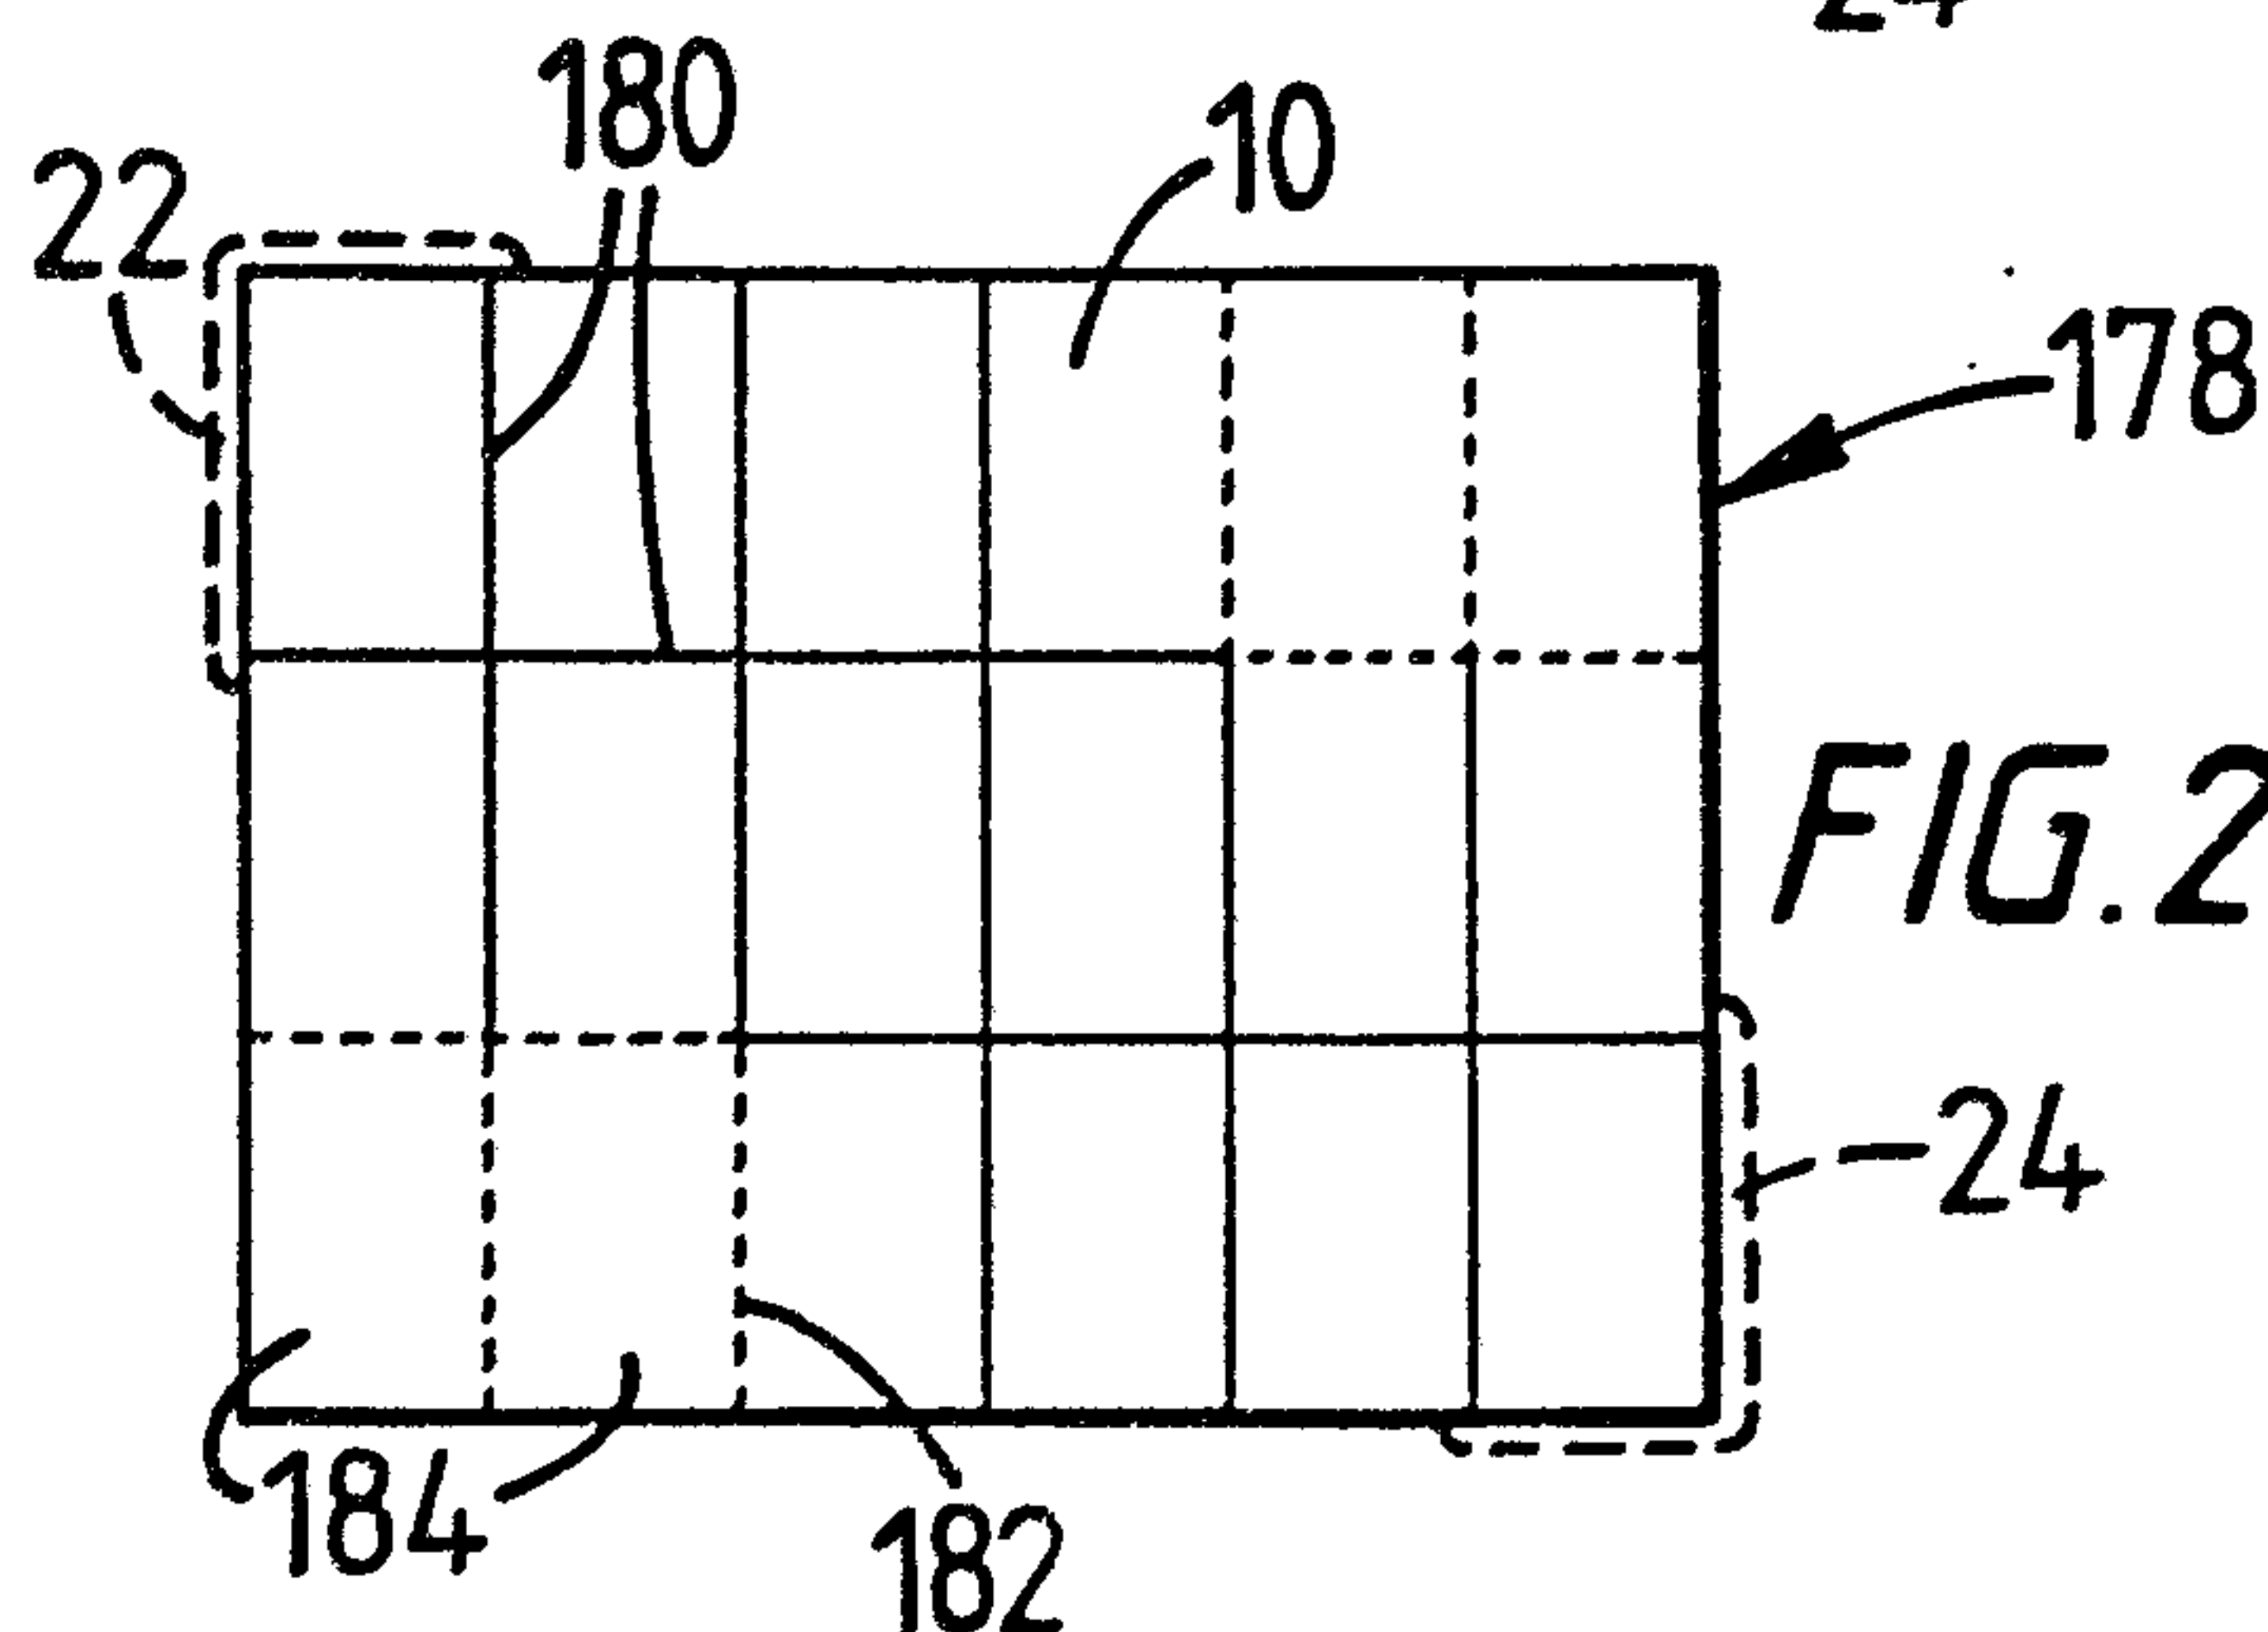