



(19)

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 932 012 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
17.12.2003 Bulletin 2003/51

(51) Int Cl.7: **F41A 9/76, F41A 9/82,**
F41A 9/39

(21) Application number: **99850004.5**

(22) Date of filing: **15.01.1999**

(54) Loading system for an artillery gun

Ladevorrichtung für ein Geschütz

Dispositif de chargement pour canon d'artillerie

(84) Designated Contracting States:
DE FR GB SE

(74) Representative: **Falk, Bengt**
Saab Bofors Support AB
Patents and Trademarks
691 80 Karlskoga (SE)

(30) Priority: **27.01.1998 SE 9800207**

(56) References cited:

(43) Date of publication of application:
28.07.1999 Bulletin 1999/30

EP-A- 0 051 119	EP-A- 0 086 127
DE-A- 2 027 586	DE-C- 3 524 924
FR-A- 1 195 834	FR-A- 2 102 839
FR-A- 2 102 840	US-A- 2 773 325
US-A- 3 242 813	

(73) Proprietor: **Bofors AB**
691 80 Karlskoga (SE)

(72) Inventor: **Berglund, Bengt**
691 48 Karlskoga (SE)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a shell magazine which is intended for preferably heavier self-propelled artillery pieces, is arranged on the elevating system and is designed in such a manner that any shell within the magazine is always available for loading into the piece. Moreover, the magazine has sufficient capacity for modern artillery tactics.

[0002] The result of modern technical possibilities of using radar or other methods to establish very rapidly the exact location of an artillery piece that is firing is that it will in future be necessary within the artillery to anticipate firing a sufficient number of shells, within a very short space of time, to combat the target in question and then, preferably even before the shells have reached the target, leaving the firing position for a new one sufficiently far away from the first one so as not to be affected by the counterfire which it has to be expected will be directed against the original gun position. This "gun and run" technique requires artillery pieces with very good inherent mobility and with very effective and rapid reloading systems which provide the necessary firing capacity.

[0003] A cost-effective way of modernizing older types of towed artillery pieces and those that have only limited inherent mobility has proved to be mounting these on so-called dumpers which give them the desired mobility and also providing them with more effective loading systems which give them the desired firing capacity. This is because the elevating systems of the artillery pieces manufactured over the last 20-30 years, with barrels, bolts etc., have as a rule proved to have good development possibilities which fully justified modernizing these pieces especially as modern ammunition gave them considerably greater range than the original.

[0004] As far as ammunition handling and loading systems are concerned, it is in the first place a matter of moving away from all manual handling of the heavy and unwieldy shells. The propelling charges, irrespective of whether these are in the form of loose charges such as cartridges or of so-called modular charges or of ready charge cases, are, on account of their very much lower weight in all these alternatives, considerably easier to handle even manually and at high loading rates. At the same time, as a result of the lower weight of the charges, it is as a rule easier to arrange storage magazines and automatic loading functions for these. At the same time, however, it is true that it may frequently be desirable to vary the charge strength between propelling charges in one and the same artillery volley, e.g. when it is desirable to fire a number of shells on different trajectories so that they all reach the target approximately simultaneously, and it can then be advantageous to be able to handle the propelling powder charges individually.

[0005] As already mentioned, the present invention relates to a shell magazine which is intended for preferably self-propelled heavier artillery pieces and is ar-

ranged on their elevating system. Among the advantages of the shell magazine according to the invention, it may be mentioned that, in spite of the fact that it can be designed in order to accommodate the maximum

5 number of shells of which the weight can be supported by the elevating system of the piece, it is nevertheless designed in such a manner that any shell within the magazine in question is always available for immediate loading. The magazine is moreover designed in such a manner

10 that fired shells can easily be replaced even if these were originally taken from different places within the magazine.

[0006] In Swedish Patent Application 9201433-1 (USA Patent 5,347,911), for example, the possibility has 15 previously been proposed of providing an artillery piece with a shell magazine which is mounted on the elevating system of the piece and which would therefore follow the latter in both its elevation and its lateral direction. The type of magazine that is proposed in this patent is,

20 however, of a refined revolver type and, for purely practical reasons, this provides room for only a relatively small number of shells. On the other hand, the rotatable revolver magazines have the advantage that they make it possible to select freely from the shells in the magazine.

[0007] Another type of shell magazine connected to the elevating system of the piece is described in GB-A-1,490,112. The magazine described therein is also of the revolver type although it comprises a number of revolvers for complete charges, where each revolver chamber accommodates two charges arranged one behind the other and only the rear charge in the respective chamber is therefore directly available for loading.

[0008] A further example of a hoisting apparatus for 35 use with a mobile gun is given by document US-A-3 242 813.

[0009] According to the present invention, it is proposed that the artillery piece concerned is provided with a magazine which is rigidly connected to the elevating 40 system of the piece and which extends over the elevating system, from or preferably slightly outside its one side, across the same and down along its other side, said magazine accommodating internally an endless chain conveyor which is provided with a number of compartments for individual shells, is deflected around guide wheels and the direction of, preferably mechanical, transport of which is optional, and the interior of the magazine also having guide rails along which the shells transported by the endless chain conveyor bear directly

45 or indirectly, and also that the magazine has, in proximity to its lowest point along that part of the chain conveyor which extends down along the side of the elevating system, a discharge opening which can be opened on command and where said guide rails can be folded aside so

50 that a shell located adjacent to this opening is then transferred to a loading bridge pivoted into said opening.

55 **[0010]** The loading bridge can then in turn be designed in such a manner that it has a front part which

receives the shell and also a rear part in which a propelling charge, e.g. in the form of a unit charge case, the necessary number of modular charges or other propelling powder charge, can be positioned, after which the shell, preferably simultaneously with mechanical or electronic fuse programming, is backed up to form an appropriately brought-together unit with the charge, after which the shell and the charge are rammed home as a unit in the barrel of the gun in question.

[0011] With the shell magazine described purely generally above, it is possible to achieve a capacity of between 20 and 30 shells in a 155 mm artillery piece and still give the piece an acceptable load profile. Moreover, the magazine has an upper horizontal endless chain conveyor portion which, through openable hatches in the protective shell, which should preferably surround the loading system and other splinter-sensitive parts of the piece, can easily be replenished with new shells.

[0012] The shell content of the shell magazine can then be replenished either by means of a crane which lifts one or more shells in from above and directly down into empty compartments in the upper horizontal portion of the endless chain conveyor, or by means of a pendulum lifting arm which is mounted in the elevating system of the piece and can be pivoted up from its one side and which has at its free end a shell cradle which is preferably equipped with special shell-clamping members and in which one shell at a time can be positioned directly from ground level in order then to be pivoted upwards/inwards by the pendulum lifting arm towards that compartment in the horizontal portion of the endless chain conveyor which is to be refilled, and when the shell cradle has reached this unloading position, the shell-clamping members mentioned previously are released and the shell is then tipped into the compartment concerned. If such a pendulum lifting arm is not double-articulated, it will be able to reach only one of the different positions of the shell compartments in the upper horizontal portion of the endless chain conveyor but this will probably not have any significance because empty shell compartments can always be moved to this loading position irrespective of where they were originally located in the magazine.

[0013] The invention has been defined in the patent claims below and it will now be described in somewhat greater detail in connection with the appended figures, in which:

- Figure 1 shows an inclined projection of a dumper-mounted artillery piece designed in the manner concerned here,
- Figure 2 shows a slightly different inclined projection of the elevating system in the piece according to Fig. 1 (in this figure, the splinter-protection of the magazine housing is not drawn so that it does not conceal certain components),
- Figure 3 shows on enlarged scale a section of the

shell magazine and other parts of the piece along the section line III-III in Fig. 2 while shows on enlarged scale a section of the shell magazine and other parts along the section line IV-IV in Fig. 2, and

- Figure 5 shows the rear part of the piece in question provided with a side-acting pendulum lifting arm.

10 [0014] In all the figures, corresponding components have been given the same reference numbers irrespective of the different scale of the figures.

[0015] The complete artillery vehicle 1 shown in Fig. 1 comprises the actual dumper vehicle 2 which for its 15 special function has been provided with an armoured personnel cab 3 which is designed so as to provide room for artillery personnel and also necessary data and communication equipment and also room for carrying out necessary firing calculations.

20 [0016] Also present is the elevating system 4 which comprises the gun with its barrel 5 with barrel protection 6 fixed to the gun, and two openable front hatches 6a and 6b fixed to the gun carriage, and a shell magazine 7 with splinter protection 8 which can be closed by being 25 moved in the direction of the arrow. (In Fig. 1, the splinter protection 8 is open in order to make the top side of the magazine accessible.) Also included therein is a loading bridge 9 with accessories and also a ram 10 (see Fig. 2) and a small standby magazine 11 for propelling powder charges. Additional propelling powder charges are 30 carried in the storage magazines 12 and 13 fixed to the dumper.

[0017] The purpose of the barrel protection 6 is on the one hand to protect the recoil system of the gun from 35 splinter and on the other hand to screen the hot barrel from the environment so that it is more difficult to locate using IR-sensitive equipment.

[0018] The shell magazine 7 is provided internally with three guide wheels 14-16 (see Fig. 3), around which 40 an endless chain conveyor 17, which in the examples shown consists of 24 interlinked shell compartments 18, is arranged in a mechanically displaceable manner. The endless chain conveyor 17 forms a continuous loop with two portions 19, 20 extending one above the other over 45 the elevating system from its one side to its other side, and two side portions 21, 22 (an inner 21 and an outer 22) extending down along its right side. The shell magazine housing 7 is also provided internally with guide strips 23 (a front one and a rear one) on which the shells 50 24 positioned in the shell compartments 18 and, respectively, the shell compartments 18 rest and along which these are displaced.

[0019] All the shell compartments 18 are also open 55 outwards away from the guide wheels 14-16. This means that the shell compartments 18 in the upper portion 19 of the endless chain conveyor 17 are open upwards and that the shells in this part of the magazine are supported entirely by the shell compartments which

in turn rest on their own guide strip here. Any empty shell compartments can thus be filled from this side provided that the shell magazine 7 can be opened in this part. Accordingly, this can take place e.g. by means of a crane but can also take place using the pendulum arm illustrated in Figure 5.

[0020] Close to the inner side part 21 of the endless chain conveyor 17 at the level of the lower guide wheel 16, the guide strips 23 can be opened, which means that that shell 24 which, in its compartment 18, is located at the level of this opening 25 when the guide strips 23 are moved aside will be transferred to the loading bridge 9 provided that this has been pivoted in towards the opening in question. From this position, the loading bridge 9 can be pivoted in towards the loading opening 26 of the barrel 5, after which the ram 10 is actuated.

[0021] In order that a high ramming rate can be used, however, it is necessary for the shell 24 itself to have been brought together beforehand with the propelling powder charge to form an appropriately held-together unit so that these can be rammed home as a unit. The fuse of the shell must also be programmed. In this connection, refer to Fig. 4. As can be seen from this figure, a shell 24' from the shell magazine 7 has been guided down onto the loading bridge 9. The latter also has room for a propelling powder charge 28, in this case in the form of a charge case which has been supplied separately. As soon as the shell and the charge case are in position, a member 27 for combined fuse programming and bringing together is actuated, which engages over the front part of the shell, i.e. its fuse, and, at the same time as fuse programming is carried out (mechanically or electronically), moves the shell 24' in the direction of the arrow A until the shell and the propelling powder charge 28 form an appropriately held-together unit, after which the member 27 is returned to its starting position and the loading bridge 9 is transferred to the loading position directly adjacent to the loading opening of the barrel 5.

[0022] In Figure 5, only the rearmost part of the dumper vehicle 2 and the rearmost part of the elevating system 4 are shown. On the other hand, the entire magazine 7, the loading bridge 9 and the ram 10 and also parts of a shell 24" lying on the loading bridge 9 and a propelling powder charge 28" are shown. The pendulum loading arm illustrated in the figure has been given the reference number 29. It is fastened pivotably to the elevating system 4 of the gun via two bearings 30, 31. Mounted in the same bearings, so as to fold up, is a protective frame 32. In the figure, this is drawn in its folded down position. During movement, it can be folded up towards the magazine 7. The pendulum loading arm 29 has a shell cradle 33 at its free outer end. This cradle is provided with gripping members (not drawn in the figure) which hold a shell 24" positioned in the same until the pendulum arm has reached its final position. The refilling position of the pendulum loading arm 29 is drawn in broken lines in the figure. In this position, shells can be po-

sitioned in the shell cradle, after which the drive members (concealed in the figure) of the pendulum loading arm, in the form of a hydraulic piston assembly, pivots the arm up in the direction of the arrows B, past the position drawn in the figure, until the shell cradle 33 is located directly above the empty shell compartment 18', drawn in the figure, in the magazine 7. In this position, the shell-gripping members mentioned previously are released and the shell 24" is tipped into the shell compartment 18' and the pendulum loading arm 29 is returned to the starting position down between the arms of the protective frame 32, and at the same time the next empty shell compartment is advanced to the receiving position previously occupied by the shell compartment 18'.

5 The shell cradle 33 of the pendulum loading arm can be loaded with a new shell, either manually or mechanically, when it is in its lower refilling position between the arms of the protective frame 32.

[0023] By virtue of the fact that the direction of movement of the endless chain conveyor is optional, a promptly required shell can be conveyed to the discharge position 25, at the same time as the specific positioning of the endless chain conveyor on the elevating system of the gun and its own special design provide a 10 high magazine capacity and short and rapid ramming operations. The magazine is moreover easy to refill.

[0024] The magazine system outlined above is therefore effective in terms of both action and cost.

15

Claims

1. Shell magazine (7) of the endless chain conveyor type intended for preferably heavier self-propelled artillery pieces (1), comprising a number of shell compartments (18) which are arranged parallel to one another and connected, by means of links adapted thereto, to form an endless chain conveyor which is movable around guide wheels (14-16), and which compartments can each receive a shell (24), where said endless chain conveyor (17) is arranged in a magazine (7) connected rigidly to the elevating system of the gun (5), **characterized in that** said endless chain conveyor extends around the guide wheels (14-16) in a loop with an upper portion (19) and a lower portion (20) across the upper part of the elevating system (4) and also an outer portion (22) and an inner portion (21) down along at least one side of the elevating system, the magazine (7) having at the level of its lower part an openable and closable discharge opening (25) for discharging the shell (24') from that shell compartment (18) which is located at the level of the discharge opening (25) when it is open.
2. Shell magazine according to Claim 1, **characterized in that** the shell compartments (18) included in the endless chain conveyor (17) are open in the

outward direction away from the guide wheels (14-16) and **in that** the inside of the magazine (7) has guide strips (23) against which the shell compartments and, respectively, the shells located in the shell compartments can bear as necessary.

3. Shell magazine (7) according to Claim 2, **characterized in that** the magazine (7) is designed with an openable upper part (8) and replenished by a pendulum lifting arm (29) which is fastened to the elevating system of the gun below the magazine and is pivotably movable transversely to the longitudinal direction of the gun and with which shells (24'') can be lifted mechanically from ground level up to the upper horizontal portion (19) of the endless chain conveyor (17) in order there to be transferred into an empty shell compartment (18').

4. Shell magazine (7) according to one of Claims 1-3, **characterized in that** it is complemented by a loading bridge (9) which is displaceable from a position at the level of the discharge opening (25) of the shell magazine to a position directly adjacent to the loading opening (26) of the gun and which, in addition to room for a shell (24'), also provides space for a propelling powder charge (28), the loading bridge being complemented by a member (27) for backing up the shell (24') towards the propelling powder charge (28) and bringing these together to form an appropriately held-together unit before they are rammed home as a unit in the loading opening (26) of the gun (5).

5. Shell magazine (7) according to Claim 4, **characterized in that** the member (27) for bringing together the shell (24') and the propelling powder charge (28) is also used for setting the fuse of the shell before the latter is rammed home in the gun.

5 Höhenrichtsystems (4) und auch einem äußeren Teil (22) und einem innenliegenden Teil (21) wenigstens entlang einer Seite des Höhenrichtsystems, wobei das Magazin (7) auf der Höhe seines unteren Teils eine zu öffnende und zu schließende Ausgabeöffnung (25) zum Ausgeben der Patrone (24') aus dem Patronenabteil (18) hat, das in seinem offenen Zustand auf der Höhe der Ausgabeöffnung (25) liegt.

10 2. Patronenmagazin nach Anspruch 1, **dadurch gekennzeichnet, dass** die Patronenabteile (18), die in dem Endlosförderband (17) enthalten sind, in der Richtung nach außen, weg von den Führungsrädern (14-16) offen sind, und dass das Innere des Magazins (7) Führungsstreifen (23) hat, an welchen die Patronenabteile und dementsprechend die Patronen, welche in den Patronenabteilen angeordnet sind, falls notwendig anliegen können.

15 3. Patronenmagazin nach Anspruch 2, **dadurch gekennzeichnet, dass** das Magazin (7) mit einem zu öffnenden oberen Teil (8) gestaltet ist und durch einen pendelnden Hebearm (29) nachgefüllt wird, der an dem Höhenrichtsystem des Geschützes unterhalb des Magazins befestigt ist und quer zu der Längsrichtung des Geschützes schwenkbar bewegbar ist, und mit welchem die Patronen (24'') mechanisch in der Höhe des Bodens bis zu dem oberen horizontalen Teil (19) des Endlosförderbandes (17) angehoben werden können, um dort in ein leeres Patronenabteil (18') transferiert zu werden.

20 4. Patronenmagazin (7) nach einem der Ansprüche 7 bis 3, **dadurch gekennzeichnet, dass** es durch eine Ladebrücke (9) vervollständigt ist, die in einer Position auf der Höhe der Ausgabeöffnung (25) des Patronenmagazins in eine Position direkt neben der Ladeöffnung (26) des Geschützes verschiebbar ist, und die zusätzlich zum Aufnehmen einer Patrone (24') auch einen Raum für eine antreibende Pulverladung (28) schafft, wobei die Ladebrücke durch ein Element (27) vervollständigt ist, um die Patrone (24') in Richtung auf die antreibende Pulverladung (28) abzustützen und diese zusammenzubringen, um eine auf geeignete Art zusammengehaltene Einheit zu bilden, bevor diese als eine Einheit in die Ladeöffnung (26) des Geschützes (5) angesetzt werden.

25 5. Patronenmagazin (7) nach Anspruch 4, **dadurch gekennzeichnet, dass** das Element (27) zum Zusammenbringen der Patrone (24') und der treibenden Pulverladung (28) auch zum Setzen des Zünders der Patrone verwendet wird, bevor diese im Geschütz angesetzt wird.

30

35

40

45

50

55

Patentansprüche

1. Patronenmagazin (7) nach Art eines Endlosförderbandes, das für vorzugsweise schwerere selbst angetriebene Artillerie-Fahrzeuge (1) vorgesehen ist, mit einer Anzahl von Patronenabteilen (18), die mittels an diese angepasster Gelenke parallel zueinander angeordnet und miteinander verbunden sind, um ein Endlosförderband zu bilden, das um Führungsräder (14-16) bewegbar ist, und wobei die Abteile jeweils eine Patrone (24) aufnehmen können, wobei das Endlosförderband (17) in einem Magazin (7) angeordnet ist, welches starr an das Höhenrichtsystem des Geschützes (5) angeschlossen ist, **dadurch gekennzeichnet, dass** das Endlosförderband sich um die Führungsräder (14-16) in einer Schlaufe erstreckt, mit einem oberen Teil (19) und einem unteren Teil (20) quer zu dem oberen Teil des

Revendications

1. Chargeur d'obus (7) du type de convoyeur à chaîne sans fin, destiné de préférence aux pièces d'artillerie lourde autopropulsées (1), comprenant un certain nombre de compartiments d'obus (18) qui sont agencés en parallèle les uns avec les autres et raccordés, au moyen de chaînons adaptés à ceux-ci, afin de former un convoyeur à chaîne sans fin qui est mobile autour de roues de guidage (14-16), et lesquels compartiments peuvent chacun recevoir un obus (24), où ledit convoyeur à chaîne sans fin (17) est agencé dans un chargeur (7) rigidement raccordé au système d'élévation du canon (5), **caractérisé en ce que** ledit convoyeur à chaîne sans fin s'étend autour des roues de guidage (14-16) en une boucle avec une partie supérieure (19) et une partie inférieure (20) en travers de la partie supérieure du système d'élévation (4), et également une partie externe (22) et une partie interne (21) en bas et le long d'au moins un côté du système d'élévation, le chargeur (7) ayant au niveau de sa partie inférieure une ouverture de décharge (25), pouvant être ouverte et fermée, destinée à décharger l'obus (24') du compartiment d'obus (18) qui est placé au niveau de l'ouverture de décharge (25) lorsqu'elle est ouverte.

5 du canon et qui, en plus d'une chambre destinée à un obus (24'), fournit également de l'espace destiné à une charge de poudre de propulsion (28), le pont de chargement étant complété par un élément (27) destiné à faire reculer l'obus (24') vers la charge de poudre de propulsion (28) et à assembler ceux-ci afin de former ensemble une unité maintenue ensemble et de manière appropriée, avant d'être poussés en tant qu'unité dans l'ouverture de chargement (26) du canon (5).

10 5. Chargeur d'obus (7) selon la revendication 4, **caractérisé en ce que** l'élément (27) destiné à assembler l'obus (24') et la charge de poudre de propulsion (28), est également utilisé pour fixer l'amorce de l'obus avant que ce dernier ne soit poussé dans le canon.

15 20

25 25

2. Chargeur d'obus (7) selon la revendication 1, **caractérisé en ce que** les compartiments d'obus (18) compris dans le convoyeur à chaîne sans fin (17) sont ouverts vers l'extérieur et au loin des roues de guidage (14-16), et **en ce que** l'intérieur du chargeur (7) comporte des bandes de guidage (23) contre lesquelles les compartiments d'obus et, respectivement, les obus placés dans les compartiments d'obus, peuvent porter en tant que de besoin.

30 30

3. Chargeur d'obus (7) selon la revendication 2, **caractérisé en ce que** le chargeur (7) est conçu avec une partie supérieure pouvant être ouverte (8), et réapprovisionné à l'aide d'un bras de levage pendulaire (29) qui est rattaché au système d'élévation du canon sous le chargeur et est déplaçable en rotation et transversalement selon la direction longitudinale du canon, et avec lequel des obus (24'') peuvent être soulevés mécaniquement à partir du niveau du sol jusqu'à la partie horizontale supérieure (19) du convoyeur à chaîne sans fin (17) afin d'être transférés dans un compartiment d'obus vide (18').


35 40

45

4. Chargeur d'obus (7) selon l'une des revendications 1 à 3, **caractérisé en ce qu'il** est complété par un pont de chargement (9) qui est déplaçable à partir d'une position au niveau de l'ouverture de décharge (25) du chargeur d'obus jusqu'à une position directement adjacente à l'ouverture de chargement (26)

50 50

55

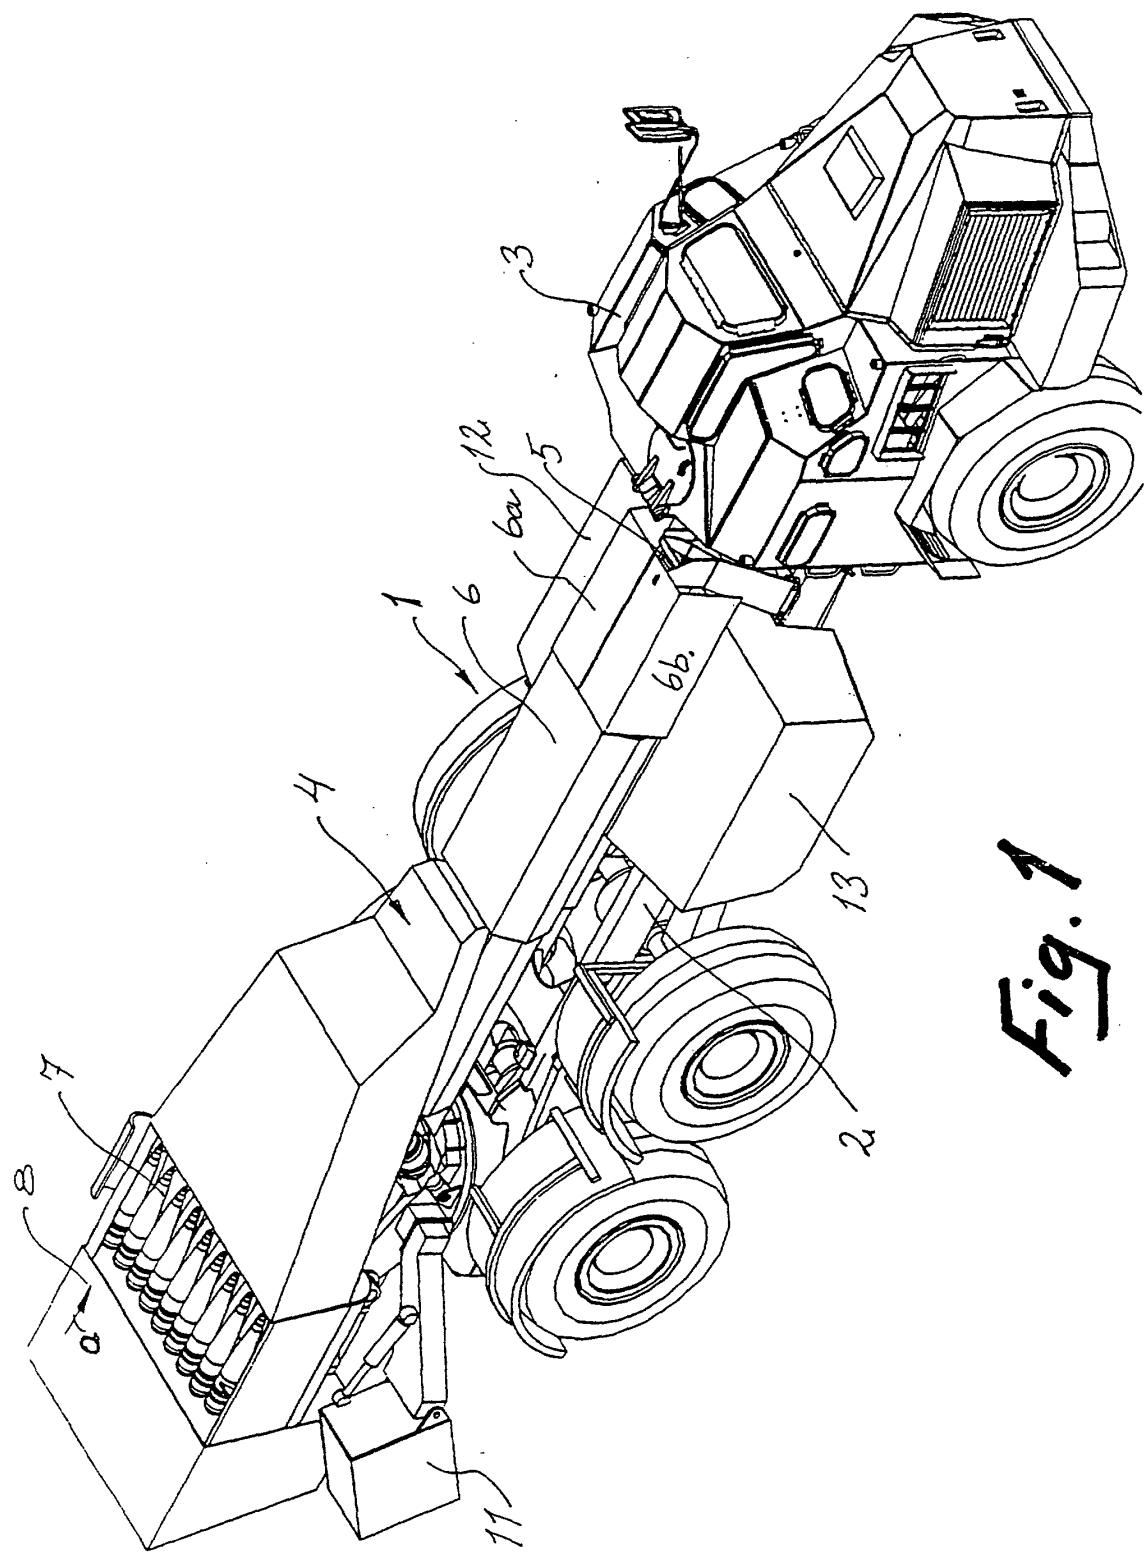

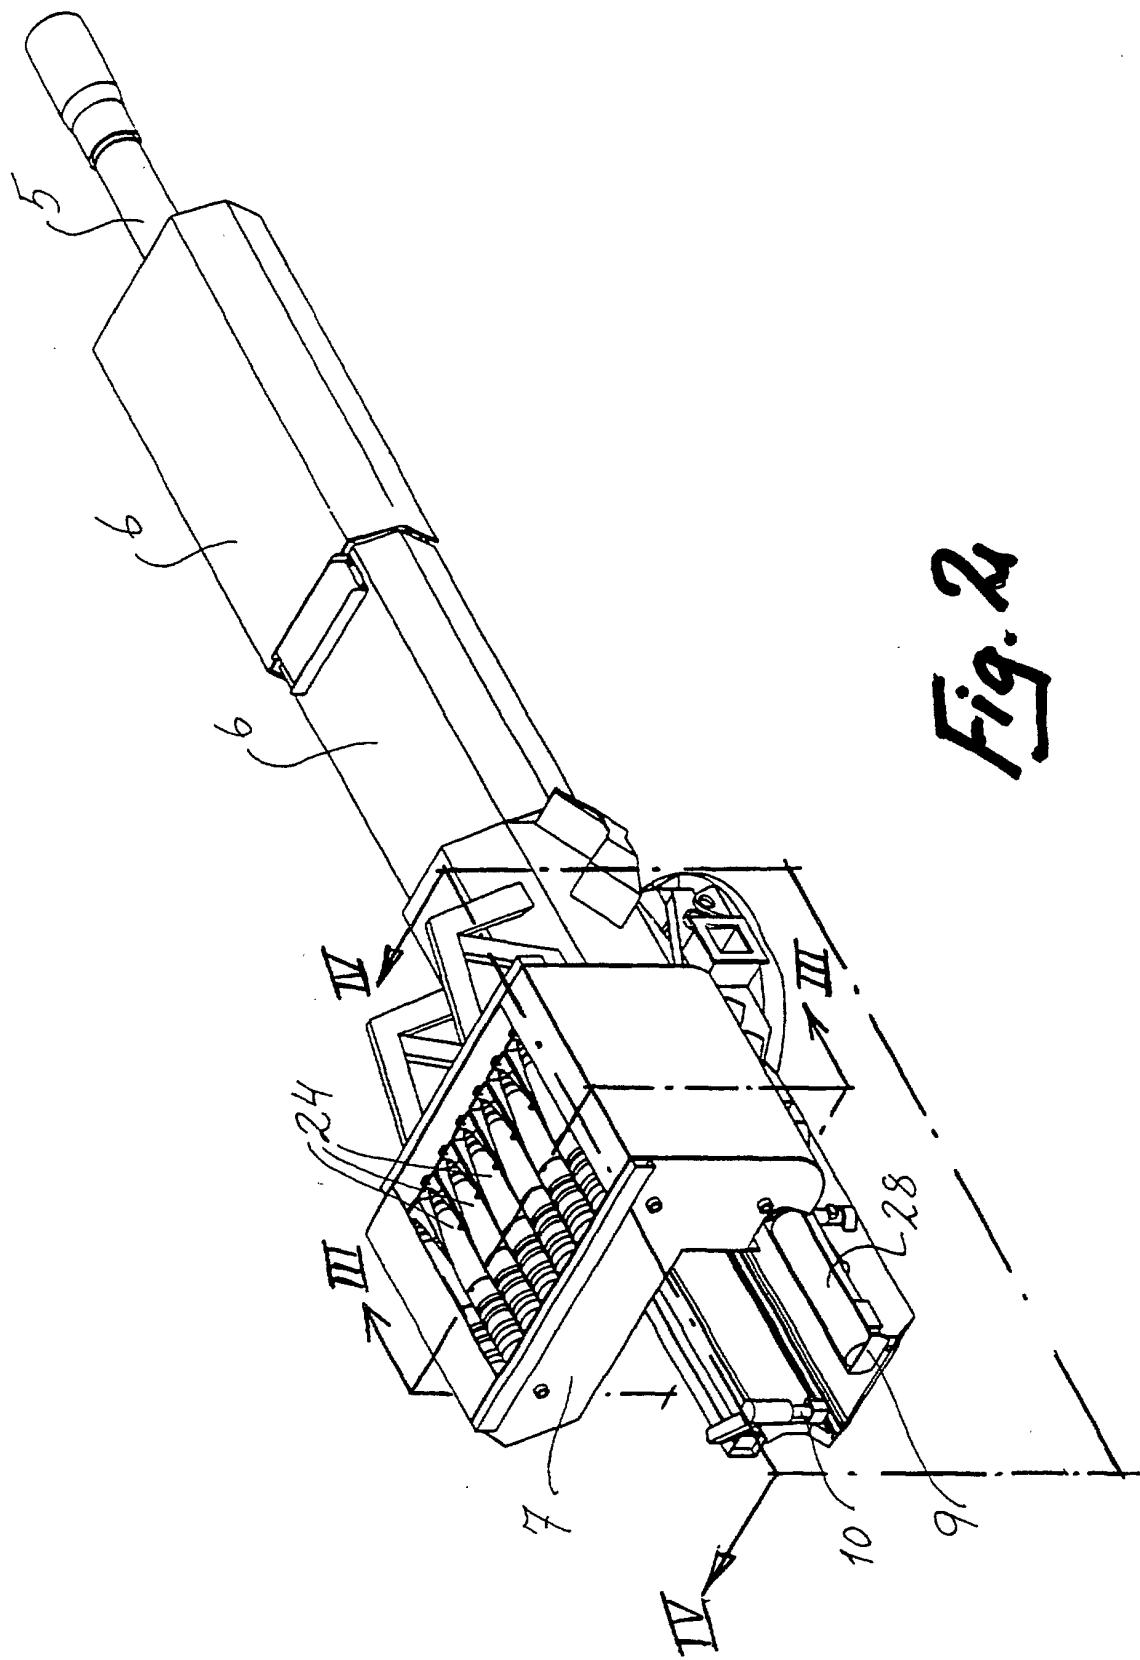


Fig. 2

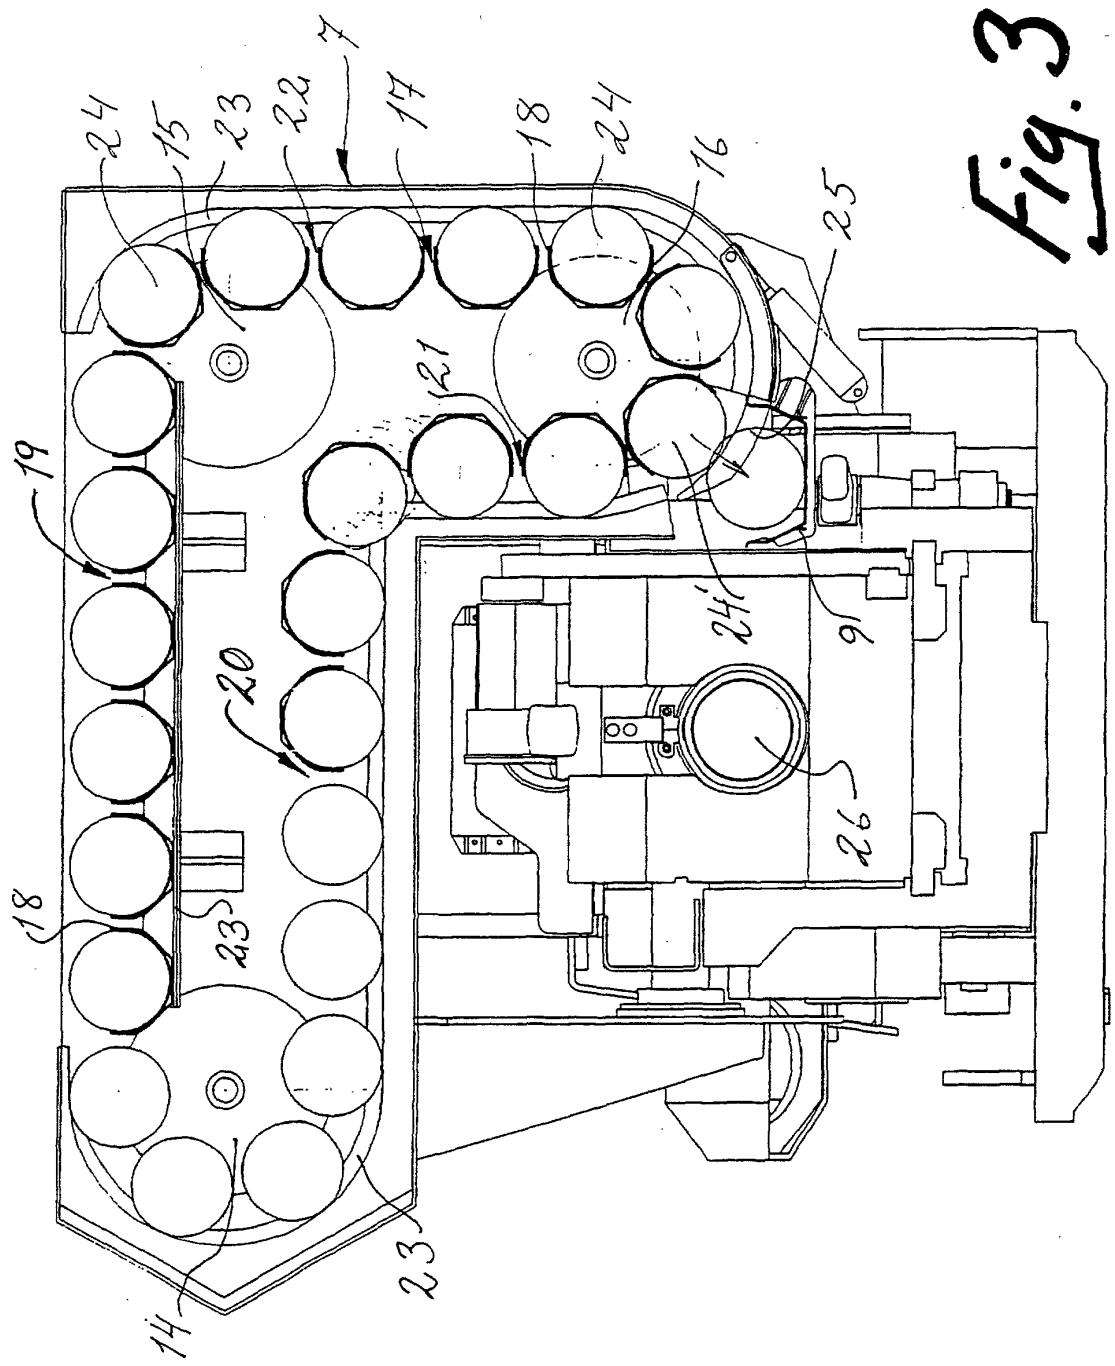


Fig. 3

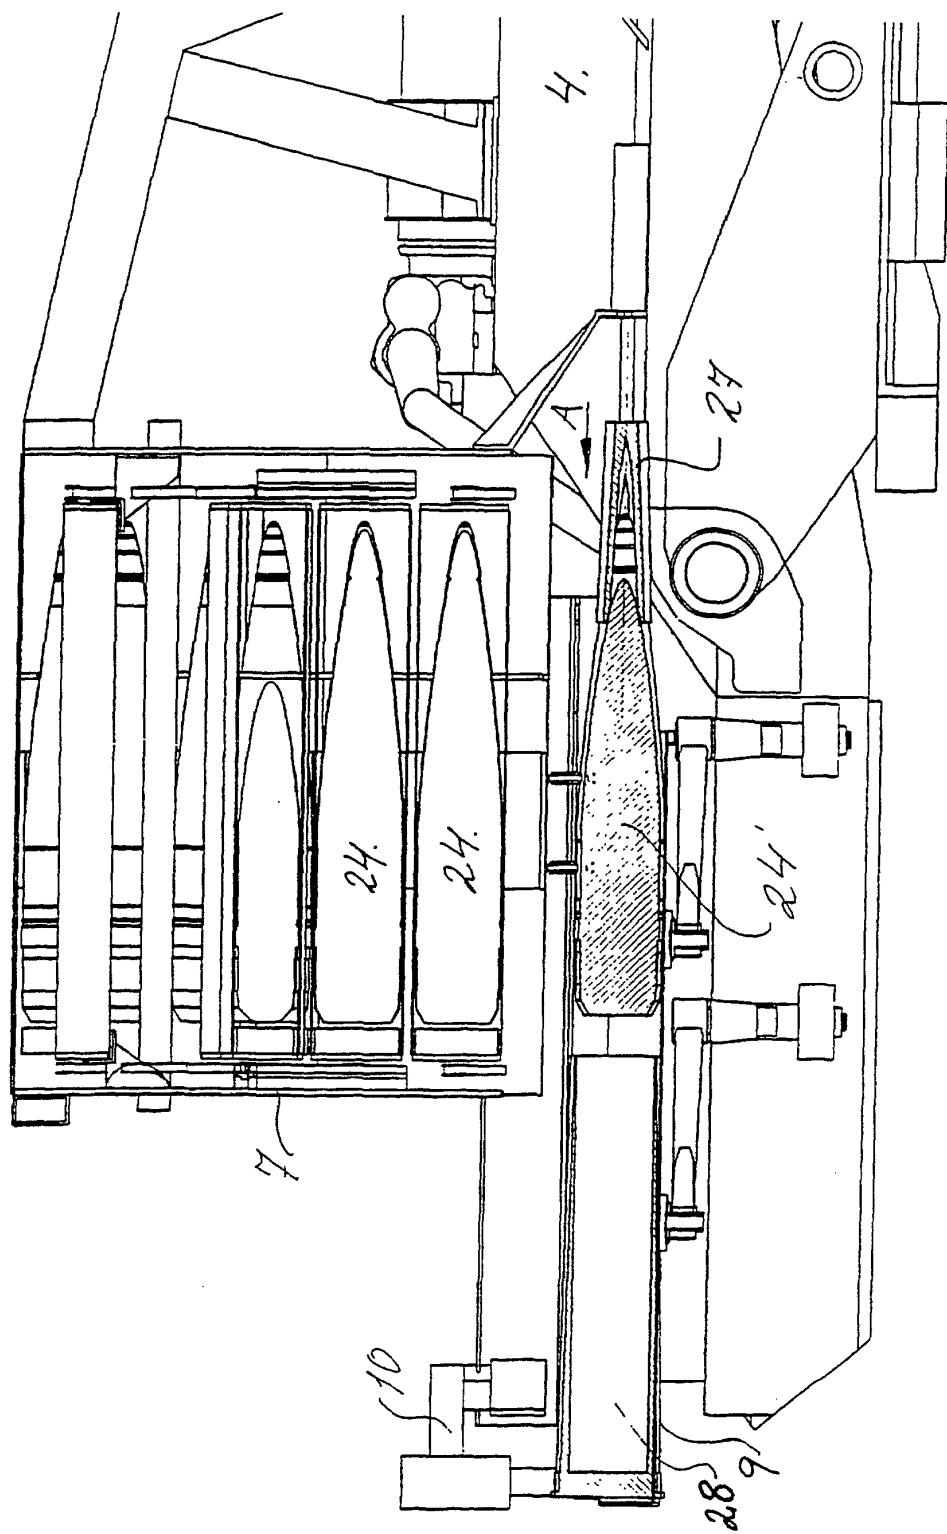


Fig. 11

