




(86) Date de dépôt PCT/PCT Filing Date: 2015/08/19
(87) Date publication PCT/PCT Publication Date: 2016/02/25
(45) Date de délivrance/Issue Date: 2022/10/04
(85) Entrée phase nationale/National Entry: 2017/02/21
(86) N° demande PCT/PCT Application No.: US 2015/045844
(87) N° publication PCT/PCT Publication No.: 2016/028863
(30) Priorités/Priorities: 2014/08/21 (US62/040,049);
2015/08/18 (US14/829,047)

(51) Cl.Int./Int.Cl. *F42B 6/04* (2006.01),
F42B 6/08 (2006.01)
(72) Inventeur/Inventor:
PERRY, DALE, US
(73) Propriétaire/Owner:
GOOD SPORTSMAN MARKETING, L.L.C., US
(74) Agent: RICHES, MCKENZIE & HERBERT LLP

(54) Titre : ENSEMBLE INSERT/EXCART POUR FLECHE
(54) Title: INSERT/OUTSERT ASSEMBLY FOR AN ARROW

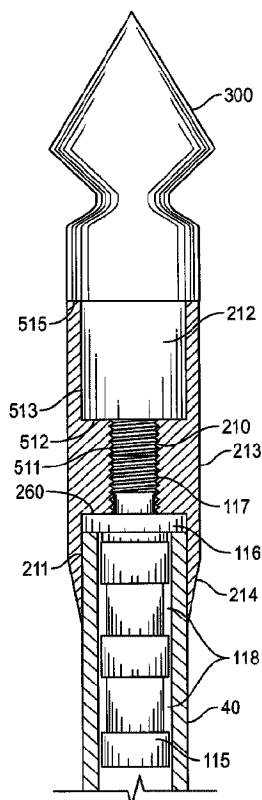

(57) Abrégé/Abstract:

An insert/outsert assembly for an arrow. The insert includes a cylindrical body having first and second ends. The second end of the insert is dimensioned to fit within the bore of an arrow shaft. The first end includes a prong containing male threads. The outsert includes a cylindrical wall with an arrowshaft end and an arrowhead end. A center bore extends between the arrowshaft and arrowhead ends. The center bore contains a threaded region with female threads located intermediate of the arrowhead end and arrowshaft end. The insert is threadedly connected to the outsert. An arrowhead is threadedly connected to the outsert.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number
WO 2016/028863 A1

(43) International Publication Date
25 February 2016 (25.02.2016)

(51) International Patent Classification:
F42B 6/08 (2006.01)

(21) International Application Number:
PCT/US2015/045844

(22) International Filing Date:
19 August 2015 (19.08.2015)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/040,049 21 August 2014 (21.08.2014) US
14/829,047 18 August 2015 (18.08.2015) US

(71) Applicant: **BARNETT OUTDOORS, LLC** [US/US];
955 E. Live Oak, Tarpon Springs, FL 34689 (US).

(72) Inventor: **PERRY, Dale**; 16408 W. Mohave Street, Goodyear, AZ 85338 (US).

(74) Agents: **WADDELL, ROBERT L.** et al.; Jones Walker LLP, 600 Jefferson Street, Suite 1600, Lafayette, Louisiana 70501 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: INSERT/OUTSERT ASSEMBLY FOR AN ARROW

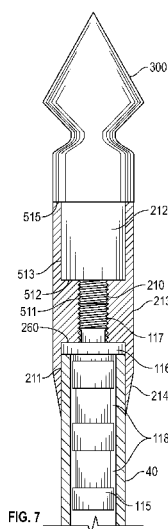

(57) Abstract: An insert/outsert assembly for an arrow. The insert includes a cylindrical body having first and second ends. The second end of the insert is dimensioned to fit within the bore of an arrow shaft. The first end includes a prong containing male threads. The outsert includes a cylindrical wall with an arrowshaft end and an arrowhead end. A center bore extends between the arrowshaft and arrowhead ends. The center bore contains a threaded region with female threads located intermediate of the arrowhead end and arrowshaft end. The insert is threadedly connected to the outsert. An arrowhead is threadedly connected to the outsert.

WO 2016/028863 A1

INSERT/OUTSERT ASSEMBLY FOR AN ARROW

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of priority to U.S. Provisional Application No. 62/040,049, filed on August 21, 2014.

BACKGROUND OF THE INVENTION

The present invention relates to an insert/outsert assembly for arrows.

SUMMARY OF THE INVENTION

Embodiments of the invention include an insert and outsert for an arrow or an insert/outsert assembly. The insert/outsert assembly may include an insert having a cylindrical body with a first end and a second end. The second end may be dimensioned to fit within a bore of an arrow shaft. The first end may terminate in a prong containing male threads. The insert/outsert assembly may also include an outsert having a cylindrical wall with an arrowshaft end and an arrowhead end. The cylindrical wall may also include a center bore extending between the arrowshaft end and the arrowhead end. The center bore may contain a threaded region containing female threads. The threaded region may be located intermediate of the arrowhead end and the arrowshaft end and may extend between a top shoulder and a bottom shoulder. The female threads of the threaded region may be threadedly connectable to the male threads of the prong.

In an embodiment, the insert may include a radially extending flange positioned at the first end below the prong. The radially extending flange may have an upper edge that receives and supports an arrowhead shoulder of an arrowhead. The radially extending flange may also have a bottom edge that contacts a terminal end of an arrow shaft.

In an embodiment, the outer surface of the second end of the insert includes a plurality of pockets. The plurality of pockets may be dimensioned to receive a glue.

In an embodiment, the arrowshaft end of the cylindrical wall of the outsert may be tapered. The arrowshaft end of the cylindrical wall of the outsert may be tapered inwardly.

In an embodiment, the center bore of the outsert may contain an arrowhead adapter chamber positioned above the threaded region. The arrowhead adapter chamber may be dimensioned to accommodate an arrowhead adapter section of an arrowhead. The center bore of the outsert may contain an arrowshaft chamber positioned below the threaded region. The arrowshaft chamber may be dimensioned to accommodate a terminal end of the arrow shaft.

WO 2016/028863

PCT/US2015/045844

In an embodiment, the insert/outsert assembly also includes an arrowhead. The arrowhead may include an arrowhead adapter section with an extension member containing male threads for threaded connection to the female threads of the threaded region of the outsert. The arrowhead adapter section may include an arrowhead shoulder that contacts a top edge of the arrowhead adapter chamber.

In another embodiment an assembly for an arrow is provided that includes an insert having a cylindrical body with a first end and a second end. The second end may be dimensioned to fit within a bore of an arrow shaft. The first end may terminate in a prong containing male threads. The assembly may include an arrowhead including an upper target penetrating section and a lower insert connecting section. The lower insert connecting section may include a bottom wall section containing an interior bore that terminates at a threaded region section. The threaded region section may include female threads for connecting with the male threads of the prong of the insert.

In an embodiment, the upper target penetrating section may be a broadhead or a practice point.

In an embodiment, the bottom wall section may be tapered. The bottom wall section may be tapered inwardly.

Embodiments of the invention also include a method of assembling an arrow. The method may include the step of providing an insert/outsert assembly comprising: an insert having a cylindrical body with a first end and a second end, the second end dimensioned to fit within a bore of an arrow shaft, the first end terminating in a prong containing male threads; an outsert having a cylindrical wall with an arrowshaft end and an arrowhead end, a center bore extending between the arrowshaft end and the arrowhead end, the center bore containing a threaded region containing female threads, the threaded region located intermediate of the arrowhead end and the arrowshaft end and extending between a top shoulder and a bottom shoulder, the female threads of the threaded region being threadably connectable to the male threads of the prong. The method may also include the step of inserting the second end of the insert into the bore of the arrowshaft. The method may also include the step of threadably connecting the outsert to the insert.

In an embodiment, the method may include the step of gluing the second end of the insert to an internal bore wall of the arrowshaft.

In an embodiment, the method may include the step of providing an arrowhead, the arrowhead including an arrowhead adapter section with an extension member containing male threads for threaded connection to the female threads of the threaded region of the

outsert. The method also may include the step of threadedly connecting the arrowhead to the outsert.

In an embodiment, the arrowhead may be threadedly connected to the outsert before the outsert is threadedly connected to the insert.

In an embodiment, the method may also include the steps of: disconnecting the arrowhead from the outsert; disconnecting the outsert from the insert; threadedly connecting a second outsert to the insert, the second outsert having a weight different from the disconnected outsert; and threadedly reconnecting the disconnected arrowhead to the second outsert.

Accordingly, in one aspect, the present invention resides in an assembly for an arrow, comprising: an insert having a cylindrical body with a first end and a second end, the second end dimensioned to fit within a bore of an arrow shaft, the first end terminating in a prong containing male threads; an arrowhead including an upper target penetrating section and a lower insert connecting section, the lower insert connecting section including a bottom wall section containing an outer surface tapered inwardly towards an arrow shaft end of the arrowhead and an interior bore having a uniform inner diameter that terminates at a threaded region section and dimensioned for accommodation of the arrow shaft, the threaded region section including female threads for connecting with the male threads of the prong of the insert.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a cross-sectional view of an embodiment of an outsert.

FIG. 2 is a cross-sectional view of an embodiment of an insert in operative association with an arrow.

FIG. 3 is a cross-sectional view of an embodiment of an insert/outsert assembly in operative association with an arrow.

FIG. 4 is a cross-sectional view of an arrowhead.

FIG. 5 is a cross-sectional view of an embodiment of an arrowhead in the form of a broadhead that may be used with the insert shown in FIG. 2.

FIG. 6 is a cross-sectional view of an embodiment of an arrowhead in the form of a practice point that may be used with the insert shown in FIG. 2.

FIG. 7 is a cross-sectional view of an embodiment of an arrowhead operatively associated with an embodiment of an insert/outsert assembly in operative position on an arrow.

DETAILED DESCRIPTION OF THE INVENTION

With reference to FIGS. 1 and 3, outsert **200** may contain cylindrical wall **213** with center bore **201**. Outsert 200 may also include arrow shaft end **220** and arrowhead end **230**. At arrow shaft end 220, cylindrical wall 213 may contain tapered section **214**. Tapered section 214 may taper inwardly so that the thickness of cylindrical wall 213 gradually thins at arrowhead shaft end 230 to provide a smooth transition between outsert 200 and arrow shaft **40** when outsert 200 is operatively positioned about arrow shaft 40 as seen in FIG. 3. The transition between a constant diameter of cylindrical wall 213 and tapered section 214 may begin at a position that is approximately half the length of arrow shaft chamber **211**. Arrow

WO 2016/028863

PCT/US2015/045844

shaft chamber 211 may be formed in the section of center bore 201 that is positioned adjacent the arrow shaft end 220. Arrow shaft chamber 211 may have an inner diameter substantially equal to or slightly greater than that of the outer diameter of arrow shaft 40 to receive arrow shaft 40 in arrow shaft chamber 211. The inner diameter of arrow shaft chamber 211 may vary based on the outer diameter of the mating arrow shaft 40. With the outsert shaft end 220 surrounding the terminating end of arrow shaft 40, outsert 200 (in operative connection with insert 100) provides structural support and additional strength to the terminal end of arrow shaft 40, a traditionally weak point in an arrow. The length of tapered section 214 may vary. In one embodiment, tapered section 214 may have a length of about 0.2 to 1.5 inches or 0.5 to .75 inches.

Again with reference to FIGS. 1 and 4, center bore 201 of outsert 200 may include interior top shoulder **250** and interior bottom shoulder **260**. In the region of cylindrical wall 213 between interior top and bottom shoulders 250, 260, cylindrical wall 213 is thicker and accommodates interior female threaded region **210**. Female threaded region 210 is designed to threadedly engage with cooperating male threads of prong **117** of insert 100 and with cooperating male threads of extension member **511** of arrowhead adaptor section **510** of arrowhead 300. In one exemplary embodiment, interior female threaded region 210 may be from about 0.1 inches to 1.5 inches, or from about .03 inches to 1.0 inches, or about 0.5 inches in length. Top interior shoulder 250 may be chamfered to accommodate any curvature in arrowhead shoulder **512**.

As seen in FIGS. 1 and 4, arrowhead adapter chamber **212** may be formed in the section of center bore 201 above interior top shoulder 250. Arrowhead adapter chamber 212 may be sized to accommodate smooth cylindrical end **513** of the arrowhead adaptor 510. Top edge **240** of arrowhead adaptor chamber 212 may be chamfered to accommodate any curvature in arrowhead adaptor 510 at or near arrowhead shoulder **515**. In exemplary embodiments, the inner diameter of arrowhead chamber 212 may range from 0.20 to 0.25 inches or from 0.231 to 0.243 inches, or about 0.205 inches.

The length of outsert 200 can vary. Exemplary lengths may be about 1.0 to 2.0 inches or 1.41 inches to 1.62 inches.

Extension member 511 of arrowhead adapter section 510 of arrowhead 300 may be secured to outsert 200 by threaded connection between the male threads on extension member 511 of arrowhead 300 and the threads on interior female threaded region 210 of outsert 200. Shoulder 512 of arrowhead adapter 510 will contact and seat on interior top shoulder 250 of outsert 200.

WO 2016/028863

PCT/US2015/045844

The material composition of outsert 200, its overall length and wall thickness, can vary to provide for multiple outserts 200 having different weights. Outserts of differing weights provides the feature of a variable weighted arrow. For example, an archer has the option of changing the weight at the front of arrow 40 to better suit the archery application and to help fine tune arrow 40 for optimum flight characteristics by selecting an outsert 200 of a desired weight. The weight of outsert 200 may range from about 30 to 100 grains or from about .068 to .228 ounces.

FIG. 2 depicts an embodiment of insert **100** inserted into a chamber or centerbore **122** in arrow shaft **40**. Insert **100** may include cylindrical lower body **115** that terminates in a flange, collar or stop **116**, above which is upwardly extending male prong **117** containing threads. Prong **117** is positioned on the center axis of insert **100**. Prong **117** is sized to threadedly engage with interior female threaded region **210** of the outsert **200**. Cylindrical lower body **115** of insert **100** may have one or more grooves, slots, or pockets **118**, such as the circumferential pockets **118** shown in FIG. 2, or other surface variations to accommodate glue or adhesive. When threadedly connected with outsert **200**, the upper edge **120** of insert stop **116** may seat against interior bottom shoulder **260** of outsert **200**. The length of insert **100** may vary. In an exemplary embodiment, the length of insert **100** may be from about 1.0 to 2.0 inches or about 1.5 inches. The outer diameter of insert **100** at lower body end **115** may be from about 1.0 to 2.0 inches or about 1.65 inches.

Both insert **100** and outsert **200** may be made of high carbon steel, stainless steel, or other metal alloy, such as aluminum or magnesium.

FIG. 3 shows insert **100** an outsert **200** (or the insert/outsert assembly) installed to arrow shaft **40**. To assemble the insert/outsert assembly within arrow shaft **40**, insert **100** is fixed in center bore **122** of the arrow shaft **40**. Bottom edge **124** of insert stop **116** contacts terminal end **42** of the arrow shaft **40**. Insert **100** may be fixed within center bore **122** by contact of the outer surface of lower cylindrical body **115** with the inner surface of bore wall **44** of arrow shaft **40**. Alternatively, the outer surface of lower cylindrical body **115** of insert **100** may be glued to bore wall **44**. The glue may be placed within pockets **118**. Outsert **200** is then threadedly connected to insert **100** by mating the female threads of interior female threaded region **210** to the male threads of prong **117** until top edge **120** of insert stop **116** contacts shoulder **260**. Arrowhead **300** may now be threadedly connected to outsert **200** by mating the male threads of extension member **511** to the female threads of interior female threaded region **210**. Alternatively, arrowhead **300** could be first threaded connected to

WO 2016/028863

PCT/US2015/045844

outsert 200 and then the assembly of the arrowhead 40 and outsert 200 threaded connected to insert 100 as described above.

The insert/outsert assembly allows for ease of assembly, strengthens the tip of arrow shaft 40, and provides the ability to change tip weights and tip configurations without removing the glued insert from arrow shaft 40, thus avoiding damaging the arrow shaft.

Additionally, the system also allows an archer to disassemble outsert 200 from insert 100 so that insert 100 may be used as a means to directly connect with an arrowhead that is modified to threadedly connect with prong 117 of insert 100. For example, arrowhead 300 may be modified to remove arrowhead adapter section 510, which is replaced with a female adapter capable of threadedly connecting to prong 117 of insert 100.

With reference to FIG. 5, broadhead 300 is configured with bottom wall section 79 that contains interior bore 71 that terminates in female threaded region section 70. Bottom wall section 79 may contain tapered section 74 similar in design and function as described above in connection with tapered section 214 of outsert 200. Female threaded region section 70 is threadedly connected to the male threads of prong 117 to directly connect arrowhead 300 to insert 100.

With reference to FIG. 6, practice point 20 is configured with bottom wall section 28 that contains interior bore 21 that terminates in female threaded region section 22. Bottom wall section 28 may contain tapered section 14 similar in design and function as described above in connection with tapered section 214 of outsert 200. Female threaded region section 22 is threadedly connected to the male threads of prong 117 to directly connect practice point 20 to insert 100.

FIG. 7 shows insert/outsert assembly operatively positioned within arrow shaft 40 with arrowhead 300 operatively connected to the insert/outsert assembly as described above.

While the illustrative forms disclosed herein have been described with particularity, it will be understood that various other modifications will be apparent to and can be readily made by those skilled in the art without departing from the spirit and scope of the disclosure. Accordingly, it is not intended that the scope of the claims appended hereto be limited to the example and descriptions set forth herein, but rather that the claims be construed as encompassing all the features of patentable novelty which reside herein, including all features which would be treated as equivalents thereof by those skilled in the art to which this disclosure pertains

We claim:

1. An insert/outsert assembly for an arrow, comprising:
an insert having a cylindrical body with a first end and a second end, the second end dimensioned to fit within a bore of an arrow shaft, the first end terminating in a prong containing male threads;
an outsert having a cylindrical wall with an arrowshaft end and an arrowhead end, a center bore extending between the arrowshaft end and the arrowhead end, the center bore containing a threaded region containing female threads, the threaded region located intermediate of the arrowhead end and the arrowshaft end and extending between a top shoulder and a bottom shoulder, the female threads of the threaded region being threadably connectable to the male threads of the prong.
2. The assembly of claim 1 wherein the insert includes a radially extending flange positioned at the first end below the prong.
3. The assembly of claim 2 wherein the radially extending flange has an upper edge that receives and supports an arrowhead shoulder of an arrowhead.
4. The assembly of claim 3 wherein the radially extending flange has a bottom edge that contacts a terminal end of the arrow shaft.
5. The assembly of claim 1 wherein an outer surface of the second end of the insert includes a plurality of pockets.
6. The assembly of claim 5 wherein the plurality of pockets are dimensioned to receive a glue.
7. The assembly of claim 1 wherein the arrowshaft end of the cylindrical wall of the outsert is tapered.
8. The assembly of claim 7 wherein the arrowshaft end of the cylindrical wall of the outsert is tapered inwardly.

9. The assembly of claim 1 wherein the center bore of the outsert contains an arrowhead adapter chamber positioned above the threaded region.
10. The assembly of claim 9 wherein the arrowhead adapter chamber is dimensioned to accommodate an arrowhead adapter section of an arrowhead.
11. The assembly of claim 1 wherein the center bore of the outsert contains an arrowshaft chamber positioned below the threaded region.
12. The assembly of claim 11 wherein the arrowshaft chamber is dimensioned to accommodate a terminal end of the arrow shaft.
13. The assembly of claim 1 further comprising an arrowhead, the arrowhead including an arrowhead adapter section with an extension member containing male threads for threaded connection to the female threads of the threaded region of the outsert.
14. The assembly of claim 13 wherein the arrowhead adapter section includes an arrowhead shoulder that contacts a top edge of the arrowhead adapter chamber.
15. An assembly for an arrow, comprising:
an insert having a cylindrical body with a first end and a second end, the second end dimensioned to fit within a bore of an arrow shaft, the first end terminating in a prong containing male threads;
an arrowhead including an upper target penetrating section and a lower insert connecting section, the lower insert connecting section including a bottom wall section containing an outer surface tapered inwardly towards an arrow shaft end of the arrowhead and an interior bore having a uniform inner diameter that terminates at a threaded region section and dimensioned for accommodation of the arrow shaft, the threaded region section including female threads for connecting with the male threads of the prong of the insert.
16. The assembly of claim 15 wherein the upper target penetrating section is a broadhead.

17. The assembly of claim 15 wherein the upper target penetrating section is a practice point.

18. A method of assembling an arrow comprising the steps of:

- a) providing an insert/outsert assembly comprising: an insert having a cylindrical body with a first end and a second end, the second end dimensioned to fit within a bore of an arrow shaft, the first end terminating in a prong containing male threads; an outsert having a cylindrical wall with an arrowshaft end and an arrowhead end, a center bore extending between the arrowshaft end and the arrowhead end, the center bore containing a threaded region containing female threads, the threaded region located intermediate of the arrowhead end and the arrowshaft end and extending between a top shoulder and a bottom shoulder, the female threads of the threaded region being threadedly connectable to the male threads of the prong;
- b) inserting the second end of the insert into the bore of the arrowshaft;
- and
- c) threadedly connecting the outsert to the insert.

19. The method of claim 18 wherein step (b) also includes the step of gluing the second end of the insert to an internal bore wall of the arrowshaft.

20. The method of claim 18 further comprising the steps of:

- d) providing an arrowhead, the arrowhead including an arrowhead adapter section with an extension member containing male threads for threaded connection to the female threads of the threaded region of the outsert;
- e) threadedly connecting the arrowhead to the outsert.

21. The method of claim 20 wherein the arrowhead is threadedly connected to the outsert before the outsert is threadedly connected to the insert.

22. The method of claim 20 further comprising the steps of:

- f) disconnecting the arrowhead from the outsert;
- g) disconnecting the outsert from the insert;

- h) threadedly connecting a second outsert to the insert, the second outsert having a weight different from the disconnected outsert; and
- i) threadedly reconnecting the disconnected arrowhead to the second outsert.

1/4

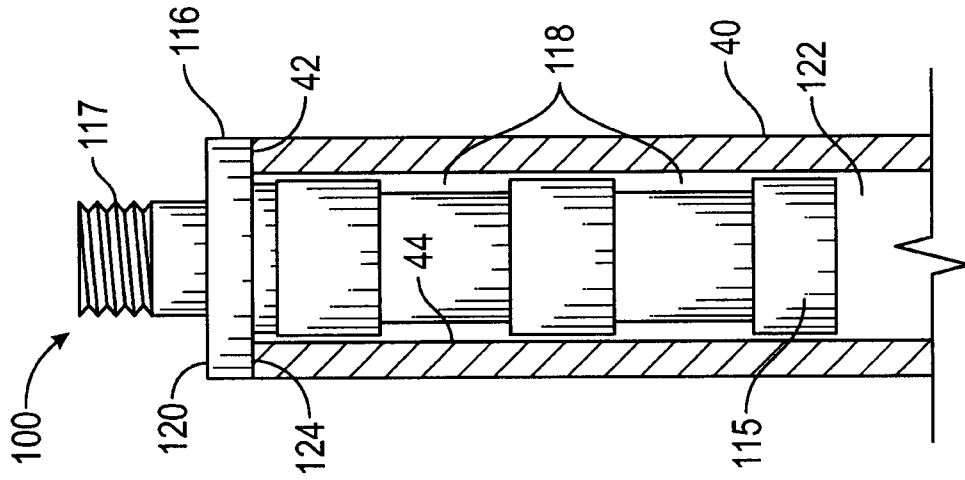


FIG. 2

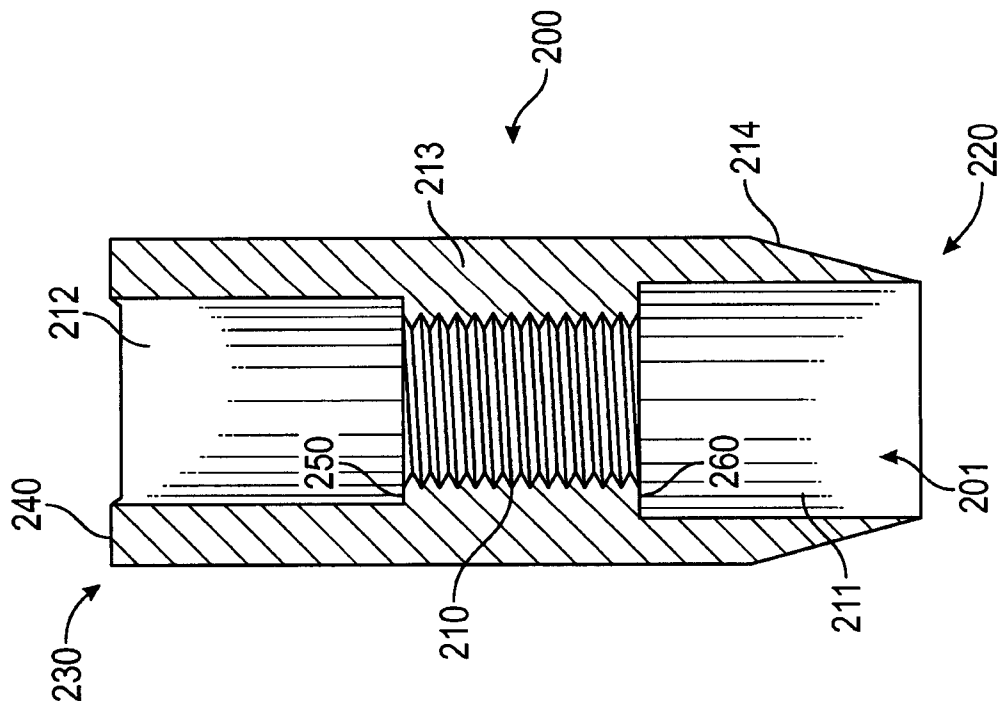


FIG. 1

2/4

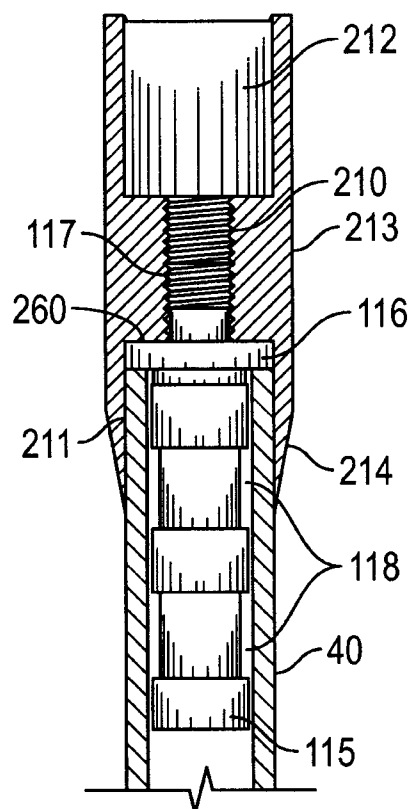


FIG. 3

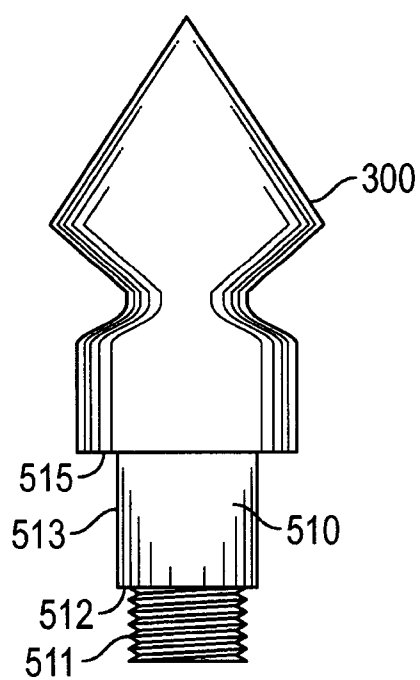


FIG. 4

3/4

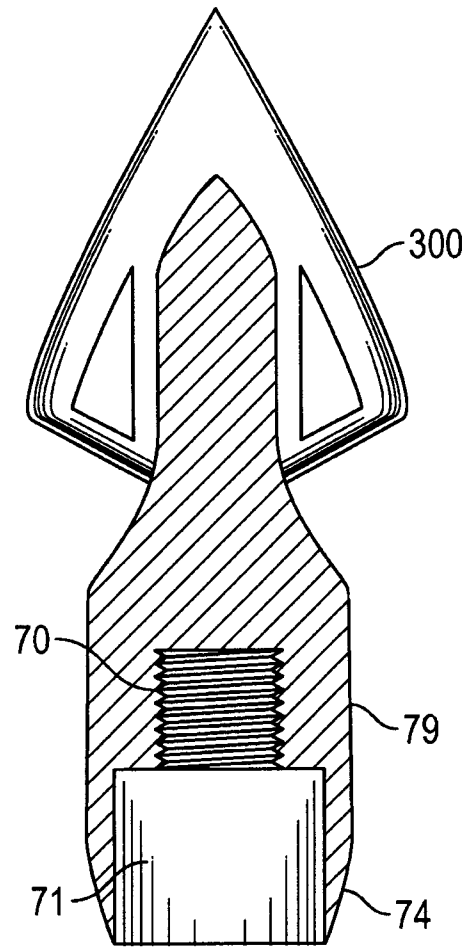


FIG. 5


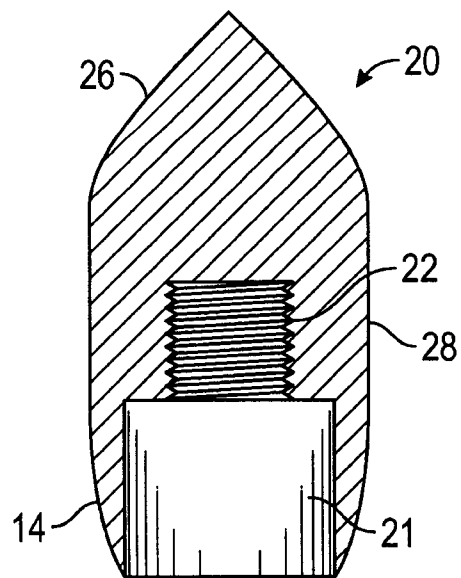


FIG. 6

**FIG. 7**

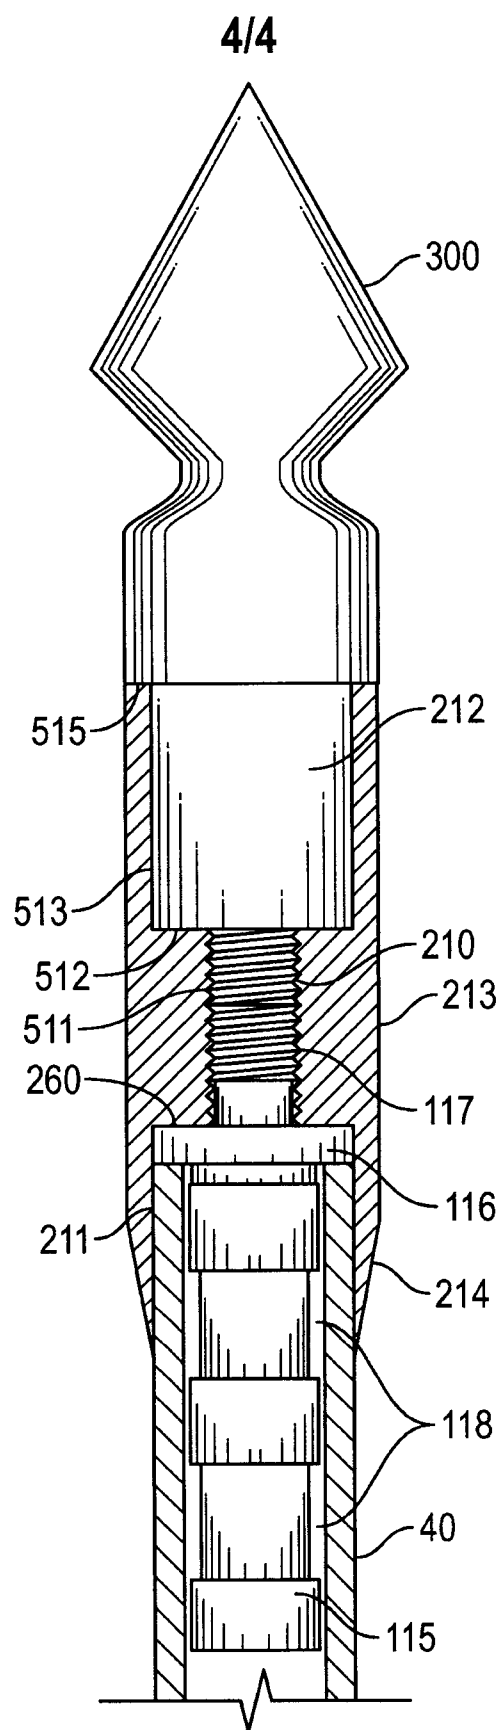