



(51) International Patent Classification:
E21B 43/27 (2006.01)

(21) International Application Number:
PCT/US2011/033803

(22) International Filing Date:
25 April 2011 (25.04.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/366,693 22 July 2010 (22.07.2010) US

(71) Applicant (for all designated States except US):
EXXONMOBIL UPSTREAM RESEARCH COMPANY [US/US]; Corp-Urc-Sw359, P.O. Box 2189, Houston, TX 77252-2189 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ALVAREZ, Jose, O.** [US/US]; 1317 Oneil Street, Houston, TX 77019 (US). **HECKER, Michael, T.** [US/US]; 16211 Castle-grove Court, Tomball, TX 77377 (US).

(74) Agents: **JAMES, Rick, F.** et al.; Exxonmobil Upstream Research Company, Corp-urc-sw359, P.o. Box 2189, Houston, TX 77252-2189 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

— as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

— with international search report (Art. 21(3))

(54) Title: SYSTEM AND METHOD FOR STIMULATING A MULTI-ZONE WELL

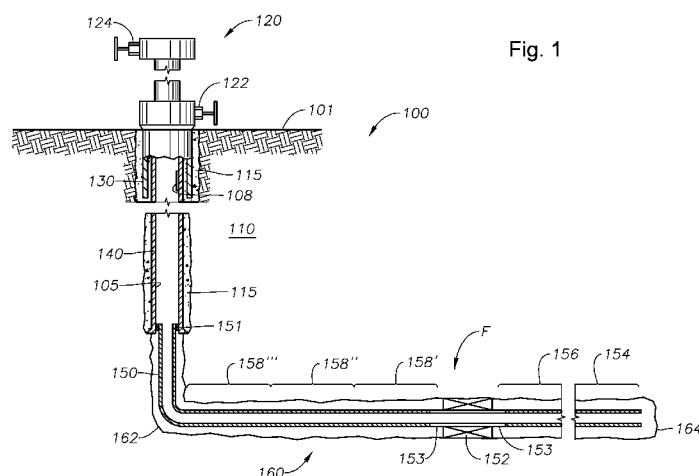

SYSTEM AND METHOD FOR STIMULATING A MULTI-ZONE WELL
CROSS-REFERENCE TO RELATED APPLICATION

5 [0001] This application claims the benefit of U.S. Provisional Patent Application 61/366,693 filed July 22, 2010 entitled SYSTEM AND METHOD FOR STIMULATING A MULTI-ZONE WELL, the entirety of which is incorporated by reference herein.

FIELD OF THE INVENTION

10 [0002] This section is intended to introduce various aspects of the art, which may be associated with exemplary embodiments of the present disclosure. This discussion is believed to assist in providing a framework to facilitate a better understanding of particular aspects of the present disclosure. Accordingly, it should be understood that this section should be read in this light, and not necessarily as admissions of prior art.

15 [0003] The present inventions relate to the field of wellbore completions. More specifically, the inventions relate to systems and methods for isolating selected zones along a wellbore to facilitate the stimulation of those zones for the injection of acid.

BACKGROUND

20 [0004] In the drilling of oil and gas wells, a wellbore is formed using a drill bit that is urged downwardly at a lower end of a drill string. After drilling to a predetermined depth, the drill string and bit are removed and the wellbore is lined with a string of casing. An annular area is thus formed between the string of casing and the formation.

25 [0005] A cementing operation is typically conducted in order to fill or “squeeze” the annular area with cement. This serves to form a cement sheath. The combination of cement and casing strengthens the wellbore and facilitates the isolation of the formations behind the casing.

[0006] It is common to place several strings of casing having progressively smaller outer diameters into the wellbore. Thus, the process of drilling and then cementing progressively smaller strings of casing is repeated several or even multiple times until the well has reached total depth. The final string of casing, referred to as a production casing, is cemented into

place. In some instances, the final string of casing is a liner, that is, a string of casing that is not tied back to the surface, but is hung from the lower end of the preceding string of casing.

[0007] In some instances, a well may be completed as an open-hole completion. This means that the final tubular body run into the wellbore is not cemented into place; instead, a
5 perforated liner may be installed. Where the producing formation is located in a sandstone or other loose or unconsolidated formation, a sand screen may alternatively be used. A production string or “tubing” is then positioned inside the wellbore extending down to the last string of casing.

[0008] There are certain advantages to open-hole completions versus cased hole
10 completions. First, because open-hole completions have no perforation tunnels, formation fluids can converge on the wellbore radially 360 degrees. This has the benefit of eliminating the additional pressure drop associated with converging radial flow and then linear flow through particle-filled perforation tunnels. The reduced pressure drop associated with an open-hole completion virtually guarantees that it will be more productive than an
15 unstimulated, cased hole in the same formation.

[0009] Second, open-hole completions, including gravel pack techniques, are oftentimes less expensive than cased hole completions. For example, the use of perforated liners and gravel packs eliminates the need for cementing, perforating, and post-perforation clean-up operations.

20 [0010] As an additional step in the wellbore completion process, production equipment such as tubing, packers and pumps may be installed within the wellbore. A wellhead (or “tree”) is installed at the surface along with fluid gathering and processing equipment. Production operations may then commence.

[0011] Before beginning production, it is sometimes desirable for the drilling company to
25 “stimulate” the formation by injecting an acid solution through the casing. This is particularly true when the formation comprises carbonate rock. In operation, the drilling company injects a concentrated formic acid or other acidic composition into the wellbore, and directs the fluid along and even into the near-wellbore region. This is known as acidizing. The acid helps to dissolve carbonate material, thereby opening up porous channels through
30 which hydrocarbon fluids may flow into the wellbore. In addition, the acid helps to dissolve

drilling mud that may have invaded the formation. Acid stimulation as described above is a routine part of petroleum industry operations.

[0012] In many wellbores, it is now common to complete a well through multiple zones of interest. Such zones may represent up to about 30 meters (100 feet) of gross, vertical thickness of subterranean formation. When there are multiple or layered reservoirs to be hydraulically fractured, or a very thick hydrocarbon-bearing formation, then more complex treatment techniques may be required to obtain treatment of the entire target zone. In this respect, the drilling company must isolate various zones to ensure that each separate zone is adequately treated. In this way the operator is sure that stimulation fluid is being injected into each zone of interest or along the entire zone of interest to effectively increase the flow capacity at each desired depth.

[0013] To do this, various fluid diversion techniques may be employed. Two general categories of fluid diversion have been developed to help ensure that the acid reaches the desired rock matrix – mechanical and chemical. Mechanical diversion involves the use of a physical or mechanical diverter that is placed within the wellbore. Chemical diversion, on the other hand, involves the injection of a fluid or particles along and into the formation itself.

[0014] Referring first to chemical diverters, chemical diverters include foams, particulates, gels, and viscosified fluids. Foam commonly comprises a dispersion of gas and liquid wherein a gas is in a non-continuous phase and liquid is in a continuous phase. Where acid is used as the liquid phase, the mixture is referred to as a foamed acid. In either event, as the foam mixture is pumped downhole and into the porous medium that comprises the original, more permeable formation, additional foam is generated. The foam initially builds up in the areas of high permeability until it provides enough resistance to force the acid into the new zone of interest having a lower permeability. The acid is then able to open up pores and channels in the new formation.

[0015] Particulate diverters consist of fine particles. Examples of known particulate diverters are cellophane flakes, oyster shells, crushed limestone, gilsonite, oil-soluble naphthalenes, and even chicken feed. Within the last several years, solid organic acids such as lactic acid flakes have been used. As the particles are injected, they form a low permeability filter-cake on the face of wormholes and other areas of high permeability in the original formation. This then forces acid treatment to enter the new zone(s) of interest. After

the acidizing treatment is completed, the particulates hydrolyze in the presence of water and are converted into acid.

[0016] Viscous diverters are highly viscous materials, sometimes referred to as gels. Gels use either a polymer or a viscoelastic surfactant (VES) to provide the needed viscosity.

5 Polymer-based diverters crosslink to form a viscous network upon reaction with the formation. The crosslink breaks upon continued reaction and/or with an internal breaker. VES-based diverters increase viscosity by a change in micelle structure upon reaction with the formation. As the high-viscosity material is injected into the formation, it fills existing wormholes. This allows acid to be injected into areas of lower permeability higher in the
10 wellbore. The viscosity of the gel breaks upon exposure to hydrocarbons (on flowback) or upon contact with a solvent.

[0017] Chemical diverters may have limited effectiveness in certain situations. For example, if the density of the acid and the diverting fluid is considerably different, or if the wellbore significantly deviates from vertical, the interface of the acid with the diverter may
15 break down or experience distortion while traveling down the wellbore. In some cases, this distortion may involve the mixing of acid and an acid-containing diverter. This, in turn, reduces the viscosity of the diverter, thereby reducing the diverter effectiveness and the overall performance of the stimulation job. Depending on stage size, fluid density, fluid viscosity, and pumping rate, the interface distortion may be severe.

20 **[0018]** Referring now to mechanical diverters, various types of mechanical diverters have been employed. These generally include ball sealers, plugs, and straddle packers. For example, U.S. Pat. No. 3,289,762 uses a ball that seats in a baffle to cause mechanical isolation. U.S. Pat. No. 5,398,763 uses a wireline to set and then to retrieve a baffle. The baffle isolates a portion of a formation for the injection of fluids. U.S. Pat. No. 6,491,116
25 provides a fracturing plug, or “frac plug.” Frac plugs are common in the industry and rely upon a ball that is either dropped from the surface to land on a seat, or that is integral to the plug itself. Frac plugs generally require a wireline for setting. Frac plugs may also be retrieved via wireline, although in some instances frac plugs have been fabricated from materials that can be drilled out. Drilling out the material adds time and expense to the
30 stimulation operation.

[0019] Mechanical plugs are used to isolate an interval after successfully stimulating each zone. Although the stimulation of each zone separately can be very effective, multiple electric line runs and acid stimulations may be required to fully stimulate a long interval, increasing the time and cost of the acid treatment. Further, while mechanical plugs can provide high confidence that formation treatment fluid is being diverted, there is a risk of incurring high costs due to mechanical and operational complexity of the plugs. Plugs may become stuck in the casing resulting in a lengthy and costly fishing operation. If unsuccessful, a drill rig may be needed to be brought on-sight to drill the plug out. Drilling out the plug is not preferred due to the time and cost associated with mobilizing a drill rig on location. In some situations, the well may have to be sidetracked or even abandoned. Mechanical plugs particularly have a history of reliability issues in large diameter wells. In this respect, it can be difficult to locate a plug suitable for a large borehole, and those that are available have a history of failures.

[0020] A need therefore exists for an acid diverting system and method that offers the reliability of a mechanical plug without the risk of mechanical failure or sticking. Further, a need exists for a system that optimizes the acid circulation process by removing the need for a wireline, and yet has greater reliability than a viscous chemical diverter. A need further exists for a system that improves the stimulation of a formation along the entire length of a deviated, open-hole wellbore.

SUMMARY

[0021] A system is provided for stimulating a multi-zone well. The system first includes a pre-perforated tubular body. The tubular body is dimensioned to be received within a wellbore. In one aspect, the tubular body is a liner made up of a plurality of joints.

[0022] The tubular body comprises pre-drilled holes placed along a wall of the tubular body. The holes may be arranged in repeating patterns. The tubular body is also apportioned into at least a first zone and a second zone. Optionally, a third zone (and additional zones) may also be provided. The tubular body extends at least 10 feet (3.0 meters) along each of the first, second, and third zones. Preferably, the third zone has a measured depth that is less than the second zone, while the second zone has a measured depth that is less than the first zone. However, the inverse may apply.

[0023] The wellbore may be completed substantially vertically. Alternatively, the wellbore may be completed as a deviated wellbore. In one aspect, the deviated wellbore is completed to have a substantially horizontal portion such that the horizontal portion has a heel and a toe. In one aspect, the first zone resides at the toe of the horizontal portion of the wellbore.

[0024] The system has at least two sets of dissolvable plugs. A first set of plugs is placed in holes along the pre-perforated tubular body within the first zone. The plugs in the first set of plugs are fabricated to substantially dissolve upon contact with an acidic stimulation fluid within a first selected time. A second set of dissolvable plugs is placed in holes along the tubular body within the second zone. The plugs in the second set of plugs are fabricated to substantially dissolve upon contact with the acidic fluid within a second selected time that is greater than the first selected time. A third set of dissolvable plugs is optionally placed in holes along the tubular body within a third zone. The plugs in the third set of plugs are fabricated to substantially dissolve upon contact with the acidic fluid within a third selected time that is greater than the second selected time. Alternatively, holes placed along the third zone may not have plugs.

[0025] The acidic fluid may comprise, for example, hydrochloric acid, acetic acid, or formic acid. The acid is used to clean drilling mud damage and stimulate the reservoir rock before the well is brought on line for production.

[0026] In one preferred aspect of the system, the pre-perforated tubular body further comprises a fourth zone. The fourth zone has a measured depth that is greater than the first zone, and resides at the toe of the horizontal portion of the wellbore. The holes in the tubular body along the fourth zone do not have the dissolvable plugs. In this way, an initial injection of stimulation fluid immediately enters the near-wellbore region adjacent to the fourth zone.

[0027] Concerning the plugs, in one embodiment each dissolvable plug is fabricated to have a central body. The central body has a diameter that is dimensioned to closely fit within a diameter of a respective pre-drilled hole in the tubular body. In addition, each plug has a top end. The top end has a diameter that is larger than the diameter of the respective hole in the tubular body. In addition, each plug has a bottom end. The bottom end has a diameter that is at least as large as the diameter of the respective pre-drilled hole in the tubular body.

The bottom end is preferably partially fabricated from an elastomeric material so that it may be compressed and inserted through the respective hole.

[0028] A method of stimulating a multi-zone well using an acidization treatment is also provided herein. In one embodiment, the method includes setting a pre-perforated tubular body in a wellbore. The tubular body preferably comprises a plurality of joints, and is dimensioned to be received within a wellbore. The tubular body may be, for example, a liner.

[0029] The tubular body comprises a plurality of perforations, or holes, pre-drilled into a wall of the tubular body. The holes may be arranged in repeating patterns along the tubular body. The tubular body is also apportioned into at least a first zone and a second zone. 10 Optionally, the tubular body may be further apportioned into a third zone.

[0030] The tubular body includes a first set of dissolvable plugs. These plugs are placed in the holes along the tubular body within the first zone. Each of the plugs in the first set of plugs is fabricated to substantially dissolve upon contact with an acidic stimulation fluid within a first selected time.

15 [0031] The tubular body also includes a second set of dissolvable plugs. These plugs are placed in the holes along the tubular body within the second zone. Each of the plugs in the second set of plugs is fabricated to substantially dissolve upon contact with the acidic stimulation fluid within a second selected time that is greater than the first selected time.

20 [0032] The pre-perforated tubular body may further include a third set of dissolvable plugs. These plugs are placed in the holes along the tubular body within the third zone. Each of the plugs in the third set of plugs is fabricated to substantially dissolve upon contact with the acidic stimulation fluid within a third selected time that is greater than the second selected time.

[0033] The method also includes injecting an acidic solution into the well under pressure. 25 The acidic fluid may be, for example, hydrochloric acid or formic acid. Injecting the acidic solution causes the first set of plugs to dissolve. This exposes a subsurface formation outside of the tubular body along the first zone. This further insures that the formation along the first zone is adequately treated without concern that some acidic fluid will be lost along the second and third zones.

[0034] The method further includes injecting the acidic solution into the well under pressure so as to dissolve the second set of plugs. Injecting the acidic solution causes the second set of plugs to dissolve. This, in turn, exposes a subsurface formation outside of the tubular body along the second zone.

- 5 [0035] Where a third zone is provided along the tubular body, the method also includes further injecting the acidic solution into the well under pressure so as to dissolve the third set of plugs. Injecting the acidic solution causes the third set of plugs to dissolve. This, in turn, exposes a subsurface formation outside of the tubular body along the third zone.

[0036] Preferably, the third zone has a measured depth that is less than the second zone,
10 and the second zone has a measured depth that is less than the first zone. However, the inverse may apply.

[0037] The wellbore may be completed substantially vertically. Alternatively, the wellbore may be completed as a deviated wellbore. In one aspect, the deviated wellbore is completed to have a substantially horizontal portion such that the horizontal portion has a
15 heel and a toe.

[0038] In one aspect, the tubular body further comprises a fourth zone. Note that the term “fourth”, and similar numeric indicators used herein, are merely used herein to simplify illustration and discussion purpose only, as in relation to the exemplary embodiments discussed herein. Same for such terms as used in the claims. Such numeric terms are not
20 intended to be defined narrowly in relation to only a specific and sequential set of only such zones, nor does they indicate that there are only such number of zones in the wellbore.

[0039] In still other aspects, the wellbore contains a fourth or additional zone. Such zone merely has a measured depth that is greater than the first zone, and for illustration purposes, resides at or near the toe of a horizontal portion of the wellbore. The holes in the tubular
25 body along the fourth zone do not have plugs. The method then further comprises injecting the acidic solution into the well under pressure so as to expose a subsurface formation along or near the toe of the wellbore to an acid solution before the acidic solution contacts the subsurface formation along at least the first (or other) zone.

[0040] In another aspect, the inventive methods include performing a wellbore fluid swap
30 while the annulus is open or not yet packed off, by circulating or otherwise introducing weak-

acid or substantially non-reactive fluids (e.g., fluids that do not substantially immediately stimulate the formation or react substantially with the completion component materials) into the well such as over the full or partial length of the completion section of the wellbore. Such process may leave the wellbore conditioned or otherwise prepared for more substantial and
5 reactive acid or other stimulation. It is understood that in the presence of swellable packers such fluids are circulated before the packers completely swell.

BRIEF DESCRIPTION OF THE DRAWINGS

[0041] So that the present inventions can be better understood, certain drawings, charts, graphs and/or flow charts are appended hereto. It is to be noted, however, that the drawings
10 illustrate only selected embodiments of the inventions and are therefore not to be considered limiting of scope, for the inventions may admit to other equally effective embodiments and applications.

[0042] Figure 1 is a cross-sectional view of an illustrative wellbore. The wellbore has been completed substantially horizontally, as an open-hole completion. The horizontal
15 portion of the wellbore is directed through a subsurface interval that contains hydrocarbon fluids.

[0043] Figures 2A and 2B show a pre-perforated liner as may be used in the acidization systems and methods of the present inventions, in one embodiment.

[0044] Figure 2A is a cross-sectional view of a portion of the pre-perforated liner.

20 [0045] Figure 2B is a perspective view of the portion of the pre-perforated liner of Figure 2A.

[0046] Figure 3 is a cut-away view of a small section of the pre-perforated liner of Figures 2A and 2B. Here a hole is shown receiving a dissolvable plug.

25 [0047] Figures 4A, 4B, and 4C demonstrate additional views of the dissolvable plug of Figure 3.

[0048] Figure 4A is a top view; Figure 4B is a bottom view; and Figure 4C is a side cross-sectional view.

[0049] Figure 4D provides a side, cross-sectional view of a dissolvable plug in an alternate embodiment. Here, both the top and bottom portions of the plug are fabricated from an elastomeric material.

[0050] Figures 5A and 5B are additional views of the pre-perforated liner of Figures 2A and 2B. Each view is a cross-sectional side view.

[0051] In Figure 5A, perforations or holes are shown along the pre-perforated liner.

[0052] In Figure 5B, dissolvable plugs have been installed into the holes.

[0053] Figure 6 is a flowchart demonstrating steps of a method for stimulating a multi-zone well, in one embodiment.

10

DETAILED DESCRIPTION

Definitions

[0054] As used herein, the term "hydrocarbon" refers to an organic compound that includes primarily, if not exclusively, the elements hydrogen and carbon. Hydrocarbons generally fall into two classes: aliphatic, or straight chain hydrocarbons, and cyclic, or closed ring, hydrocarbons including cyclic terpenes. Examples of hydrocarbon-containing materials include any form of natural gas, oil, coal, and bitumen that can be used as a fuel or upgraded into a fuel.

[0055] As used herein, the term "hydrocarbon fluids" refers to a hydrocarbon or mixtures of hydrocarbons that are gases or liquids. For example, hydrocarbon fluids may include a hydrocarbon or mixtures of hydrocarbons that are gases or liquids at formation conditions, at processing conditions, or at ambient conditions (15° C and 1 atm pressure). Hydrocarbon fluids may include, for example, oil, natural gas, coal bed methane, shale oil, pyrolysis oil, pyrolysis gas, a pyrolysis product of coal, and other hydrocarbons that are in a gaseous or liquid state.

[0056] As used herein, the term "fluid" refers to gases, liquids, and combinations of gases and liquids, as well as to combinations of gases and solids, and combinations of liquids and solids.

[0057] As used herein, the term "condensable hydrocarbons" means those hydrocarbons that condense at about 15° C and one atmosphere absolute pressure. Condensable hydrocarbons may include, for example, a mixture of hydrocarbons having carbon numbers greater than 4.

5 [0058] As used herein, the term "subsurface" refers to geologic strata occurring below the earth's surface.

[0059] As used herein, the term "formation" refers to any definable subsurface region. The formation may contain one or more hydrocarbon-containing layers, one or more non-hydrocarbon containing layers, an overburden, and/or an underburden of any geologic
10 formation.

[0060] The terms "zone of interest" or "interval" refers to a portion of a formation containing hydrocarbons.

[0061] As used herein, the term "wellbore" refers to a hole in the subsurface made by drilling or insertion of a conduit into the subsurface. A wellbore may have a substantially
15 circular cross section, or other cross-sectional shapes. As used herein, the term "well", when referring to an opening in the formation, may be used interchangeably with the term "wellbore."

[0062] The term "tubular member" refers to any pipe, such as a joint of casing, a portion of a liner, or a pup joint.

20 [0063] The term "perforation" includes a pre-drilled hole or slot placed in a tubular body.

Description of Selected Specific Embodiments

[0064] The inventions are described herein in connection with certain specific embodiments. However, to the extent that the following detailed description is specific to a particular embodiment or a particular use, such is intended to be illustrative only and is not to
25 be construed as limiting the scope of the inventions.

[0065] **Figure 1** is a cross-sectional view of an illustrative wellbore **100**. The wellbore **100** defines a bore **105** that extends from a surface **101**, and into the earth's subsurface **110**. The bore **105** preferably includes a shut-in valve **108**. The shut-in valve **108** controls the

flow of production fluids from the wellbore **100** in the event of a catastrophic event at the surface **101**.

[0066] The wellbore **100** includes a wellhead, shown schematically at **120**. The wellhead **120** contains various items of flow control equipment such as a lower master fracturing valve **122** and an upper master fracturing valve **124**. It is understood that the wellhead **120** will include other components during the formation and completion of the wellbore **100**, such as a blowout preventer (not shown).

[0067] The wellbore **100** has been completed by setting a series of pipes into the subsurface **110**. These pipes include a first string of casing **130**, sometimes known as surface casing or a conductor. These pipes also include a final string of casing **150**, known as a production casing. The pipes also include one or more sets of intermediate casing **140**. Typically, the surface **130** and intermediate **140** strings of casing are set in place through cement **115**.

[0068] Referring specifically to the production casing **150**, the production casing **150** may also be set in place using a cement sheath **115**. However, in the illustrative wellbore arrangement of **Figure 1**, the production casing **150** is set as an open hole completion. Further, the production casing **150** defines a pre-perforated liner. The liner **150** is hung from the bottom of the intermediate casing string **140** using a liner hanger **151**.

[0069] The illustrative wellbore **100** is completed horizontally. A horizontal portion is shown at **160**. The horizontal portion **160** has a heel **162**. The horizontal portion **160** also has a toe **164** that extends through a hydrocarbon-bearing interval. While the wellbore **100** is shown as a horizontal completion, it is understood that the present inventions have equal application in vertical wells or in deviated wells that extend through multiple formations or zones of interest.

[0070] In **Figure 1**, the horizontal portion **160** of the wellbore **100** extends laterally through a formation “**F**.” Preferably, the formation “**F**” is a carbonate or sand formation having good consolidation. However, the formation “**F**” may alternatively be a sand formation or other formation that is unconsolidated. In such instances, a gravel pack and/or sand screen may be used.

[0071] The wellbore **100** also includes at least one packer **152**. The at least one packer **152** is placed along the outer diameter of the liner **150**. In the arrangement of **Figure 1**, the packer **152** is a swellable packer. Such a packer **152** has benefit to the operator when running a production logging tool (“PLT”).

[0072] Swellable packers are known, and include at least one swellable packer element fabricated from a swelling elastomeric material. Suitable examples of swellable materials may be found in Easy Well Solutions’ CONSTRUCTOR™ or SWELLPACKER™, and Swellfix’s E-ZIP™. The thickness and length of the swellable packer **152** must be able to expand to the wellbore wall and provide the required pressure integrity at that expansion ratio. The swellable packer **152** may be fabricated from a combination of materials that swell in the presence of both water and oil, respectively. Stated another way, the swellable packer element **152** may include two types of swelling elastomers -- one for water and one for oil. In this situation, the water-swellable element will swell when exposed to the water-based drilling fluid or formation water, and the oil-based element will expand when exposed to hydrocarbon production.

5 [0073] Swellable elastomeric materials may include, for example, natural rubber; acrylate butadiene rubber; polyacrylate rubber; isoprene rubber; chloroprene rubber; butyl rubber; brominated butyl rubber; chlorinated butyl rubber; chlorinated polyethylene; neoprene rubber; styrene butadiene copolymer rubber; ethylene vinyl acetate copolymer; silicone rubbers; nitrile rubber; and many other swellable elastomeric materials. The swelling
10 elastomeric material may be determined to swell in the presence of one of a conditioned drilling fluid, a completion fluid, a production fluid, an injection fluid, a stimulation fluid, or any combination thereof. However, the present inventions are not limited to the particular design of the packer **152**.

[0074] In completing the wellbore **100** for the production of hydrocarbons, the operator
15 may wish to stimulate the formation “F” by circulating an acid solution. This serves to clean out residual drilling mud both along the wall of the borehole **105** and into the near-wellbore region (the region within formation “F” close to the production casing **150**). However, and as noted above, known methods present technical difficulties, particularly in horizontal or highly deviated wells. Chemical diverters tend to mingle with the acid, making it difficult if
20 not impossible to ensure that the entire formation is adequately treated; mechanical diverters

can become stuck and oftentimes require numerous and time consuming trips in and out of the wellbore **100** with wirelines, setting tools, plugs, and other devices.

5 **[0075]** In addition, with long horizontal and highly deviated wells, the pressure differential along the wellbore makes it difficult to inject the acid treatment evenly. In this respect, the hydrostatic head formed by the fluid creates a high pressure at the heel **162** of the horizontal (or deviated) portion **160**, while friction losses substantially reduce the pressure at the toe **164** of the horizontal portion **160**. This pressure differential is particularly marked when the horizontal (or deviated) portion **160** is long, such as greater than 3,000 feet (914 meters), or even over 10,000 feet (3,048 meters).

10 **[0076]** To address these concerns, novel systems and methods are offered herein. Particularly, a pre-perforated tubular body is employed having small plugs (seen at **300** in **Figure 3**) that are tuned to dissolve in the presence of acid over selected periods of time. Such plugs **300** carry the benefits of a chemical diverter in that they do not require repeated trips in and out of the wellbore **100** with a wireline and an expensive mechanical device and
15 they cannot become permanently stuck in the wellbore **100**. This removes the possibility of failure and subsequent fishing operations. At the same time, they carry the benefits of a mechanical plug in that they cannot be “bypassed” and do not require the injection of staged chemicals.

20 **[0077]** **Figures 2A** and **2B** show a pre-perforated liner **250** as may be used in the acidization systems and methods of the present inventions, in one embodiment. **Figure 2A** is a cross-sectional view of a portion of the pre-perforated liner **250**. **Figure 2B** is a perspective view of the portion of liner **250** of **Figure 2A**. The liner **250** is one embodiment of the tubular body and is used as the production casing **150** of **Figure 1**. The liner **250** will be discussed with reference to both **Figures 2A** and **2B**.

25 **[0078]** The liner **250** is a cylindrical body having a wall **252**. The wall **252** defines a bore **254** running therethrough. In addition, the liner **250** has a plurality of pre-drilled holes **255**. Preferably, the holes **255** are of the same diameter, and are spaced equi-distantly apart. The holes **255** may optionally be arranged in repeating patterns, such as the one shown in **Figures 2A** and **2B**.

30 **[0079]** It is understood that the liner **250** is actually an elongated tubular body. The liner **250** is preferably made up of a plurality of joints in order to extend hundreds and perhaps

thousands of feet through one or more subsurface zones of interest. The liner **250** may be interrupted by one or more packers, such as swellable packer **152**. In this case, the liner **250** may further be interrupted by short sections of blank pipe **153** on either end of the packer **152**.

5 [0080] The holes **255** in the liner **250** are dimensioned to receive a dissolvable plug **300**. **Figure 3** provides a cut-away view of a section of the pre-perforated liner **250** of **Figures 2A** and **2B**. Here a hole or perforation **255** is seen receiving the dissolvable plug **300**.

[0081] **Figures 4A, 4B, and 4C** provide various views of the dissolvable plug **300** of **Figure 3**, in one embodiment. **Figure 4A** provides a top view of the plug **300**, while **Figure**
10 **4B** shows a bottom view of the plug **300**. **Figure 4C** presents a side view of the plug **300**. The plug **300** will be described with reference to **Figures 4A, 4B, and 4C**, together.

[0082] The plug **300** has a central body **310**. The central body **310** has a diameter D_1 that is dimensioned to closely slide and fit into the holes **255**. The central body **310** is preferably a substantially rigid, cylindrical body. In another embodiment, the central body **310** may be
15 covered by or be made of elastomeric material.

[0083] The plug **300** also has a top end **320**. The top end **320** is arranged as a small, rigid disc that is connected to the central body **310** at one end. The top end **320** has a diameter D_2 that is slightly greater than diameter D_1 . In addition, diameter D_2 is dimensioned to be larger than the diameter of the pre-drilled holes **255**. In this way, the top end **320** will rest on an
20 outer surface of the liner **250**.

[0084] The plug **300** also has a bottom end **330**. The bottom end **330** is also arranged as a small, rigid disc, and is connected to the central body **310** at an end opposite the top end **320**. The bottom end **330** has a diameter D_3 that is slightly greater than diameter D_2 . In addition, the bottom end **330** includes a circular wing or edge **332**, fabricated from a flexible,
25 elastomeric material. The elastomeric nature of the edge **332** allows the bottom end **330** to be compressed and placed through a pre-drilled hole **255**. Optionally, the entire bottom end **330** is fabricated from a thin, highly elastomeric material.

[0085] **Figure 4D** provides a side, cross-sectional view of a dissolvable plug **400** in an alternate embodiment. As with plug **300**, plug **400** has a central body **410**. The central body

410 has a diameter D_1 that is dimensioned to closely slide and fit into the holes **255**. The central body **410** is preferably a substantially rigid, cylindrical body.

[0086] The plug **400** also has a top end **420**. The top end **420** is arranged as a small, rigid disc that is connected to the central body **410** at one end. The top end **420** has a diameter D_2 that is slightly greater than diameter D_1 . In addition, diameter D_2 is dimensioned to be at least as large as the diameter of the pre-drilled holes **255**. In this way, the top end **420** will rest on an outer surface of the liner **250**. In addition, the top end **420** includes a circular wing or edge **422**, fabricated from a flexible, elastomeric material.

[0087] The plug **400** also has a bottom end **430**. The bottom end **430** is also arranged as a small, rigid disc, and is connected to the central body **410** at an end opposite the top end **420**. The bottom end **430** has a diameter D_3 that optionally is slightly greater than diameter D_2 . In addition, the bottom end **430** includes a circular wing or edge **432**, fabricated from a flexible, elastomeric material. The elastomeric nature of the edge **432** allows the bottom end **430** to be compressed and placed through a pre-drilled hole **255**.

[0088] The elastomeric material at the top **420** and bottom **430** ends of the plug **400** are fabricated from a material that will dissolve in the presence of an acidic fluid. It is acknowledged in **Figure 4** that the top end **420** is shown at the bottom of the plug **400**, and that the bottom end **430** is shown at the top of the plug **400**. It is understood though that the bottom end **430** will be inserted into a hole **255**, such that it may operate as a bottom end. However, in the arrangement of **Figure 4**, the ends **420**, **430** are essentially interchangeable.

[0089] **Figures 5A** and **5B** are additional views of the pre-perforated liner **250** of **Figures 2A** and **2B**. Each view is a cross-sectional side view. In **Figure 5A**, open perforations **255** (or holes) are shown along the liner **250**. In **Figure 5B**, dissolvable plugs **300** have been installed into the plurality of holes **255**. In each view, the bore **254** is visible.

[0090] It can be seen in **Figure 5B** that the top end **320** of each of the plugs **300** is residing along an outer surface of the liner **250**. It can further be seen in **Figure 5B** that the bottom end **330** of each of the plugs **300** is residing along an inner surface of the liner **250**. The plugs **300** are installed into the holes **255** manually.

[0091] The plugs **300** are fabricated from a material that will dissolve in the fluid making up the acid solution. An example of an acidic fluid is a fluid comprised of about 15% to 50%

hydrochloric acid or formic acid. The current methods are not limited by the nature of the acidic composition. Examples of suitable material for dissolving in the acidic fluid include sodium bicarbonate, calcite rock, chalk rock, or combinations thereof.

[0092] In accordance with the present inventions, and as noted above, the plugs **300** are
5 “tuned” to dissolve in the fluid making up the acid solution according to a selected time. In this way, the portion of the formation “F” closest to the heel **162** of the deviated portion **160** of a wellbore **100** may be isolated from a portion of the formation “F” at the toe **164** of the wellbore **100**, and even intermediate portions of the formation “F.”

[0093] It can be seen in **Figure 1** that the horizontal portion **160** of the wellbore **100** has
10 been apportioned into a plurality of zones. The zone at the toe **164** is indicated as zone **154**. The next zone closest to the heel **162** is indicated as zone **156**. Additional zones progressing sequentially closer to the heel **162** of the deviated portion **160** are indicated as zones **158'**, **158''**, etc. It is noted that in this context, the term “zone” means a selected length of the tubular body **150**, as opposed to a discrete geological feature or a defined subsurface interval.

[0094] In operation, the liner **150** along zone **154** will simply be a pre-perforated liner
15 **250** without plugs **300**. This is shown in the illustrative view of **Figure 5A**. Next, the holes (such as holes **255**) within the liner **150** along zone **156** will have plugs **300**. These plugs **300** are fabricated to dissolve at various times that can vary from about five minutes to over ten hours after exposure to an acidic stimulation fluid.

[0095] In one aspect, the holes **255** within the liner **150** along zone **154** may also have
20 plugs **300**. In that instance, the plugs **300** along zone **154** will be fabricated to dissolve very quickly, such as within ten minutes, or even five minutes, in the presence of the acidic stimulation fluid. Then, the plugs **300** along zone **156** will be fabricated to dissolve more slowly than the plugs **300** along zone **154**, to allow zone **154** to obtain the desired amount of
25 acidic fluid. For example, the plugs **300** along zone **156** may be tuned to dissolve within about 15 to 60 minutes.

[0096] As shown in **Figure 1**, multiple additional zones **158'**, **158''**, etc. may be
provided. Each of these zones **158'**, **158''**, etc. has plugs **300** that have different material characteristics. In this respect, the plugs **300** in each zone **158'**, **158''**, etc. are fabricated to
30 dissolve more slowly than the plugs **300** in the preceding zone to allow preceding zones to obtain the desired amount of acidic fluid. Thus, for example, each of the plugs **300** along

zone **158'** is fabricated to dissolve more slowly than each of the plugs **300** in zone **156**. Similarly, each of the plugs **300** along zone **158'''** is fabricated to dissolve more slowly than the plugs **300** in zone **158''**, and so forth.

[0097] In order to adjust the dissolution rate of various sets of plugs **300**, an outer layer
5 may be provided over the plugs **300** to delay the reaction with the acidic fluid and the dissolving of the plugs **300** in the wellbore **100**. Examples of suitable coating material are polyester, polycarbonates, polylactic acid, nylon, cellulose, starch, acrylonitrile, polyurethane, and polyacrylate. The thicker the coating along the outer layer, the more slowly a particular plug will dissolve. In one aspect, plugs **300** along zone **158'''**
10 (representing a zone closest to the heel **162**) may be coated such that the plugs **300** will not begin to dissolve until after about 30 minutes, or even three hours, of exposure to an acidic fluid.

[0098] It is preferred that the coating material be elastomeric in nature. This enables the bottom end **330** of each plug **300** to be folded or compressed, and then inserted through
15 corresponding perforations **255**. Depending on the composition of the elastomeric material and the volume percent of acid in the stimulation fluid, a 0.5 mm thickness of coating may represent a 5 minute delay.

[0099] In addition to the use of a coating, or alternatively, the amount of material used in the bottom end **330** of the various plugs **300** may be adjusted. Where a set of plugs **300** is
20 intended to dissolve more slowly, then the amount of dissolvable material in the bottom end **330** may be increased. In general, the dimensions, density, shape and amount of material may be selected to meet specific operational needs.

[00100] As another way of adjusting dissolution rates, the spacing between perforations **255** (or holes) may be adjusted. In **Figures 5A** and **5B**, the perforations **255** are shown more
25 or less equi-distantly spaced. However, variations in spacing may be employed. For example, the perforations in the tubular body **200** may have a different spacing along the third zone as compared to the perforations along the first zone. Alternatively, the hole spacings may be different in each zone.

[00101] As yet another way of adjusting dissolution rates, the diameter of the holes **255**
30 may be adjusted. In **Figures 5A** and **5B**, the holes **255** are shown as being uniform in size. However, variations in diameter may be employed. For example, the perforations in the

tubular body **200** may have a larger diameter along the first zone as compared to the diameter of the perforations along the second zone or the third zone.

[00102] A method of stimulating a multi-zone well using an acidization treatment is also provided herein. **Figure 6** presents steps for such a method **600**, in one embodiment.

- 5 **[00103]** The method includes setting a pre-perforated tubular body in a wellbore. This is shown at Box **610**. The tubular body preferably comprises a plurality of joints, and is dimensioned to be received within a wellbore. In one aspect, the tubular body is a liner.

[00104] The tubular body also comprises a plurality of pre-drilled holes in a wall of the tubular body. The holes may be arranged in repeating patterns along the tubular body.

- 10 **[00105]** The tubular body is apportioned into at least a first zone, a second zone, and a third zone. This is shown in Box **620**. In one aspect, the tubular body extends at least 30 feet (9.1 meters) along each of the first, second, and third zones, and preferably at least 50 feet (15.2 meters).

- [00106]** The pre-perforated tubular body includes a first set of plugs. These plugs are
15 placed in the holes along the tubular body within the first zone. Each of the plugs in the first set of plugs is fabricated to substantially dissolve upon contact with an acidic fluid within a first selected time.

- [00107]** The tubular body also includes a second set of plugs. These plugs are placed
20 in the pre-drilled holes along the tubular body within the second zone. Each of the plugs in the second set of plugs is fabricated to substantially dissolve upon contact with the acidic fluid within a second selected time that is greater than the first selected time.

- [00108]** The tubular body may further include a third set of plugs. These plugs are
25 placed in the holes along the tubular body within an optional third zone. Each of the plugs in the third set of plugs is fabricated to substantially dissolve upon contact with the acidic fluid within a third selected time that is greater than the second selected time. It is understood that additional zones with additional sets of plugs may also be employed. For example, an extremely long horizontal wellbore may have even four or five discrete zones, with plugs designed to substantially dissolve over increasingly long periods of time.

[00109] The method **600** also includes pumping an acidic solution into the well under pressure. This is indicated at Box **630**. The acidic fluid may be, for example, hydrochloric acid, acetic acid, formic acid, or combinations thereof. The acid may be injected in a bullhead fashion. Pumping the acidic solution causes the first set of plugs to dissolve. This
5 exposes a subsurface formation outside of the tubular body along the first zone. This further insures that the formation along the first zone is adequately treated without concern that some acidic fluid will be lost along the second and third zones.

[00110] The method **600** further includes pumping the acidic solution into the well under pressure so as to dissolve the second set of plugs. This is seen at Box **640**. Injecting
10 the acidic solution causes the second set of plugs to dissolve. This, in turn, exposes a subsurface formation outside of the tubular body along the second zone.

[00111] The method **600** also includes optionally injecting the acidic solution into the well under pressure so as to dissolve the third set of plugs. This is shown at Box **650**. Injecting the acidic solution causes the optional third set of plugs to dissolve. This, in turn,
15 exposes a subsurface formation outside of the tubular body along the third zone.

[00112] Preferably, the third zone has a measured depth that is less than the second zone, and the second zone has a measured depth that is less than the first zone. However, the inverse may apply.

[00113] The wellbore may be completed substantially vertically. Alternatively, the
20 wellbore may be completed as a deviated wellbore. In one aspect, the deviated wellbore is completed to have a substantially horizontal portion such that the horizontal portion has a heel and a toe.

[00114] In one preferred aspect, the tubular body further comprises a fourth zone. The fourth zone has a measured depth that is greater than the first zone, and resides at the toe of a
25 horizontal portion of the wellbore. In this embodiment, the pre-drilled holes in the tubular body along the fourth zone do not have plugs. The method then further comprises injecting the acidic solution into the well under pressure so as to contact a subsurface formation along the toe of the wellbore before the acidic solution contacts the subsurface formation along the first zone.

[00115] As can be seen, the above method provides a way to perform acid stimulation in multi-zone wells without the use of chemical diverters, viscous fluids, or mechanically-placed plugs. The method takes advantage of plugs pre-placed along a pre-drilled liner string, with the plugs being fabricated from an acid-reactive material. Certain of the plugs
5 may be covered by a gel or reactive polymer to delay the reaction with the acidic fluid. In this way, selective zones along the liner string are tuned to dissolve at different rates. Some plugs may be fabricated so that they do not dissolve for 30 minutes, or 45 minutes, or even over ten hours after contacting acidic fluid.

[00116] A plug's rate of reaction with the acid may be a function of the properties of
10 the rock behind the tubular body, the length of the completion interval, wellbore hydraulics, and the volume of acid desired in each zone of the completion interval. The times needed for the acid to break through a plug (that is, to dissolve the plugs enough to allow acid to flow through the corresponding perforations) in certain sections of the well may be well above ten hours. This is desirable, for example, for very long horizontal wells being treated at a low
15 pump rate.

[00117] It is noted that packers may be placed along the outside of the perforated liner to assist in the diversion. This optional step is shown at Box 660. In addition, it is preferred that a zone be preserved along the tubular body that does not have dissolvable plugs. This means that the pre-drilled holes along the tubular body at an apportioned zone are left open.
20 This optional step is shown at Box 670. The apportioned zone is ideally at the end of the wellbore, and allows acidic solution to be injected into the near-wellbore region before stimulation of zones that have plugs. The apportioned zone may be the third zone, or a separate fourth zone as discussed above.

[00118] The method has particular application in wells that are completed as an open-
25 hole for the production of hydrocarbons. In one aspect, the hydrocarbon-producing formation contains carbonates. The perforated or pre-drilled liner may be run into the open-hole portion of the wellbore and placed inside another pre-drilled liner that may or may not have plugs in its pre-drilled holes.

[00119] A method of creating a liner string is also provided herein. In one aspect, the
30 method first includes providing a first set of threaded joints. The first set of threaded joints

has pre-drilled holes along a body of each of the joints, This may be, for example, in accordance with the tubular body **250** of **Figure 5A**.

[00120] The method also includes providing a second set of threaded joints. The second set of threaded joints also has pre-drilled holes along a body of each of the joints. The method further includes providing a third set of threaded joints. The third set of threaded joints also has pre-drilled holes along a body of each of the joints.

[00121] The method also includes inserting plugs into each of the holes in the second and third sets of joints. This may be, for example, in accordance with the tubular body **250** of **Figure 5B**. Each of the plugs for the second set of joints is designed to substantially dissolve upon contact with an acidic fluid within a first selected time. Similarly, each of the plugs for the third set of joints is designed to substantially dissolve upon contact with the acidic fluid within a second selected time that is greater than the first selected time.

[00122] In one embodiment of the method, each plug is in accordance with plug **300** of **Figure 3**. In this respect, each plug is fabricated to have:

- a central body, the central body having a diameter dimensioned to closely fit within a diameter of a respective pre-drilled hole;
- a top end, the top end having a diameter that is larger than the diameter of the respective pre-drilled hole; and
- a bottom end, the bottom end having a diameter that is also larger than the diameter of the respective pre-drilled hole, and wherein the bottom end is at least partially fabricated from an elastomeric material so that it may be compressed and inserted through the respective hole.

Each of the plugs may be fabricated from, for example, sodium bicarbonate, calcite rock, chalk rock, or even acid reactive elastomeric material, or combinations thereof.

[00123] While it will be apparent that the inventions herein described are well calculated to achieve the benefits and advantages set forth above, it will be appreciated that the inventions are susceptible to modification, variation and change without departing from the spirit thereof.

Claims

What is claimed is:

1. A system for stimulating a multi-zone well, comprising:
a tubular body dimensioned to be received within a wellbore, the tubular body being
5 apporportioned into at least a first zone and a second zone;
a first set of plugs placed in pre-drilled holes along the tubular body within the first
zone, the first set of plugs being fabricated to substantially dissolve upon contact with an
acidic fluid within a first selected time; and
a second set of plugs placed in pre-drilled holes along the tubular body within the
10 second zone, the second set of plugs being fabricated to substantially dissolve upon contact
with the acidic fluid within a second selected time that is greater than the first selected time.
2. The system of claim 1, wherein the tubular body comprises at least two joints.
- 15 3. The system of claim 1, wherein the tubular body extends at least 10 feet (3.0 meters)
along each of the first and second zones.
4. The system of claim 1, wherein the acidic fluid comprises hydrochloric acid, acetic
acid or formic acid.
- 20 5. The system of claim 3, wherein the tubular body is a wellbore liner.
6. The system of claim 3, wherein:
the tubular body is further apporportioned into a third zone; and
25 the tubular body also extends at least 10 feet (3.0 meters) along the third zone.
7. The system of claim 6, wherein a third set of plugs is placed in pre-drilled holes along
the tubular body within the third zone, the third set of plugs being fabricated to substantially
dissolve upon contact with the acidic fluid within a third selected time that is greater than the
30 second selected time.
8. The system of claim 6, wherein pre-drilled holes are placed along the tubular body
within the third zone, with the pre-drilled holes within the third zone having no plugs.
- 35 9. The system of claim 6, wherein:

the third zone has a measured depth that is less than the second zone; and
the second zone has a measured depth that is less than the first zone.

10. The system of claim 1, wherein the tubular body resides in a substantially vertical
5 wellbore.

11. The system of claim 1, wherein the tubular body resides in a deviated wellbore.

12. The system of claim 11, wherein:
10 the deviated wellbore is completed to have a substantially horizontal portion;
the substantially horizontal portion comprises a heel and a toe; and
an apportioned zone resides proximate the toe of the horizontal portion.

13. The system of claim 12, wherein:
15 the apportioned zone proximate the toe of the horizontal portion of the wellbore has a
plurality of pre-drilled holes; and
the holes in the tubular body along the apportioned zone do not have plugs.

14. The system of claim 12, wherein the first zone is the apportioned zone that resides
20 proximate the toe of the horizontal portion of the wellbore.

15. The system of claim 1, wherein at least some of the holes in the tubular body are
arranged in repeating patterns.

25 16. The system of claim 1, wherein the holes in the tubular body along each zone have a
different spacing.

17. The system of claim 1, wherein the holes in the tubular body have different diameters
from zone to zone.

30 18. The system of claim 1, wherein each plug is fabricated to have:
a central body, the central body having a diameter dimensioned to closely fit within a
diameter of a respective pre-drilled hole in the tubular body;
a top end, the top end having a diameter that is larger than the diameter of the
35 respective pre-drilled hole in the tubular body; and
a bottom end, the bottom end having a diameter that is also at least as large as the
diameter of the respective pre-drilled hole in the tubular body, and wherein the bottom end is

at least partially fabricated from an elastomeric material so that it may be compressed and inserted through the respective hole.

19. The system of claim 1, wherein the plugs in at least one of the first and second zones
5 are fabricated from sodium bicarbonate, calcite rock, chalk rock, acid-reactive elastomeric material, or combinations thereof.

20. The system of claim 19, wherein the material that dissolves in the presence of the
acidic fluid substantially dissolves within about 5 minutes to 10 hours after being exposed to
10 the acidic fluid within the wellbore.

21. The system of claim 7, wherein the plugs in at least the second zone are coated with
an elastomeric material to delay dissolution of the plugs in the corresponding zone.

22. A method for stimulating a multi-zone well, comprising:
15 setting a tubular body in a wellbore, the tubular body being apportioned into at least a first zone and a second zone, and the tubular body comprising:

a first set of plugs placed in pre-drilled holes along the tubular body within the
first zone, the first set of plugs being fabricated to substantially dissolve upon contact
20 with an acidic fluid within a first selected time, and

a second set of plugs placed in pre-drilled holes along the tubular body within
the second zone, the second set of plugs being fabricated to substantially dissolve
upon contact with the acidic fluid within a second selected time that is greater than the
first selected time;

25 injecting an acidic solution into the well under pressure so as to dissolve the first set
of plugs and expose a subsurface formation along the first zone; and

further injecting the acidic solution into the well under pressure so as to dissolve the
second set of plugs and expose a subsurface formation along the second zone.

30 23. The method of claim 22, wherein:

the tubular body is further apportioned into a third zone;

the tubular body further comprises a third set of plugs placed in pre-drilled holes
along the tubular body within the third zone, the third set of plugs being fabricated to
substantially dissolve upon contact with the acidic fluid within a third selected time that is
35 greater than the second selected time; and

the method further comprises:

still further injecting the acidic solution into the well under pressure so as to dissolve the third set of plugs and expose a subsurface formation along the third zone.

5 24. The method of claim 22, wherein the material that dissolves in the presence of the acidic fluid substantially dissolves within about 5 minutes to 10 hours after being exposed to the acidic fluid within the wellbore.

10 25. The method of claim 22, wherein the tubular body:
comprises at least two joints; and
is dimensioned to be received within a wellbore.

26. The method of claim 22, wherein the acidic fluid comprises hydrochloric acid, acetic acid, formic acid, or combinations thereof.

15 27. The method of claim 22, wherein the tubular body is a liner.

28. The method of claim 23, wherein:
the third zone has a measured depth that is less than the second zone; and
20 the second zone has a measured depth that is less than the first zone.

29. The method of claim 22, wherein the wellbore is completed substantially vertically.

30. The method of claim 22, wherein the wellbore is completed as a deviated wellbore.
25

31. The method of claim 30, wherein:
the deviated wellbore is completed to have a substantially horizontal portion;
the substantially horizontal portion comprises a heel and a toe; and
an apportioned zone resides proximate the toe and has pre-drilled holes.

30 32. The method of claim 31, wherein the pre-drilled holes in the apportioned zone proximate the toe do not have plugs.

33. The method of claim 28, wherein the first zone is the apportioned zone that resides
35 proximate the toe of the horizontal portion of the wellbore.

34. The method of claim 28, wherein the first zone resides proximate the heel of the horizontal portion of the wellbore.
35. The method of claim 22, wherein the pre-drilled holes in the tubular body are
5 arranged in repeating patterns.
36. The method of claim 22, wherein the pre-drilled holes in the tubular body along each zone have a different spacing.
- 10 37. The system of claim 22, wherein the pre-drilled holes in the tubular body have different diameters from zone to zone.
38. The method of claim 22, wherein each plug is fabricated to have:
a central body, the central body having a diameter dimensioned to closely fit within a
15 diameter of a respective pre-drilled hole in the tubular body;
a top end, the top end having a diameter that is larger than the diameter of the respective pre-drilled hole in the tubular body; and
a bottom end, the bottom end having a diameter that is also larger than the diameter of the respective pre-drilled hole in the tubular body, and wherein the bottom end is at least
20 partially fabricated from an elastomeric material so that it may be compressed and inserted through the respective pre-drilled hole.
39. The method of claim 22, further comprising, after setting the tubular body in the wellbore and before stimulating one of the first and second zones, circulating at least one of a
25 wellbore conditioning fluid, a weak acid fluid, and a non-reactive fluid into at least a portion of the wellbore.
40. A method of creating a liner string, comprising:
providing a first set of threaded joints having pre-drilled holes therein;
30 providing a second set of threaded joints also having pre-drilled holes therein;
providing a third set of threaded joints also having pre-drilled holes therein;
inserting plugs into each of the holes in the second set of joints, wherein the plugs for the second set of joints are designed to substantially dissolve upon contact with an acidic fluid within a first selected time;

inserting plugs into each of the holes in the third set of joints, wherein the plugs for the third set of joints are designed to substantially dissolve upon contact with the acidic fluid within a second selected time that is greater than the first selected time.

5 41. The method of claim 40, wherein each plug is fabricated to have:

a central body, the central body having a diameter dimensioned to closely fit within a diameter of a respective pre-drilled hole;

a top end, the top end having a diameter that is larger than the diameter of the respective pre-drilled hole; and

10 a bottom end, the bottom end having a diameter that is also larger than the diameter of the respective pre-drilled hole, and wherein the bottom end is at least partially fabricated from an elastomeric material so that it may be compressed and inserted through the respective pre-drilled hole.


15 42. The method of claim 40, wherein the each of the plugs comprises sodium bicarbonate, calcite rock, chalk rock, acid-reactive elastomeric material, or combinations thereof.

43. The method of claim 40, wherein the pre-drilled holes in the first set of threaded joints do not have plugs.

20 44. The method of claim 40, further comprising:

inserting plugs into each of the holes in the first set of joints, wherein the plugs for the first set of joints are designed to substantially dissolve upon contact with the acidic fluid within a third selected time that is less than the first selected time.

Fig. 1

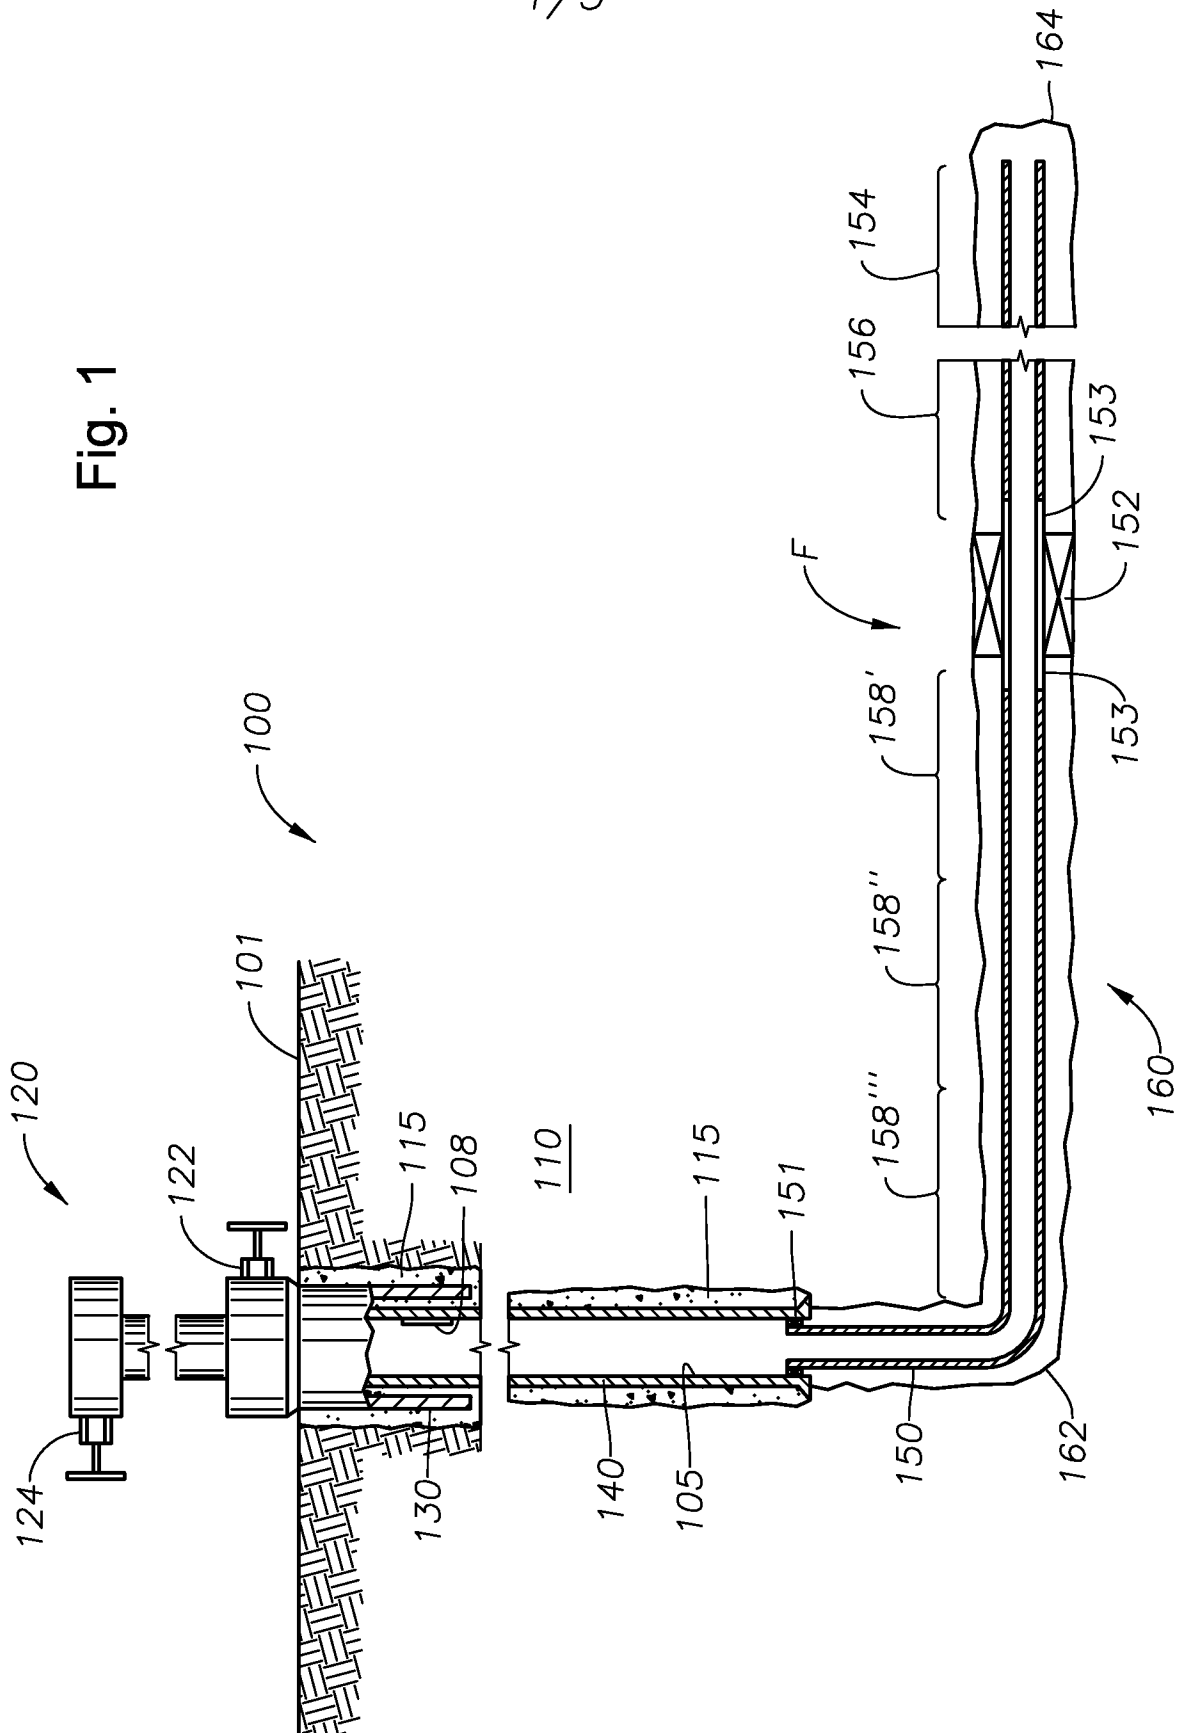

2/5

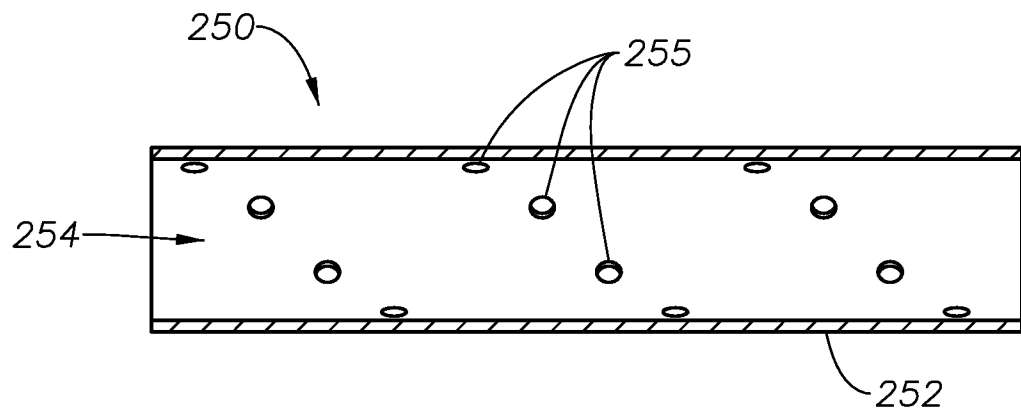


Fig. 2A

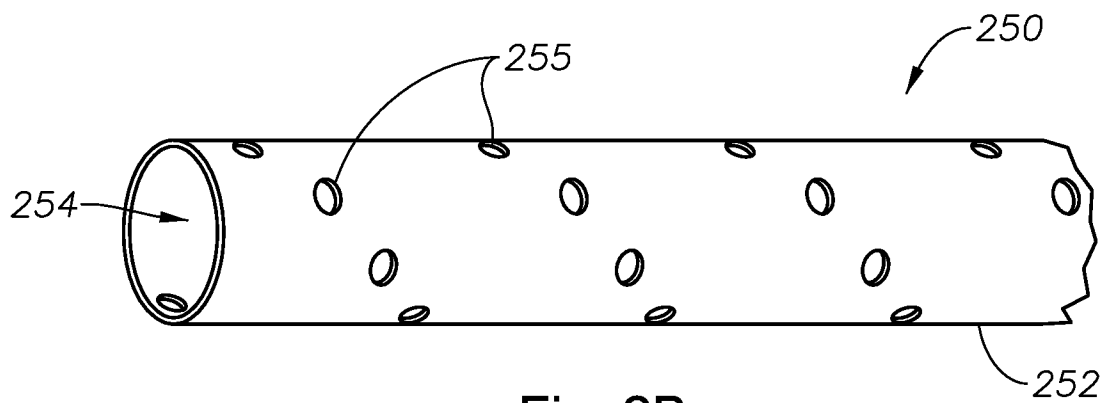


Fig. 2B

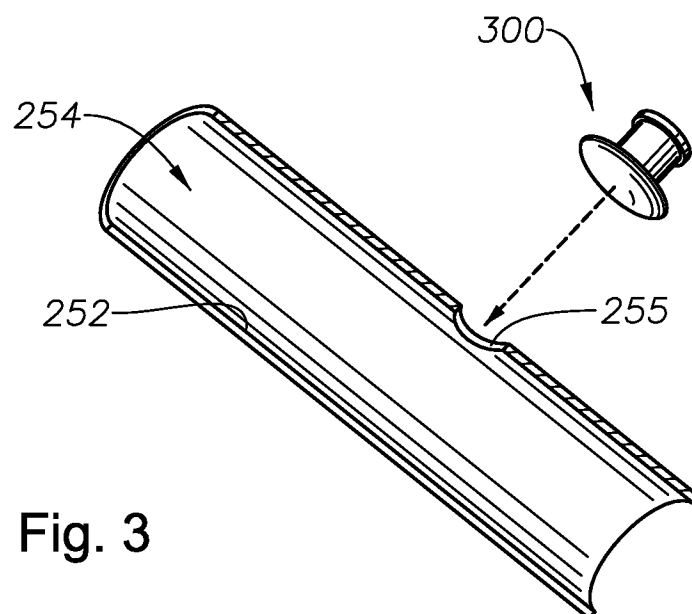


Fig. 3

3/5

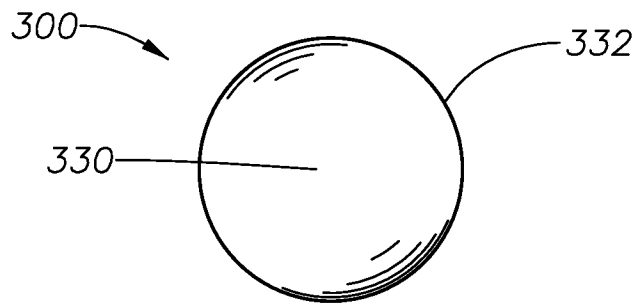


Fig. 4A

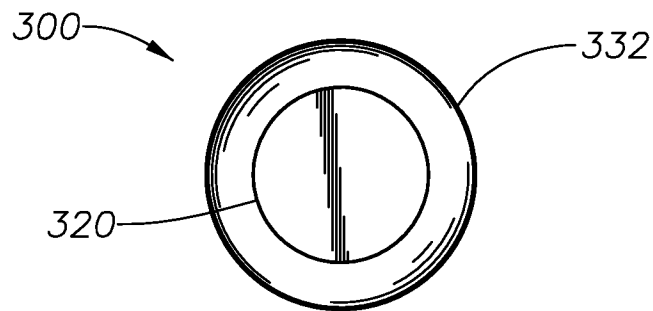


Fig. 4B

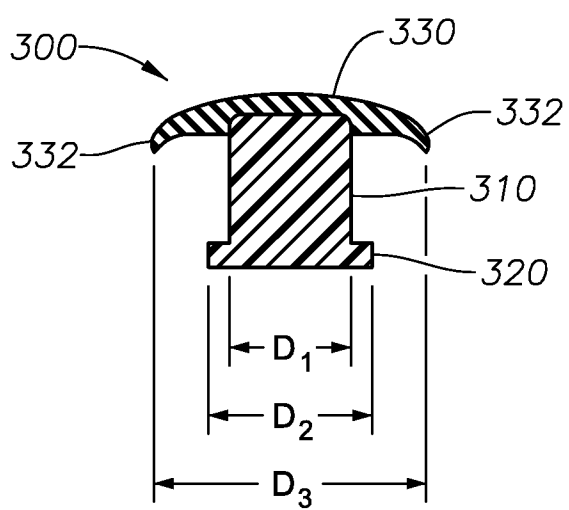


Fig. 4C

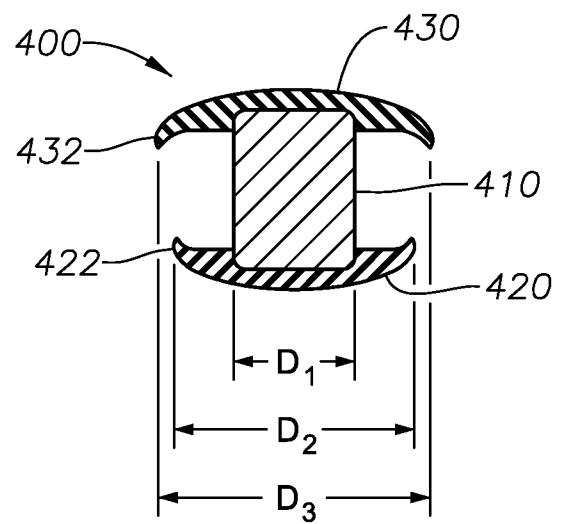


Fig. 4D

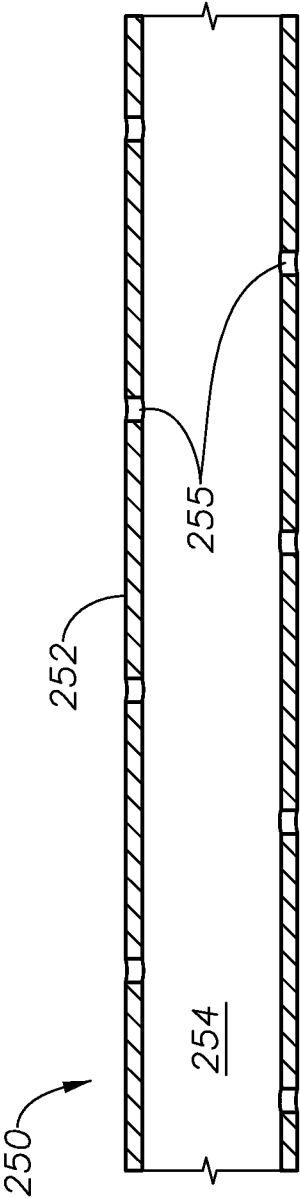


Fig. 5A

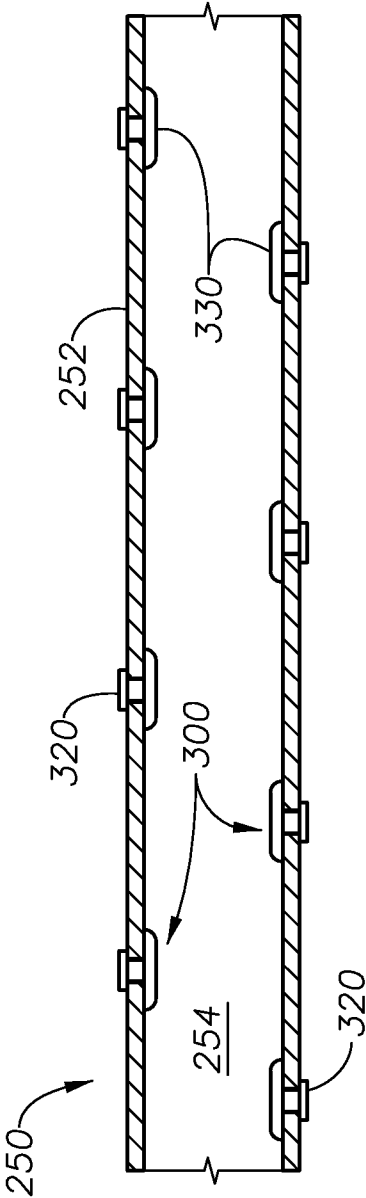


Fig. 5B

5/5

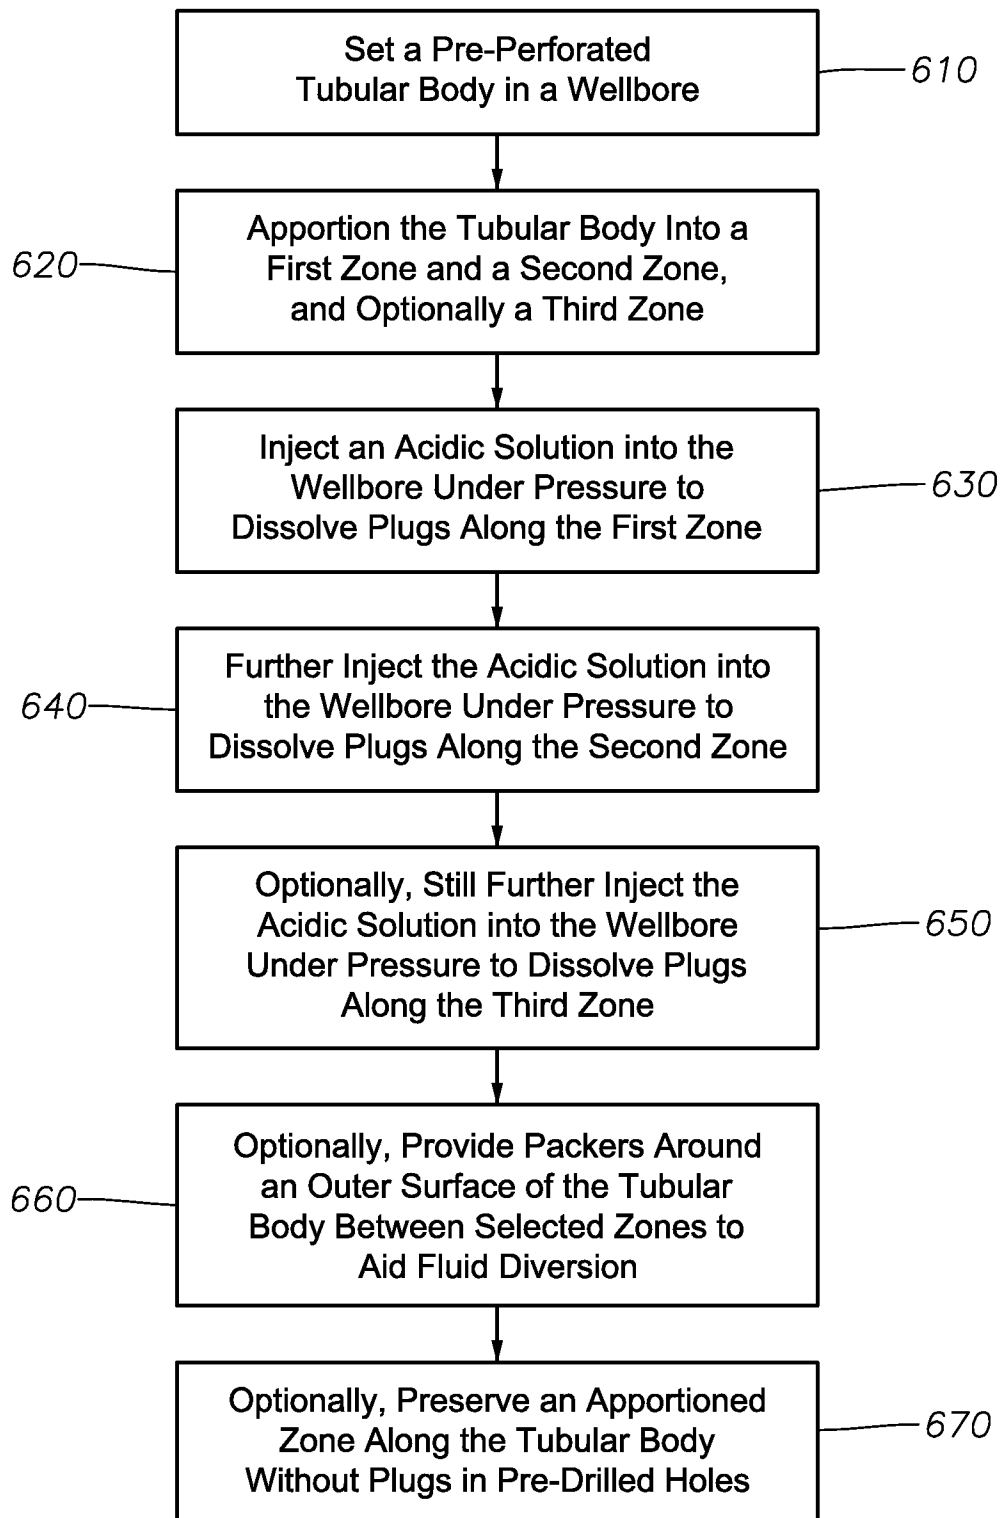


Fig. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 11/33803

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - E21B 43/27 (2011.01)

USPC - 507/933

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

USPC: 507/933

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
 IPC(8): E21B 43/27 (2011.01); USPC: 507/103, 104, 117, 140, 145, 200, 203, 204, 219, 269, 277, 902, 922, 923, 933, 934; 166/177.5, 269, 271, 282, 305.1, 306, 307, 308.1, 308.2, 376; (keyword limited; terms below)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PubWEST(USPT,PGPB,EPAB,JPAB); Google Scholar

Search Terms: acid, dissolve, caustic, plug, cap, seal, heel, toe, threaded, joint, bend, turn, bicarbonate, calcite, chalk, elastomer, rubber, material, zone, sector, area, dimension, pre-drilled.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 7,699,101 B2 (FRIPP et al.) 20 April 2010 (20.04.2010), entire document, especially; FIG 1, 2, col 1, 7-11, col 2, ln 34-58, col 3, ln 22-38, col 4, ln 3-58, col 5, ln 5-21, col 5, ln 42-67, col 6, ln 9-14, col 10, ln 1-11.	1-44
Y	US 2008/0156498 A1 (PHI et al.) 03 July 2008 (03.07.2008), entire document, especially; FIG 2, para [0034], [0044] - [0046], [0047], [0049].	1-44
Y	US 7,287,592 B2 (SURJAATMADJA et al.) 30 October 2007 (30.10.2007), entire document, especially; col 5, ln 27-53.	18, 38, 41
Y	US 2008/0093073 A1 (BUSTOS et al.) 24 April 2008 (24.04.2008), entire document, especially; para [0020], [0024].	20, 24
A	US 2009/0294128 A1 (DALE et al.) 03 December 2009 (03.12.2009), entire document.	1-44



Further documents are listed in the continuation of Box C.



* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

08 July 2011 (08.07.2011)

Date of mailing of the international search report

26 JUL 2011

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774