


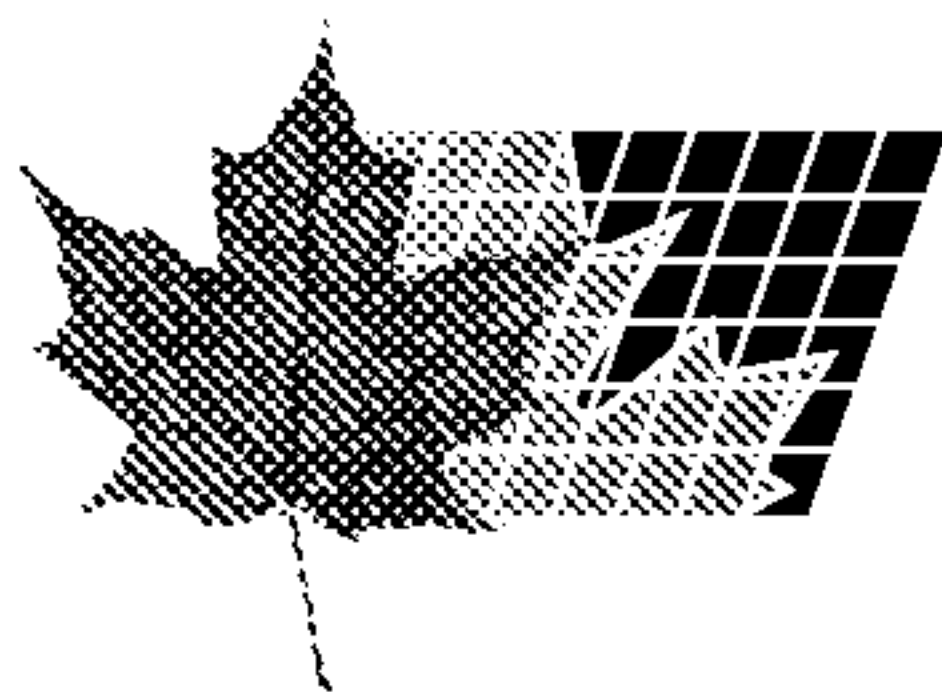

(11) (21) (C) **2,002,578**
(22) 1989/11/09
(43) 1990/05/10
(45) 2001/03/20

(72) Smaardijk, Abraham A., NL

(72) Kramer, Arris H., NL

(73) SHELL CANADA LIMITED, CA

(51) Int.Cl.⁵ C08J 3/24, B05D 7/26, C08L 87/00, C08G 83/00

(30) 1988/11/10 (8826324) GB

(30) 1989/01/17 (8900953) GB

(54) **RESINES THERMODURCIES**

(54) **THERMOSET RESINS**

(57) Thermoset resin obtainable by curing a thermoplastic polymer, which resin is obtainable by reacting a curing agent with a linear alternating copolymer of carbon monoxide and one or more olefinically unsaturated compounds, or with a curable functional derivative thereof. Process for its preparation and uses.

2002578

- 15 -

T 436 FF

A B S T R A C T

THERMOSET RESINS

Thermoset resin obtainable by curing a thermoplastic polymer, which resin is obtainable by reacting a curing agent with a linear alternating copolymer of carbon monoxide and one or more olefinically unsaturated compounds, or with a curable functional derivative thereof. Process for its preparation and uses.

CS4/T0436FF

THERMOSET RESINS

This invention relates to a thermoset resin, to a process for its preparation, to various uses thereof, and to a precursor composition of the resin.

At the present, thermosetting resin compositions
5 are increasingly employed as materials of established commercial utility. They find their use for example in the automotive, lacquer, paint, and coating industry, and as various castings in small house-hold appliances. However, their use is not limited to these applica-
10 tions, as research is still developing new fields of application. To satisfy clients' wishes a range of resin compositions must be available in which the resin corresponding to the particular needs can be found. For instance, in the lacquer, paint, and coating industry
15 resins are requested to have features such as good adhesion, temperature stability, chemical and stress resistance. Moreover, the thermosetting compositions should have a good processability and preferably be made of cheap and common starting materials.

20 It is known to prepare thermoset resins or resin compositions from thermoplastic material, e.g. oligomers or polymers (further collectively referred to as "polymers"), by curing. The curing may consist of e.g. a heat treatment, of an (ultraviolet) light treatment,
25 or of a chemical reaction, using a so-called curing agent. The curing treatment generally causes some chemical modification of the molecules of the polymer, usually crosslinking between chains. The latter implies that bridges between chains are made, and when a
30 chemical curing is effectuated, this often means that reactive groups of the molecule of the curing agent link themselves to reactive sites on the polymer chain.

Because the molecules of curing agents generally contain at least two reactive groups, the result is formation of a bridge incorporating (a part of) the curing agent's molecule. For instance, agents containing two
5 or more alkoxy groups react with polymer chains containing hydroxyl, carboxyl or amide groups, under formation of crosslinked polymers and an alkanol.

Although many commercial thermosets have excellent properties, they are sometimes rather costly, which may
10 be due to the prices of the polymers from which they are prepared. Moreover, some of them are not very handleable, i.e. they are either not liquid at room temperature (mixing thus being inconvenient), or not miscible with the curing agent, or not processable in
15 other respects.

The Applicants have now found that novel thermoset resins may be prepared from novel thermosetting resin compositions, which compositions comprise a curing agent and a linear, alternating "polyketone" or a
20 functional derivative thereof, which resins are easily processed, present excellent physical and chemical resistance, and are made from inexpensive starting materials such as carbon monoxide and ethene.

It should be mentioned that in US Patent Specification No. 3979374, which relates to the preparation of
25 a thermoplastic derivative of a polyketone containing pyrrolic units, a comparative example is given wherein a copolymer of carbon monoxide and ethene having a molecular weight of about 300,000 daltons is treated
30 with a bifunctional compound, to wit 1,6-hexamethylene-diamine. The resulting crosslinked product was not worked up or analysed in any way, and was apparently considered by the inventors of US-3979374 as a product without any practical interest. The latter product is
35 not claimed as a part of the present invention.

It may be remarked too, that EP-A-118312 discloses a chemical curing of polyketones, but the polyketones used and intended therein do not have a linear, alternating structure (instead, they should rather be looked upon as polyolefins having a relatively small number of carbonyl groups randomly dispersed in the polymer backbone), which yields quite different physical and chemical properties.

10 The present invention accordingly relates to a thermoset resin obtained by curing a thermoplastic polymer, characterized in that the resin is obtained by reacting a curing agent with a linear alternating copolymer of carbon monoxide and one or more olefinically unsaturated compounds, or with a curable functional derivative thereof, and in that the weight average molecular weight of the thermoplastic polymer from which the resin is obtained is in the range of 200 to 20,000 daltons.

20 The invention also concerns a process for the preparation of a thermoset resin as claimed above, characterized in that a curing agent is reacted with a linear alternating copolymer of carbon monoxide and one or more olefinically unsaturated compounds, or with a curable functional derivative thereof.

It comprises furthermore a thermosetting composition comprising a curing agent and a thermoplastic polymer, characterized in that it comprises as the thermoplastic polymer a linear alternating copolymer of carbon monoxide and one or more olefinically unsaturated compounds, or a curable

functional derivative thereof, the weight average molecular weight of the linear alternating copolymer or the curable derivative thereof being in the range of 200 to 20,000 daltons.

The handleability of polymers is closely related to their viscosity, and thus to their molecular weight.

Polyketones of low molecular weight are liquid or viscous, and can thus be blended easily with the curing agent, and the resulting thermoset resins are usually liquid or viscous as well, which simplifies their application as a coating or an adhesive. Nevertheless,

10

resins of high molecular weight may be used as coatings etc. too, by applying them as a powder, e.g. by electrostatic or flame spraying techniques. Therefore, though all molecular weights are suitable for the present invention, preferably the weight average molecular weight of the thermoplastic polymer from which the resin is obtainable, is below 200,000 daltons, especially in the range of 200 to 20,000 daltons, and in particular in the range of 200 to 10,000 daltons. It makes some difference for the viscosity whether the thermoplastic polymer from which the present thermoset resins are obtainable, is a "pure" polyketone or a derivative thereof, and in as much as necessary, this will be addressed at the appropriate places hereafter.

The linear, alternating copolymer of carbon monoxide and one or more olefinically unsaturated compounds is known per se from various patents and patent applications of the Applicants, e.g. No. EP-B-121965. It comprises a repeating unit of formula $\{A'-C(=O)\}$ in which A' stands for a unit derived from the olefinically unsaturated compound A. Thus if A represents the ethene molecule of formula $CH_2=CH_2$, A' stands for the ethylene biradical of formula $-CH_2-CH_2-$. It will be understood that copolymerisation of mixtures of olefinically unsaturated compounds (A and B) with CO will give terpolymers in which units of formula $\{A'-C(=O)\}$ alternate randomly with units of formula $\{B'-C(=O)\}$.

Examples of suitable compounds A are olefinically unsaturated hydrocarbons such as olefins or styrenes, and unsaturated non-hydrocarbons, such as acrylic acid or methacrylates. Preferably the one or more olefinically unsaturated compounds, being monomers of the thermoplastic polymer from which the resin is obtainable, are selected from alkenes, cycloalkenes, arylalkenes, alkadienes and oxycarbonylalkenes, having from 2

to 12 carbon atoms. It is particularly preferred that the one or more olefinically unsaturated compounds, being monomers of the thermoplastic polymer from which the resin is obtainable, comprise at least ethene.


5 Preferably A is a hydrocarbon, especially of up to 12 carbon atoms, in particular an alkene of up to 8 carbon atoms such as: ethene, propene, butene, pentene, methylbutene, hexene, methylpentene, dimethylbutene, ethylbutene, heptene, methylhexene, dimethylpentene,
10 ethylpentene, trimethylbutene, ethylmethylbutene, octene, methylheptene, dimethylhexene, ethylhexene, trimethylpentene, ethylmethylpentene, propylpentene, dimethylethylbutene, diethylbutene, and methylpropylbutene. More preferably A is a 1-alkene, ethene or
15 propene being most preferred.

The compound B may be any ethylenically unsaturated compound other than A. Preferably B is a compound selected from alkenes, alkadienes, cycloalkenes, e.g. cyclopentene or cyclohexene, aryl substituted alkenes,
20 e.g. styrene or p-methylstyrene, carbonyloxy substituted alkenes, e.g. acrylic acid, crotonic acid, maleic acid, maleic acid anhydride, fumaric acid, or monomethyl fumarate, or other vinyl-type monomers, such as vinyl chloride, or acrylonitrile. More preferably, B is
25 selected from 1-alkenes, or aryl-substituted 1-alkenes.

Very suitable polyalcohols are polyalcohols having a molecular weight of from 450 to 3500 and preferably of from 1000 to 1500.

Advantageously the thermoplastic polymer from
30 which the resin is obtainable, is a linear alternating copolymer of carbon monoxide and one or more olefinically unsaturated compounds. In other words, the thermoplastic polymer is cured as such, without further derivatisation. In this case, it is preferred that the
35 thermoplastic polymer from which the resin is

obtainable, is a linear alternating carbon monoxide/-alkylene oligomer having a weight average molecular weight of from 500 to 1,800, represented by the formula

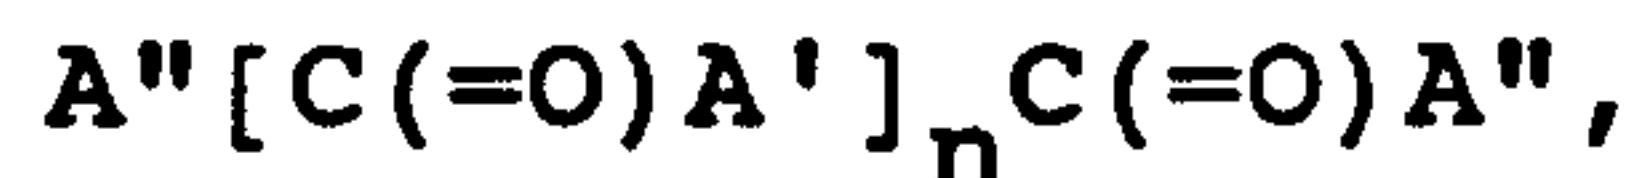


wherein each A'' independently is an alkyl group of 2 up to 8 carbon atoms, or an alkoxy group of 1 up to 8 carbon atoms, each A' independently is an alkylene group of 2 up to 8 carbon atoms, and n is such that the weight average molecular weight is as defined.

On the other hand, good results have also been obtained when the thermoplastic polymer from which the resin is obtainable, is a curable functional derivative of a linear alternating copolymer of carbon monoxide and one or more olefinically unsaturated compounds.


Suitable curable functional derivatives of polyketones to be employed in the present invention comprise, in principle, all derivatives of ketone carbonyl groups which contain a function capable of reacting with a curing agent. They are selected, inter alia, from the group comprising polybisphenols, acrylonitrile derivatives, polyaminoacids, Mannich addition products, polythiols, dithiocyclic group substituted polyketones, hemimercaptals, polyamides, polyamines, furan derivatives, polycyanohydrins, polyoxims, polyphosphonates, polyvinylketones, polyhydroxymethylketones, polyaminoalcohols, polyketone ketals and hemiketals, polyepoxide derivatives, polyhydroxysulphonate adducts, polyhydroxyphosphonate adducts, polydihalo derivatives, polyhaloketone derivatives, polyhydrazone derivatives and polyalcohols.

These suitable derivatives are discussed in more detail hereafter:

1. Polybisphenols, used according to the following scheme:

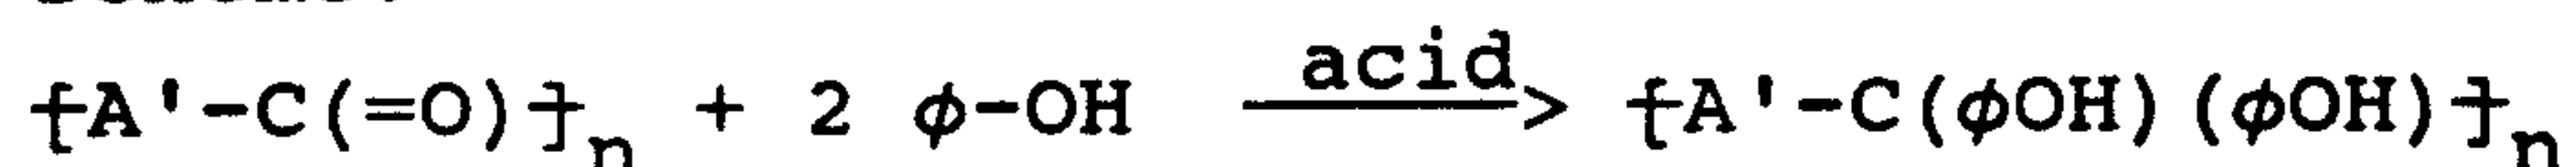


This compound is directly curable by reaction with e.g. formaldehyde, but may also be glycidated first:

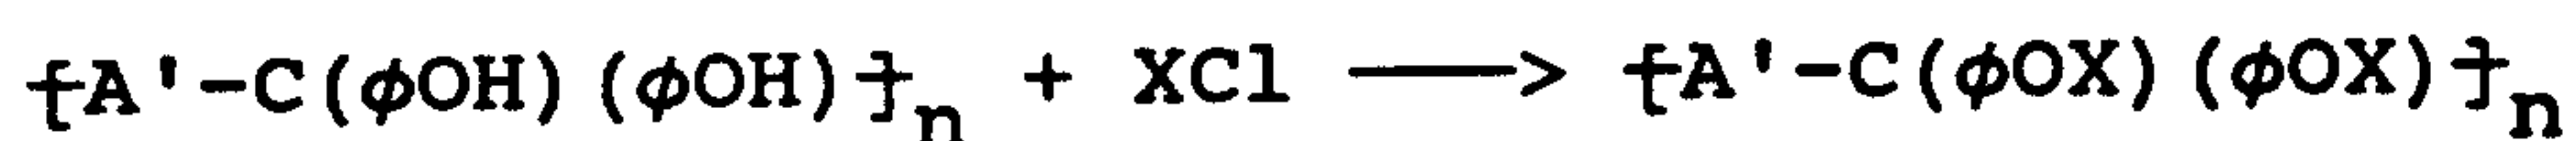

which product can be cured using a known curing agent
5 for epoxides, such as an amine, an anhydride or a melamine-formaldehyde resin.


Herein ϕ represents an optionally substituted phenyl group, A' may have the meanings given above, preferably an ethylene biradical, and X stands for the 2,3-epoxy-prop-1-yl group (XCl thus being α -epichlorohydrin).
10

2. Acrylonitrile derivatives, used according to the following scheme (a copolymer of CO and ethene is used by way of example):

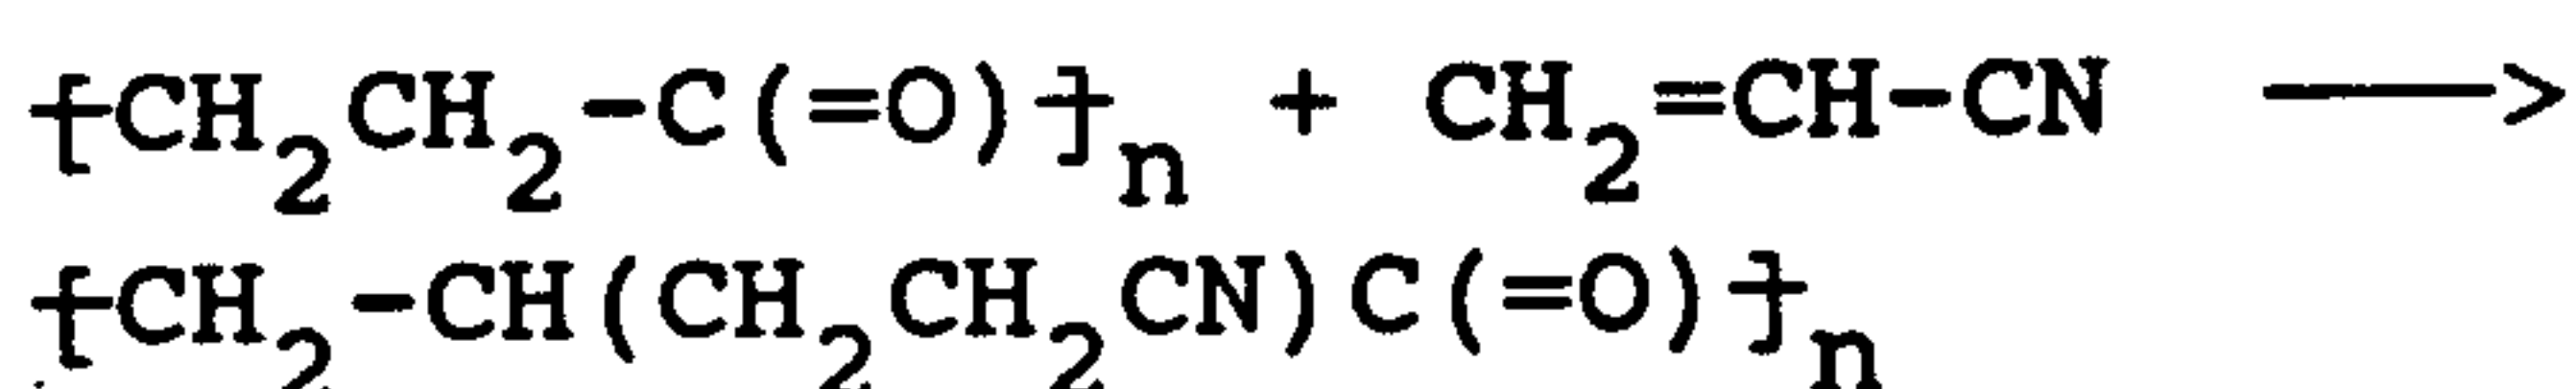

This compound is directly curable by reaction of the
15 carbonyl groups with e.g. a polyamine, or indirectly by hydrolysis of the cyano group to a carboxylic acid, acid amide, or ester, followed by curing using e.g. a triol in the presence of acid.

3. Polyaminoacids, which can be prepared via
20 hydantoin rings according to the scheme below:

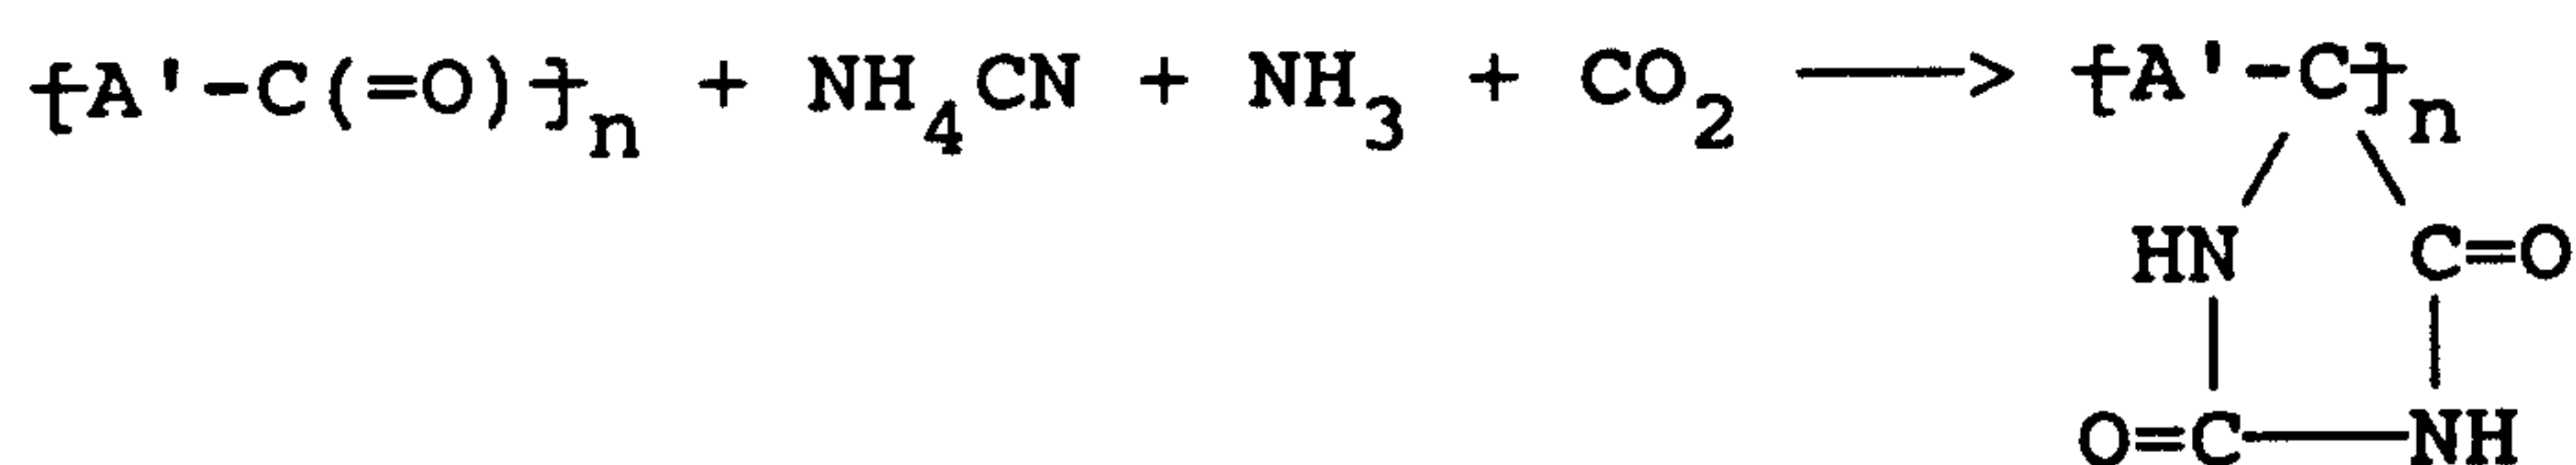

which products are reacted first with a base and then with acid, thus converting the hydantoin ring into a linear group of structure $-NH-C(=O)-NH-COOH$. The latter group is converted into an aminoacid group by
25 evolution of CO_2 and hydrolysis of the amide to give polymers of formula $\{A'-C(NH_2)(COOH)\}_n$. These are curable by crosslinking in ways known per se.


4. Mannich addition products, according to the following scheme (a copolymer of CO and ethene is used by
30 way of example):



In this reaction, R represents a hydrocarbyl group, in particular an (ar)alkyl or (alk)aryl group, of up to 12 carbon atoms. Further reaction of this addition product with polyketone and in the presence of H_2CO causes bridging between chains via the nitrogen atom. In case NH_3 or NH_4Cl is used instead of the primary amine RNH_2 , three-dimensional crosslinking takes place.


5. Thiol based compounds:

10 (a) Polythiols, via the following sequence:

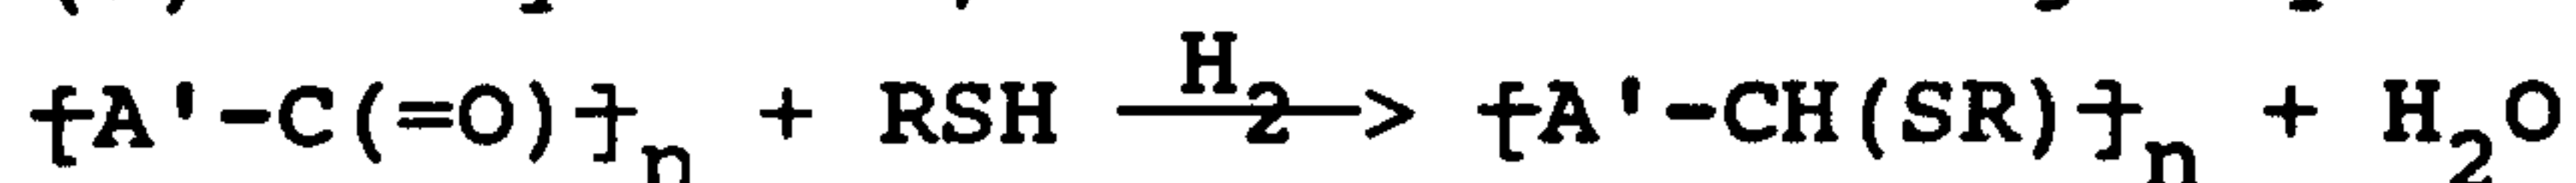

In this reaction, R has the meanings given in the preceding paragraph. The polythiol product may be cured in any manner known per se, also by making S-S bridges between adjacent chains.

15 (b) Dithiocyclic groups substituted into polyketones. This reaction follows the scheme below:

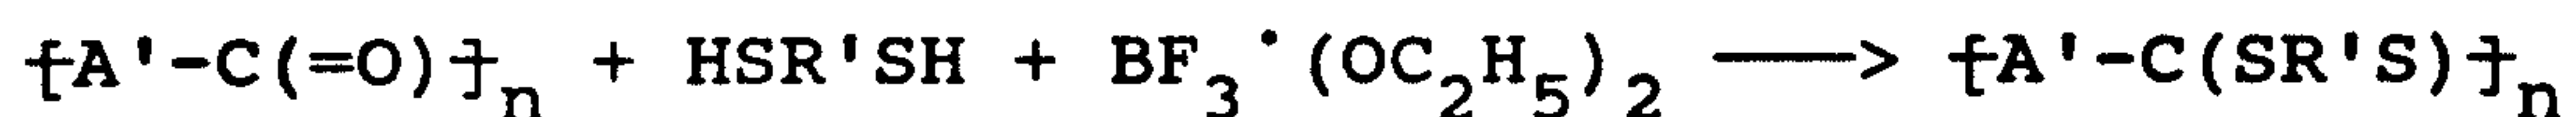


In this reaction R' represents a bridging group having 2, 3 or 4 atoms in the bridge, preferably an ethylene group (yielding a 1,3-dithiolane). The product may be cured in any manner known per se, optionally after further derivatisation.

(c) Hemimercaptals, via the following scheme:



The product may be cured in any manner known per se, optionally after further derivatisation.

6. Polyamides, which are obtainable by reaction with hydrazoic acid, in the presence of an acid catalyst:

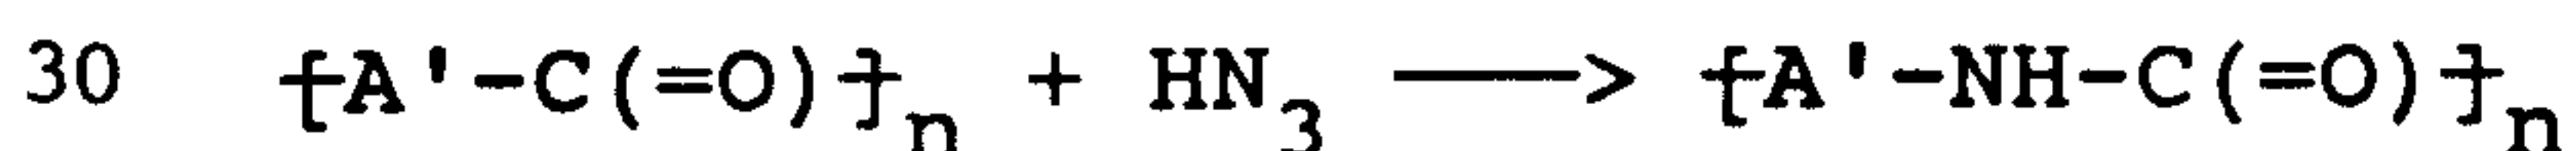


Cross-linking of this product may be effected using e.g. an epoxide or anhydride curing agent.

7. Polyamines, which are obtainable by reaction of polyketones with hydrogen and with ammonia or a primary or secondary amine:


$\{A'-C(=O)\}_n + R''R''NH + H_2 \longrightarrow \{A'-CH(NR''R'')\}_n$
 wherein each R'' independently represents a group R as defined hereinbefore, or a hydrogen atom. The polyamine may be cured with e.g. an epoxide or anhydride curing agent.

8. Furan derivatives, which are obtainable by mild heating in the presence of an acid (H^+), followed by a Diels-Alder addition reaction using e.g. maleic acid anhydride, according to the following reactions (a copolymer of CO and ethene is used by way of example):

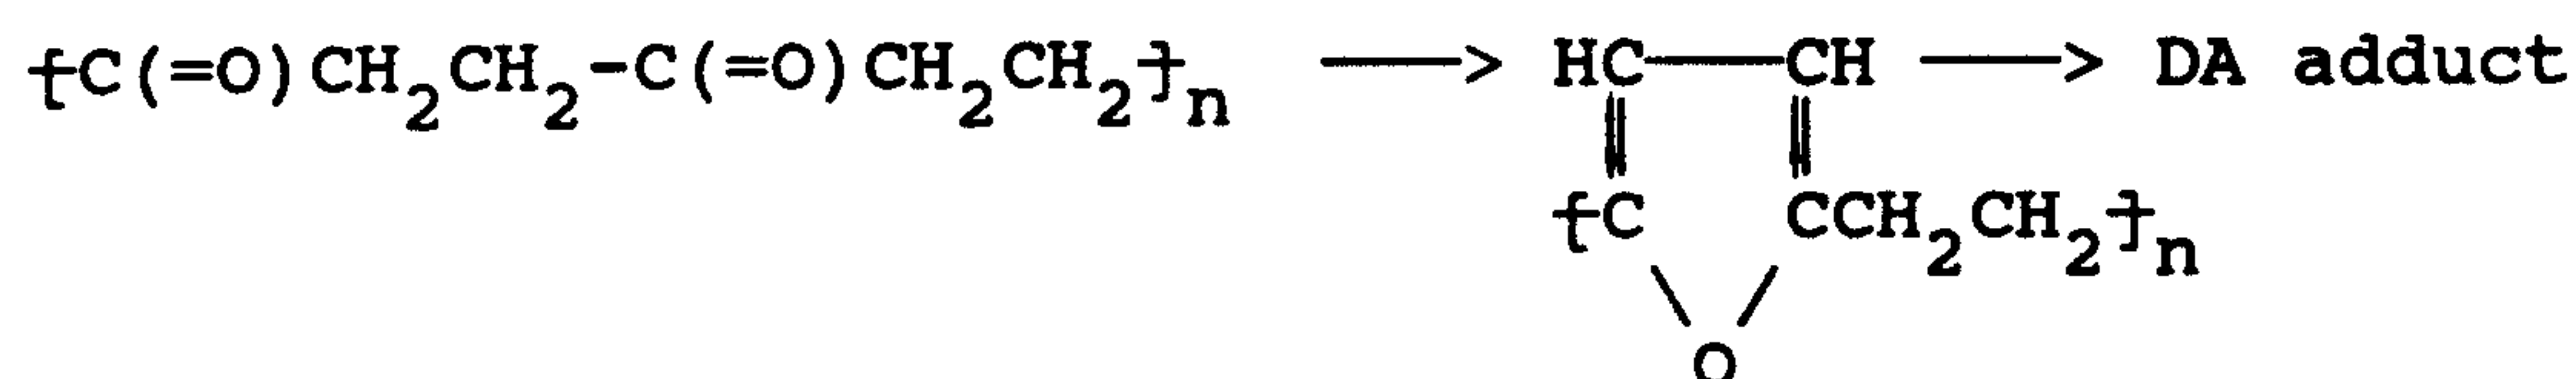


The obtained polyanhydride is curable using e.g. an epoxide.

9. Polycyanohydrins, which can be obtained by addition of HCN to (part of) the carbonyl groups, and which may be converted further to polyamides, acids or esters, following the reactions below:

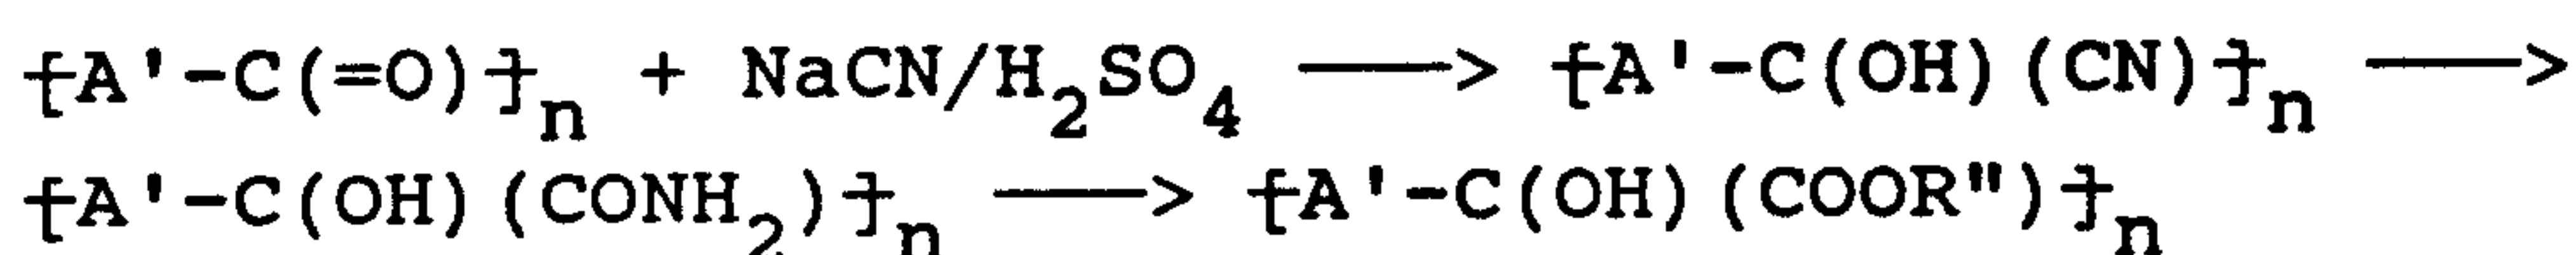



R'' has the meaning defined hereinbefore. The polymers formed may be cured directly in the case of the polyamides, whereas the acids and esters may be dehydrated first to unsaturated acids or esters, after which curing is possible using any agent known per se for similar compounds.

10. Polyoxims which are obtainable by reaction of (part of) the carbonyl groups with hydroxylamine, optionally followed by a reaction with PCl_5 to rearrange the oxim:

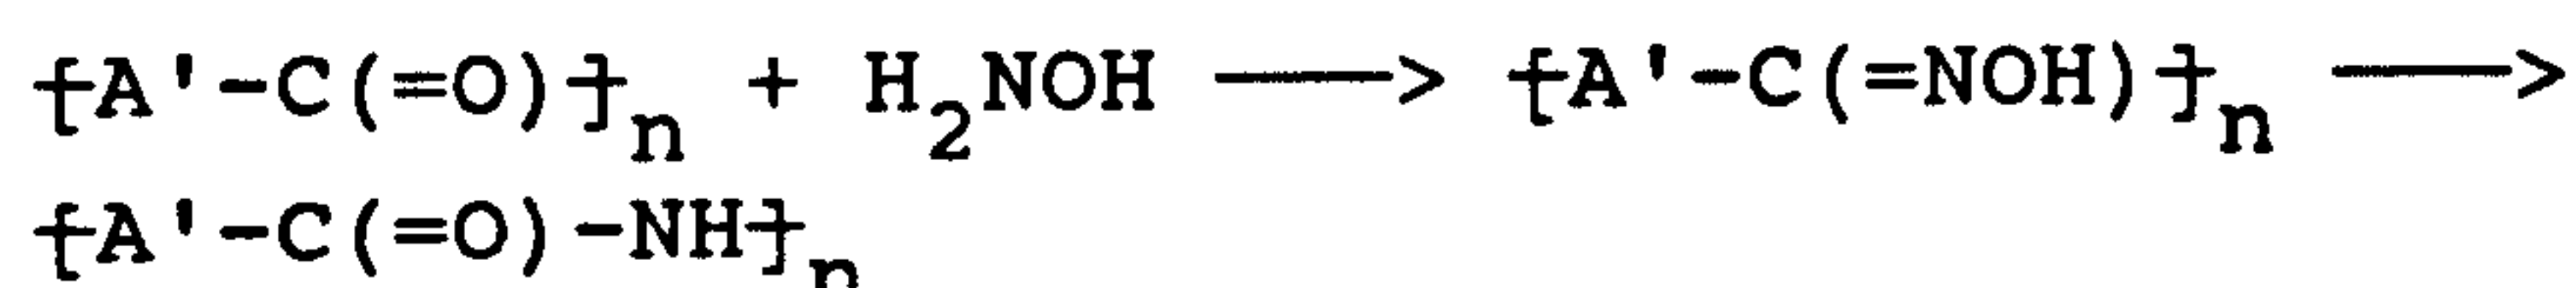


Curing of the carbonyl groups may be effected using any suitable crosslinking agent, as discussed hereinafter.

11. Polyphosphonates, which are obtained through reaction of dialkylphosphonates with (part of) the carbonyl groups of a polyketone:

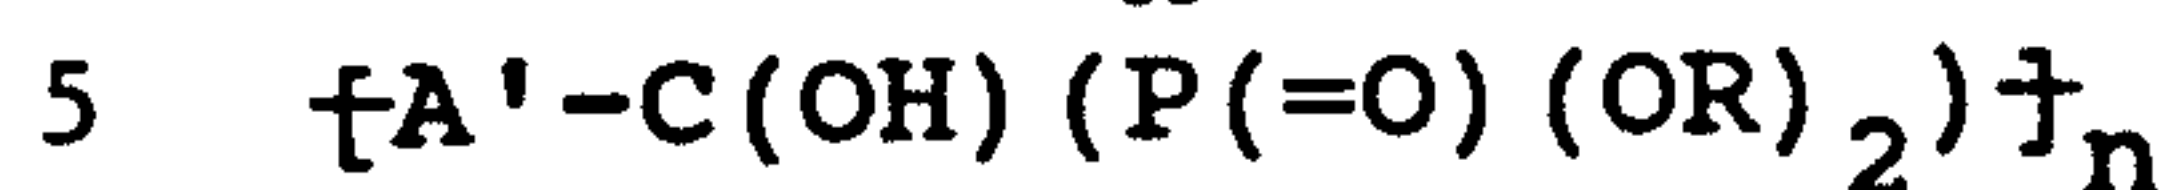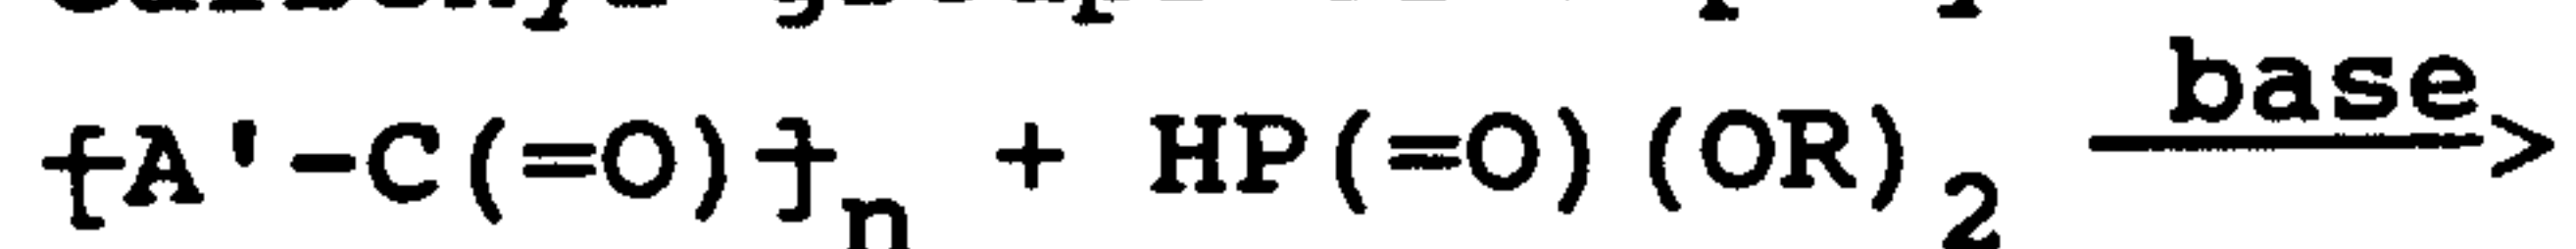


The products are then cured by a crosslinking reaction on the carbonyl and/or the hydroxy groups using any of the suitable curing agents specified hereinafter.

12. Polyvinylketones or polyhydroxymethylketones, which are the result of condensing polyketones with formaldehyde (Tollens' reaction) according to the scheme below (a copolymer of CO and ethene is used by way of example):

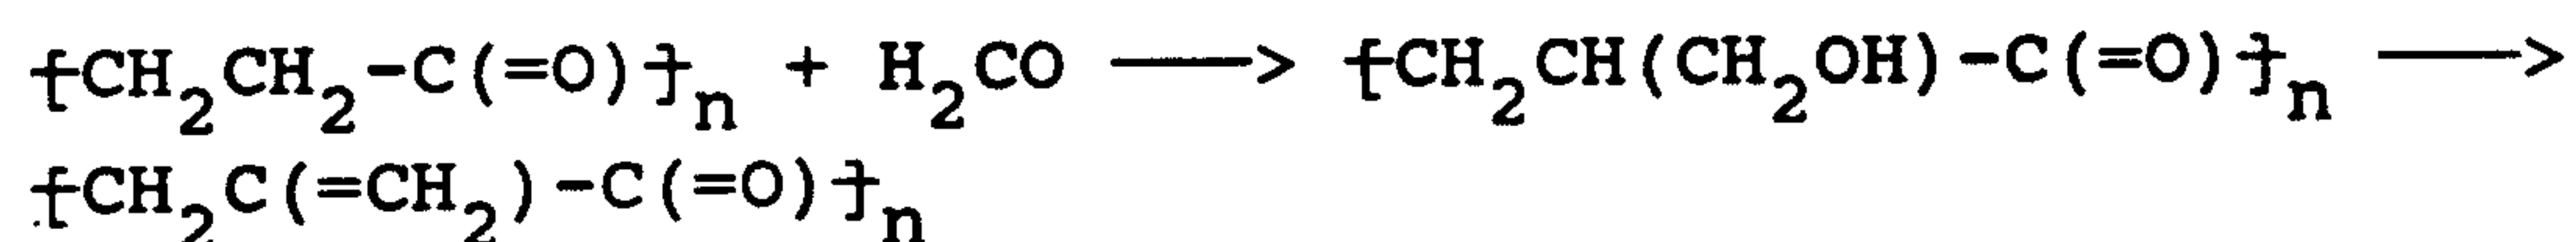


15 The polymers are crosslinked on their carbonyl, vinyl or hydroxyl functions.

13. Polyaminoalcohols, which are obtained by mild reduction, using for instance $LiAlH_4$, of the polyoxims (prepared according to the scheme of § 10 above):

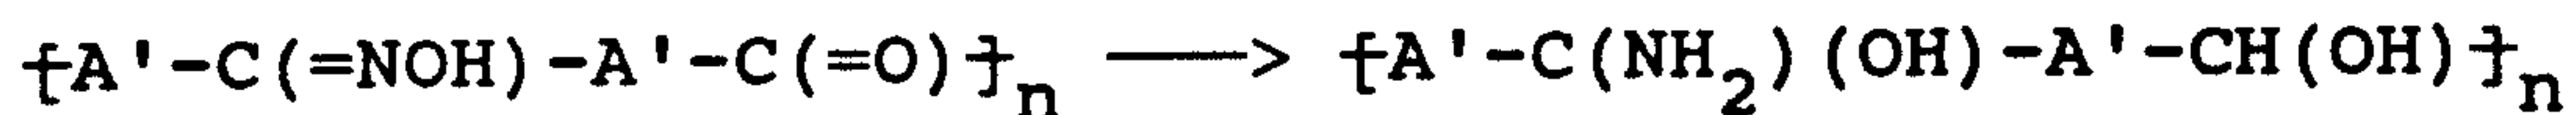


20 The polymers are crosslinked on their amine and/or hydroxyl functions.



14. Polyketone ketals and hemiketals, which are obtainable in known ways employing a basic reagent:

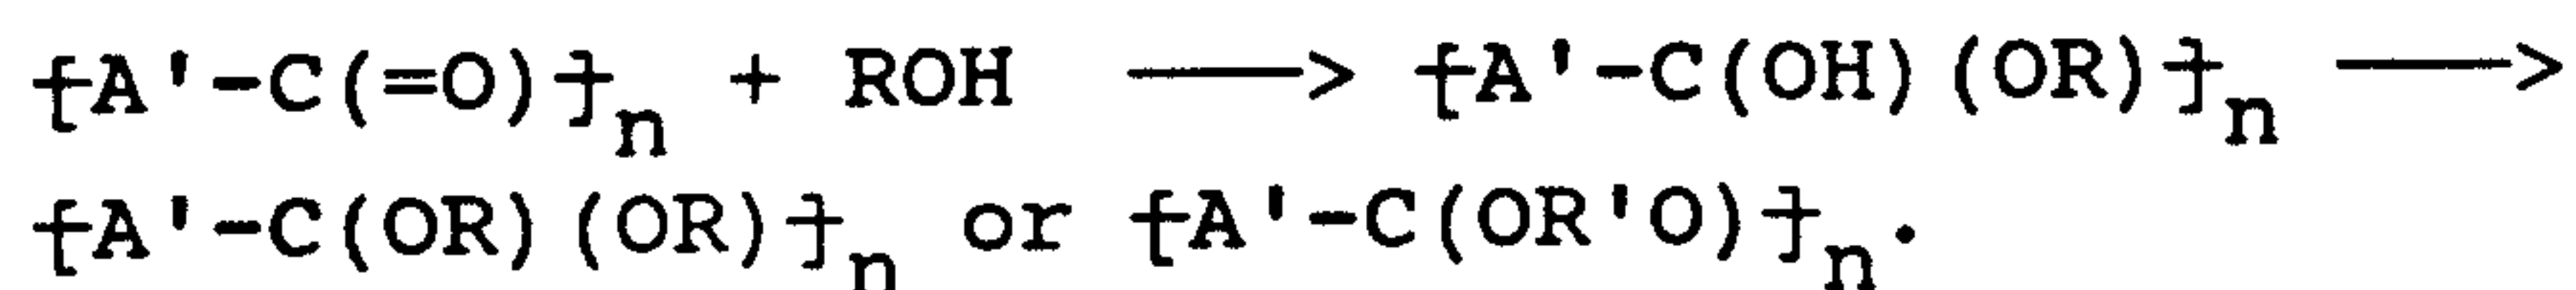

25 Herein R' again stands for a bridging group. These ketals and hemiketals are cured using crosslinking agents such as polyamines or epoxides.


15. Polyepoxide derivatives of polyketones, obtainable by (partial) conversion of the carbonyl groups by reaction with a reagent like dimethylsulphoxonium methylide (3), formed as follows:

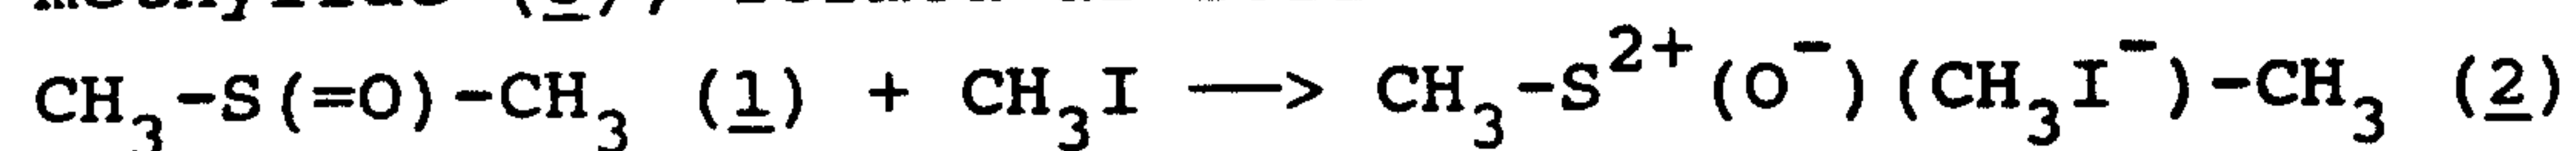

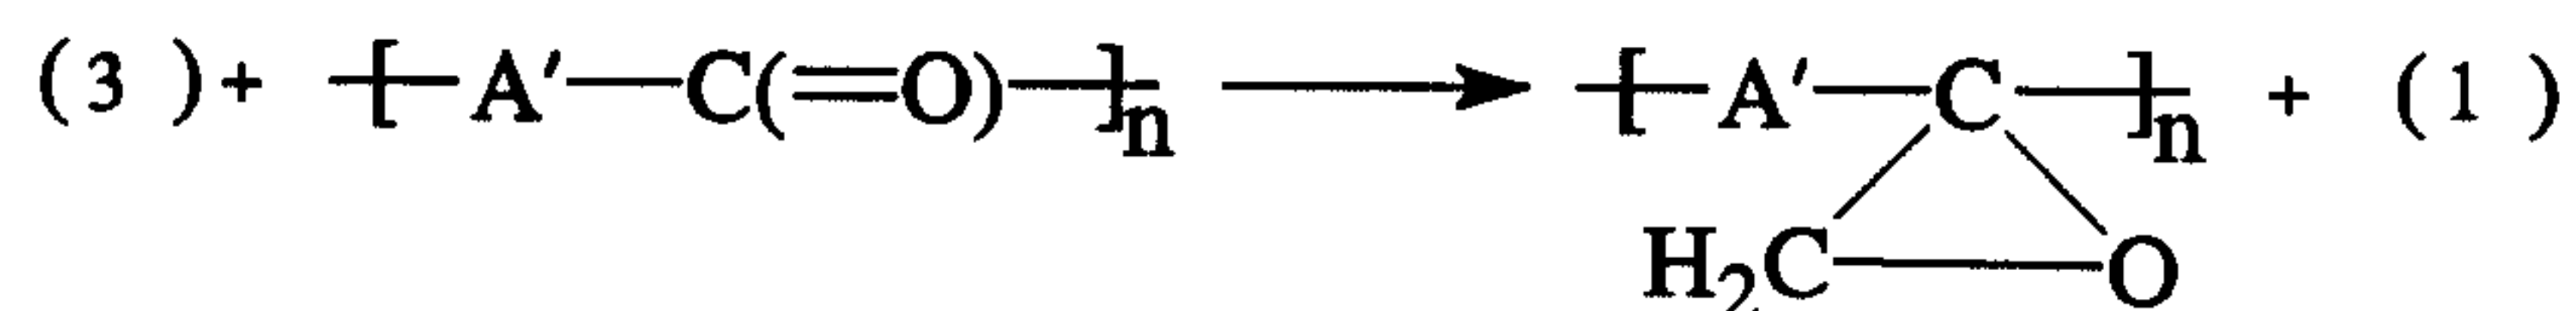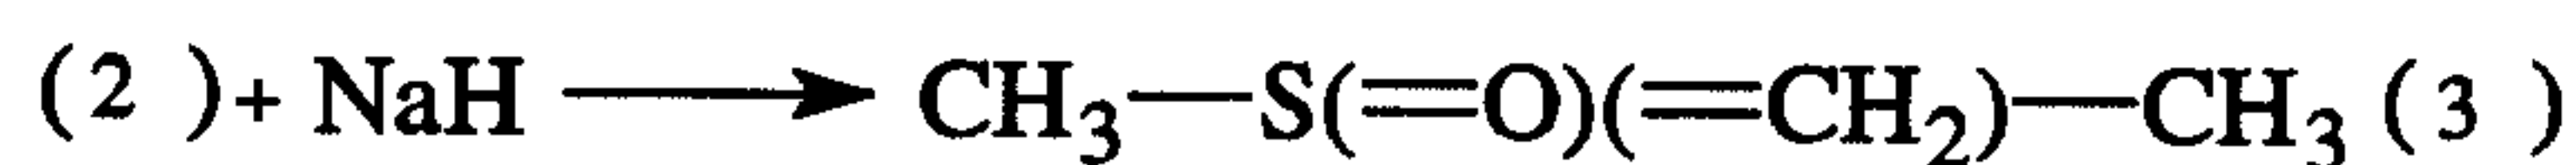


These polyepoxide derivatives are crosslinked by reaction with conventional epoxide curing agents, e.g. amines, anhydrides or melamine-formaldehyde resins.

16. Polyhydroxysulphonate adducts obtainable by reaction of (part of) the carbonyl groups with sodium bisulphite:

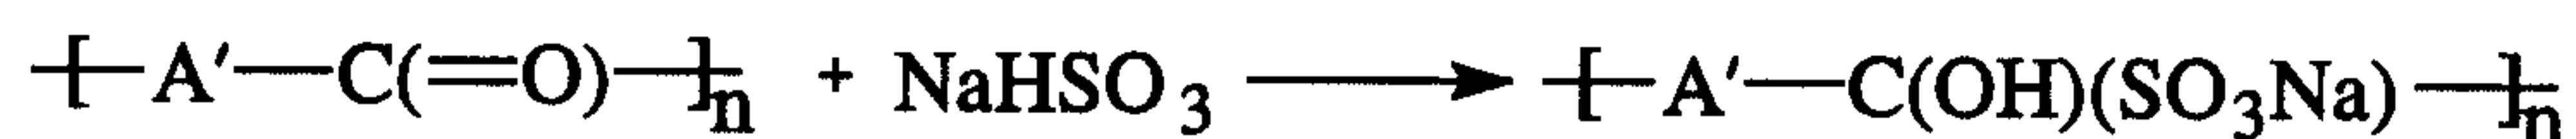


The adducts are soluble in water at lower values of n , and are easily cured to thermosets.

10 17. Polyhydroxyphosphonate adducts obtainable by reaction of (part of) the carbonyl groups of the polyketone with phosphorus trichloride (PCl_3):

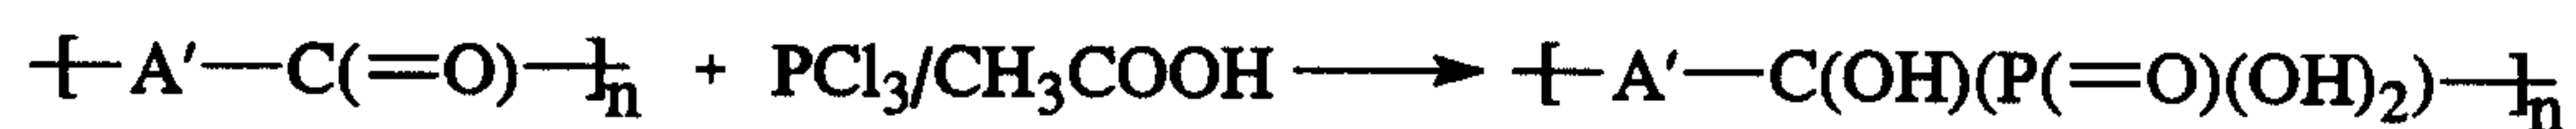


The adducts are soluble in water at lower values of n , and are easily cured to thermosets.

18. Polydihalo derivatives from polyketones, obtainable by reaction with phosphorus pentachloride:

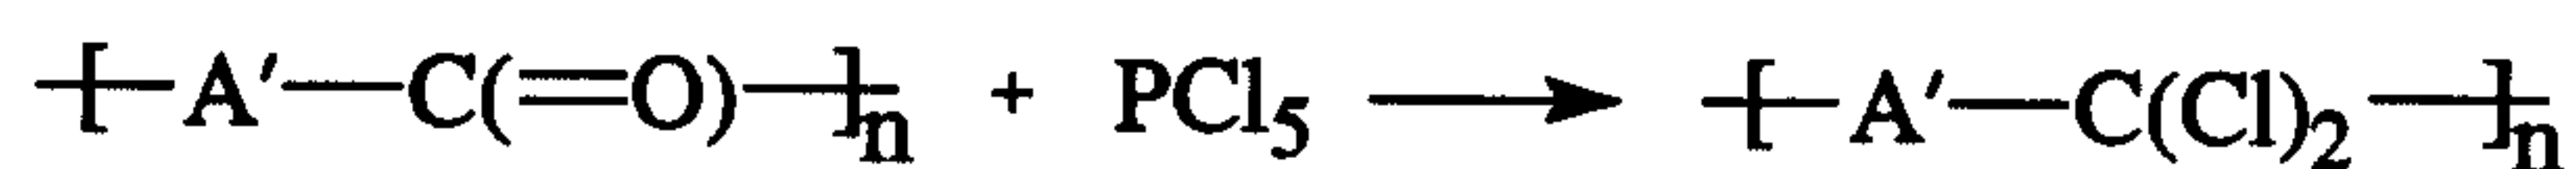

Curing to thermoset polymers is possible by interchain reactions, optionally incorporating curing agent molecules.


19. Polyhaloketone derivatives, obtainable by reaction of sulphuryl chloride with polyketones having a tertiary hydrogen atom (a co- or terpolymer containing units based on CO and propene is used by way of example) :

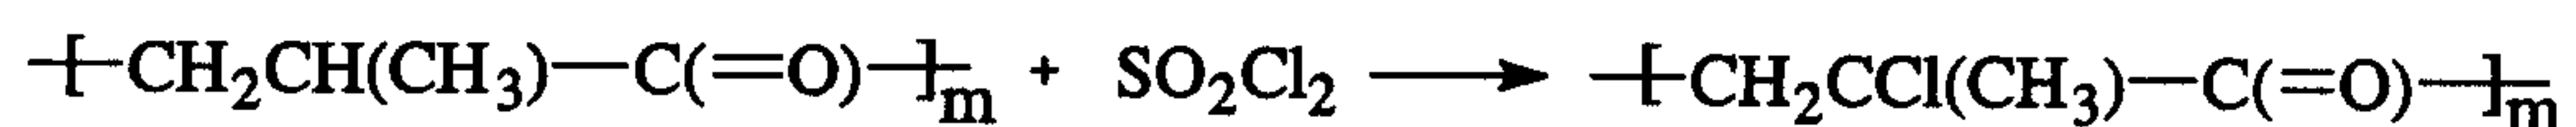

10 These α -chloroketone products are optionally reduced, thus yielding epoxide rings, which may be cured in a way known per se.


20. Polyhydrazone derivatives of polyketones, obtainable by reaction thereof with hydrazine, as illustrated

below (a copolymer of CO and ethene is used by way of example):

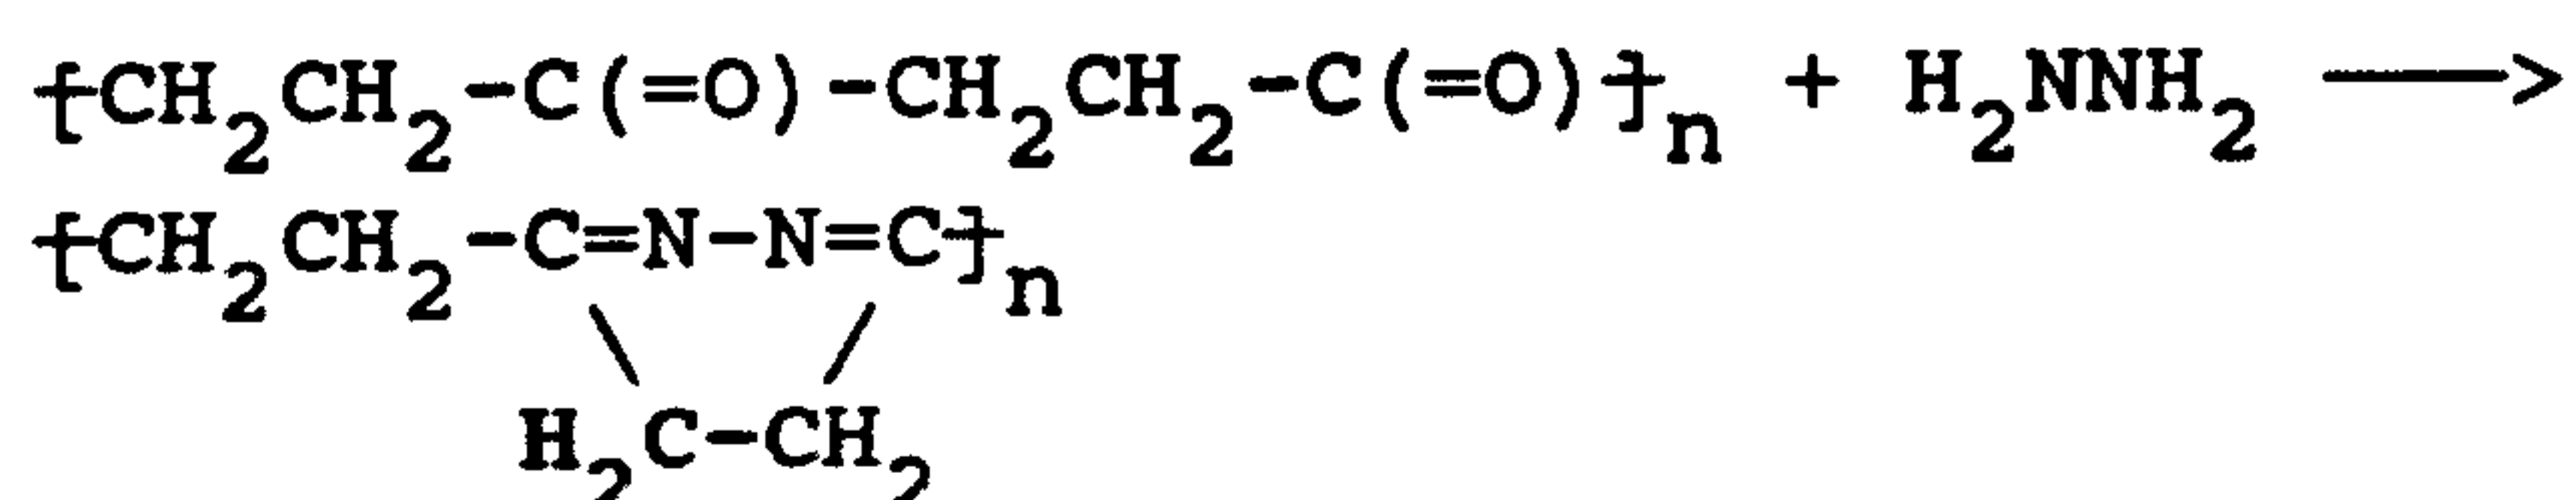

These products are curable by crosslinking agents reacting with the C=N bonds.

- 5 21. Polyalcohols which are obtainable by the reduction of polyketones, along the scheme below:

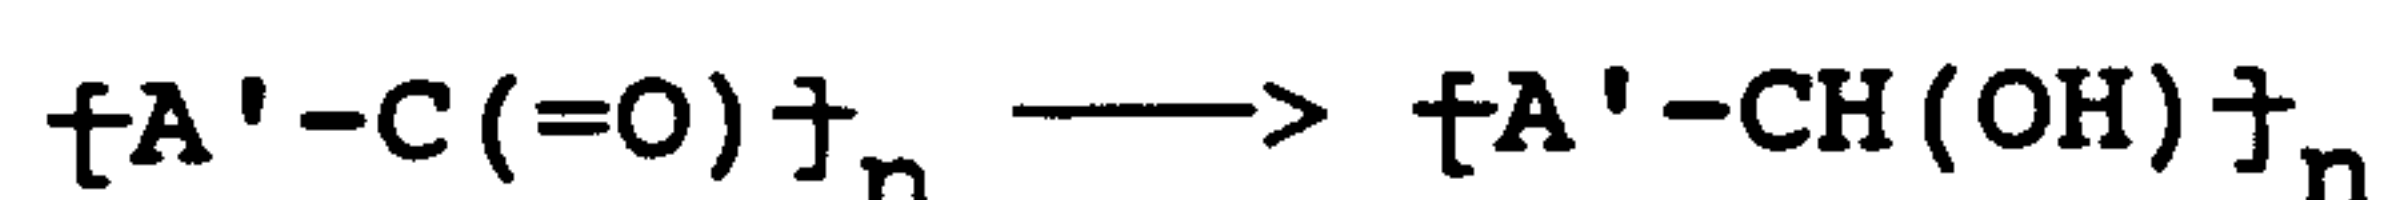

- The polyalcohols are obtainable by catalytic reduction of the polyketone with hydrogen gas, or by
10 reduction with sodium borohydride or lithium aluminium hydride in either hexafluoroisopropanol, tetrahydrofuran, or any other suitable solvent. In the event of obtaining the polyalcohols by reduction, the degree of reduction, i.e. the percentage of hydroxy groups formed
15 by reduction related to carbonyl groups originally present, is preferably from 4 to 100 %, more preferably from 20 to 100 %, most preferably from 50 to 100 %.

- Excellent resins have been obtained when the curable functional derivative of the copolymer is a
20 polyalcohol. it is preferred that the polyalcohol has a weight average molecular weight of from 450 to 3,500, especially from 1,000 to 2,000.

- A number of curing agents and reactions of polyalcohols derived from linear alternating polyketones is
25 illustrated non-limitatively below:

- 21/1. The well-known Ritter reaction, involving the reaction between an alcohol and a nitrile or hydrogen cyanide yielding an amide (hydrolysable to an amine), can be carried out with a multifunctional cyanide, thus
30 causing crosslinking between chains.

- 21/2. The hydroxyl groups may be replaced at least in part by halogen atoms, by reaction with a


hydrohalogenic acid or with thionyl chloride, and any remaining OH-groups can then be crosslinked.

21/3. Azide groups may be introduced by reaction with diphenylphosphoryl azide, according to the following reaction:



Herein ϕ stands for a phenyl group.


21/4. Cyano groups may be introduced by e.g. the following reaction:

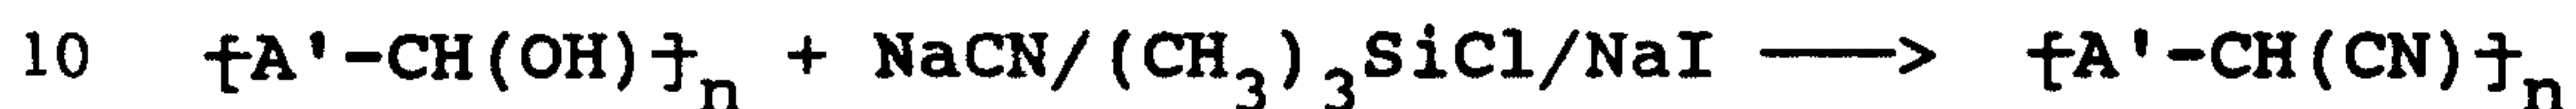

21/5. Hydroperoxides can be formed by reaction with hydrogen peroxide:




21/6. Phosphonate groups can be included in the polyalcohol by reaction with e.g. phosphorus oxychloride:

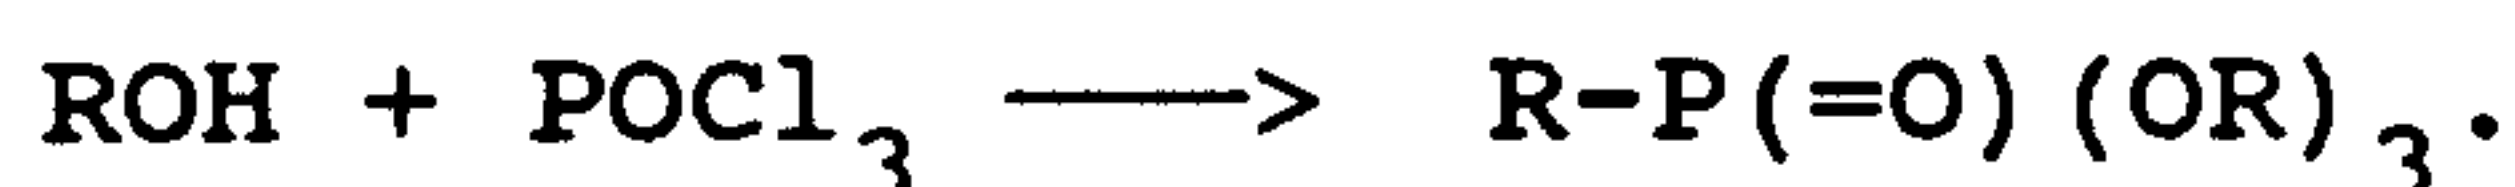


Herein ROH represents the polyalcohol $\text{fA}'\text{-CH(OH)}\text{f}_n$, so that the formula of the final product stands for a three-dimensional crosslinked network.

21/7. Tetrahydrofuran rings are obtainable by condensation of two adjacent hydroxyl groups, using e.g. a strong acid like H_3PO_4 :

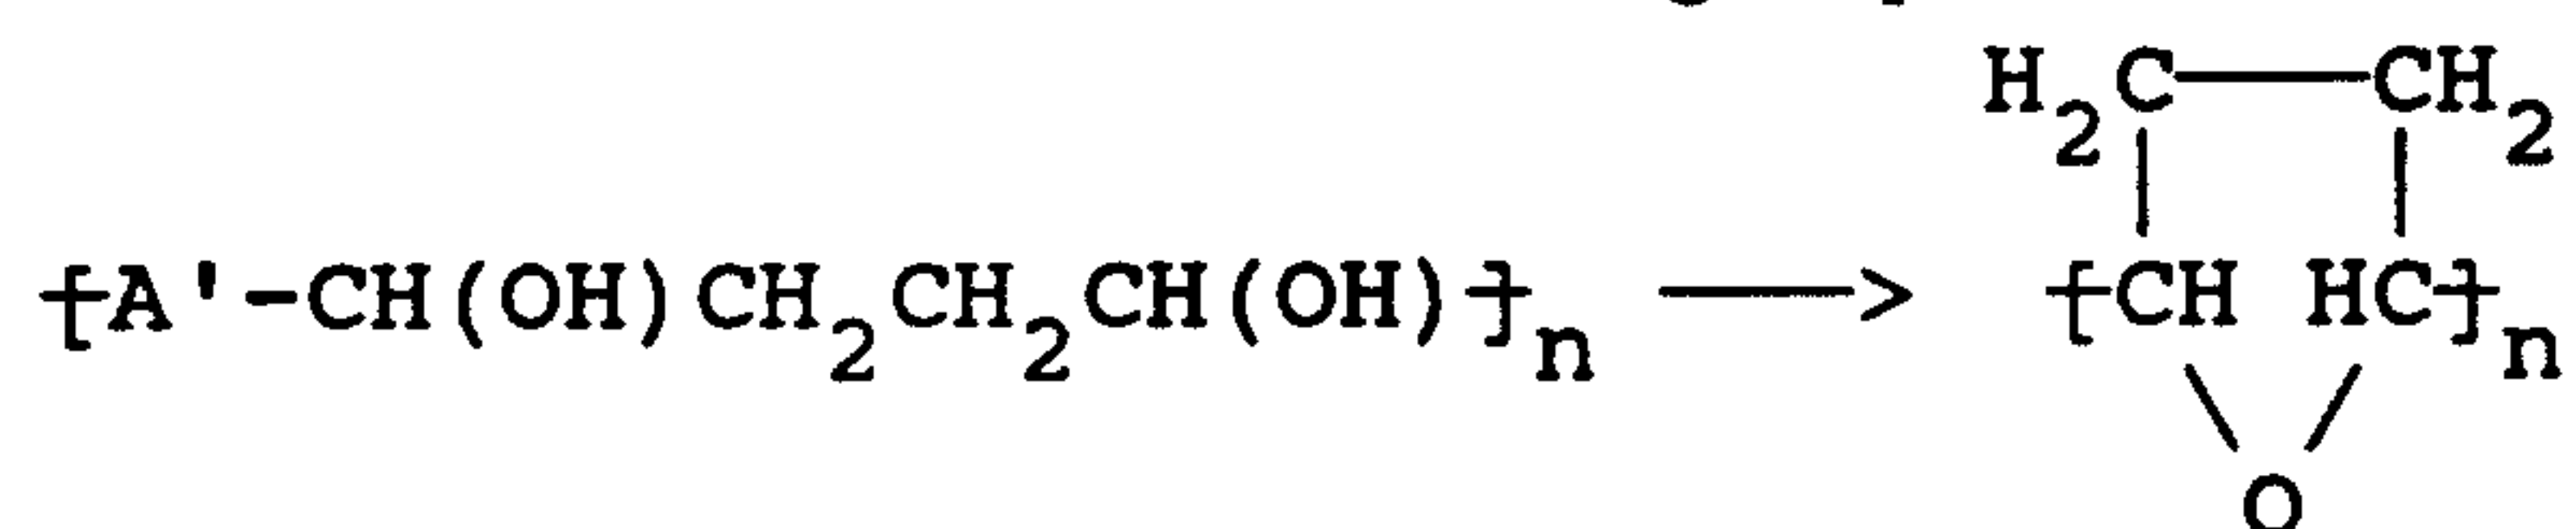


21/8. Ether linkages may be formed by dehydration of two alcohol groups in adjacent chains, using e.g. an alkyl halide in a phase transfer catalyst system. This reaction can be carried out too with epichlorohydrin.


21/9. The polymer chain may be locally dehydrated to yield unsaturated bonds, according to the reaction below:

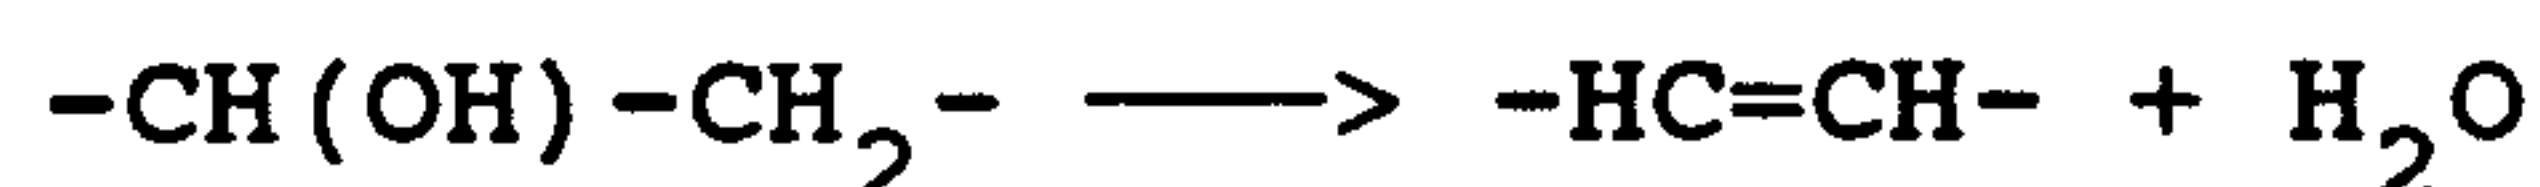

21/10. The polymers can be crosslinked by reacting them with epoxides:

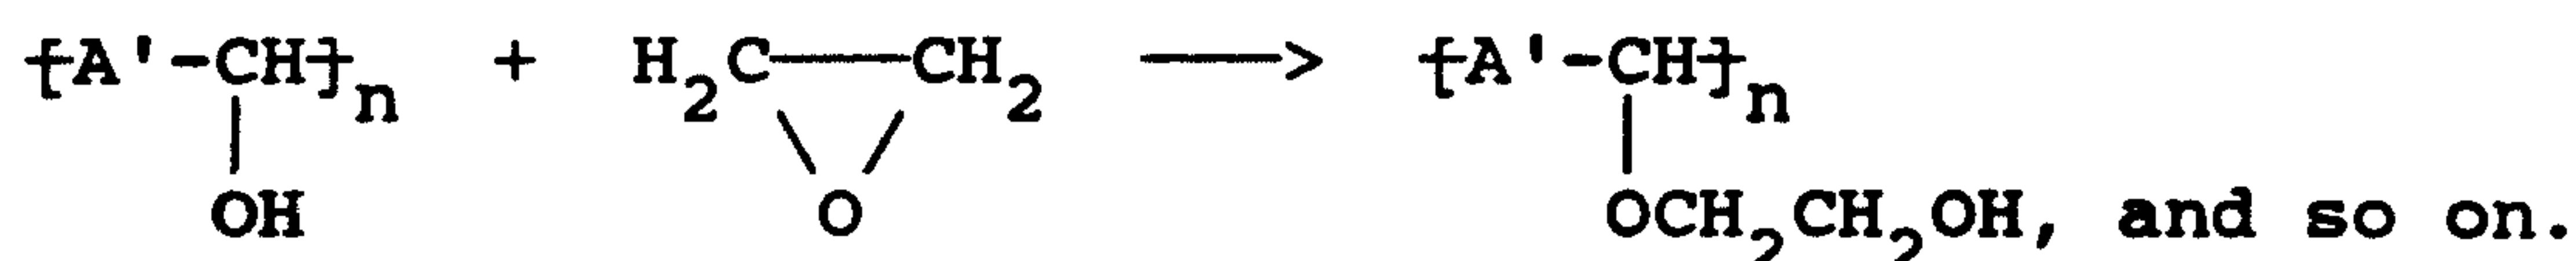


21/11. The polymers can be crosslinked by reacting them with (multifunctional) acids or anhydrides, forming ester linkages:

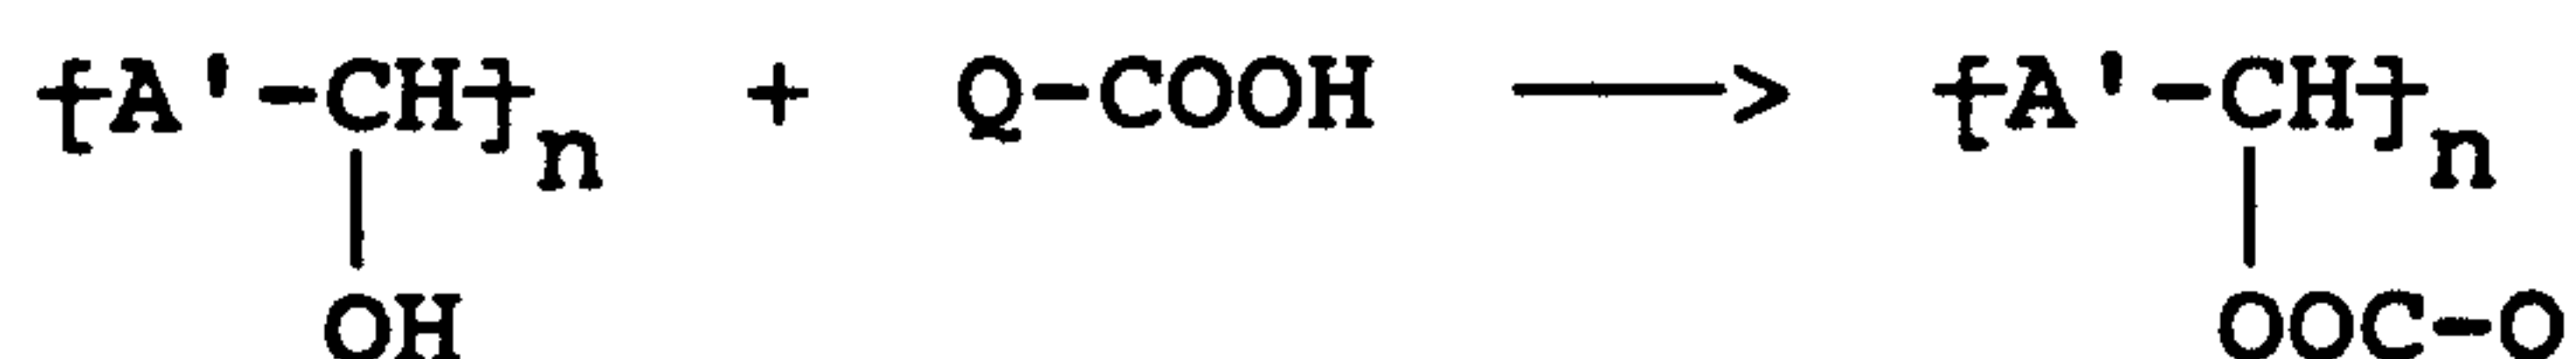


Herein the letter Q stands for a group containing at least one carboxyl group, which links in analogous way to hydroxyl groups of adjacent chains.

21/12. The melamine-formaldehyde type resins can crosslink the polymer chains according to the following scheme (a part of the hexakismethoxymethylmelamine (2,4,6-tris(bis(methoxymethyl)amino)-s-triazine) molecule is taken by way of example):

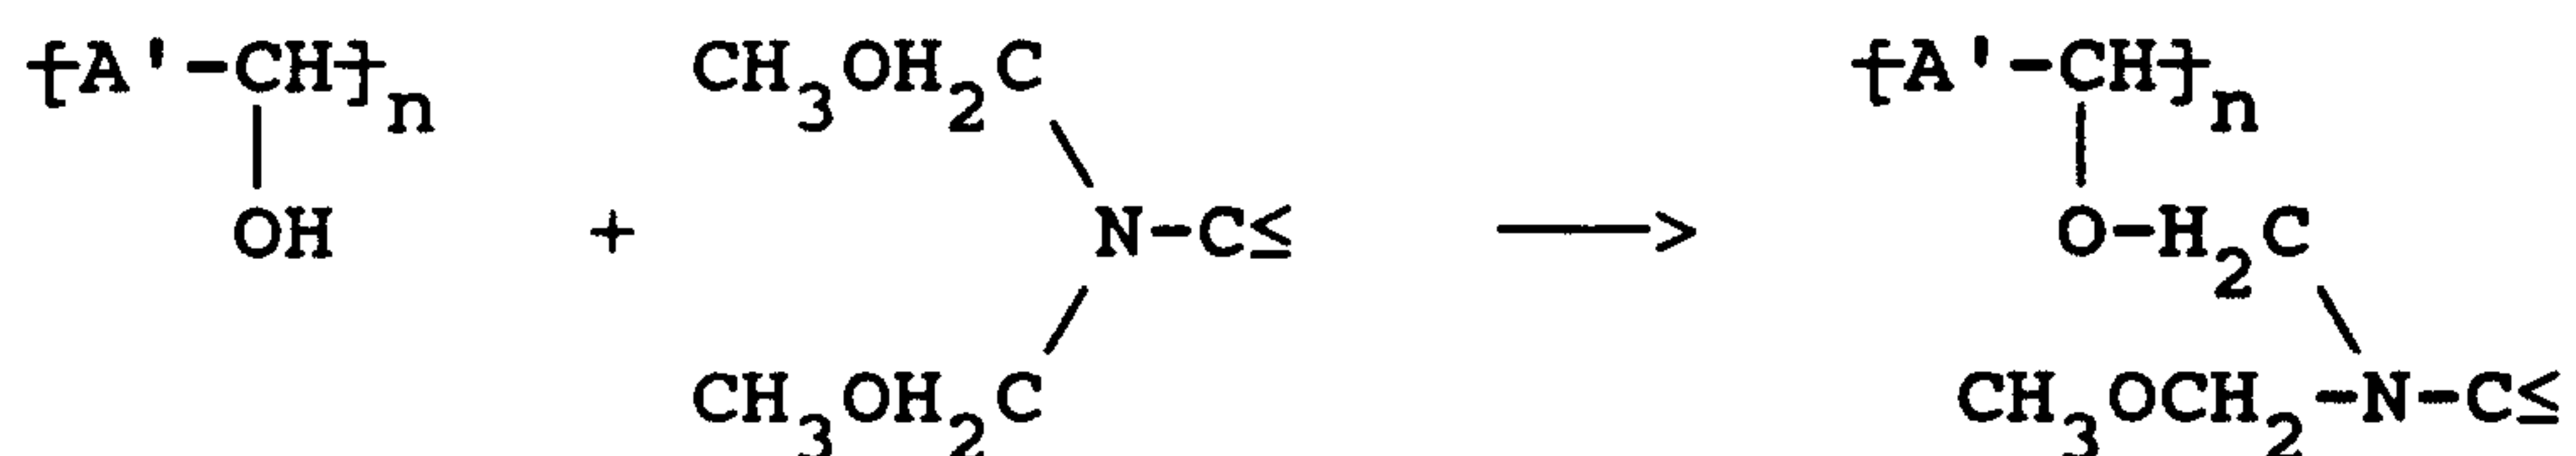

One of the five remaining methoxymethyl groups may then link to another hydroxyl group of the polymer.


21/13. The polyalcohol may be cured by reaction with an isocyanate, yielding a carbamate, which is then converted with isocyanic acid to an allophanate ester, according to the reactions below:

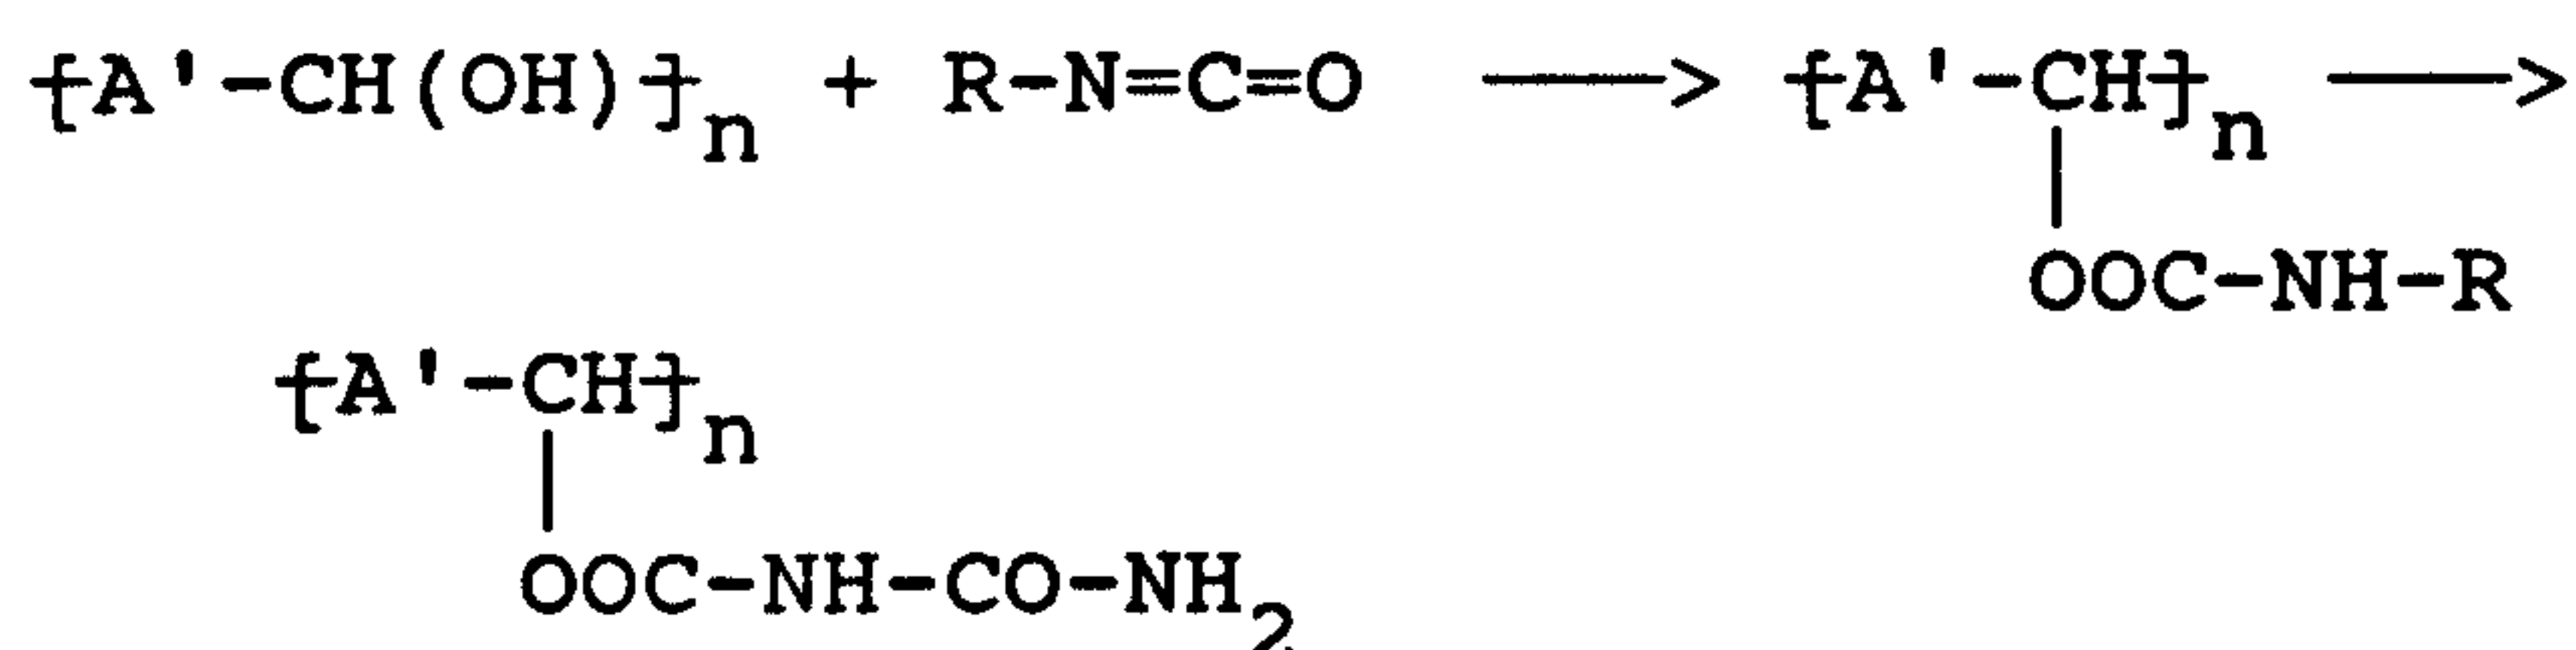

The allophanate enables to link to other chains.


21/14. The reaction with phosphorus trichloride causes crosslinking with other chains by the formation

of phosphonate ester bonds, via the unstable phosphite ester, as indicated below:

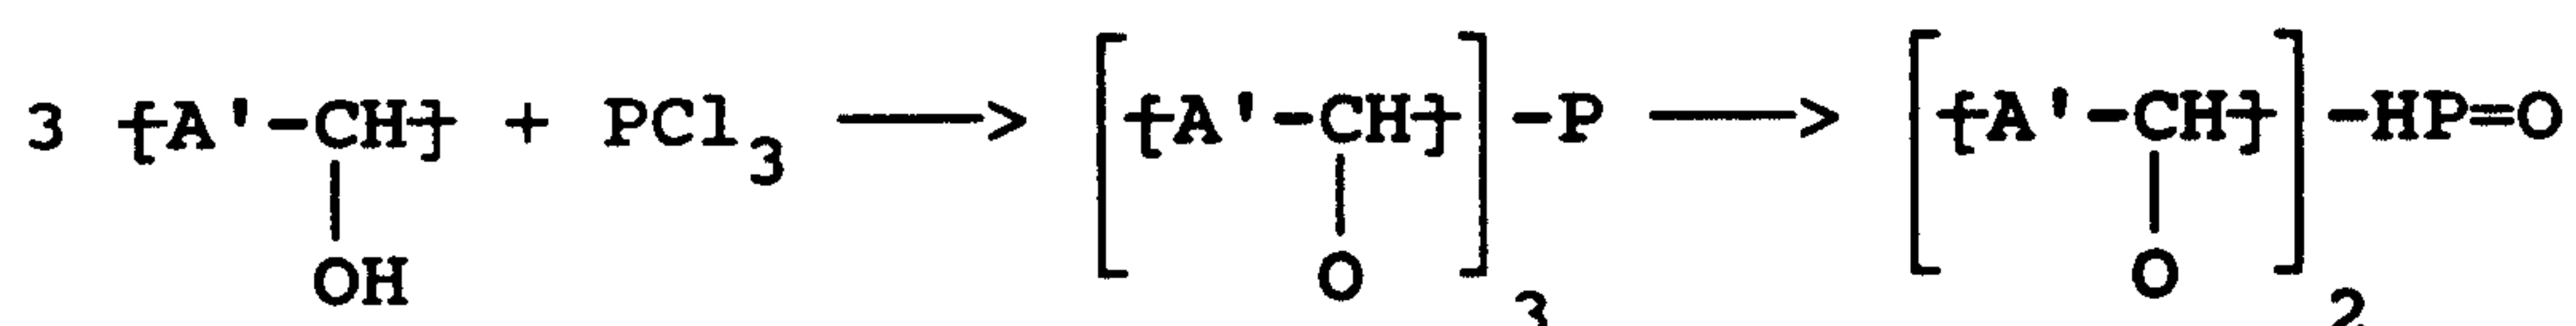

Other suitable but usually less preferred derivatives of polyketones are prepared by the following reactions:


22. Strecker synthesis:

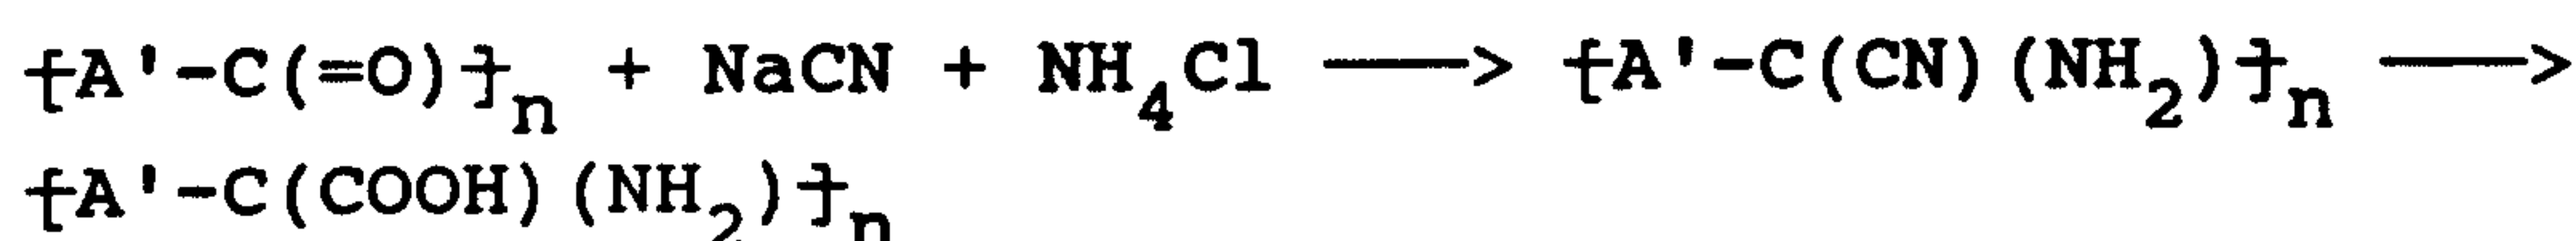

23. Baeyer-Villiger rearrangement:




24. Acylation by anhydrides, using BF_3 in the first step and aqueous sodium acetate in the second, as described in Organic Syntheses III, 16, 51, p 90, and in Org. Reactions 8, 59-196(1954), pp 98-106 (a copolymer of CO and ethene is used by way of example):

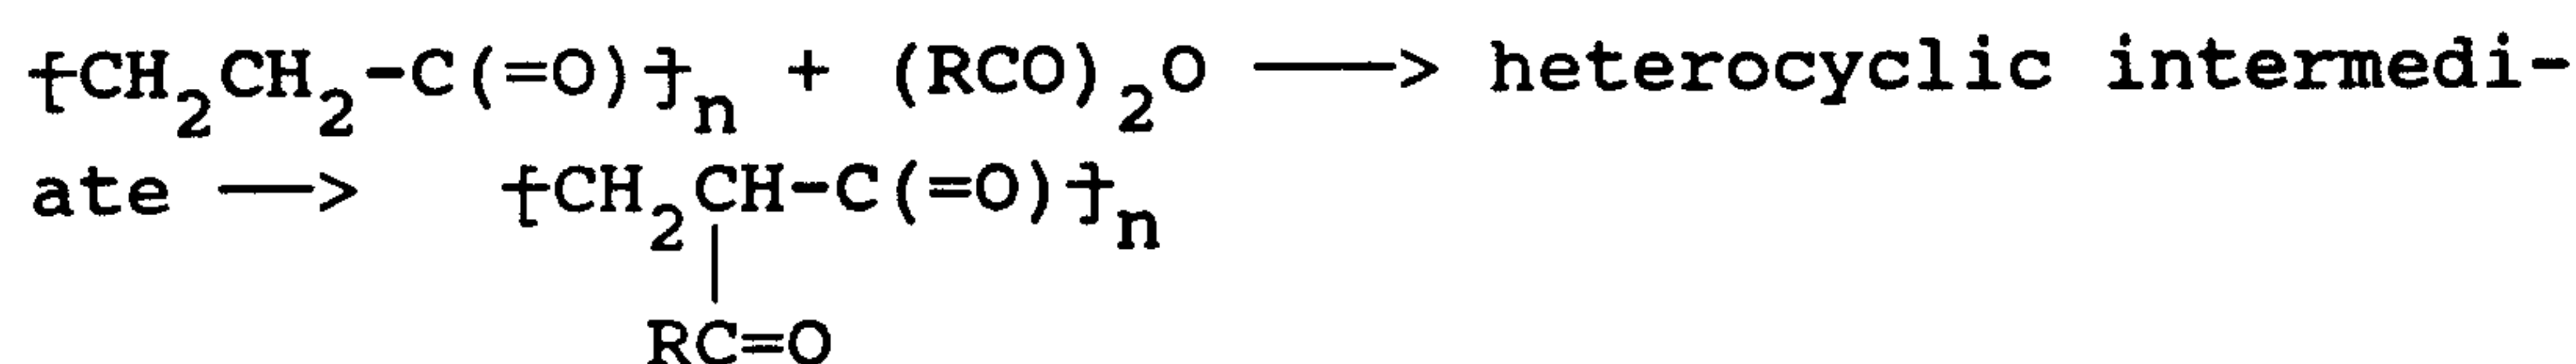


25. Sulphonation (a copolymer of CO and ethene is used by way of example):




26. Introduction of cyano groups adjacent to the carbonyl moiety, by reaction with lithium diisopropylamide in tetrahydrofuran in a first step and with p-toluenesulphonyl cyanide in a second, as described in Tetrahedron Letters, 22(1981)5011:

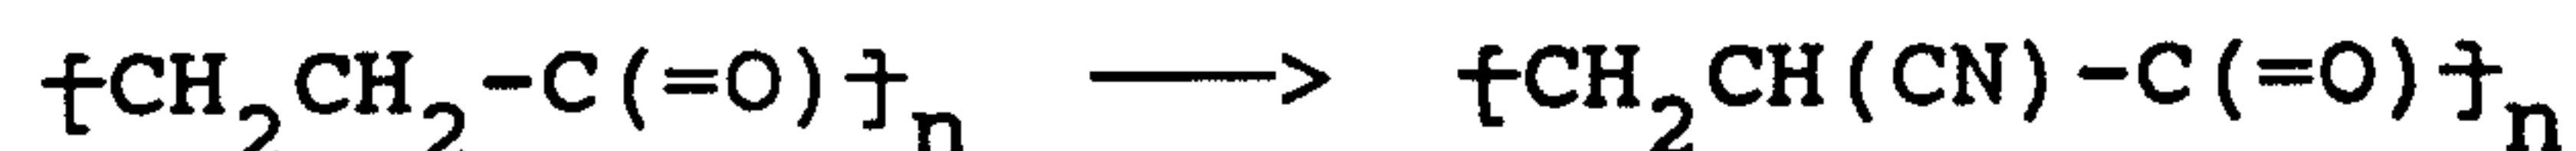



27. Dimethylation, using trimethylaluminium or dimethyltitanium chloride, thus at least partially converting the polyketone into a polyolefin:

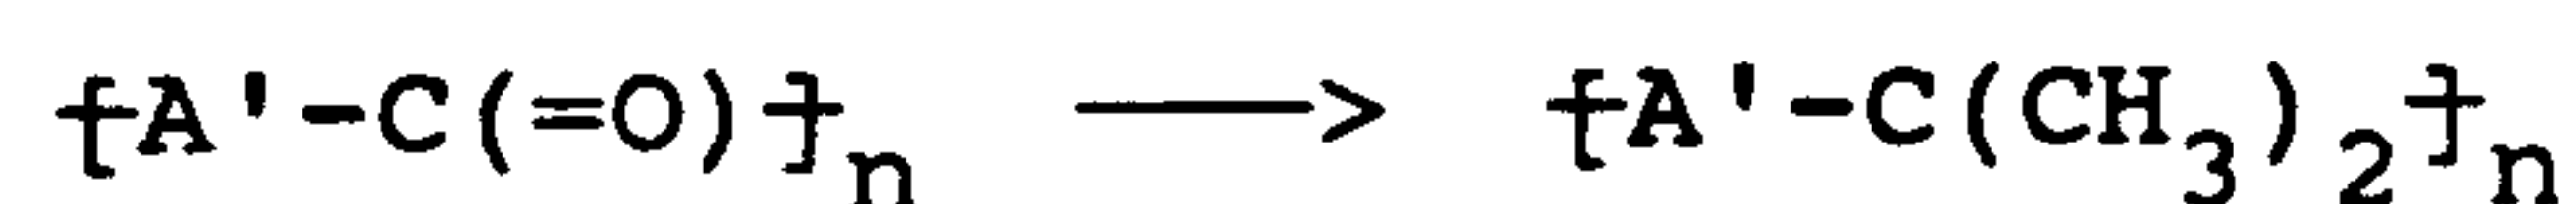


28. Dihalomethyl addition, by reaction of the carbonyl group with dihalomethanes at liquid nitrogen temperatures in the presence of lithium dicyclohexylamide, $\text{LiN}(\text{C}_6\text{H}_{11})_2$, followed by a hydrolysis with water, as described in J. Am. Chem. Soc., 96(1974)3010 and Bull. Chem. Soc. Japan 50(1977)1588:

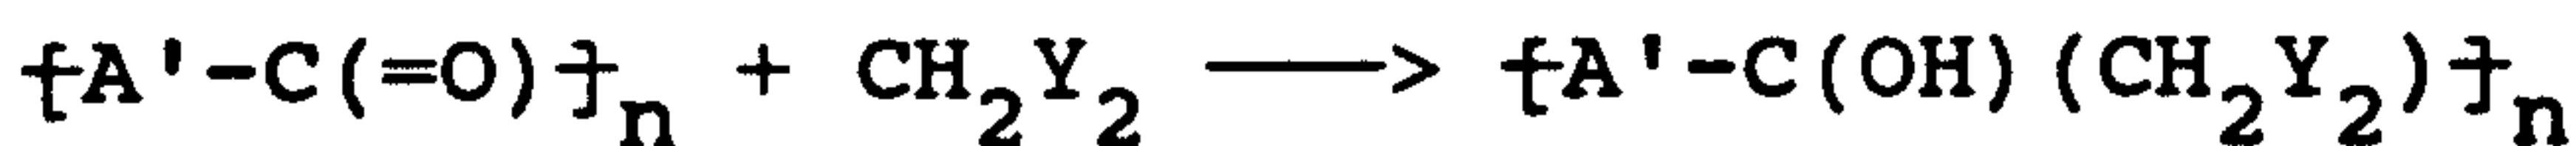

29. Preparation of α -hydroxyketones, by reaction with alkyllithium and carbon monoxide, followed by an acid hydrolysis, as described in J. Org. Chem. 48(1983)1144 and Tetrahedron Lett. 24(1983)4907:

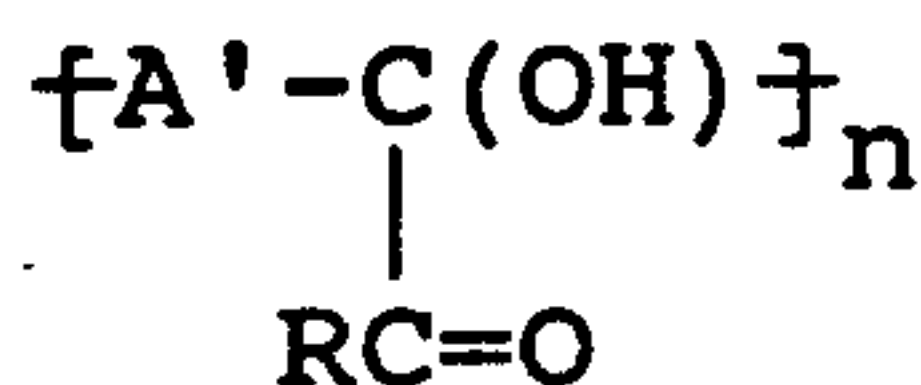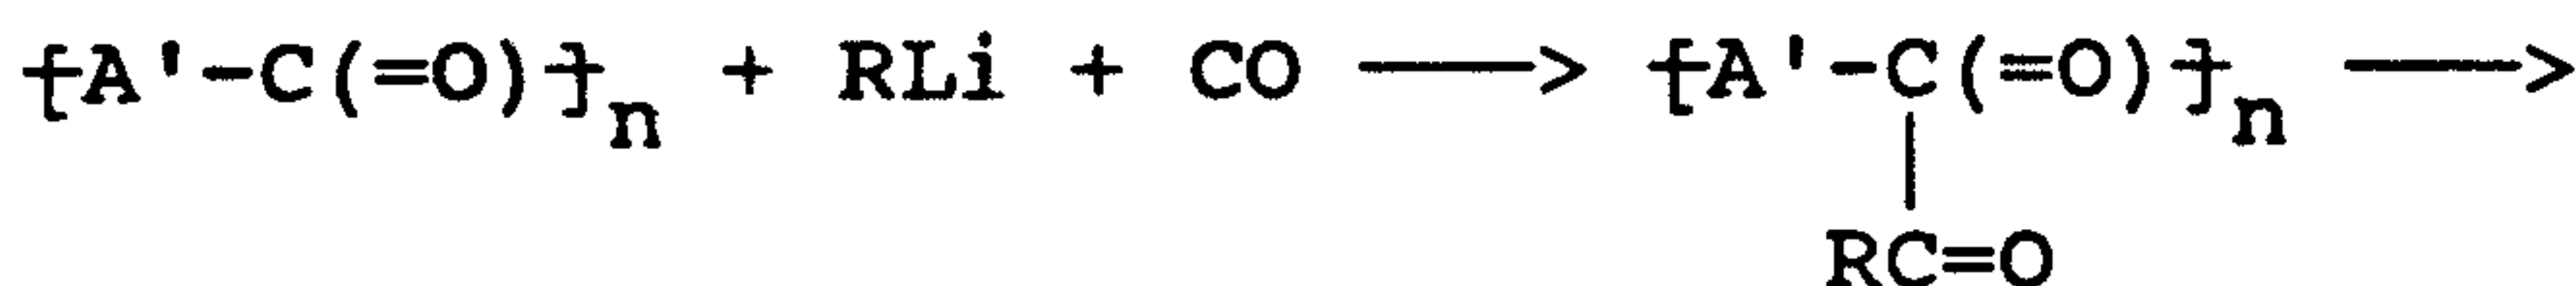

30. Reformatsky reaction:

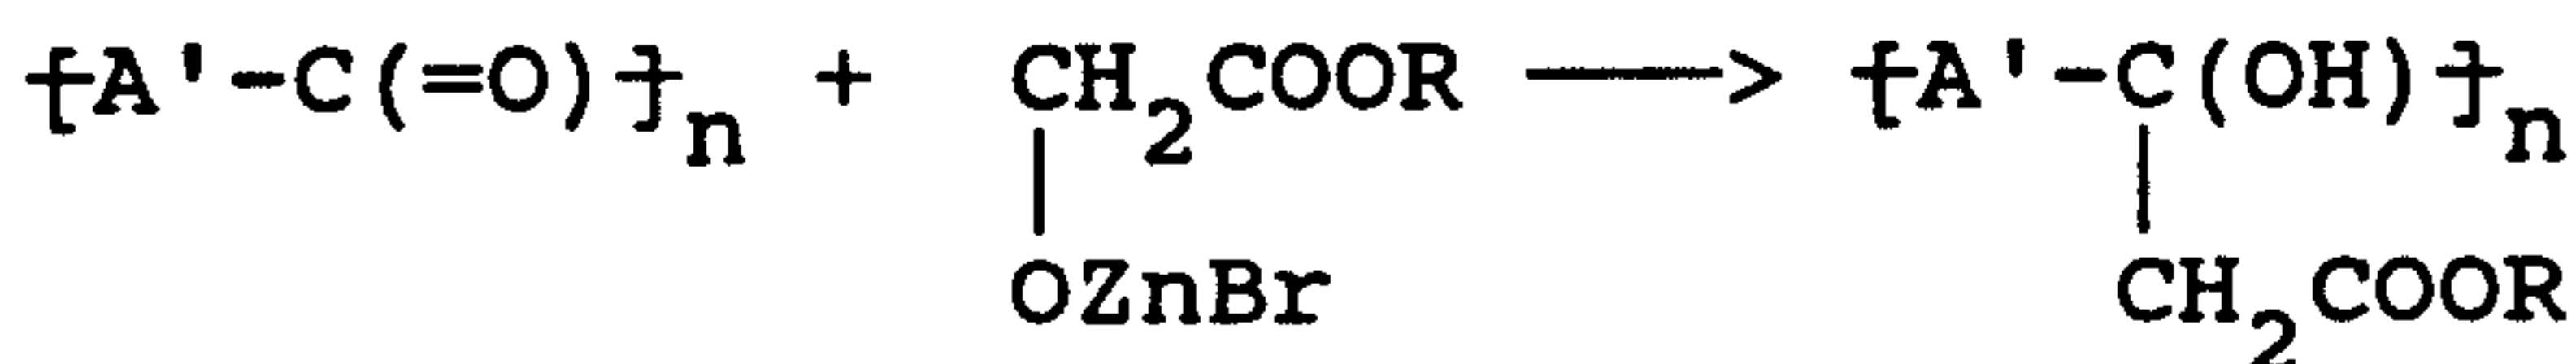

It will be appreciated that all these reactions need not, and sometimes even cannot, proceed completely, so that in some cases only part of the A' or CO groups present in the polyketone is derivatised. This implies that curing can take place on the carbonyl groups as well as on the groups derived thereof.

As indicated hereinbefore, the present invention also relates to a thermosetting composition comprising a curing agent and a thermoplastic polymer, characterised in that it comprises as the thermoplastic polymer a linear alternating copolymer of carbon monoxide and one or more olefinically unsaturated compounds, or a curable functional derivative thereof. Such compositions can be marketed as one-component systems, which are storage-stable for periods of several minutes up to several months or possibly years, depending on

temperature and on the choice of components, or as two-component systems.

Curing agents suitable for the preparation of the resins of the invention are compounds able to react with the (derivatized) carbonyl groups of different (modified) polyketone chains, thereby forming a highly crosslinked, three-dimensional network. Examples of such suitable compounds are di- and polyaldehydes, di- and polyamines, ammonia, ammonium salts, di- and polyacids, di- and
10 polyepoxides, di- and polyisocyanates, anhydrides, aminoplast resins, and adducts and precursors of these compounds.

In order to obtain an adequate cure, the amount of curing agent to be added to the polymer is from 0.1 to 10, preferably from 0.2 to 5, more preferably from 0.25 to 1.1 mole per mole of polymer. Expressed in weight percentages, the amount is in most cases more than 3% by weight, preferably from 7 to 120 %wt and in particular from 20 to 100 %wt, based on the weight of the thermoplastic polymer. The degree of
20 cure is also controlled by the curing temperature; i.e. with a curing temperature of 125°C or above, less agent is required to obtain sufficient cure, than with a curing temperature of 100°C. There is no upper limit to the amount of curing agent, though above a certain level it is no longer economical to use more, or even disadvantageous to the properties of the final product.


- 17a -

The invention relates in particular to such a thermosetting composition which comprises as the said thermoplastic polymer a linear alternating carbon monoxide/alkylene polymer having a weight average molecular weight of from 500 to 1,800 daltons, represented by the formula



wherein each A" independently is an alkyl group of 2 up to 8 carbon atoms, or an alkoxy group of 1 up to 8 carbon atoms, each A' independently is an alkylene group of 2 up to 8 carbon atoms, and n is such that the weight average molecular weight is as defined. Then the curing agent preferably is either a primary di- or polyphosphine, a primary di- or polyamine, an adduct or precursor of an aforementioned compound, a compound having in combination two or more of the aforementioned functional groups, ammonia or an ammonium salt. More preferably the curing agent is a primary di- or polyamine, such as ethylenediamine, hexamethylenediamine, diethylenetriamine, triethylenetetramine, tetraethylenepentamine, phenylenediamine, methylenedianiline, dimethylpropylenediamine, melamine, or the like. Also preferred are carbamate adducts or metal complexes thereof, e.g. blocked di- or polyamides such as hexamethylenediamine carbamate, or the amine complexes with e.g. lithium, sodium, or potassium chloride. A most preferred curing agent for linear, alternating polyketones is diethylenetriamine. The quantity of curing agent is suitably from 0.1 to 10 mole per mole of copolymer.


The result of direct curing with a polyamine is formation of Schiff's bases and/or 2,5-pyrrolediy1 heterocyclic groups incorporated into polyketones, according to the following scheme (a copolymer of CO and propene is used by way of example):

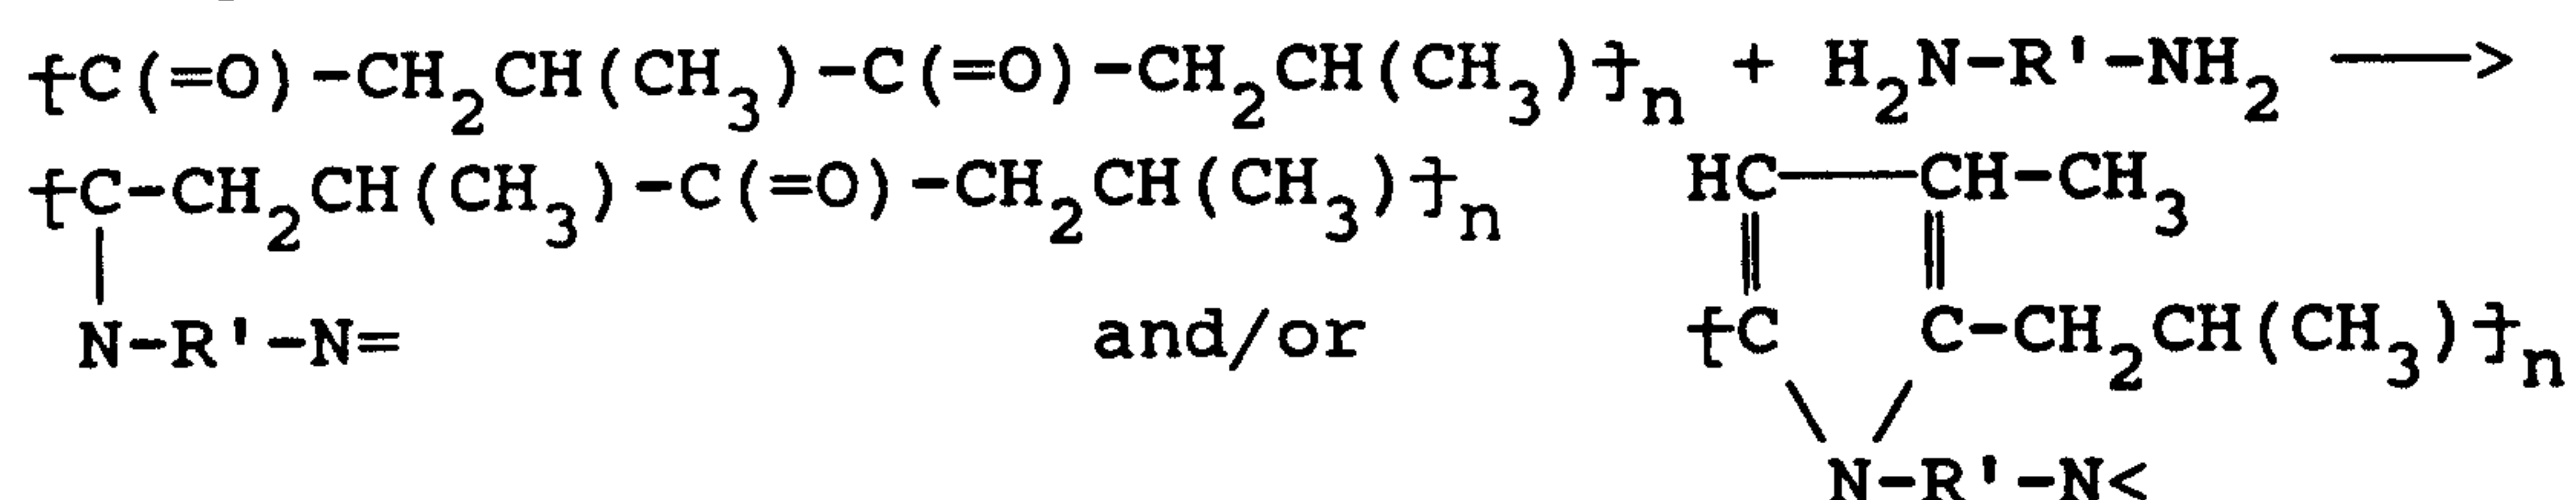

wherein R' has the meaning defined above, N= stands for a nitrogen atom built into a second Schiff's base, and

N< represents a nitrogen atom built into a second pyrrolic ring.

The result of direct crosslinking using base-induced condensation reactions is the following type of bridging (a copolymer of CO and ethene is used by way of example):

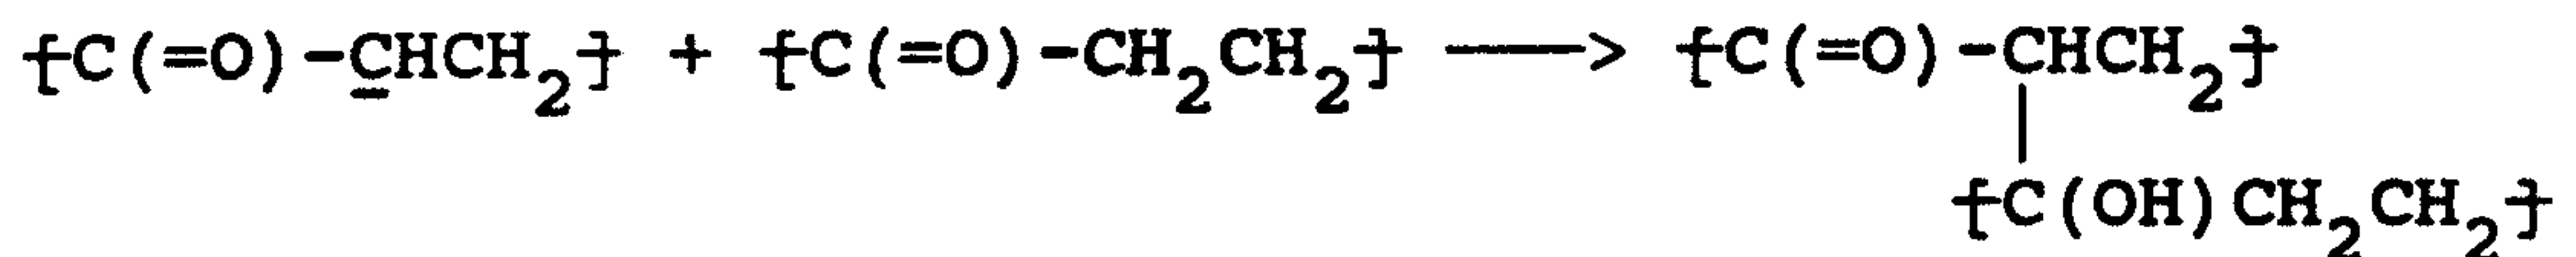

and so on.

When the polymer is one of the derivatives of a polyketone listed hereinbefore, the curing agent preferably is a di- or polyacid, a di- or polyamine, a di- or polyepoxide, a di- or polyisocyanate, an anhydride, an aminoplast resin, or an adduct or precursor of these compounds. It will be obvious to the skilled reader which agent to select for a particular derivative.

Another preferred thermosetting composition comprises as the said thermoplastic polymer a polyalcohol having at least two hydroxyl groups and a weight average molecular weight of from 200 to 10,000 daltons, which is obtainable by hydrogenation of a linear alternating copolymer having the repeating structure $\{A'-C(=O)\}_n$ in which A' is a unit derived from an ethylenically unsaturated compound A, and n is such that the weight average molecular weight is as defined. For such polyalcohol derivatives of polyketones, the amino-
plast resins, such as alkoxylated or aryloxylated reaction products of formaldehyde and melamine (2,4,6-triamino-s-triazine) or benzoguanamine (2,4-diamino-6-phenyl-s-triazine) are preferred. Other preferred curing agents for polyalcohols are the optionally alkylated melamine-formaldehyde resins, of which hexakis-methoxymethylmelamine (HMMM) is particularly efficient. A quantity of more than 3 %wt of a curing agent based on the weight of the polyalcohol constituent in the

resin composition, in particular of from 7 to 120 %wt of a melamine-formaldehyde resin, and especially of from 20 to 100 %wt of hexakismethoxymethylmelamine as the curing agent has been found to be very effective.

5 The thermosetting resin composition may also comprise co-reactants that can be built-in to modify the properties of the thermoset final product. Suitable co-reactants are di- or polyalcohols such as ethylene, propylene, and trimethylene glycol, cyclopentanediol, glycidol, gluticol, ribitol, erythrol, threol, and
10 pentaerythritol.

 The resin compositions can be cast, moulded, extruded, pultruded, laminated, and they may serve as binder compositions in paints, lacquers, stoving enam-
15 els or the like. Moreover, to the resin compositions stabilisers, plasticisers, lubricants, colouring and enforcing agents, or fibres can be added without diverging from the gist of the invention.

 Accordingly, the invention also relates to a
20 process for coating or bonding an article by applying a quantity of thermosetting resin thereto, characterised in that a thermosetting composition as defined hereinbefore is applied, as well as to an article of manufacture, characterised in that it consists at least in
25 part of a thermoset resin according to the invention.

 The invention is now illustrated by the following Examples.

Experiment A - Preparation polyketone

 A linear alternating carbon monoxide/propene
30 copolymer was prepared as follows. A mechanical stirred autoclave with a volume of 1000 ml was charged with 250 ml methanol, 106 mg Cu(II)tosylate, 120 mg 1,3-bis(di-phenylphosphino) propane, and 54 mg Pd(II)acetate. The autoclave was closed, flushed and pressurised with
35 carbon monoxide to a pressure of 60 bar, after which

100 g of (liquid) propene was added to the contents of the autoclave. The pressure was then brought to 40 bar by expanding carbon monoxide. Thereafter the contents of the autoclave were stirred, and brought to and maintained for 20 hours at 80 °C, during which time the pressure is 60 bar by continuous admittance of carbon monoxide. The autoclave was then cooled, excess of carbon monoxide and propene were bled off and the autoclave was opened. There was a 69 % yield (115 g) of oligomer having a average molecular weight (GPC) of 1100. After reaction the oligomer mixture was stabilised with 2,6-di-^tbutyl-4-methylphenol and kept under nitrogen. It appeared from analysis that the mixture contained approximately 10 %wt of components containing only one carbonyl group per molecule. These have been removed by vacuum distillation (85 °C, 0.1 mm Hg). Infrared and NMR spectroscopy confirmed the general formula $C_3H_7[C(=O)C_3H_6]_n C(=O)OCH_3$, n having a value of approximately 13. The oligomer was a viscous liquid.

20 Experiment B - Preparation polyalcohol

A polyalcohol was prepared by adding a solution of 2 g of the polyketone prepared in Experiment A in 25 ml THF drop-wise to a stirred suspension of 1 g $LiAlH_4$ or $NaBH_4$ in 10 ml THF. After addition, the mixture was refluxed for 18 hours. Water was added, and the mixture was filtered. Chloroform was then added and the organic layer separated, extracted with water, dried over $MgSO_4$, and filtered. The product was obtained by evaporation of the solvents. The polyalcohol mixture was a viscous ochre coloured liquid.

30 Experiment C - Preparation thermally cured polyketone

A black and brittle coating was prepared by depositing a thin film (essentially 0.050 mm) of the polyketone prepared in Experiment A on a phosphated steel strip, and placing the strip in a temperature oven set

at 160 °C for 40 min. After cooling the degree of cure was qualitatively assessed by subsequently rubbing with a wad soaked in methylethyl ketone (MEK) and scratching with a pencil or knife (Pencil hardness, as defined in
5 ASTM D3363-74). The crosslinked oligomer withstood less than 10 MEK rubs, and performed poor in the scratch test.

Example 1

10 A hard, tough and light brown coating was prepared by depositing a thin film of the polyalcohol prepared in Experiment C on a phosphated steel strip, and placing the strip in a temperature oven set at 190°C for 90 min. After cooling the cure was quantitatively assessed by subsequent rubbing with a wad soaked in methylethyl
15 ketone (MEK) and scratching with a pencil or knife (Pencil hardness, as defined in ASTM D3363-74). It appeared that the sole polyalcohol crosslinked in air to form a coating resisting more than 100 MEK rubs.

Example 2

20 A hard, tough and clear coating was prepared according to the directions set out in Example 1 using 25 %wt of HMMM based on the weight of the polyalcohol and a drop of concentrated HCl. By heating at 140 °C for 60 min in a nitrogen atmosphere a 0.025 mm thick
25 film was obtained that withstood more than 100 MEK rubs and performed well in the pencil hardness test (i.e., no visible scratch with H4 pencil).

Example 3

30 Hard, tough and clear coatings were prepared according to the directions set out in Example 1 using different amounts of HMMM per mole polyalcohol, optionally a drop of surfactant to eliminate strain induced by temperature differences, and curing the resin composition for 60 min in a nitrogen atmosphere at temperatures ranging from 75 to 150 °C. Example 3/0 is
35

presented as a comparison. The 0.025 mm thick films of Examples 3/1, 3/2, 3/3 and 3/4 performed well in the pencil hardness test. The MEK resistance results are summarised in the Table below. From the table it is
 5 concluded that to obtain a attractive coating while curing under nitrogen without acid catalyst, a minimal amount of 7 %wt of HMMM based on the total of HMMM and polyalcohol (PA) is advisable. While curing under an oxygen containing atmosphere, and moreover, while using
 10 a catalyst, the minimal amount of HMMM needed to obtain an adequate coating is 3%wt.

TABLE

Example	HMMM %wt	MEK-rubs at			
		75°C	100°C	125°C	150°C
3/0	3	< 5	< 5	< 5	7
3/1	12	< 5	5	10	100
3/2	25	5	12	100	> 100
3/3	50	5	16	> 100	» 100
3/4	100	5	25	» 100	» 100

Example 4

A hard, tough and ochre coating was prepared according to the directions set out in Example 1, using
 15 1.1 mole of diethylenetriamine per mole oligomer as curing agent. At approximately 200 °C for 90 min. in a nitrogen atmosphere, a 0.100 mm thick film was obtained that withstood more than 100 MEK rubs and performed well in the scratch test (i.e., no visible scratch with
 20 H4 pencil).

Example 5

A hard, tough and black coating was prepared according to the directions set out in Example 1, using
 25 0.25 mole of diethylenetriamine per mole oligomer as curing agent. At approximately 190 °C for 90 min. in

air, a 0.050 mm thick film was obtained that withstood more than 100 MEK rubs and performed well in the scratch test (H4).

5 From these results it is clear that primary amines as curing agents lead to hard tough coatings with a good MEK-resistance and, used in a nitrogen atmosphere, no discoloration.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. Thermoset resin obtained by curing a thermoplastic polymer, characterized in that the resin is obtained by reacting a curing agent with a linear alternating copolymer of carbon monoxide and one or more olefinically unsaturated compounds, or with a curable functional derivative thereof, and in that the weight average molecular weight of the thermoplastic polymer from which the resin is obtained is in the range of 200 to 20,000 daltons.
2. A thermoset resin as claimed in claim 1, characterized in that the weight average molecular weight of the thermoplastic polymer from which the resin is obtained is in the range of 200 to 10,000 daltons.
3. A thermoset resin as claimed in claim 1 or 2, characterized in that the one or more olefinically unsaturated compounds, being monomers of the thermoplastic polymer from which the resin is obtained, are selected from alkenes, cycloalkenes, arylalkenes, alkadienes and oxycarbonylalkenes, having from 2 to 12 carbon atoms.
4. A thermoset resin as claimed in claim 3, characterized in that the one or more olefinically unsaturated compounds, being monomers of the thermoplastic polymer from

which the resin is obtained, comprise at least ethene.

5. A thermoset resin as claimed in any one of claims 1 to 4, characterized in that the thermoplastic polymer from which the resin is obtained, is a linear alternating copolymer of carbon monoxide and one or more olefinically unsaturated compounds.

6. A thermoset resin as claimed in claim 5, characterized in that the thermoplastic polymer from which the resin is obtained, is a linear alternating carbon monoxide/alkylene oligomer having a weight average molecular weight of from 500 to 1,800, represented by the formula



wherein each A'' independently is an alkyl group of 2 up to 8 carbon atoms, or an alkoxy group of 1 up to 8 carbon atoms, each A' independently is an alkylene group of 2 up to 8 carbon atoms, and n is such that the weight average molecular weight is as defined.

7. A thermoset resin as claimed in any one of claims 1 to 4, characterized in that the thermoplastic polymer from which the resin is obtained, is a curable functional derivative of a linear alternating copolymer of carbon monoxide and one or more olefinically unsaturated compounds,

comprising any derivative of a ketone carbonyl group which contains a function capable of reacting with a curing agent.

8. A thermoset resin as claimed in claim 7, characterized in that the curable functional derivative of the copolymer is selected from the group comprising polybisphenols, acrylonitrile derivatives, polyaminoacids, Mannich addition products, polythiols, dithiocyclic group substituted polyketones, hemimercaptals, polyamides, polyamines, furan derivatives, polycyanohydrins, polyoxims, polyphosphonates, polyvinylketones, polyhydroxymethylketones, polyaminoalcohols, polyketone ketals and hemiketals, polyepoxide derivatives, polyhydroxysulphonate adducts, polyhydroxyphosphonate adducts, polydihalo derivatives, polyhaloketone derivatives, polyhydrazone derivatives and polyalcohols.

9. A thermoset resin as claimed in claim 8, characterized in that the curable functional derivative of the copolymer is a polyalcohol.

10. A thermoset resin as claimed in claim 9, characterized in that the polyalcohol has a weight average molecular weight of from 450 to 3,500.

11. Thermosetting composition comprising a curing agent and a thermoplastic polymer, characterized in that it

comprises as the thermoplastic polymer a linear alternating copolymer of carbon monoxide and one or more olefinically unsaturated compounds, or a curable functional derivative thereof, the weight average molecular weight of the linear alternating copolymer or the curable derivative thereof being in the range of 200 to 20,000 daltons.

12. Thermosetting composition as claimed in claim 11, characterized in that the weight average molecular weight of the linear alternating copolymer or the curable derivative is in the range of 200 to 10,000 daltons.

13. A thermosetting composition as claimed in claim 11 or 12, characterized in that it comprises a curing agent selected from di- and polyaldehydes, di- and polyamines, ammonia, ammonium salts, di- and polyacids, di- and polyepoxides, di- and polyisocyanates, anhydrides, aminoplast resins, and adducts and precursors of these compounds.

14. A thermosetting composition as claimed in any one of claims 11 to 13, characterized in that it comprises more than 3 %wt of curing agent based on the weight of the thermoplastic polymer.

15. A thermosetting composition as claimed in claim 14, characterized in that it comprises from 7 to 120 %wt of curing agent.

16. A thermosetting composition as claimed in any one of claims 11 to 15, characterized in that it comprises as the said thermoplastic polymer a linear alternating carbon monoxide/alkylene polymer having a weight average molecular weight of from 500 to 1,800, represented by the formula



wherein each A'' independently is an alkyl group of 2 up to 8 carbon atoms, or an alkoxy group of 1 up to 8 carbon atoms, each A' independently is an alkylene group of 2 up to 8 carbon atoms, and n is such that the weight average molecular weight is as defined.

17. A thermosetting composition as claimed in claim 16, characterized in that it comprises as the curing agent from 0.1 to 10 mol per mol polymer of a primary di- or polyphosphine, a primary di- or polyamine, an adduct or precursor of an aforementioned compound, a compound having in combination any of the aforementioned functional groups, ammonia, or an ammonium salt.

18. A thermosetting composition as claimed in claim 17, characterized in that the curing agent is a primary di- or polyamine, or a carbamate adduct or metal complex thereof.

19. A thermosetting composition as claimed in claim 18,

characterized in that the curing agent is diethylenetriamine.

20. A thermosetting composition as claimed in any one of claims 11 to 15, characterized in that it comprises as the said thermoplastic polymer a polyalcohol having at least two hydroxyl groups and a weight average molecular weight of from 200 to 10,000, which is obtained by hydrogenation of a linear alternating copolymer having the repeating structure



in which A' is a unit derived from an ethylenically unsaturated compound.

21. Process for coating or bonding an article by applying a quantity of thermosetting resin thereto, characterized in that a thermosetting composition as claimed in any one of claims 11 to 20 is applied.

22. Article of manufacture, characterized in that it consists at least in part of a thermoset resin as claimed in any one of claims 1 to 10.

SMART & BIGGAR
OTTAWA, CANADA

PATENT AGENTS