



US007942310B2

(12) **United States Patent**
Dominski et al.

(10) **Patent No.:** **US 7,942,310 B2**
(45) **Date of Patent:** **May 17, 2011**

(54) **CONTAINER**

(75) Inventors: **Dan Dominski**, Highland Village, TX
(US); **Brad Moore**, Haltom City, TX
(US)

(73) Assignee: **Mary Kay Inc.**, Dallas, TX (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 584 days.

(21) Appl. No.: **11/777,616**

(22) Filed: **Jul. 13, 2007**

(65) **Prior Publication Data**

US 2008/0135560 A1 Jun. 12, 2008

Related U.S. Application Data

(60) Provisional application No. 60/862,853, filed on Oct.
25, 2006.

(51) **Int. Cl.**

B65D 25/04 (2006.01)

B65D 25/00 (2006.01)

B65D 1/24 (2006.01)

B65D 1/36 (2006.01)

B65D 57/00 (2006.01)

B65D 85/00 (2006.01)

(52) **U.S. Cl.** **229/120.17**; 220/507; 220/62

(58) **Field of Classification Search** 229/120.17,
229/120.03, 185, 120.16; 220/507, 62, 533,
220/552; 206/182–191

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

557,371 A * 3/1896 Ferguson 229/120.04
1,854,955 A * 4/1932 Reaume et al. 206/162

2,089,067	A *	8/1937	Myers		229/120.08
2,524,516	A *	10/1950	Cody		229/120.17
2,586,886	A *	2/1952	Tyrseck		229/120.17
2,662,682	A *	12/1953	Bolding		229/120.13
2,665,026	A	1/1954	Katzman		217/22
2,693,308	A *	11/1954	Gircux et al.		229/120.03
2,693,309	A *	11/1954	Giroux et al.		229/120.04
2,830,697	A *	4/1958	Eaton		206/45.29
3,118,589	A	1/1964	Hughes		229/120.17
3,145,902	A *	8/1964	Nolen		229/120.03
3,184,143	A	5/1965	Kotowick		229/120.17
3,326,444	A	6/1967	Farquhar		229/120.18
3,363,824	A	1/1968	Murata		206/511
3,825,174	A	7/1974	Booth, Jr.		229/120.17
3,952,941	A *	4/1976	Zimmerman		229/117
3,985,288	A	10/1976	Bell		229/115
4,067,492	A	1/1978	Gargan		229/120.25
4,148,427	A	4/1979	Baker		206/423
4,172,550	A	10/1979	Garmon		229/120.17
D253,520	S	11/1979	Dempster		D9/433
4,211,359	A	7/1980	Chaffin		229/120.17
4,294,397	A	10/1981	Kohler		229/120.08
D262,357	S	12/1981	Kohler		D9/433
4,320,867	A	3/1982	Gardner		229/120.26
4,342,417	A	8/1982	Forbes, Jr.		229/120.08
4,347,967	A	9/1982	Loudermilk, Jr.		229/120.17
4,376,508	A	3/1983	Gardner et al.		229/120.17
4,489,878	A	12/1984	Mode		229/117
4,574,996	A	3/1986	Brian		229/120.17

(Continued)

Primary Examiner — Nathan J Newhouse


Assistant Examiner — Latrice Byrd

(74) *Attorney, Agent, or Firm* — Fulbright & Jaworski L.L.P.

(57) **ABSTRACT**

A container that can be constructed from a blank is disclosed. The container can include four side walls and can be divided into multiple cells. The size or shape of the cell(s) can be substantially similar or can be varied. For instance, the cell(s) can be varied to correspond to the size or shape of a particular article of manufacture.

27 Claims, 21 Drawing Sheets

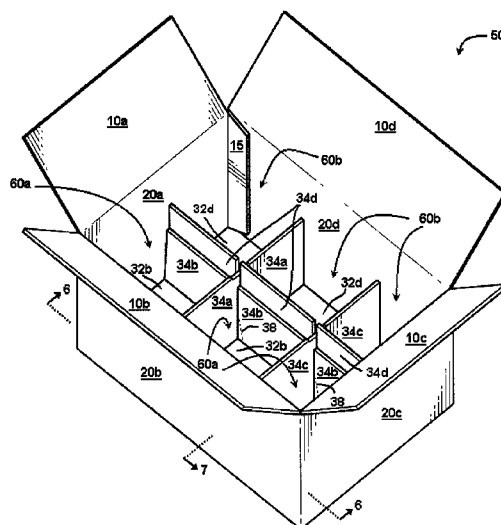

US 7,942,310 B2

Page 2

U.S. PATENT DOCUMENTS

4,671,450 A *	6/1987	Lopez	229/120.17	6,516,951 B2	2/2003	Sears et al.	206/541
4,944,405 A	7/1990	Buford et al.	229/240	6,840,437 B2	1/2005	Chen	229/120.17
D329,375 S	9/1992	Bergman	D9/759	7,004,314 B2	2/2006	Pucillo et al.	206/217
5,579,990 A *	12/1996	Durand	229/120.17	7,172,109 B2 *	2/2007	Kuenstler et al.	229/120.13
5,938,109 A	8/1999	Sainz et al.	229/120.21	2005/0067475 A1	3/2005	Duyst	229/120.17
6,012,630 A	1/2000	Block	229/120.17	2006/0022023 A1	2/2006	Kuenstler et al.	229/120.13

* cited by examiner

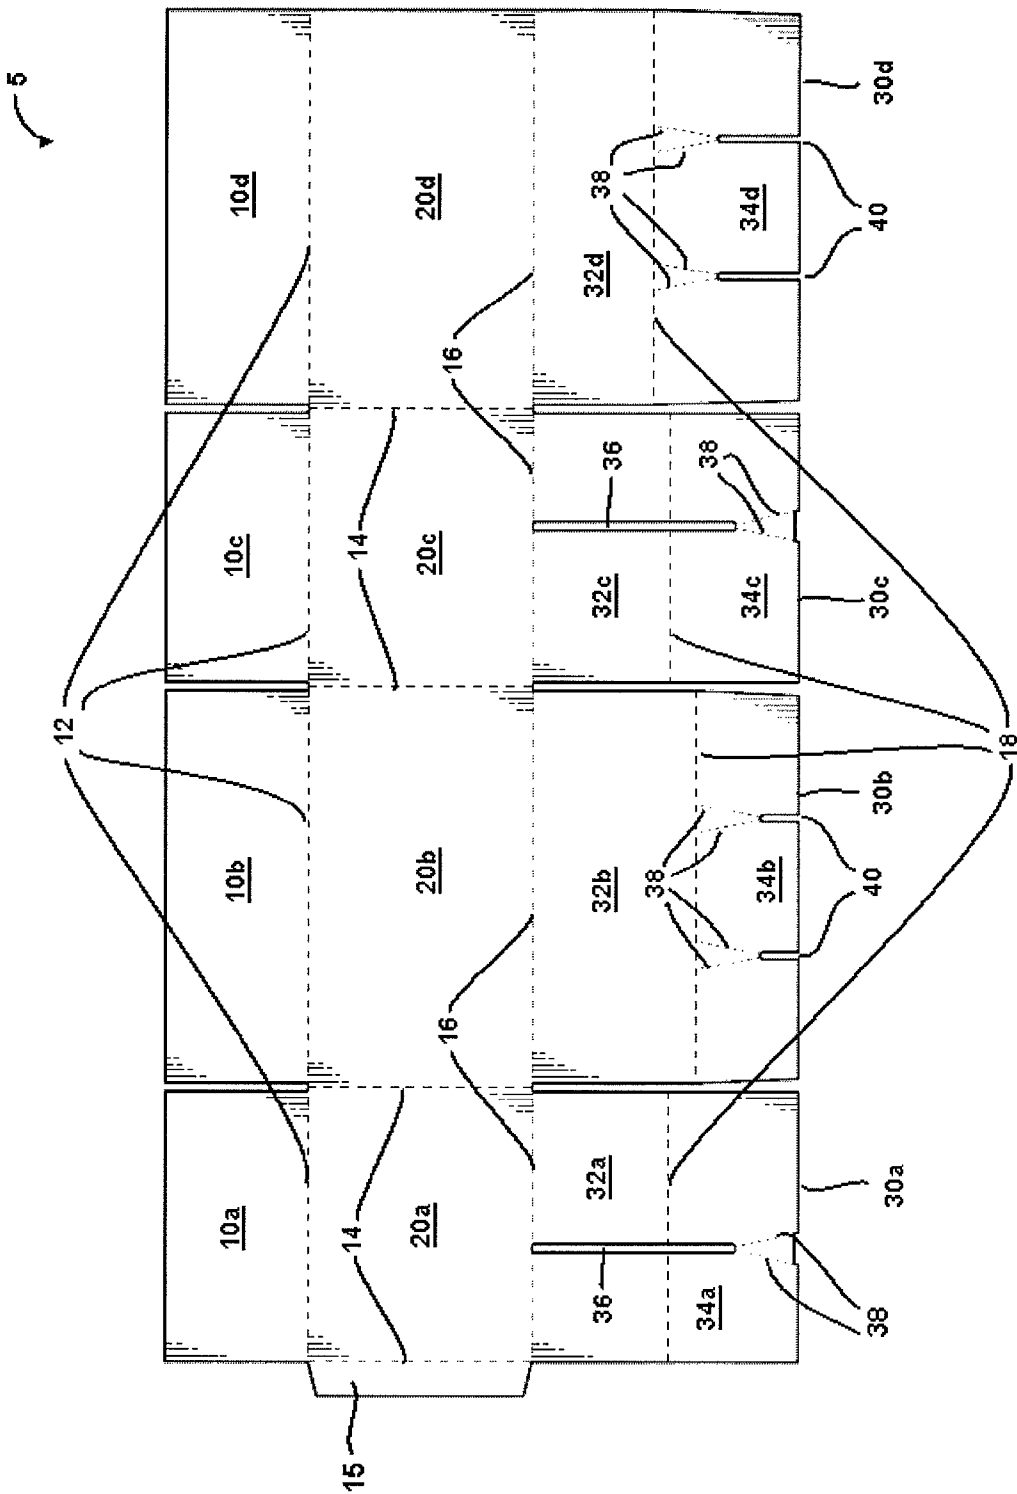


FIG. 1

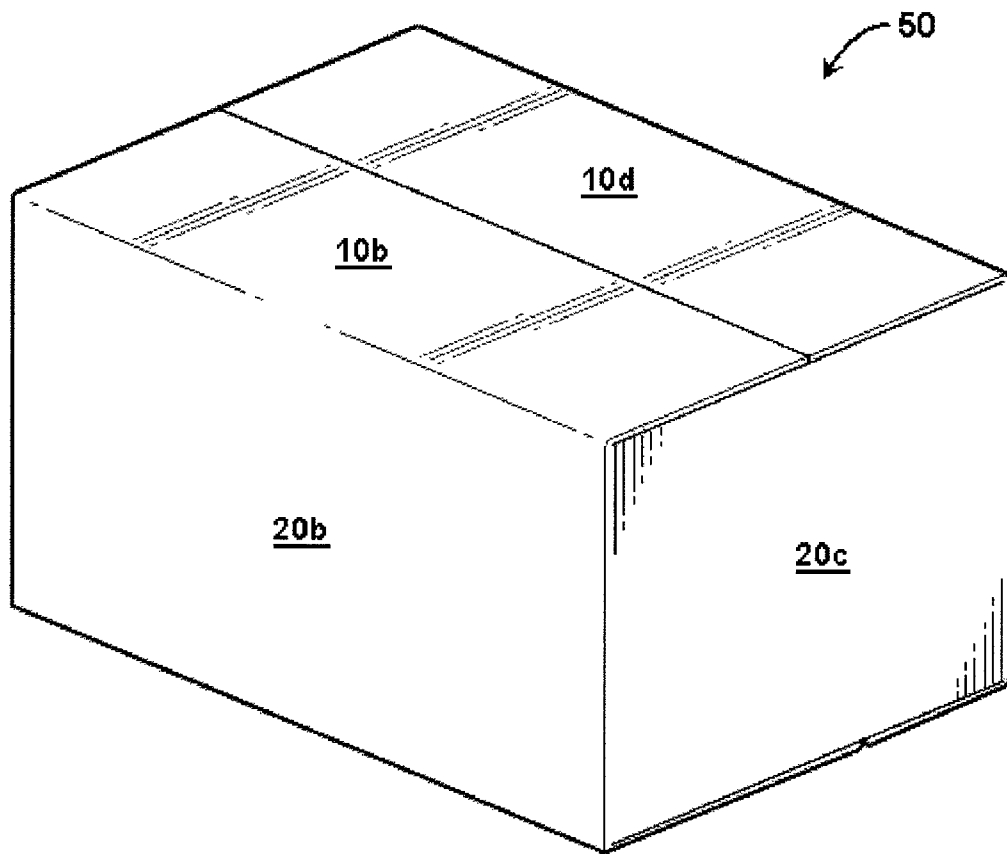


FIG. 2

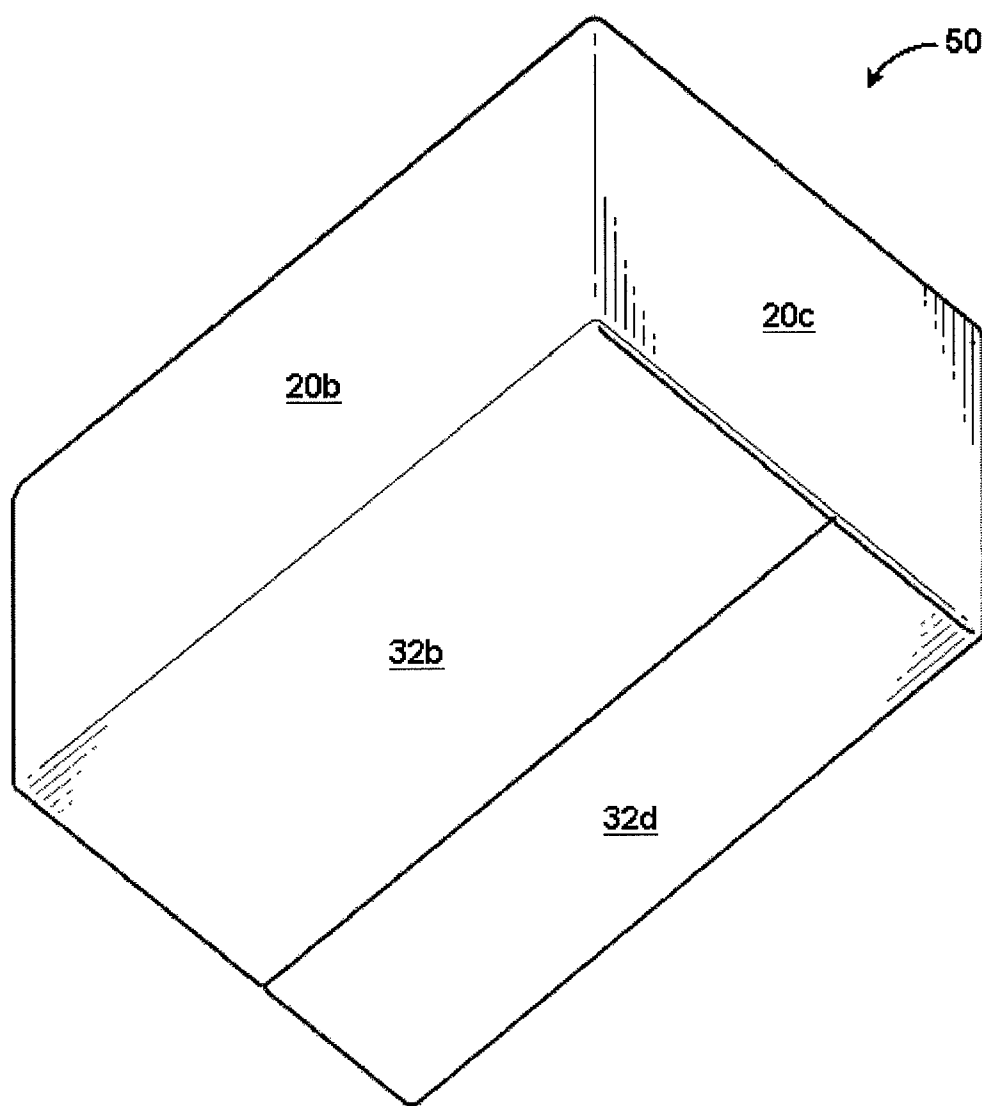


FIG. 3

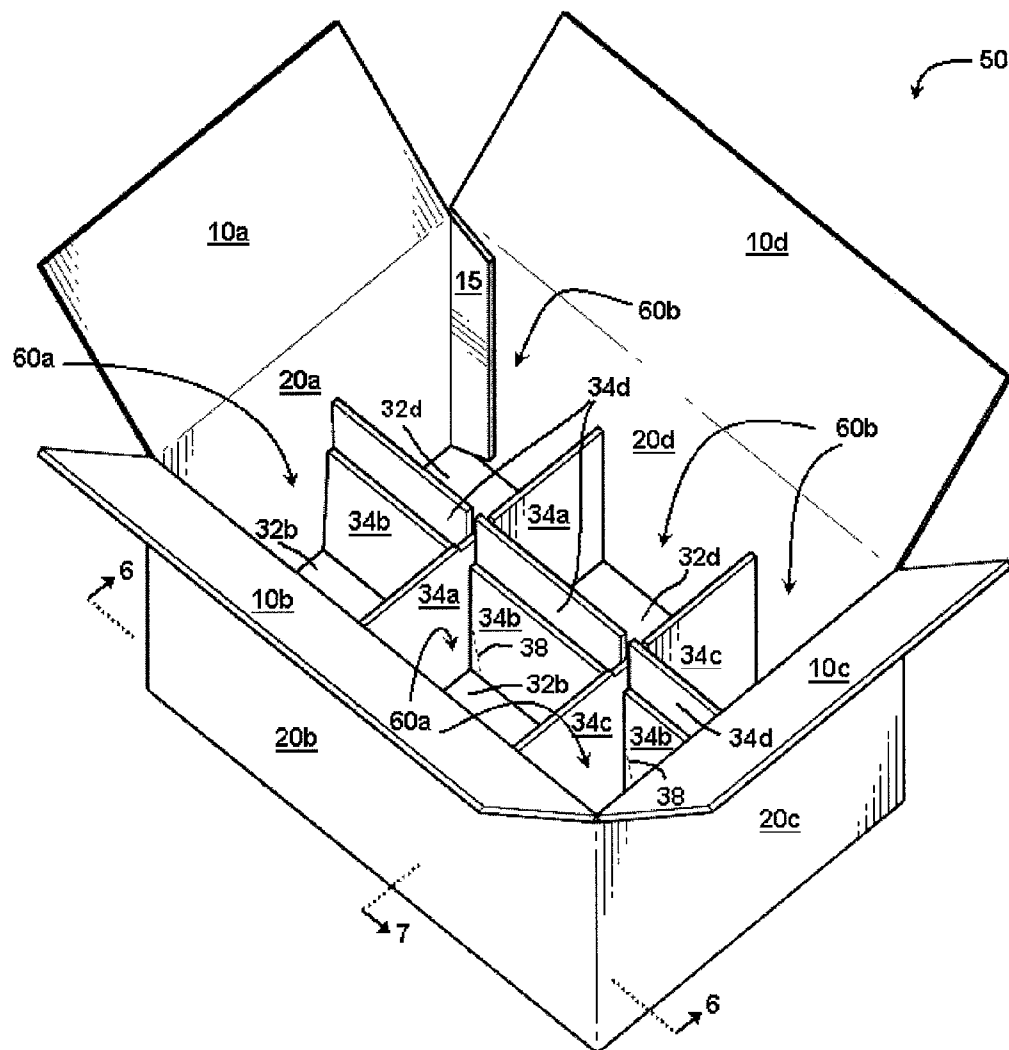


FIG. 4

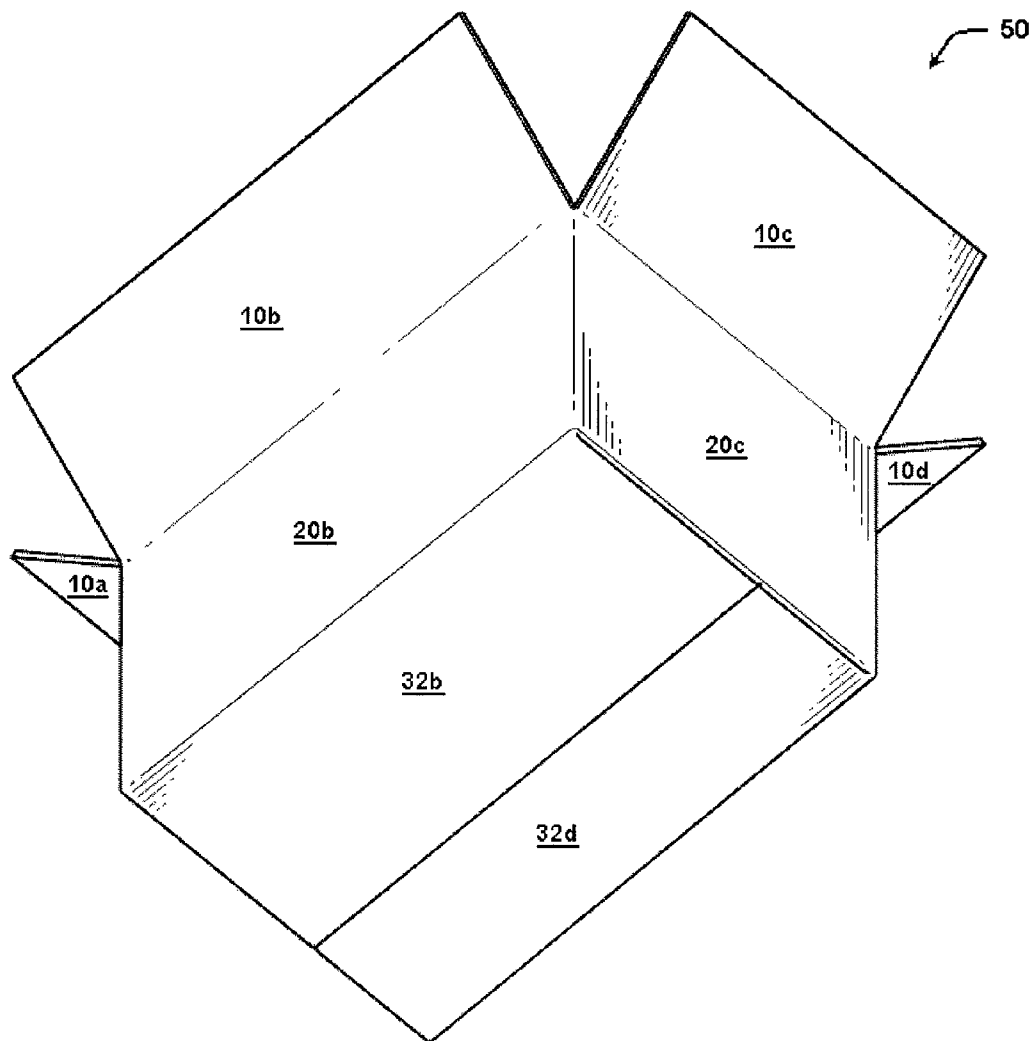


FIG. 5

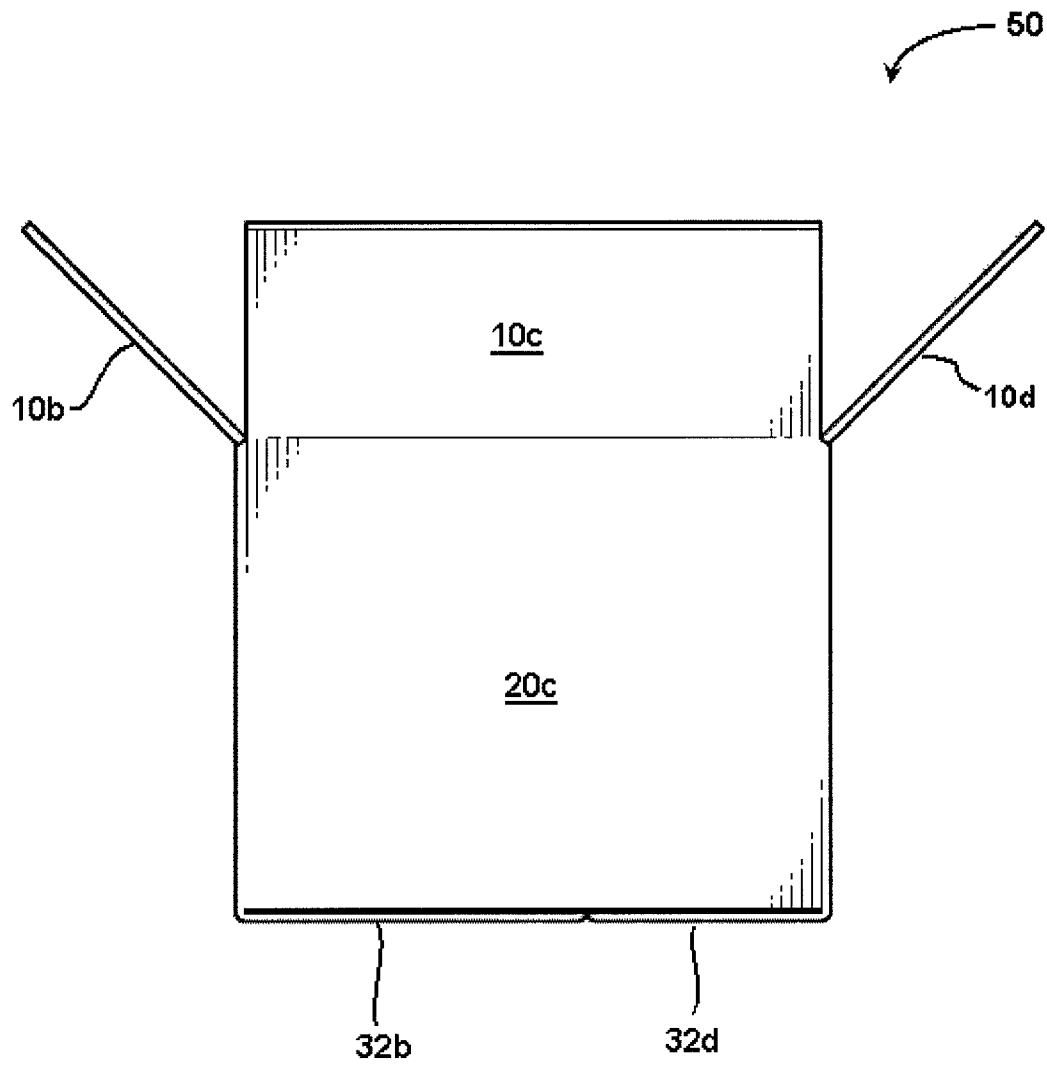


FIG. 6

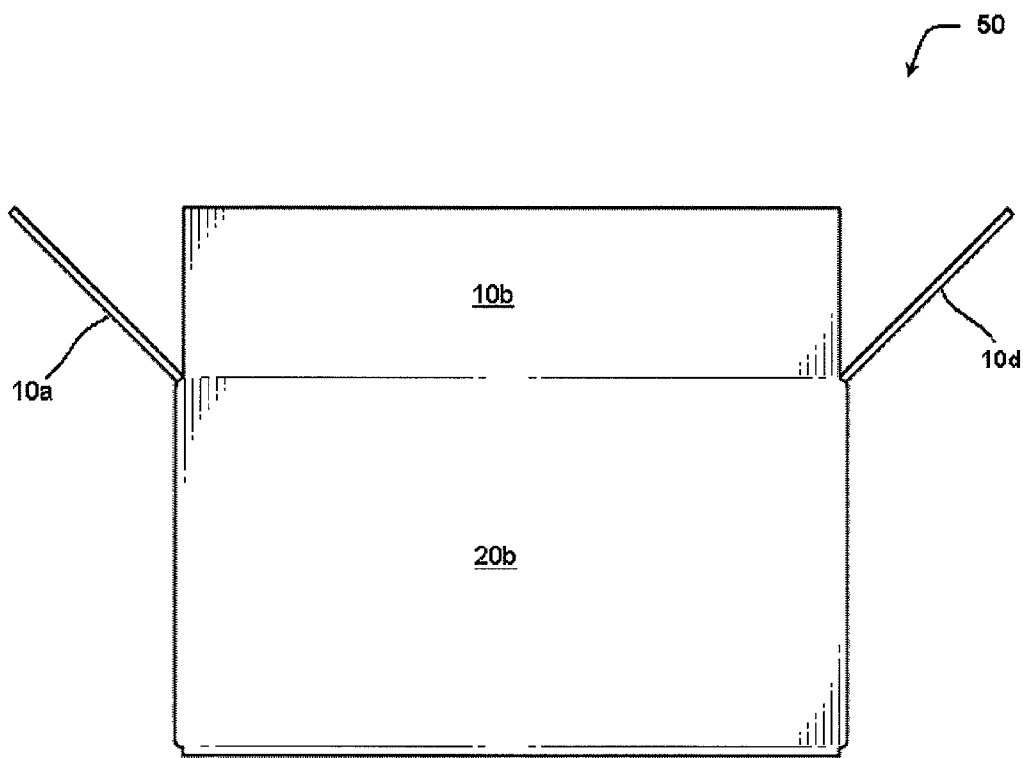


FIG. 7

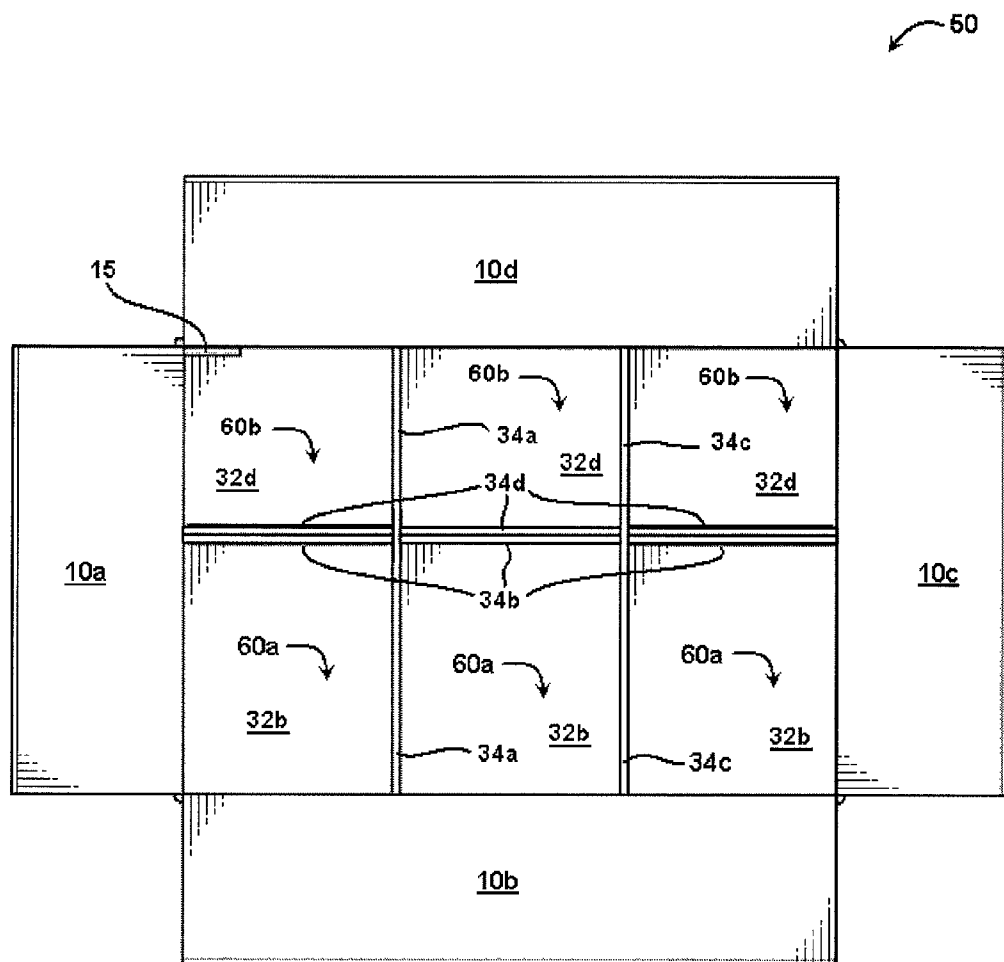


FIG. 8

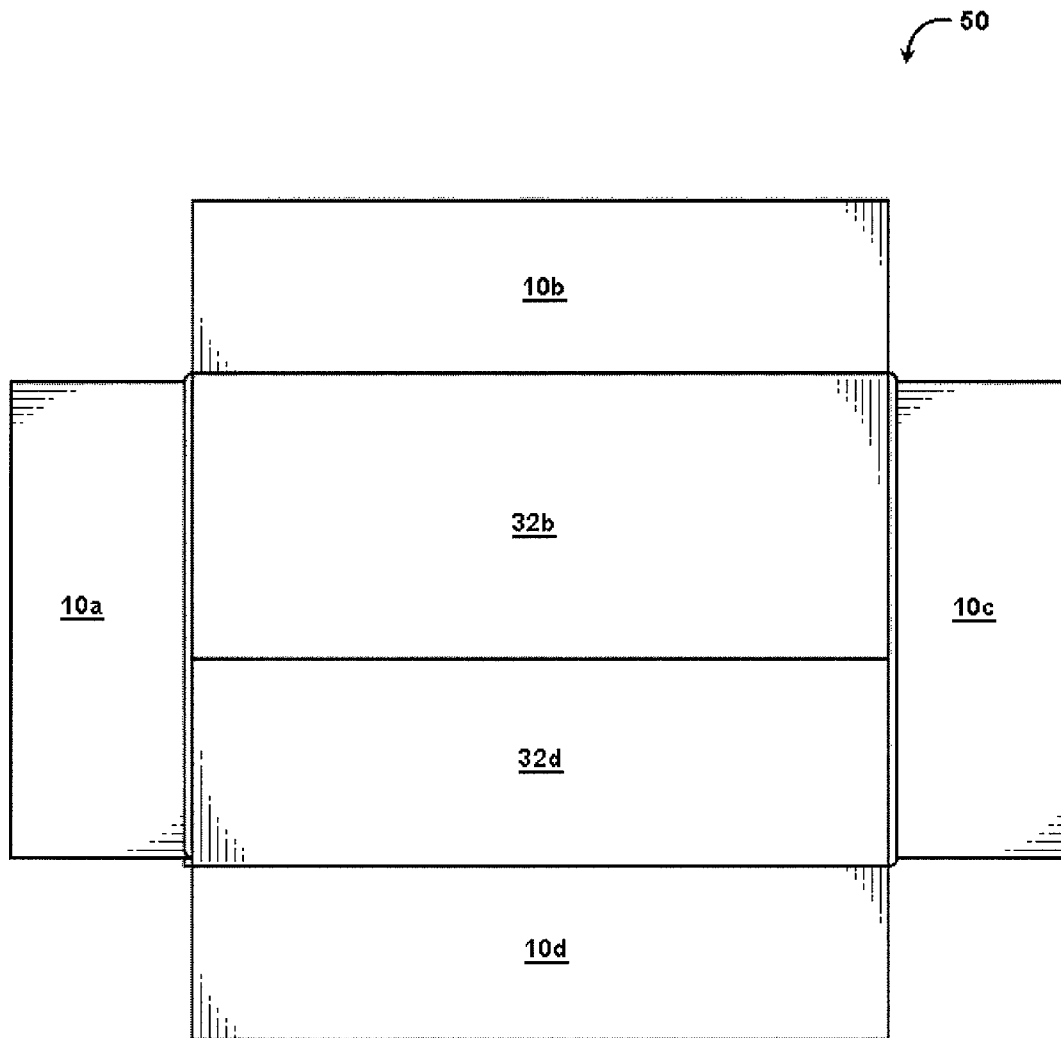


FIG. 9

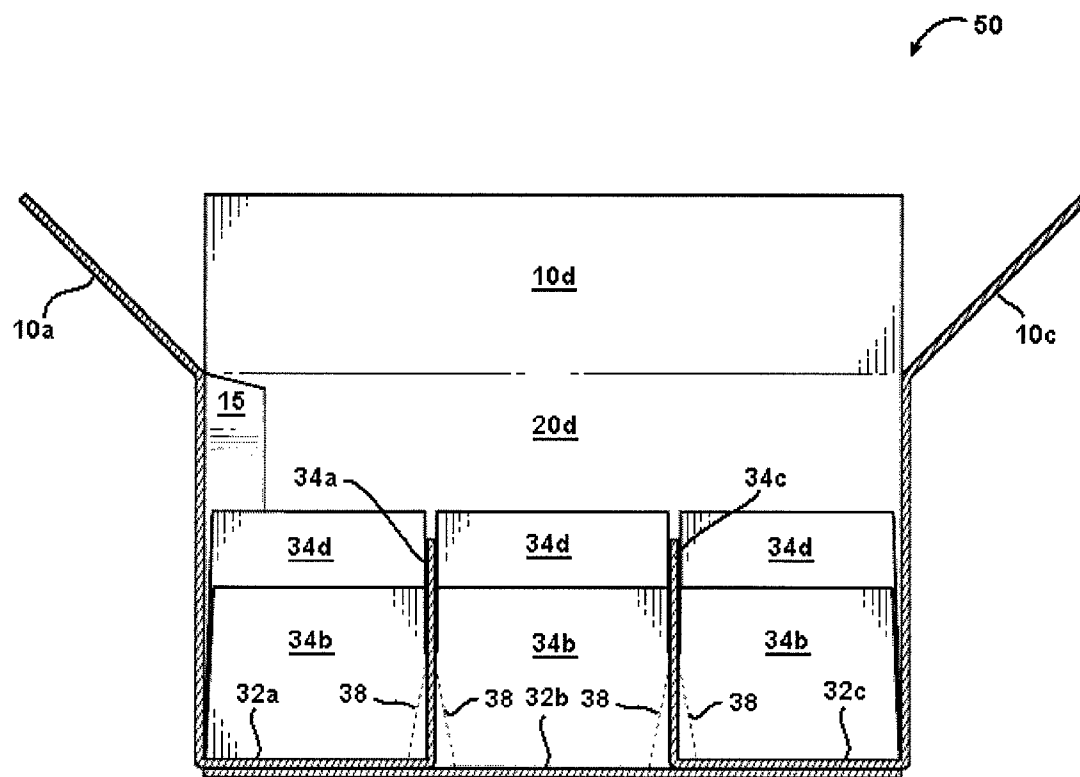


FIG. 10

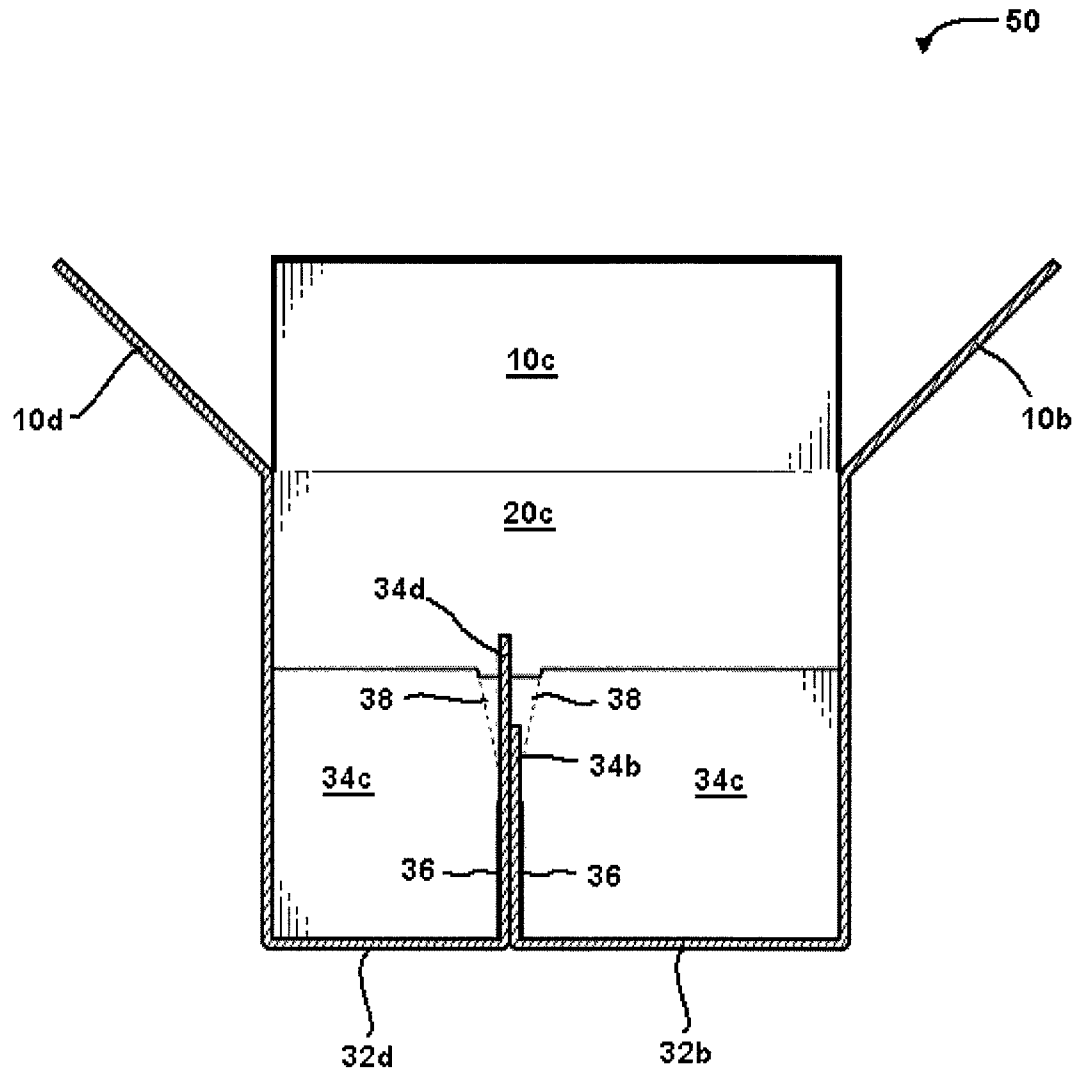


FIG. 11

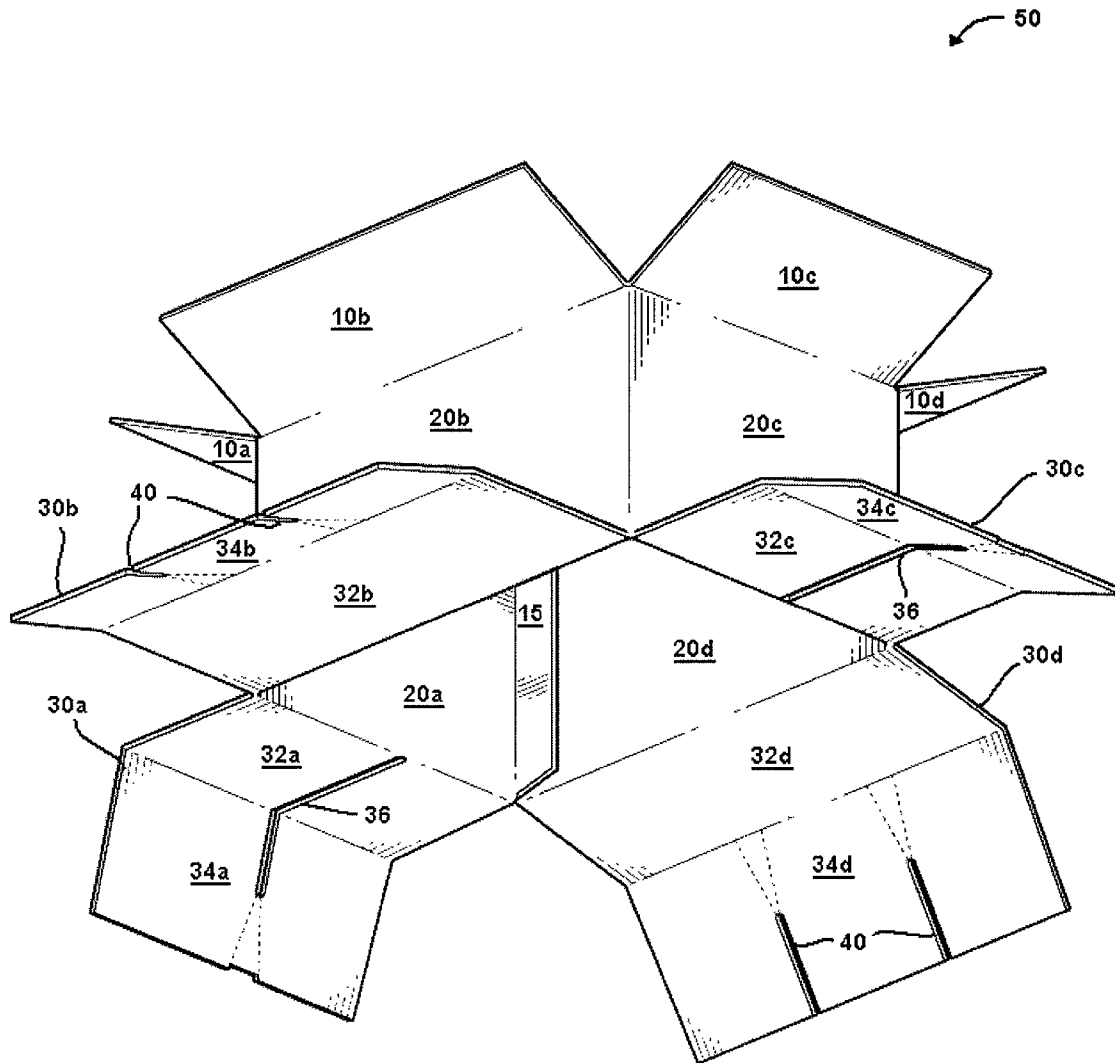


FIG. 12

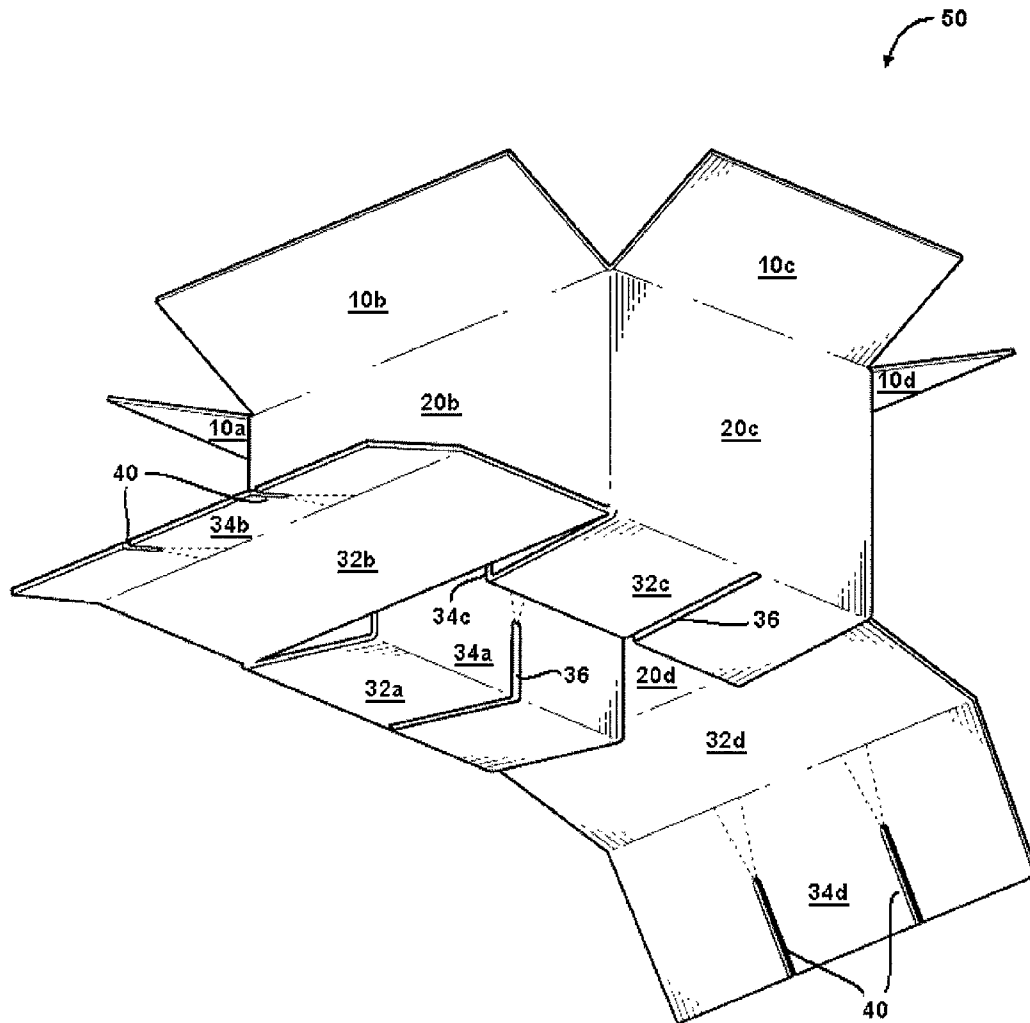


FIG. 13

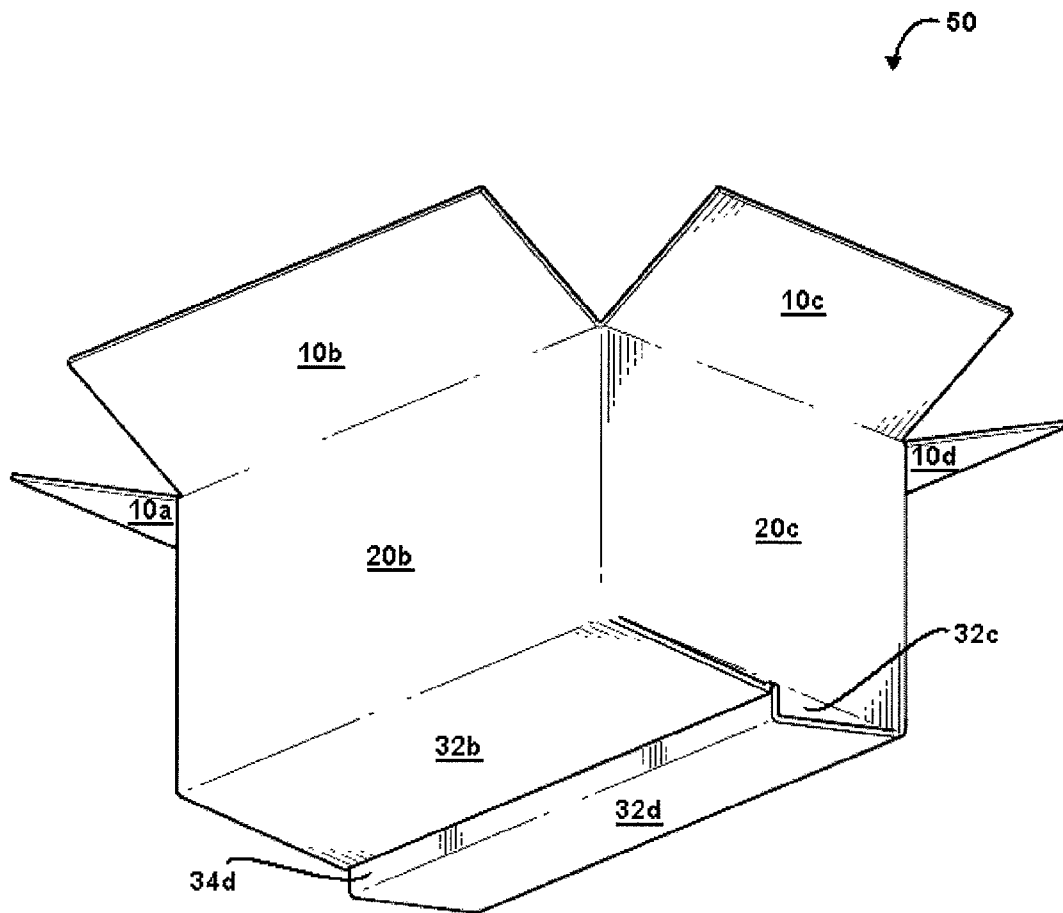


FIG. 14

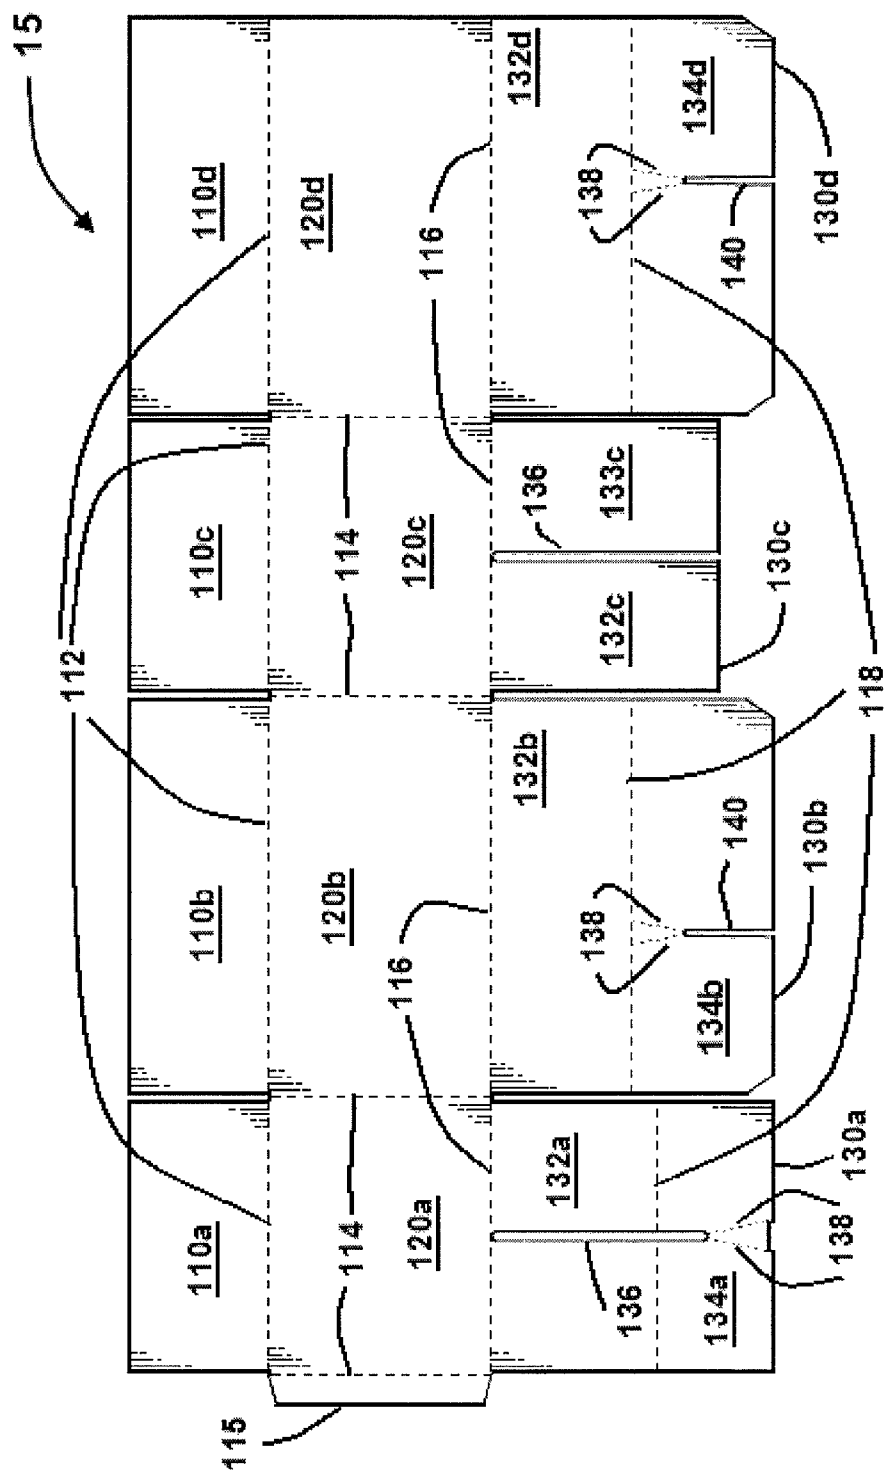


FIG. 15

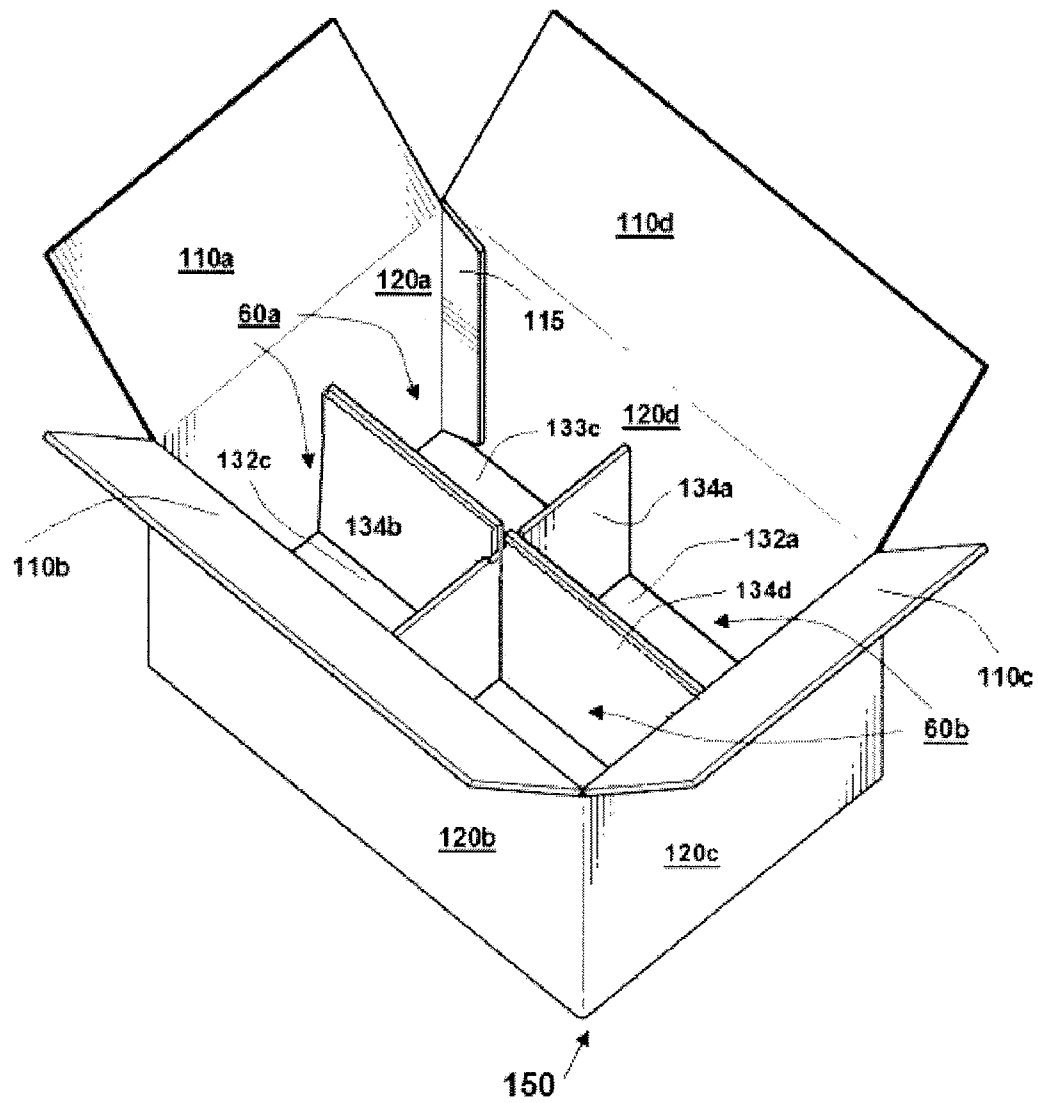


FIG. 16

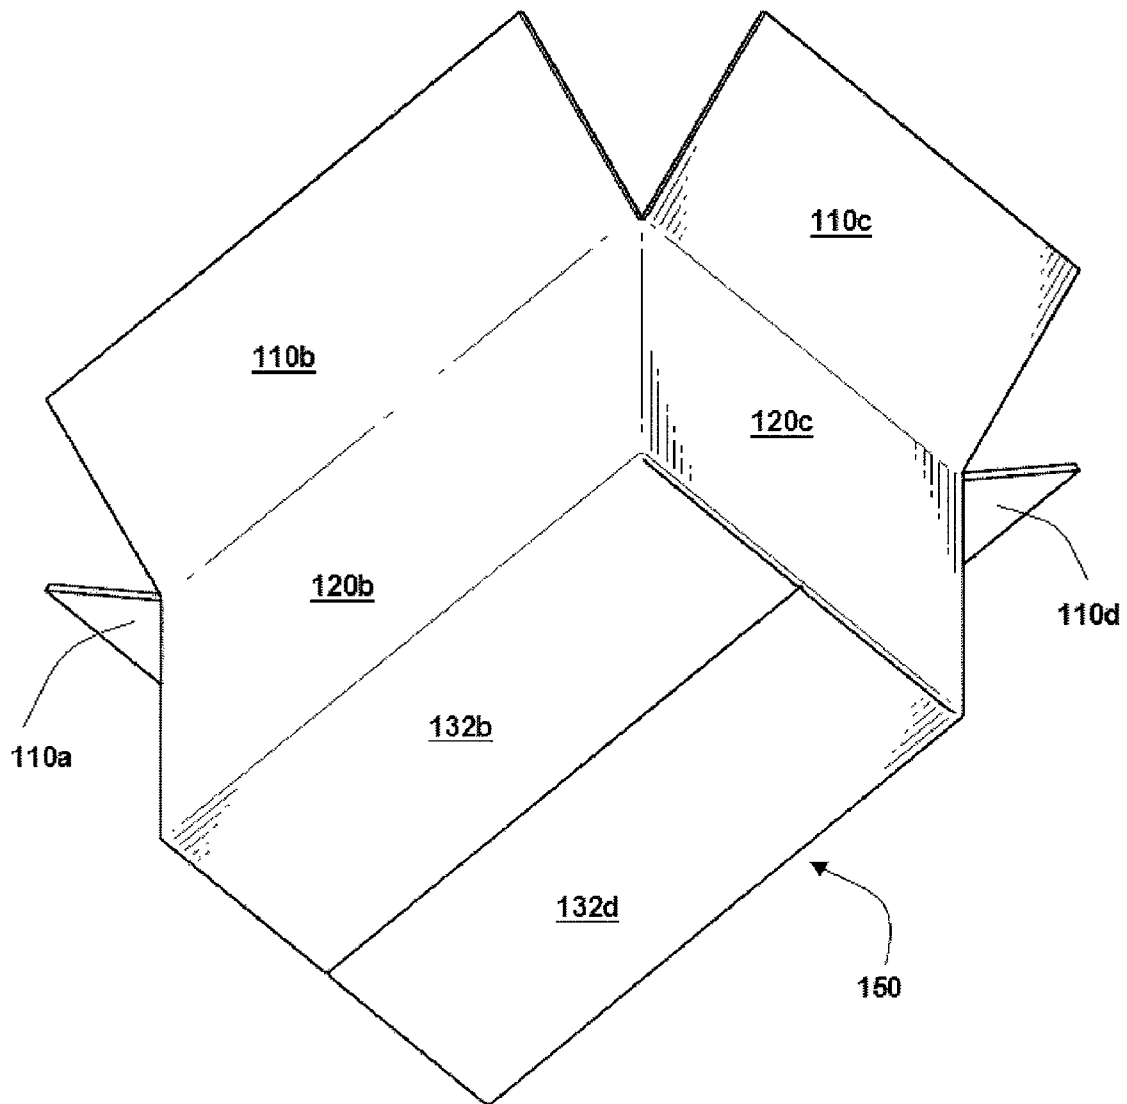


FIG. 17

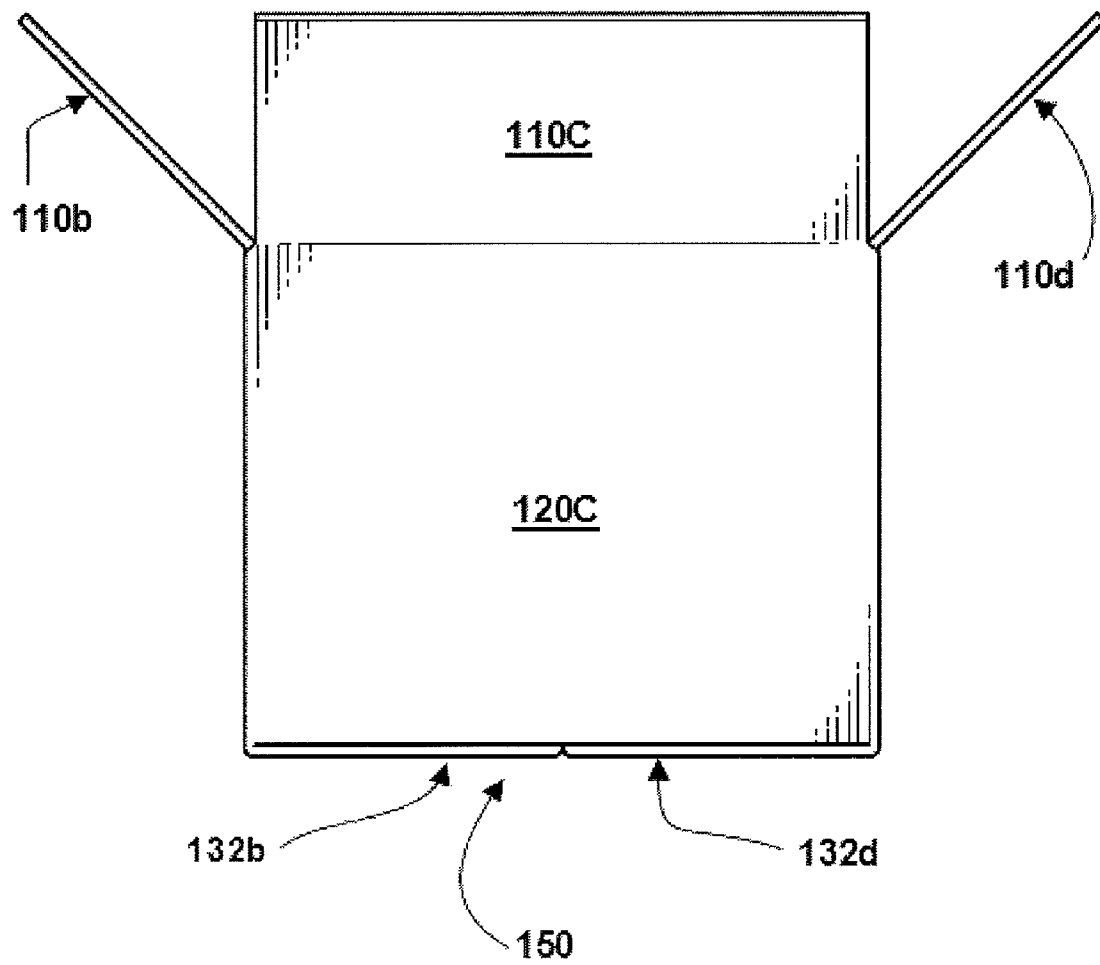


FIG. 18

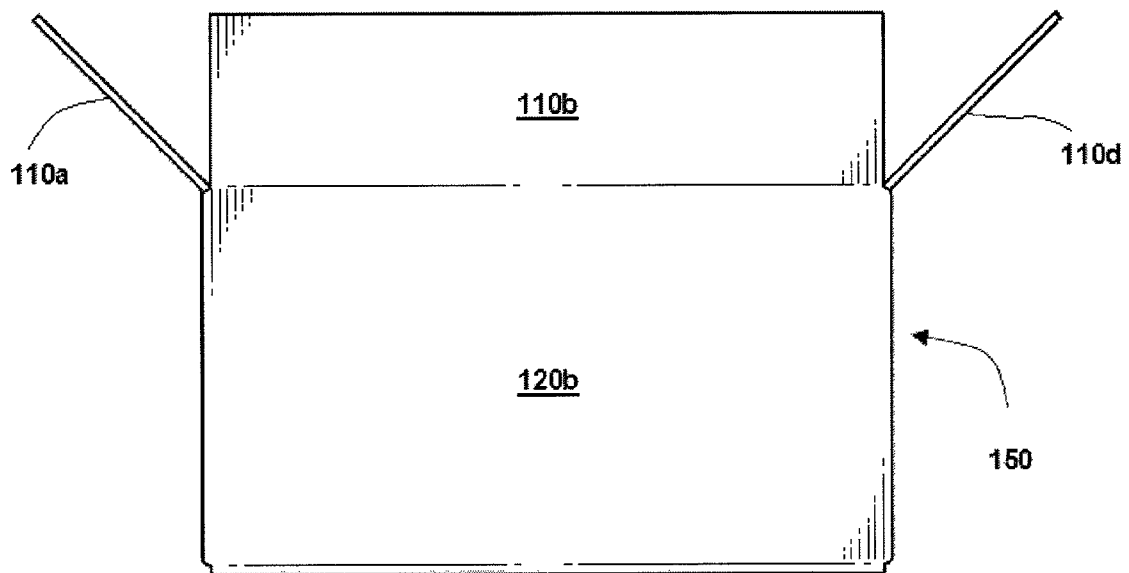


FIG. 19

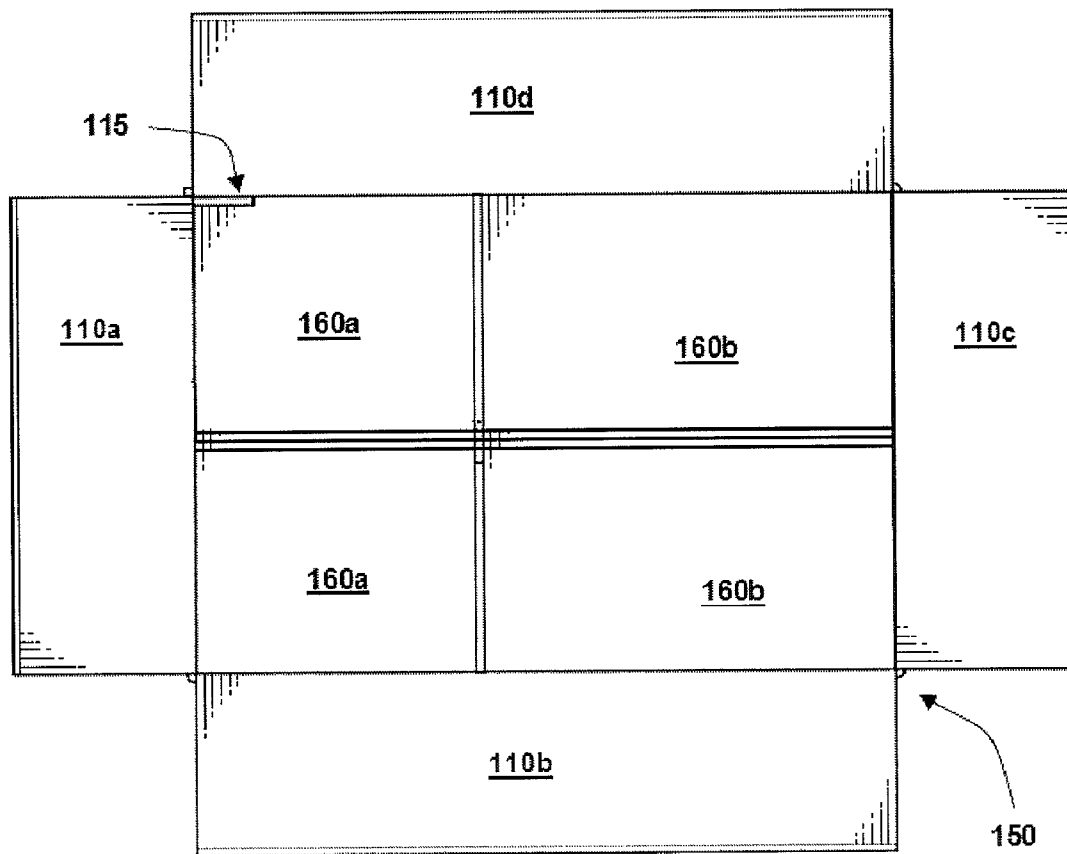


FIG. 20

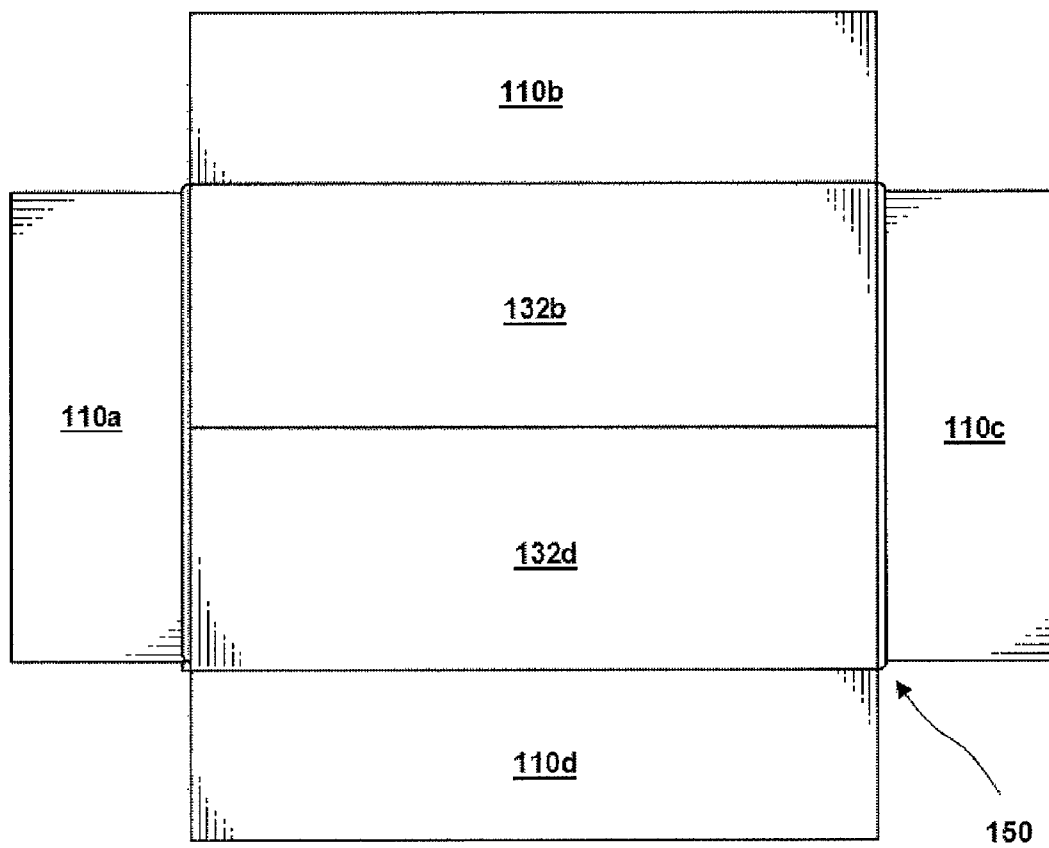


FIG. 21

1

CONTAINER**CROSS-REFERENCE TO RELATED APPLICATIONS**

This application claims the benefit of U.S. Provisional Application Ser. No. 60/862,853, filed Oct. 25, 2006, the contents of which are incorporated by reference.

BACKGROUND OF THE INVENTION**A. Field of the Invention**

The present invention concerns a container that can be used to hold or transport matter (e.g., objects such as articles of manufacture).

B. Description of Related Art

Containers that include internal dividers are known. These containers can have reduced stability and strength. This can lead to damage of any articles of manufacture that are included in the containers.

SUMMARY OF THE INVENTION

The present invention overcomes deficiencies in the art by providing containers that can be used to hold or transport matter. Non-limiting examples of matter include things that have mass and occupy space (e.g., objects such as articles of manufacture).

In one non-limiting embodiment, there is provided a container comprising: a first, second, third, and fourth side wall panel, wherein the first and third side wall panels are in opposed relationship, and wherein the second and fourth side wall panels are in opposed relationship, the side wall panels defining an interior space of the container; a first second, third, and fourth bottom panel, wherein the first bottom panel is coupled to the first side wall panel, the second bottom panel is coupled to the second side wall panel, the third bottom panel is coupled to the third side wall panel, and the fourth bottom panel is coupled to the fourth side wall panel, and wherein each bottom panel comprises: (a) a divider portion that extends into the interior of the container and is configured to form a cell wall that defines a cell; and (b) a bottom portion. In another non-limiting embodiment, the first, second and fourth bottom panels comprise a bottom portion and a divider portion, while the third bottom panel comprises only a bottom portion. In certain aspects, the divider portions can all have the same or different aspect ratios. For instance, the divider portions of the second and fourth bottom panels can have different aspect ratios or the same aspect ratios when compared to one another. Similarly, the divider portions of the first and third bottom panels can have the same or different aspect ratios when compared to one another or when compared to the second and fourth bottom panels. In one embodiment, the second and fourth bottom panels have different aspect ratios when compared to one another. The first and third bottom panels can have similar aspect ratios when compared to one another. The container can include a first fold line that defines a boundary between each side wall panel and each bottom panel, and a second fold line that defines a boundary between the divider portion and the bottom portion of each bottom panel. The distance between the first fold line and second fold line of the second bottom panel can be the same, less than, or greater than the distance between the first fold line and second fold line of the fourth bottom panel. In certain aspects, the distance between the first fold line and the second fold line of the first

2

bottom panel is substantially similar to the distance between the first fold line and the second fold line of the third bottom panel.

The interior space of the container can comprise or be divided into 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, or more cells. In certain embodiments, the container can be divided into 4 or 6 cells. In a 4 cell container, the cells can be further divided into two sets of two. In a six cell container, the cells can be further divided into two sets of three. The first set of cells can have the same or different shape when compared to one another. The second set of cells can also have the same or different shape when compared to one another. In certain aspects, the first set of cells can have a smaller, the same, or larger interior space in comparison to the cells in the second set. A non-limiting way to measure the interior space of a cell is by volume. By way of example only, the first set of cells can have the same shape when compared to one another and can have a smaller interior space in comparison to the second set of cells which can also have the same shape when compared to one another.

The container can be folded in such a way that each divider portion can be capable of being folded in such a way that the interior space of the container is either not divided or else it is divided into 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, or more cells. The bottom portions of the second and fourth bottom panels can be adapted to form the outside surface of the bottom of the container. The first and third bottom panels can further comprise elongated openings that are configured to accept the divider portions of the second and fourth bottom panels. In certain embodiments, the divider portions of the second and fourth bottom panels can further comprise 1, 2, 3, 4, 5, 6, 7, 8, or more sub-panels.

The container can further include a first, second, third, and fourth top panel. The first top panel can be coupled to the first side wall panel, the second top panel can be coupled to the second side wall panel, the third top panel can be coupled to the third side wall panel, and the fourth top panel can be coupled to the fourth side wall panel. The top panels can be adapted to fold in such a way so as to enclose the top portion of the container. Alternatively, a lid that is separate from the container blank can be used to enclose the top portion of the container. The first and third side wall panels can further include apertures that form handles. The second and fourth side wall panels can further comprise apertures that form handles. Handles can be used to assist the user to pick of the box.

The container can have a multitude of shapes. In one embodiment, the container has a rectangular shape. However, other shapes such as, but not limited to, a square, a hexagonal, and an octagonal shape are contemplated. The container can also be made from multiple blanks of material or a single blank of material. In certain aspects, a single blank of material is used, and the container can be made by scoring and/or cutting the blank.

In another non-limiting embodiment, there is provided a container comprising: a first, second, third, and fourth side wall panel, wherein the first and third side wall panels are in opposed relationship, and wherein the second and fourth side wall panels are in opposed relationship, the side wall panels defining an interior space of the container; a first second, third, and fourth bottom panel, wherein the first bottom panel is coupled to the first side wall panel, the second bottom panel is coupled to the second side wall panel, the third bottom panel is coupled to the third side wall panel, and the fourth bottom panel is coupled to the fourth side wall panel, and wherein each bottom panel comprises: (a) a divider portion that extends into the interior of the container and is capable of

3

being folded in such a way that the interior space of the container is either not divided or else it is divided into multiple cells (e.g., 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, or more); and (b) a bottom portion. In another non-limiting embodiment, the first, second and fourth bottom panels comprise a bottom portion and a divider portion, while the third bottom panel comprises only a bottom portion.

Also disclosed is a single blank of material for constructing a container. The blank can be made of any material that can be used to form a container. Non-limiting examples include cardboard, corrugated paper, plastics, metals, fibers, clothes, etc. The blank can include a first, second, third, and fourth side wall panel, wherein the first and third side wall panels are in opposed relationship, and wherein the second and fourth side wall panels are in opposed relationship, the side wall panels being configured to define an interior space when the container is formed; a glue joint coupled to the first side wall panel (as indicated above, the glue joint can also be coupled to the fourth side wall panel); a first second, third, and fourth bottom panel, wherein the first bottom panel is coupled to the first side wall panel, the second bottom panel is coupled to the second side wall panel, the third bottom panel is coupled to the third side wall panel, and the fourth bottom panel is coupled to the fourth side wall panel, and wherein each bottom panel comprises: (a) a divider portion that is configured to extend into the interior of the container when the container is formed; and (b) a bottom portion, wherein the divider portions of the first and third bottom panels have the same aspect ratio and the divider portions of the second and fourth bottom panels have different aspect ratios. In another non-limiting embodiment, the first, second and fourth bottom panels comprise a bottom portion and a divider portion, while the third bottom panel comprises only a bottom portion. As indicated above, the divider portions can all have the same or different aspect ratios. For instance, the divider portions of the second and fourth bottom panels can have different aspect ratios or the same aspect ratios when compared to one another. Similarly, the divider portions of the first and third bottom panels can have the same or different aspect ratios when compared to one another or when compared to the second and fourth bottom panels. In one embodiment, the second and fourth bottom panels have different aspect ratios when compared to one another, and the first and third bottom panels have similar aspect ratios when compared to one another. In certain aspects, the blank has a rectangular shape. However, other shapes such as, but not limited to, a square, a hexagonal, and an octagonal shape are contemplated. The blank can be cut from a material by using a stamping machine. For instance, a single piece of material can be used to prepare multiple blanks by placing the material in a stamp machine (e.g., assembly line manufacture). This can be advantageous for speed of production and/or to minimize waste material (e.g., material that is not part of the blank). Additionally, the design of the blank allows for the use of a stamping machine while preserving the symmetrical or asymmetrical fold patterns.

In yet another embodiment, there is disclosed a container comprising: a first, second, third, and fourth side wall panel, wherein the first and third side wall panels are in opposed relationship, and wherein the second and fourth side wall panels are in opposed relationship, the side wall panels defining an interior space of the container; a first second, third, and fourth bottom panel, wherein the first bottom panel is coupled to the first side wall panel, the second bottom panel is coupled to the second side wall panel, the third bottom panel is coupled to the third side wall panel, and the fourth bottom panel is coupled to the fourth side wall panel, wherein a first

4

fold line defines a boundary between each side wall panel and each bottom panel, and wherein each bottom panel comprises: (a) a divider portion that extends into the interior of the container and is configured to form a cell wall that defines a cell; and (b) a bottom portion, wherein a second fold line defines a boundary between the divider portion and the bottom portion of each bottom panel, and wherein the distance between the first fold line and the second fold line of the second bottom panel is greater than the distance between the first fold line and second fold line of the fourth bottom panel. In another non-limiting embodiment, the first, second and fourth bottom panels comprise a bottom portion and a divider portion, while the third bottom panel comprises only a bottom portion. As noted above, the distance between the first fold line and the second fold line of the first bottom panel can be substantially similar to the distance between the first fold line and the second fold line of the third bottom panel.

In still another embodiment, a container of the present invention can include a first, second, third, and fourth side wall panel, wherein the first and third side wall panels are in opposed relationship, and wherein the second and fourth side wall panels are in opposed relationship, the side wall panels defining an interior space of the container; a first second, third, and fourth bottom panel, wherein the first bottom panel is coupled to the first side wall panel, the second bottom panel is coupled to the second side wall panel, the third bottom panel is coupled to the third side wall panel, and the fourth bottom panel is coupled to the fourth side wall panel, and wherein each bottom panel comprises: (a) a divider portion that extends into the interior of the container and is capable of forming a cell wall defining a cell and/or a portion of the bottom of the container; and (b) a bottom portion. In another non-limiting embodiment, the first, second and fourth bottom panels comprise a bottom portion and a divider portion, while the third bottom panel comprises only a bottom portion. As discussed above, the interior space of the container can either not be divided or else it is divided into multiple cells.

Methods for using the container of the present invention are also contemplated. Non-limiting methods include methods for shipping, storing, or displaying articles of manufacture (e.g., consumer products). Also contemplated is a method for reducing the damage of an article of manufacture during shipping or storage comprising placing the article of manufacture in a container of the present invention, wherein the likelihood of damage to the article during storage or shipping is reduced when compared to a container that is known in the prior art.

It is contemplated that any embodiment discussed in this specification can be implemented with respect to any method or container of the invention, and vice versa. Furthermore, containers of the invention can be used to achieve methods of the invention.

The term “about” or “approximately” are defined as being close to as understood by one of ordinary skill in the art, and in one non-limiting embodiment the terms are defined to be within 10%, preferably within 5%, more preferably within 1%, and most preferably within 0.5%.

The use of the word “a” or “an” when used in conjunction with the term “comprising” in the claims and/or the specification may mean “one,” but it is also consistent with the meaning of “one or more,” “at least one,” and “one or more than one.”

The use of the term “or” in the claims and specification includes “and/or” unless explicitly indicated to refer to alternatives only or the alternatives are mutually exclusive, although the disclosure supports a definition that refers to only alternatives and “and/or.”

As used in this specification and claim(s), the words “comprising” (and any form of comprising, such as “comprise” and “comprises”), “having” (and any form of having, such as “have” and “has”), “including” (and any form of including, such as “includes” and “include”) or “containing” (and any form of containing, such as “contains” and “contain”) are inclusive or open-ended and do not exclude additional, unrecited elements or method steps.

Other objects, features and advantages of the present invention will become apparent from the following detailed description. It should be understood, however, that the detailed description and the examples, while indicating specific embodiments of the invention, are given by way of illustration only. Additionally, it is contemplated that changes and modifications within the spirit and scope of the invention will become apparent to those skilled in the art from this detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

The following drawings form part of the present specification and are included to further demonstrate certain aspects of the present invention. The invention may be better understood by reference to one or more of these drawings in combination with the detailed description of specific non-limiting embodiments presented herein. These drawings illustrate by way of example and not limitation, and they use like references to indicate similar elements.

FIG. 1 is a plain view of a one-piece blank that can be used to construct one embodiment of a container of the present invention.

FIG. 2 is a top perspective view of a container that can be constructed with the one-piece blank shown in FIG. 1.

FIG. 3 is a bottom perspective view of the container shown in FIG. 2.

FIG. 4 is a top perspective view of the container shown in FIG. 2 in an open position.

FIG. 5 is a bottom perspective view of the container shown in FIG. 4.

FIG. 6 is a front view of the container shown in FIG. 4.

FIG. 7 is a side view of the container shown in FIG. 4.

FIG. 8 is a top view of the container shown in FIG. 4.

FIG. 9 is a bottom view of the container shown in FIG. 4.

FIG. 10 is a cross-sectional view taken along line 6-6 of the container shown in FIG. 4.

FIG. 11 is a cross-sectional view taken along line 7-7 of the container shown in FIG. 4.

FIG. 12 is a perspective view of the container shown in FIG. 2 in a partially assembled condition.

FIG. 13 is a perspective view of the container shown in FIG. 12 in a later stage of assembly.

FIG. 14 is a perspective view of the container shown in FIG. 13 in a later stage of assembly.

FIG. 15 is a plain view of a one-piece blank that can be used to construct a second embodiment of a container of the present invention.

FIG. 16 is a top perspective view of a container that can be constructed with the one-piece blank shown in FIG. 15 in an open position.

FIG. 17 is a bottom perspective view of the container shown in FIG. 16.

FIG. 18 is a front view of the container shown in FIG. 16.

FIG. 19 is a side view of the container shown in FIG. 16.

FIG. 20 is a top view of the container shown in FIG. 16.

FIG. 21 is a bottom view of the container shown in FIG. 20.

DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

The containers of the present invention provide several non-limiting benefits over prior art container. For instance, the containers have increased production speed and minimized waste material during construction. Additionally, the containers have an increased ability to protect items during the shipping and storage.

In certain non-limiting aspects, a container of the present invention can be made from a one-piece blank. The container can include asymmetrical fold patterns that can provide stability or strength to the container. In certain aspects, the asymmetrical folds can be created by varying the aspect ratios of divider portions and bottom portions of the containers. In other non-limiting aspects, a portion of the interior space of the container can be divided into multiple cell(s) as needed. The size and shape of the cell(s) can be substantially similar or can be varied. For instance, the cell(s) can be varied to correspond to the size or shape of a particular article of manufacture. In some aspects, the interior space of the container can be divided into multiple cells that have different sizes or shapes to accommodate different sizes or shapes of articles of manufacture. This can allow a user to store or ship articles of manufacture of different sizes or shapes in one container. These and other aspects of the present invention are described throughout this specification.

A. Blank

FIG. 1 shows a blank 5 that can be used to construct a container of the present invention. The blank 5 includes four top panels 10a, 10b, 10c, and 10d, which can be configured to form a top portion of the constructed container. The blank 5 also includes four side panels 20a, 20b, 20c, and 20d, and four bottom panels 30a, 30b, 30c, and 30d. A glue joint 15 is coupled to side panel 20a. When the blank 5 is constructed into a container, the glue joint 15 can be used to connect itself to side panel 20d, thereby defining an interior space of the container, where side panels 20a and 20c are in opposed relationship, and side panels 20b and 20d are in opposed relationship. In a non-limiting embodiment, the connection can be made by using an adhesive. However, the connection can be made in other ways (e.g., mechanical devices such as a staple, a screw, a nail, a clamp, etc.). In other embodiments, glue joint 15 can be coupled to side panel 20d and can be configured to connect side panel 20d to side panel 20a.

Fold lines 12 define boundaries between each top panel 10a, 10b, 10c, and 10d and each corresponding side panel 20a, 20b, 20c, and 20d. Fold lines 14 define boundaries between the glue joint 15 and side panel 20a and between side panels 20a, 20b, 20c, and 20d. Fold lines 16 define boundaries between each side panel 20a, 20b, 20c, and 20d and each corresponding bottom panel 30a, 30b, 30c, and 30d.

Each bottom panel 30a, 30b, 30c, and 30d comprises a bottom portion 32a, 32b, 32c, and 32d and a divider portion 34a, 34b, 34c, and 34d. Bottom portions 32b and 32d can be configured to form the outside bottom surface of the formed container, while bottom portions 32a and 32c can be configured to form at least part of the inside bottom surface of the formed container. In other embodiments, bottom portions 32a and 32c can be configured to form the outside bottom surface of the formed container, while bottom portions 32b and 32d can be configured to form at least part of the inside bottom surface of the formed container. Bottom panels 30a and 30c each comprise an elongated opening 36 that can be configured to accept at least part of divider portions 34b and 34d when the container is formed. The elongated openings 36 extend from fold lines 16 into at least part of bottom portions

34a and **34c**. In other non-limiting aspects, the size and length of the elongated openings **36** can be varied as desired (e.g., they can extend into the bottom portion only or the entire length of the bottom panel).

Fold lines **18** define boundaries between each bottom portion **32a**, **32b**, **32c**, and **32d** and each corresponding divider portion **34a**, **34b**, **34c**, and **34d**. The distance between fold line **16** and fold line **18** of bottom panel **30a** is substantially similar to the distance between fold line **16** and fold line **18** of bottom panel **30c**. The distance between fold line **16** and fold line **18** of bottom panel **30b** is greater than the distance between fold line **16** and fold line **18** of bottom panel **30d**. In other non-limiting embodiments, the distance between fold line **16** and fold line **18** of bottom panel **30a** can be different (e.g., greater or smaller) when compared to the distance between fold line **16** and fold line **18** of bottom panel **30c**, and the distance between fold line **16** and fold line **18** of bottom panel **30b** can be substantially similar to the distance between fold line **16** and fold line **18** of bottom panel **30d**. Divider portions **34a** and **34c** have substantially similar aspect ratios, and divider portions **34b** and **34d** have different aspect ratios. In other non-limiting embodiments, divider portions **34a** and **34c** can have different aspect ratios. Similarly, divider portions **34b** and **34d** can have the same aspect ratios. Divider portions **34a**, **34b**, **34c**, and **34d** can be configured to extend into the interior of the formed container. Each divider portion **34a**, **34b**, **34c**, and **34d** includes cut lines **38** that allow a user to reconfigure the interior space of the formed container. For example, the cut lines **38** can be separated or cut along the indicated line **38**. This allows the interior space of the formed container to include 0, 1, 2, 3, 4, 5, or 6 individual cells by folding selected parts of the divider portions **34a**, **34b**, **34c**, and **34d** downward to the bottom surface of the formed container. Divider portions **34b** and **34d** also include elongated slits **40** which can facilitate the positioning of divider portions **34b** and **34d** with respect to divider portions **34a** and **34c** when the container is constructed.

B. Container

In certain non-limiting aspects, containers of the present invention can be constructed from corrugated paperboard (e.g., cardboard). Materials other than corrugated paperboard can also be used (e.g., plastics, metals, composite materials, etc.).

FIGS. 2-11 provide a non-limiting embodiment of a container **50** of the present invention. For instance, FIG. 2 illustrates a top perspective view of a container **50** that can be constructed with the blank **5** illustrated in FIG. 1. The container **50** has a rectangular shape. In other non-limiting embodiments, the container **50** can have other shapes (e.g., square). Top panels **10b** and **10d** have similar aspect ratios and are folded to enclose the interior space of the container **50**. In other non-limiting embodiments, top panels **10b** and **10d** can have different aspect ratios.

FIG. 3 illustrates a bottom perspective view of the container in FIG. 2. Bottom portions **32b** and **32d** form the outside bottom surface of the container **50**. Bottom portions **32b** and **32d** have different aspect ratios. In other non-limiting embodiments, bottom portions **32b** and **32d** can have similar aspect ratios.

FIG. 4 is a top perspective view of the container shown in FIG. 2 in an open position (e.g., top panels **10a**, **10b**, **10c**, and **10d**, are not folded downward to enclose the interior space of the container). Glue joint **15** is connected to side panel **20d**, thereby defining an interior space of the container **50**, where side panels **20a** and **20c** are in opposed relationship, and side panels **20b** and **20d** are in opposed relationship. Divider panels **34a**, **34b**, **34c**, and **34d** form cell walls that define two sets

of three cells **60a** and **60b** (i.e., six cells in total). In this embodiment, cells **60a** have a similar shape to one another and have a greater interior space when compared to cells **60b**. Cells **60b** have a similar shape to one another and have less interior space when compared to cells **60a**. A person of ordinary skill in the art will recognize that the different shapes of the two sets of cells **60a**, **60b** can be created by varying the aspect ratios of bottom portions **32b** and **32d** or divider panels **34b** and **34d**. For instance, in this non-limiting embodiment, the aspect ratio of divider panel **34b** is different than the aspect ratio of divider panel **34d** in that divider panels **34b** and **34d** have the same length, but divider panel **34d** has a greater height than divider panel **34b**.

FIG. 5 is a bottom perspective view of the container **50** shown in FIG. 4. Bottom portions **32b** and **32d** form the outside bottom surface of the container **50** and have different aspect ratios. In this non-limiting embodiment, the aspect ratio of bottom portion **32b** is different than the aspect ratio of bottom portion **32d** in that bottom portions **32b** and **32d** have the same length, but bottom portion **32b** has a greater width than bottom portion **32d**. A person of ordinary skill in the art will recognize that the aspect ratios of bottom portions **32b** and **32d** can be varied by length or width as desired.

FIG. 6 is a front view of the container **50** shown in FIG. 4. The bottom portions **32b** and **32d** form the outside bottom surface of the container **50** and have different aspect ratios in that bottom portion **32b** has a greater width than bottom portion **32d**. FIG. 7 is a side view of the container **50** shown in FIG. 4.

FIG. 8 is a top view of the container **50** shown in FIG. 4. Cells **60a** have a similar shape to one another and have a greater interior space when compared to cells **60b**. Cells **60b** have a similar shape to one another and have less interior space when compared to cells **60a**. A person of ordinary skill in the art will recognize that the different shapes of the two sets of cells **60a**, **60b** can be created by varying the aspect ratios of bottom portions **32b** and **32d** or divider panels **34b** and **34d**. For instance, the aspect ratio of bottom portion **32b** is different than the aspect ratio of bottom portion **32d** in that bottom portions **32b** and **32d** have the same length, but bottom portion **32b** has a greater width than bottom portion **32d**. FIG. 9, which is a bottom view of the container **50** shown in FIG. 4, is also illustrative of the different aspect ratios of bottom portions **32b** and **32d**.

FIG. 10 is a cross-sectional view taken along line 6-6 of the container **50** shown in FIG. 4. Glue joint **15** is connected to side panel **20d**. Bottom portions **32b** and **32d** (**32d** not shown) form the outside bottom surface of the formed container **50**. Bottom portions **32a** and **32c** form part of the inside bottom surface of the container **50**. The aspect ratio of divider portion **34d** is different than the aspect ratio of divider panel **34b** in that divider portions **34b** and **34d** have the same width, but divider portion **34d** has a greater height than divider portion **34b**. Also, divider portions **34a** and **34c** have similar aspect ratios in that they have the same width (not shown) and height.

FIG. 11 is a cross-sectional view taken along line 7-7 of the container shown in FIG. 4. Bottom portions **32b** and **32d** form the outside bottom surface of the formed container **50**. The aspect ratio of divider portion **34d** is different than the aspect ratio of divider panel **34b** in that divider portions **34b** and **34d** have the same width (not shown), but divider portion **34d** has a greater height than divider portion **34b**. The elongated slits **40** (not shown) on divider portions **34b** and **34d** can be configured to communicate with the elongated opening **36** of bottom panel **30c**.

C. Assembly

FIGS. 12-14 provide a non-limiting illustration of assembling the container 50 illustrated in FIG. 4. In FIG. 12, glue joint 15 is connected to side panel 20d, thereby defining an interior space of the container 50, where side panels 20a and 20c are in opposed relationship, and side panels 20b and 20d are in opposed relationship. In FIG. 13, bottom portions 32a and 32c are folded along fold lines 16 towards the interior space of the container 50. Divider portions 34a and 34c are folded along fold lines 18 and extend into the interior space of the container 50. Bottom portions 32a and 32c form at least part of the inside bottom surface of the container 50. In FIG. 14, divider portions 34b and 34d are folded along fold lines 18 and extend into the interior space of the container 50. The elongated slits 40 on divider portions 34b and 34d communicate with the elongated openings 36 of bottom panels 30a and 30c. Bottom portions 32b and 32d form the outside bottom surface of the container 50.

D. Alternative Embodiment

FIG. 15 shows a blank 15 that can be used to construct a second embodiment of a container according to this disclosure. This embodiment is constructed in accordance with the same general principles as the embodiment described in FIGS. 1-14. The embodiment constructed from blank 15 has four cells instead of six cells as shown in the previous embodiment described in FIGS. 1-14.

The blank 15 includes four top panels 110a, 110b, 110c, and 110d, which can be configured to form a top portion of the constructed container. The blank 15 also includes four side panels 120a, 120b, 120c, and 120d, and four bottom panels 130a, 130b, 130c, and 130d. A glue joint 115 is coupled to side panel 120a. When the blank 15 is constructed into a container, the glue joint 115 can be used to connect itself to side panel 120d, thereby defining an interior space of the container, where side panels 120a and 120c are in opposed relationship, and side panels 120b and 120d are in opposed relationship. In a non-limiting embodiment, the connection can be made by using an adhesive. However, the connection can be made in other ways (e.g., mechanical devices such as a staple, a screw, a nail, a clamp, etc.). In other embodiments, glue joint 115 can be coupled to side panel 120d and can be configured to connect side panel 120d to side panel 120a.

Fold lines 112 define boundaries between each top panel 110a, 110b, 110c, and 110d and each corresponding side panel 120a, 120b, 120c, and 120d. Fold lines 114 define boundaries between the glue joint 115 and side panel 120a and between side panels 120a, 120b, 120c, and 120d. Fold lines 116 define boundaries between each side panel 120a, 120b, 120c, and 120d and each corresponding bottom panel 130a, 130b, 130c, and 130d.

Each bottom panel 130a, 130b, and 130d comprises a bottom portion 132a, 132b, and 132d. Bottom panel 130c comprises bottom portions 132c and 133c. Bottom panels 130a, 130b, and 130d also comprise a divider portion 34a, 34b, and 34d. Bottom panels 130a and 130c each comprise an elongated opening 136 that can be configured to accept at least part of divider portions 134b and 134d when the container is formed.

Fold lines 118 define boundaries between each bottom portion 132a, 132b, and 132d and each corresponding divider portion 134a, 134b, and 134d. The distance between fold line 116 and fold line 118 of bottom panel 130b is substantially similar to the distance between fold line 116 and fold line 118 of bottom panel 130d. The distance between fold line 116 and 118 in bottom panels 130b and 130d is slightly less than the distance between fold line 116 and 118 in bottom panel 130a. In other non-limiting embodiments, the distance between

fold line 116 and fold line 118 of bottom panel 130a can be different (e.g., equal to or less than) when compared to the distance between fold line 116 and fold line 118 of bottom panels 130b and 130d. Divider portions 134b and 134d have substantially similar aspect ratios. In other non-limiting embodiments, divider portions 134b and 134d can have different aspect ratios. Divider portions 134a, 134b, and 134d can be configured to extend into the interior of the formed container. Each divider portion 134a, 134b, and 134d includes cut lines 138 that allow a user to reconfigure the interior space of the formed container. For example, the cut lines 38 can be separated or cut along the indicated line 38. This allows the interior space of the formed container to include 0, 1, 2, 3, or 4 individual cells by folding selected parts of the divider portions 134a, 134b, and 134d downward to the bottom surface of the formed container. Divider portions 134b and 134d also include elongated slits 140 which can facilitate the positioning of divider portions 134b and 134d with respect to divider portion 134a when the container is constructed.

FIGS. 16-21 provide a non-limiting embodiment of a container 150 constructed from the blank 115 shown in FIG. 15. FIG. 16 represents a top perspective view of container 150 in an open position (e.g., top panels 110a, 110b, 110c, and 110d, are not folded downward to enclose the interior space of the container). Glue joint 115 is connected to side panel 120d, thereby defining an interior space of container 150, where side panels 120a and 120b are in opposed relationship, and side panels 120b and 120d are in opposed relationship. Divider panels 134a, 134b, and 134d form cell walls that define two sets of two cells 160a and 160b (i.e., four cells in total). A person of ordinary skill in the art will recognize that the different shapes of the two sets of cells 160a and 160b can be created by varying the aspect ratios of bottom portions 132b and 132d or divider panels 134b and 134d.

FIG. 17 is a bottom perspective view of the container 150 shown in FIG. 16. Bottom portions 132b and 132d form the outside bottom surface of the container 150 and have equivalent aspect ratios. A person of ordinary skill in the art will recognize that the aspect ratios of bottom portions 132b and 132d can be varied by length or width as desired.

FIG. 18 is a front view of the container 150 shown in FIG. 16. The bottom portions 132b and 132d form the outside bottom surface of the container 150. FIG. 19 is a side view of the container 150 shown in FIG. 16.

FIG. 20 is a top view of the container 150 shown in FIG. 16. Cells 160b have a similar shape to one another and have a greater interior space when compared to cells 160a. A person of ordinary skill in the art will recognize that the different shapes of the two sets of cells 60a, 60b can be created by varying the aspect ratios of bottom portions 32b and 32d or divider panels 34b and 34d. FIG. 21, which is a bottom view of the container 150 shown in FIG. 16, is also illustrative of the equivalent aspect ratios of bottom portions 132b and 132d.

* * *

All of the container and/or methods disclosed and claimed in this specification can be made and executed without undue experimentation in light of the present disclosure. While the container and methods of this invention have been described in terms of certain embodiments, it will be apparent to those of skill in the art that variations may be applied to the containers and/or methods and in the steps or in the sequence of steps described herein without departing from the concept, spirit and scope of the invention.

11

The invention claimed is:

1. A container comprising:

a first, second, third, and fourth side wall panel, wherein the first and third side wall panels are in opposed relationship, and wherein the second and fourth side wall panels are in opposed relationship, the side wall panels defining an interior space of the container;

a first second, third, and fourth bottom panel, wherein the first bottom panel is coupled to the first side wall panel, the second bottom panel is coupled to the second side wall panel, the third bottom panel is coupled to the third side wall panel, and the fourth bottom panel is coupled to the fourth side wall panel, and wherein each bottom panel comprises:

(a) a divider portion that extends into the interior of the container and is configured to form a cell wall that defines a cell; and

(b) a bottom portion;

wherein the divider portions of the second and fourth bottom panels have different aspect ratios,

wherein a first fold line defines a boundary between each side wall panel and each bottom panel, and wherein a second fold line defines a boundary between the divider portion and the bottom portion of each bottom panel, and wherein the distance between the first fold line and second fold line of the second bottom panel is greater than the distance between the first fold line and second fold line of the fourth bottom panel.

2. The container of claim 1, wherein the divider portions of the first and third bottom panels have the same aspect ratio.

3. The container of claim 1, wherein the distance between the first fold line and the second fold line of the first bottom panel is substantially similar to the distance between the first fold line and the second fold line of the third bottom panel.

4. The container of claim 1, wherein the first side wall panel further comprises a glue joint.

5. The container of claim 1, wherein each divider portion is capable of being folded in such a way that the interior space of the container is either not divided or else it is divided into one, two, three, four, five, or six cells.

6. The container of claim 1, wherein the bottom portion of the second and fourth bottom panels form the outside surface of the bottom of the container.

7. The container of claim 1, wherein the first and third bottom panels further comprise elongated openings that are configured to accept the divider portions of the second and fourth bottom panels.

8. The container of claim 1, wherein the interior space of the container is divided into six cells.

9. The container of claim 8, wherein the six cells are divided into two sets of three, and wherein the first set of cells have the same shape and have a smaller interior space in comparison to the second set of cells.

10. The container of claim 9, wherein the second set of cells have the same shape.

11. The container of claim 1, wherein the first and third bottom panels have the same aspect ratio, and the second and fourth bottom panels have the same aspect ratio.

12. The container of claim 11, wherein the aspect ratios of the first and third bottom panels are different when compared to the aspect ratios of the second and fourth bottom panels.

13. A container comprising:

a first, second, third, and fourth side wall panel, wherein the first and third side wall panels are in opposed relationship, and wherein the second and fourth side wall panels are in opposed relationship, the side wall panels defining an interior space of the container;

12

a first second, third, and fourth bottom panel, wherein the first bottom panel is coupled to the first side wall panel, the second bottom panel is coupled to the second side wall panel, the third bottom panel is coupled to the third side wall panel, and the fourth bottom panel is coupled to the fourth side wall panel, and wherein each bottom panel comprises:

(a) a divider portion that extends into the interior of the container and is capable of being folded in such a way that the interior space of the container is either not divided or else it is divided into at least one, two, three, four, five, or six cells; and

(b) a bottom portion,

wherein a first fold line defines a boundary between each side wall panel and each bottom panel, and wherein a second fold line defines a boundary between the divider portion and the bottom portion of each bottom panel, wherein the distance between the first fold line and the second fold line of the second bottom panel is greater than the distance between the first fold line and second fold line of the fourth bottom panel, and wherein the divider portions of the second and fourth bottom panels have different aspect ratios.

14. The container of claim 13, wherein the divider portions of the first and third bottom panels have the same aspect ratio.

15. The container of claim 13, wherein the distance between the first fold line and the second fold line of the first bottom panel is identical to the distance between the first fold line and the second fold line of the third bottom panel.

16. The container of claim 13, wherein the first and third bottom panels have the same aspect ratio, and the second and fourth bottom panels have the same aspect ratio.

17. The container of claim 16, wherein the aspect ratios of the first and third bottom panels are different when compared to the aspect ratios of the second and fourth bottom panels.

18. A single blank of material for constructing a container comprising:

a first, second, third, and fourth side wall panel, wherein the first and third side wall panels are in opposed relationship, and wherein the second and fourth side wall panels are in opposed relationship, the side wall panels being configured to define an interior space when the container is formed;

a glue joint coupled to the first side wall panel;

a first second, third, and fourth bottom panel, wherein the first bottom panel is coupled to the first side wall panel, the second bottom panel is coupled to the second side wall panel, the third bottom panel is coupled to the third side wall panel, and the fourth bottom panel is coupled to the fourth side wall panel, and wherein each bottom panel comprises:

(a) a divider portion that is configured to extend into the interior of the container when the container is formed; and

(b) a bottom portion,

wherein the divider portions of the first and third bottom panels have the same aspect ratio and the divider portions of the second and fourth bottom panels have different aspect ratios, and

wherein the bottom portions of the first, second, third, and fourth bottom panels have a rectangular shape.

19. The blank of claim 18, wherein the first and third bottom panels have the same aspect ratio, and the second and fourth bottom panels have the same aspect ratio.

20. The blank of claim 19, wherein the aspect ratios of the first and third bottom panels are different when compared to the aspect ratios of the second and fourth bottom panels.

13

- 21.** A container comprising:
a first, second, third, and fourth side wall panel, wherein the
first and third side wall panels are in opposed relation-
ship, and wherein the second and fourth side wall panels
are in opposed relationship, the side wall panels defining
an interior space of the container; 5
a first second, third, and fourth bottom panel, wherein the
first bottom panel is coupled to the first side wall panel,
the second bottom panel is coupled to the second side
wall panel, the third bottom panel is coupled to the third
side wall panel, and the fourth bottom panel is coupled to
the fourth side wall panel, wherein a first fold line
defines a boundary between each side wall panel and
each bottom panel, and wherein each bottom panel com-
prises: 10
(a) a divider portion that extends into the interior of the
container and is configured to form a cell wall that
defines a cell; and
(b) a bottom portion, wherein a second fold line defines
a boundary between the divider portion and the bot-
tom portion of each bottom panel, 20
wherein the distance between the first fold line and the
second fold line of the second bottom panel is greater
than the distance between the first fold line and second
fold line of the fourth bottom panel, and wherein the
distance between the first fold line and the second fold
line of the first bottom panel is identical to the distance
between the first fold line and the second fold line of the
third bottom panel. 25
22. The container of claim **21**, wherein the first and third
bottom panels have the same aspect ratio, and the second and
fourth bottom panels have the same aspect ratio.
23. The container of claim **22**, wherein the aspect ratios of
the first and third bottom panels are different when compared
to the aspect ratios of the second and fourth bottom panels. 30
24. A container comprising:
a first, second, third, and fourth side wall panel, wherein the
first and third side wall panels are in opposed relation-

14

- ship, and wherein the second and fourth side wall panels
are in opposed relationship, the side wall panels defining
an interior space of the container;
a first, second, third, and fourth bottom panel, wherein the
first bottom panel is coupled to the first side wall panel,
the second bottom panel is coupled to the second side
wall panel, the third bottom panel is coupled to the third
side wall panel, and the fourth bottom panel is coupled to
the fourth side wall panel, and wherein the first, second,
and fourth bottom panels each comprise:
(a) a divider portion that extends into the interior of the
container and is capable of forming a cell wall defin-
ing a cell and/or a portion of the bottom of the con-
tainer; and
(b) a bottom portion,
wherein the third bottom panel includes a bottom por-
tion but not a divider portion,
a first, second, third, and fourth top panel, wherein the first
top panel is coupled to the first side wall panel, the
second top panel is coupled to the second side wall
panel, the third top panel is coupled to the third side wall
panel, and the fourth top panel is coupled to the fourth
side wall panel,
wherein the first, second, third, and fourth top panels
each have a rectangular shape, and wherein the first
and third bottom panels each further comprise an
elongated opening that is configured to accept the
divider portions of the second and fourth bottom pan-
els.
25. The container of claim **24**, wherein the interior space of
the container is either not divided or else it is divided into one,
two, three, four, five, or six cells.
26. The container of claim **24**, wherein the second and
fourth bottom panels have the same aspect ratio.
27. The container of claim **24**, wherein the second and
fourth bottom panels have the same shape.

* * * * *