




(22) Date de dépôt/Filing Date: 2003/06/25
 (41) Mise à la disp. pub./Open to Public Insp.: 2003/12/26
 (45) Date de délivrance/Issue Date: 2007/09/18
 (30) Priorités/Priorities: 2002/06/26 (US60/391,791);
 2003/06/23 (US10/601,490)

(51) Cl.Int./Int.Cl. *E05D 15/06* (2006.01)
 (72) Inventeur/Inventor:
 OWENS, N. DOUGLAS, US
 (73) Propriétaire/Owner:
 MODERNFOLD, INC., US
 (74) Agent: ROBIC

(54) Titre : CHARIOTS ET CONTACTS MULTIPROGRAMMES
 (54) Title: MULTI-PROGRAM TROLLEYS AND SWITCHES

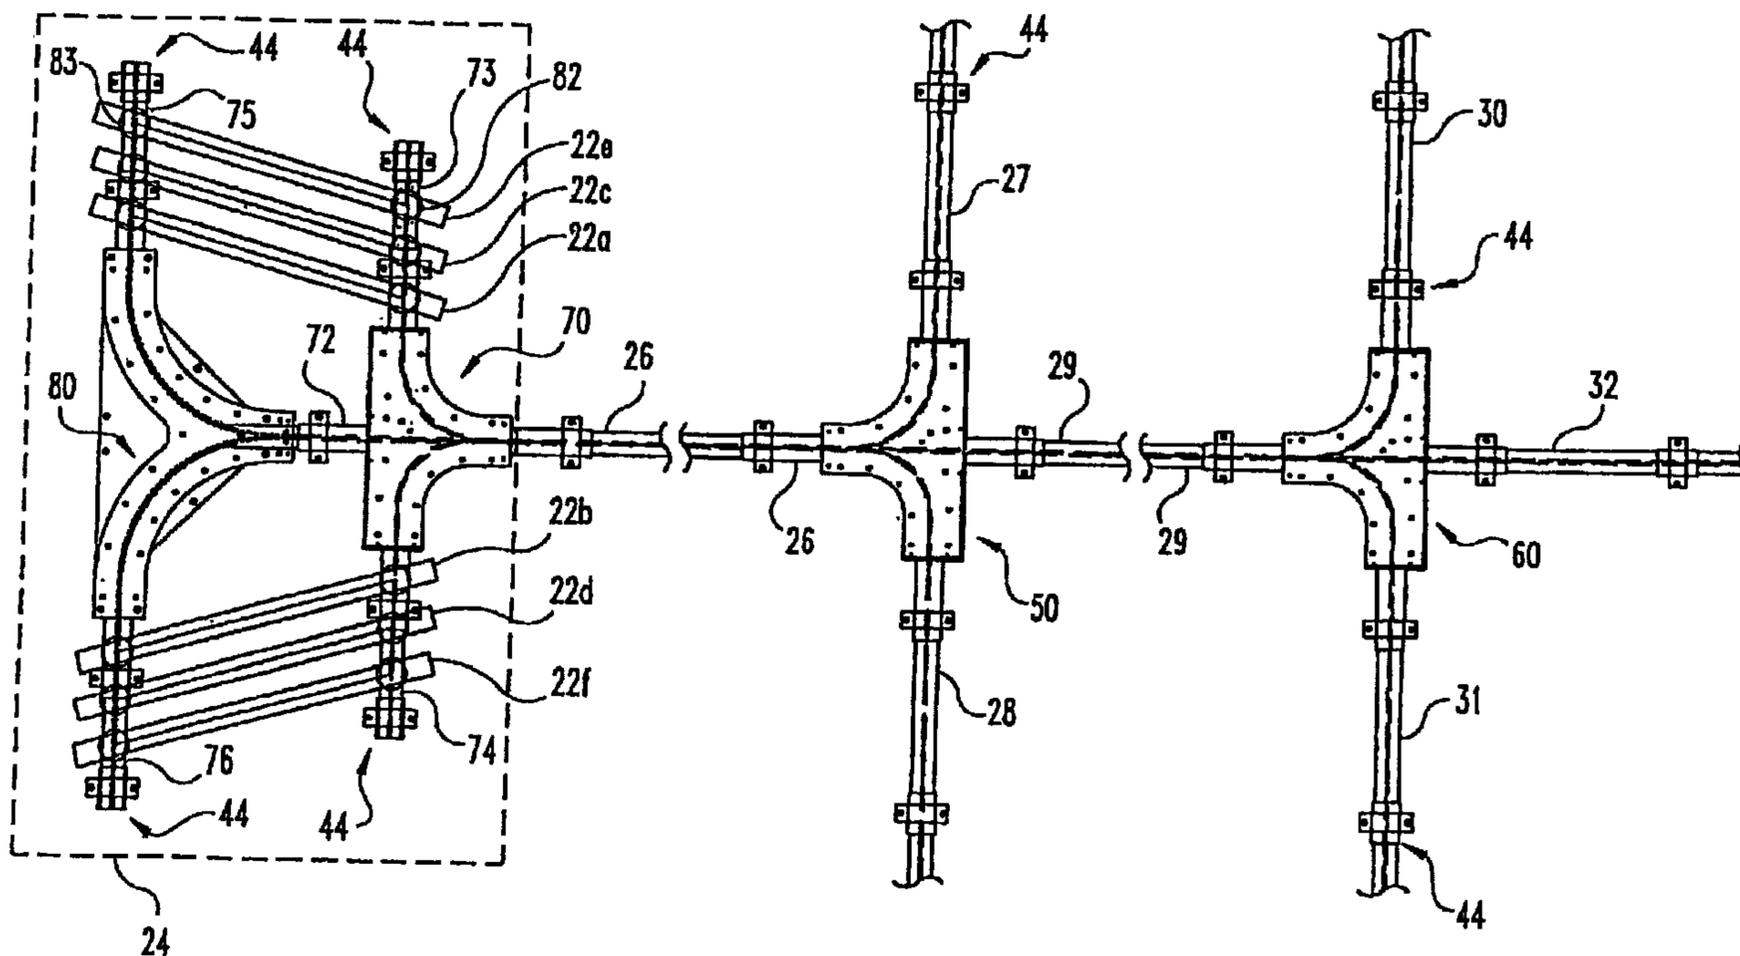

(57) Abrégé/Abstract:

A multi-program trolley and track switch system is provided for a movable wall system having multiple panels supported and movable along multiple paths defined by multiple track sections. Switch assemblies automatically direct each wall panel to a predetermined wall forming location based on the arrangement of guide plates in the each switch assembly and the configuration of a diverter element associated with each trolley. Each switch assembly includes an array of vertically oriented guide plates offset at different lateral distances from the track path. Each trolley includes a side diverter element that is positioned a predetermined lateral distance from the trolley centerline to engage a pre-selected switch guide plate. In one embodiment, lead trolleys have only a side diverter element while trailing trolleys have both a side diverter element and a center diverter element.

ABSTRACT

A multi-program trolley and track switch system is provided for a movable wall system having multiple panels supported and movable along multiple paths defined by multiple track sections. Switch assemblies automatically direct each wall panel to a predetermined wall forming location based on the arrangement of guide plates in the each switch assembly and the configuration of a diverter element associated with each trolley. Each switch assembly includes an array of vertically oriented guide plates offset at different lateral distances from the track path. Each trolley includes a side diverter element that is positioned a predetermined lateral distance from the trolley centerline to engage a pre-selected switch guide plate. In one embodiment, lead trolleys have only a side diverter element while trailing trolleys have both a side diverter element and a center diverter element.

MULTI-PROGRAM TROLLEYS AND SWITCHES

BACKGROUND OF THE INVENTION

1. Field of the Invention.

10 [0002] The present invention relates to operable wall systems used to partition larger rooms into smaller rooms and particularly to a track and trolley system wherein the trolleys can be programmed to automatically switch panels to form a desired room layout.

2. Description of the Related Art.

[0003] Operable wall panel systems, also known as movable wall panel systems, are often used to temporarily subdivide large rooms into smaller rooms such as in convention halls, hotels, and the like. These systems typically include an overhead track and trolley
20 suspension system whereby wall panels are moved along the track from a storage area to a wall forming position in the space being subdivided. The track may include a number of switches where turns and/or intersections are provided for moving the wall panels.

[0004] One difficulty in subdividing an area arises when several wall panels must be moved from a storage area through multiple intersecting track segments to a specific location to form a desired room arrangement. In many instances, each individual panel has a pre-designated position in the final room layout. This is particularly important where the subdivided room arrangement has rooms where the walls are of different colors or differing
30 surface textures which may require some of the panels to have differing features on opposite sides. In these situations, improper placement of the panels could result in mismatches in the final room layout. Previously, the process of subdividing a large space was quite time-consuming requiring that panel placement be closely monitored to achieve the desired result.

[0005] In order to facilitate the process of directing panels to a pre-determined position, guide plates have been mounted on the track intersections and used to cooperate with diverter elements mounted on the panel trolleys. In operation, the guide plates on the track intersection engage the diverter elements on the wall panel trolleys to direct the wall panel on to the proper track. One such prior design is described in U.S. Patent no. 6,481,359 and which is assigned to the assignee of the present invention.

10 [0006] In some designs, trolleys have been equipped with diverter elements that extend above the trolley wheels to engage a diverter plate mounted on the under side of a top plate of the track switch in combination with additional diverter elements mounted to a plate laterally extending from the trolley below the wheels, that engage diverter plates mounted to the underside of the bottom plate of the track switch.

[0007] One shortcoming in these prior designs is in the number of trolley and track switch combinations required to subdivide a large area.

20 [0008] In another type of movable wall system, electric switching stations are used to direct or switch wall panels to their appropriate track. The switching station includes a rotatable platter mounted at the intersection of multiple tracks. The platter is electrically operated to rotate between multiple positions connecting different track sections together at each position. One disadvantage of this system is that although it allows numerous track sections to be selectively interconnected to move the wall panels down their proper paths, a person is required to control the movement of the platter. The electric switching systems are also relatively expensive.

30 [0009] What is needed is a programmable trolley and track system that automatically directs individual wall panels to a pre-determined position in a layout without an excessive number of switch and trolley designs.

SUMMARY OF THE INVENTION

According to the present invention, there is provided a multi-program track and trolley apparatus for a movable wall system having multiple wall panels supported by and movable along multiple paths defined by multiple track sections to predetermined configurations, the apparatus comprising:

a plurality of track sections;

a switch assembly at a junction between track sections defining a first path along one track section and at least second and third paths along at least two other track sections branching from said first path, said switch assembly including an upper plate portion;

10 at least one guide member mounted on said switch assembly along said first path, said guide member being laterally offset relative to said first path; and

at least two trolleys attached to and supporting each wall panel of the movable wall system, each of said trolleys including a U-shaped channel having a transverse base portion and a pair of opposite upstanding sidewall portions, said sidewall portions defining a pair of axle bores therethrough for receiving a pair of axles, each said axle including a pair of wheel assemblies rotatably mounted thereon for rolling engagement with said track sections, and a connecting element downwardly extending from said base portion, said connecting element being configured to connect said trolley to one of the wall panels, each of said at least two trolleys having a side diverter element for selectively engaging said at least one guide member as each of
20 said trolleys travels along said first path to route the supported wall panel along either said second or said third paths, said side diverter element positioned on said trolley at a point laterally displaced from a center axis of said trolley, said center axis extending in the direction of the movement of said trolley, at least one of said at least two trolleys having a center diverter positioned at a center point on said center axis.

According to the present invention, there is also provided a multi-program track and trolley apparatus for a movable wall system having multiple wall panels supported by and movable along multiple paths defined by multiple track sections to predetermined configurations, the apparatus comprising:

30 at least one switch assembly at a junction between track sections defining a first path along one track section and at least second and third paths along at least two other track sections branching from said first path said at least one switch assembly including an upper plate portion;

a plurality of guide members mounted on and extending from said upper plate portion of said at least one switch assembly along said first path, said guide members being laterally offset relative to said first path at different lateral distances relative to each other; and

a plurality of paired trolley assemblies, each pair of said plurality of paired trolley assemblies attached to and supporting different wall panels of the movable wall system, each of said trolley assemblies including a U-shaped channel having a transverse base portion and a pair of opposite upstanding sidewall portions, said sidewall portions defining a pair of axle bores therethrough for receiving a pair of axles, each said axle including a pair of wheel assemblies rotatably mounted thereon for rolling engagement with said track sections, a connecting element downwardly extending from said base portion, said connecting element being configured to connect said trolley to one of the wall panels, and at least one side diverter element for selectively engaging said at least one guide member as each of said trolleys travels along said

10 first path to route the supported wall panel along either said second or said third paths, said side diverter element disposed on said trolley assembly at a position offset from a center axis of said trolley assembly, said center axis extending in the direction of the movement of said trolley assembly, at least one of said paired trolley assemblies having a center diverter disposed on said trolley assembly at a position on said center axis, said center diverter selectively engaging at least one of said plurality of guide members.

According to the present invention, there is also provided an automatic track switching apparatus for a movable wall system having multiple wall panels movable along a track having multiple paths defined by multiple track sections between a predetermined stored arrangement and a predetermined wall forming

20 arrangement, said apparatus comprising:

a switch assembly at a junction between track sections defining a first path along one track section and at least second and third paths along at least two other track sections branching from said first path, said switch assembly including an upper plate portion;

at least one guide member mounted on and extending downwardly from said upper plate portion of said switch assembly;

a lead trolley and a trailing trolley attached to each wall panel, each said trolley including a U-shaped channel having a transverse base portion and a pair of opposite upstanding sidewall portions, said sidewall portions defining a pair of axle bores therethrough for receiving a pair of axles, each said axle including a pair of wheel assemblies rotatably mounted thereon for rolling engagement with said track sections, a connecting element downwardly extending from said base

30 portion, said connecting element being configured to connect said trolley to one of the wall panels;

a first diverter element attached to each of said lead and trailing trolley laterally displaced from a centerline of said trolley in the direction of movement along said track for selective engagement with said at least one guide member to route the wall panel through said switch assembly in a predetermined manner to and from said wall forming arrangement; and

10 a second diverter element having an engagement member positioned on each of said trailing trolley substantially coincident with said trolley centerline of each said trailing trolley, said engagement member of said second diverter element selectively engaging said at least one guide member to control the movement of the wall panel when the wall panel is moved to said predetermined stored arrangement.

According to the present invention, there is also provided a multi-program track and trolley apparatus for a movable wall system having multiple wall panels supported by and movable along multiple paths defined by multiple track sections to predetermined configurations, the apparatus comprising:

a plurality of track sections;

a switch assembly at a junction between track sections defining a first path along one track section and at least second and third paths along at least two other track sections branching from said first path, said switch assembly including an upper plate portion;

20 a storage track connected to one of said track sections, said storage track including a first stacking section, a second stacking section, and a storage switch assembly, said first and second stacking sections each including at least a pair of parallel ones of said track sections;

at least two trolleys attached to and supporting each wall panel of the movable wall system, each of said trolleys including a trolley body rotatably supporting a pair of wheel assemblies for rolling engagement with said track sections, a connecting element extending from said trolley body, said connecting element being configured to connect said trolley to one of the wall panels, and a side diverter element disposed on said trolley at a position laterally offset from a centerline of said trolley, said side diverter selectively engaging said storage switch assembly so as to direct said trolley to one of said first and second stacking sections, and one of said at least two trolley having a center diverter disposed on said trolley at a position on a center point
30 of said centerline.

[0010] Preferably, the present invention provides a multi programmed track switch and trolley system that automatically routes wall panels between intersecting tracks to a pre-determined or pre-programmed wall-forming position. The tracks switch section includes selectively positioned guide plates on the upper interior wall of the track switch section. The guide plates engage diverter elements positioned on the trolley to direct wall panels on a particular path through the switch section. Each trolley includes an elongated diverter element or blade laterally displaced from the trolley centerline. The lateral displacement of the diverter blades is variable so as to engage selected guide plates on the track switch sections. The diverter
10 blades are also variable in height to engage or not engage certain guide plates.

[0011] Preferably, in addition, the trailing trolleys also include one or more centrally mounted diverter pins which are also variable both in height and lateral displacement relative to the trolley centerline. Through the selection of diverter blade and diverter pin arrangements, trolleys can be paired forming multiple combinations from a set of basic trolley designs.

20 **[0012]** The present invention accomplishes a primary objective of providing a track switch and trolley system that automatically routes individual wall panels of an operable wall system to a pre-determined wall forming location to compartmentalize a large room into smaller rooms without the need for an excessive number of individual trolley and switch designs.

[0013] The invention accomplishes a further objective of providing a switching system that is automatic, and without the need for human intervention.

[0014] The invention accomplishes a still further objective of providing a switching system wherein a basic set of trolley and track switch designs can be combined to form a variety of
30 room layouts.

[0015] The invention accomplishes still another objective of providing a cost effective switching system not requiring electrical power.

[0016] The invention accomplishes a still further objective of providing a switching system that permits all of the wall panels to be stored in one track storage section without the need for offset switches or flapper panels.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] The above mentioned and other advantages and objects of this invention, and the manner of obtaining them, will become more apparent and the invention itself will be better understood by reference to the following descriptions of embodiments of the invention taken in conjunction with the accompanying drawings, wherein:

[0018] Figure 1 is a diagrammatic top view of an operable wall system using a trolley and track switching system according to the present invention;

[0019] Figure 2 is a diagrammatic perspective view of the operable wall system of Figure 1;

[0020] Figure 3 is a partial diagrammatic top view of the operable wall system of Figure 1 wherein the track and track switch sections are shown in additional detail;

[0021] Figure 4 is a front view of a lead trolley equipped with a side diverter element in the outermost lateral position for the track switching system of the present invention;

[0022] Figure 5 is a right side view of the trolley of Figure 4;

[0023] Figure 6 is a front view of a trailing trolley equipped with a side diverter element in the outermost lateral position for the track switching system of the present invention;

[0024] Figure 7 is a right side view of the trolley of Figure 6;

[0025] Figure 8 is a front view of a lead trolley equipped with a side diverter element in an intermediate lateral position for the track switching system of the present invention;

[0026] Figure 9 is a front view of a trailing trolley equipped with a side diverter element in an intermediate lateral position for the track switching system of the present invention;

[0027] Figure 10 is a front view of a lead trolley equipped with a side diverter element in the innermost lateral position for the track switching system of the present invention;

[0028] Figure 11 is a front view of a trailing trolley equipped with a side diverter element in the innermost lateral position for the track switching system of the present invention;

[0029] Figure 12 is a top view of a switch assembly from Figure 2, shown removed from the remainder of the track, which serves to direct trailing trolleys to their proper track sections during wall panel stacking;

[0030] Figure 13 is a front view , taken along line 13-13 in Figure 12, of the switch assembly of Figure 12;

[0031] Figure 14 is a top view of a switch assembly from Figure 2, shown removed from the remainder of the track, which serves to direct lead trolleys to their proper track sections during wall panel stacking;

[0032] Figure 15 is a front view , taken along line 15-15 in Figure 14, of the switch assembly of Figure 14;

[0033] Figures 16-21 are front views showing the lead and trailing trolleys of Figures 4-11 entering the switch assembly of Figure 15;

[0034] Figure 22 is a top view of a first switch assembly from Figure 2, shown removed from the remainder of the track, which serves to direct trolleys to the proper intersecting track sections during movement of the suspended panels in a wall forming direction;

[0035] Figure 23 is a rear view, taken along line 23-23 in Figure 22 of the switch assembly of Figure 22;

[0036] Figure 24 is a top view of another switch assembly from Figure 2, shown removed from the remainder of the track, which serves to direct trolleys to the proper intersecting track sections during movement of the suspended panels in a wall forming direction;

[0037] Figure 25 is a rear view, taken along line 25-25 in Figure 24 of the switch assembly of Figure 24.

[0038] Corresponding reference characters indicate corresponding parts throughout the several views. Although the drawings represent embodiments of the invention, the drawings are not necessarily to scale and certain features may be exaggerated or omitted in order to better illustrate and explain the present invention.

DESCRIPTION OF THE INVENTION

[0039] For the purposes of promoting an understanding of the principles of the invention, reference will now be made to the embodiments illustrated in the drawings and specific language will be used to describe the same. It will nevertheless be understood that no limitation of the scope of the invention is thereby intended. The invention includes any alterations and further modifications in the illustrated devices and described methods and further applications of the principles of the invention which would normally occur to one skilled in the art to which the invention relates.

[0040] Referring now to **FIGS. 1** and **2**, there is diagrammatically shown a top view and a perspective view of a movable wall panel system including an automatic track switching system of the present invention. The movable wall panel system serves to selectively compartmentalize a single, large room **20** into smaller rooms or areas. The operable wall includes a multitude of panels that extend from the floor to the ceiling of room **20**, which panels are shown in **FIG. 1** in dashed lines at **22** in a stacked or storage position within a housing abstractly indicated at **24**. In **FIG. 2**, one of the panels **22** is shown being moved to a wall-forming location. Although shown as being within room **20**, housing **24** typically is located directly adjacent to and outward of a side wall of room **20** as a specially designed pocket room. Wall panels **22** may be of any conventional construction. None of the panels **22** are hinged to adjacent panels in the inventive panel system, as the track switching system of the present invention uses panels that are each separately movable along the track between an operational, wall-forming position and a storage position.

[0041] Panels **22** are movable along track segments mounted in the ceiling which form intersecting track sections **26, 27, 28, 29, 30, 31** and **32**. Track sections **26-32** are designed such that when panels **22** are all in their wall-forming positions, room **20** is compartmentalized into six smaller rooms or areas **35, 36, 37, 38, 39** and **40**. This track

configuration is merely illustrative and not intended to be limiting as the inventive track switching system may be employed with more complicated or less complicated tracks, including intersecting tracks that serve to compartmentalize a room into different numbers of smaller room or differently shaped rooms. In addition, the shown track configuration can be used in an even larger room than room 20, which larger room is equipped with one or more additional operable wall panel systems that are similar to the shown system and which form walls in alignment with the walls formed by the shown wall panel system to provide suitable room compartmentalization.

[0042] Referring now to **FIG. 3**, portions of the operable wall of **FIG. 1** are shown in a top view. Track sections **26-32** are of a conventional design suitable for use with the type of trolley employed with the panels. As described below, different types of trolleys may be used within the scope of the invention, and the track construction will be changed in a corresponding fashion to provide proper a suitable track and trolley combination. In the illustrated embodiment, track sections **26-32** are made of steel beams which are generally square in vertical cross-section. The wheels of the trolley ride along the bottom wall of the track section, and a slot centered in that bottom wall which extends longitudinally along the track section length permits passage of the pendant trolley bolt that attaches to the top of a panel **22**. Track sections **26-32** are mounted to the ceiling support structure by means of hanger brackets of conventional design, generally shown at **44**, positioned at spaced intervals along the lengths of the track sections.

[0043] A switch assembly, generally designated **50**, serves as an intersecting track section for track sections **26-29** and is operably connected to each of track sections **26-29**. Switch assembly **50** is mounted to the ceiling support structure and, as described further below, is designed to cooperate with diverter element mounted on the panel trolleys to direct panels being moved along track section **26** in a wall-forming direction into one of track sections **27**, **28** and **29**. Another switch assembly, generally designated **60**, serves as the intersection of track sections **29-32** to which it is operably connected. Switch assembly **60** also is mounted to the ceiling support structure and is designed to cooperate with diverter elements mounted

on the panel trolleys to direct panels being moved along track section 29 in a wall-forming direction into one of track sections 30, 31 and 32.

[0044] The stacking of panels 22 within housing 24 is achieved through the use of switch assemblies 70 and 80 that are interconnected by track segment 72 and which are mounted to the ceiling support structure. Switch assembly 70 is operably connected to track section 26, as well as to panel stacking track segments 73 and 74 mounted to the ceiling support structure by hanger brackets 44. Switch assembly 80 is connected to panel stacking track segments 75 and 76 mounted to the ceiling support structure by hanger brackets 44.

[0045] Panels 22 are stacked along track segments 73-76 when stored within housing 24. The length of track segments 73-76 is a function of the number of panels to be stacked, which in turn is a function of the length of the walls formed by the panels when moved to their wall-forming positions. In FIG. 3, only six panels are shown to facilitate illustration, and these panels are designated as 22a, 22b, 22c, 22d, 22e and 22f. Each of these panels represent multiple panels of a similar type, with the types being distinguished herein based solely on the configuration of their trolleys. Specifically, and while the panels may otherwise be similar in most respects, as described below the trolleys of panel type 22a differ from the trolleys of panel type 22b-f, which in turn have trolleys that differ from each other. When the operable wall is fully extended, panels of the type 22a are aligned along the entire length of track section 30, panels of the type 22b are aligned along the entire length of track section 31, panels of the type 22c are aligned along the entire length of track section 27, panels of the type 22d are aligned along the entire length of track section 28, and panels of the type 22e and 22f are aligned along the entire length of track sections 26, 29 and 32. Naturally, the number of panels each of panels 22a, 22b, 22c, 22c, 22e and 22f represents can differ as it is dependent upon the length of the walls being formed, and it is not material to the present invention.

[0046] Each of panels 22 is suspended from the track system by two trolleys, namely a lead trolley and a trailing trolley, positioned proximate opposite ends of that panel. As used

herein, lead and trailing are referenced with respect to the trolley position during movement of the panels from a stacked position to a wall-forming position. The lead or front trolleys of panels **22a**, **22b**, **22c**, **22d**, **22e** and **22f**, when such panels are stacked, are disposed along track segments **73** and **74**, and the trailing or back trolleys of the panels when stacked are disposed along track segment **75** and **76**. For example, and with reference to stacked panel **22e**, a lead trolley generally represented at **82** suspends the panel from track section **73**, and a trailing trolley generally represented at **83** suspends the panel from track section **75**.

[0047] The automatic track switching system of the present invention employs switch or diverter elements mounted to the trolleys of panel **22**. The overall form of the trolleys to which such diverter elements are attached may be selected from one of the many known designs. As a result, the term trolley is used generally herein, and is intended to encompass devices, including wheeled carriage and carriers, of all types that are operably connected to and movable along various tracks.

[0048] The trolleys used with panel types **22a** through **22f** differ only in the configuration of their diverter elements. Each lead and trailing trolley includes a side diverter element. The diverter blades on the side diverter elements are located at one of three different lateral positions relative to and on each side of the trolley center line. In addition to the side diverter elements, each trailing trolley and only the trailing trolleys also includes a center diverter element. Center diverter elements are not used on the lead trolleys.

[0049] In the description that follows only the trolleys for use with panel types **22a**, **22c**, and **22e** will be described. Trolleys with these panels will include side diverter elements positioned to the right of the trolley centerline from the perspective of a person in **Fig. 3** standing at switch **50** and looking to the left toward housing **24**. Each trolley described will have a counterpart for use with panel types **22b**, **22d** or **22f** wherein the only difference is that the side diverter element is positioned to the left of the trolley centerline.

[0050] One suitable lead trolley design for use with panel type **22e** is shown in **Figs. 4** and **5** and is generally represented at **100**. Trolley **100** includes a U-shaped carrier channel **102**

having a base or web portion **103** and a pair of opposite upstanding sidewall portions **104**. A pendent bolt fitting **116** downwardly extends from the lower surface from the base portion **103**. The fitting **116** is internally threaded to receive a pendant trolley bolt **118** which is secured to the top section of a movable wall panel abstractly shown at **101**. Sidewall portions **104** defines bores **108** through which axles **110** are received. Four trolley wheel assemblies **112** are rotatably mounted on the axles **110** extending through sidewall portions **104** and wheel spacers **114**. Wheel assemblies **112** rollingly engage the various tracks for moving wall panel **101**. Guide rollers **120** extend into the track slot and serve to reduce friction between the trolley **100** and the slot. Guide rollers **120** are rotatably mounted on pivot posts **122** which are attached to the channel base portion **103** by any suitable means several of which are known in the art.

[0051] The trolley **100** is equipped with a side diverter element **124** that cooperates with guide plates mounted on the inside of the upper surface of the track switch sections to route the panel through the switch. The diverter element **124** is displaced laterally or perpendicular from the trolley centerline in the direction of the motion of the trolley along the track. The diverter element **124** includes a blade portion **125** that extends above the trolley wheels **112** and a body portion **126** that fixedly attached such as by welding to the carrier sidewall portion **104** between the wheel assemblies **112**.

[0052] With reference to **Figs. 6 and 7**, there is shown is a trailing trolley **130** that could be paired with trolley **100** of **Figs. 4 and 5** for use on panel type **22e**. The trolley **130** includes a center diverter element **134** in the form of a pair of pins **132** projecting vertically upward from a base plate **136** that is fixedly attached to the upper portion of carrier side walls **104**. Rather than the pin shown, a diverter element in the form of a rigid plate or blade may be used on the center diverter **134**. The trailing trolley **130** also includes a side diverter element **138** having a diverter blade **139** at the same lateral displacement from the trolley centerline as diverter blade **125** on trolley **100**. Side diverter element **138** also includes a body portion **140** which is fixedly attached to carrier sidewall portion **104**. Diverter blade **139** of trolley **130** is shorter in length than diverter blade **125** of lead trolley **100**. Based on these

differences in diverter blade length along with the presence of a center diverter **132** on trailing trolley **130**, the lead and trailing trolleys **100** and **130** respectively can be routed differently through a given switch section.

[0053] **Figs. 8** and **9** show lead and trailing trolleys that can be used on panel type **22c**. Lead trolley **150** in **Fig. 8** includes a U-shaped carrier channel **152** having a base or web portion **153** and upstanding sidewalls **154**. A side diverter element in the form of a diverter blade **158** extends vertically upward from carrier channels sidewall **154**. The diverter blade **158** may be fixedly attached to sidewall portion **154**, such as by welding. Alternatively, the diverter blade may be integrally formed with channel sidewall **154**. As with the previous trolleys, diverter blade **158** functions to engage complimentary guide plates provided on the track switch section. As a lead trolley, trolley **150** includes no center diverter.

[0054] In **Fig. 9**, trailing trolley **160** for panel type **22c** is shown. As a trailing trolley, trolley **160** includes a center diverter element **162** which includes a pair of diverter pins **163** extending vertically upward from a base plate **164** that is fixedly attached such as by welding to carrier channel sidewall portions **154**. A side diverter blade **166** extends vertically upward from carrier sidewall portion **154** as shown. As in the previously described lead and trailing trolley pair, side diverter blade **166** of trailing trolley **160** is shorter in height than diverter blade **158** of lead trolley **150**.

[0055] With reference now to **Fig. 10**, there is shown a lead trolley **170** for use with panel type **22a**. Trolley **170** includes a U-shaped carrier channel **172** having a base or web portion **173** and upstanding sidewall portions **174**. Trolley **170** includes a side diverter element **176** positioned inwardly from carrier sidewall portion **174**. Diverter element **176** includes a body portion **178** that is preferably fixedly attached such as by welding to the inside of sidewall **174** between axle pairs **110**. Diverter blade **177** extends vertically upward from the body portion **178**.

[0056] A trailing trolley suitable for use with panel type **22a** is generally represented at **180** in **Fig. 11**. Similar to lead trolley **170**, trailing trolley **180** includes a side diverter element

186 that includes a body portion **188** fixedly attached to the inside of sidewall **174** and having a vertically extending diverter blade **187** which is shorter in height than diverter blade **177** of the lead trolley **170**. As a trailing trolley, trolley **180** includes a center diverter element **190** that includes a pair of diverter pins **192** that extend vertically upward from a base plate **193**. Base plate **193** is fixedly attached at one side to body portion **188** of side diverter element **186**. The other side of base plate **193** is fixedly attached to the opposite carrier channel side wall **174**. Side diverter blades **177** and **187** of trolleys **170** and **180** respectively represent the most laterally inward of the side diverter blade positions.

[0057] The switch assemblies particularly designed for use in conjunction with the panel suspending trolleys of **Figs. 4-11** are shown in greater detail in **Figs. 12-25**. With reference now to **FIGS 12** and **13**, the switch assembly **80** that during wall stacking cooperates with the trolley diverter elements to route the trailing trolleys to their proper track sections is shown in top view and front view, respectively. In the illustrated embodiment, switch assembly **80** is formed from a single top plate **240** and three bottom plate sections **242**, **243** and **244**. Top plate **240** is suspended from a support structure with conventional fasteners in order to mount switch assembly **80** in the ceiling of room **20**. Plate sections **242-244** are each connected to top plate **240** in a vertical spaced-apart relationship in a well-known manner with a plurality of bolt and nut type fasteners that extend through tubular steel spacers **246** sandwiched between the various switch plates. The portions of these plate-connecting fastener assemblies that lie above the upper surface of top plate **240** are not shown in **Fig. 12** for purposes of illustration.

[0058] Plate sections **243** and **244** are horizontally spaced apart to provide a track path **248** into which enter trolleys being routed into switch assembly **80** in a panel stacking direction. Plate sections **242** and **243**, and plate sections **244** and **242**, are horizontally spaced apart to provide arcuate track paths or slots **249** and **250**, respectively. Track paths **248**, **249** and **250**, which provide the spaces through which extend the pendant bolts of the trolleys when the trolleys move or roll along the upper surface of plate sections **242-244**, are aligned with the track paths of track sections **72**, **76** and **75**, respectively.

[0059] Diverters or guides used to selectively route trolleys passing along track path 248 into either track path 249 or 250 include a series of elongate plates mounted on either side of track path 248. As shown in Fig. 12, three elongate and arcuate guide plates 255, 256 and 257 are fixedly attached, such as by welding to the underside of the top plate 240 proximate and left of track path 248. Guide plates 255-257 are evenly horizontally spaced to provide channels 259 and 260. Three elongate, arcuate guide plates 262, 263 and 264 are similarly attached to the underside of top plate section 240 right of track path 248 to provide channels 266 and 267. The ends of the guide plates are pointed to aid in routing diverter blades into the appropriate channel or space as described further below.

[0060] Referring to Fig. 13, in conjunction with the height of the diverter blades of the side diverters of the trolleys, each of guide plates 255-257 and 262-264 are made sufficiently tall so as to project down from the top plate to a height at least slightly below the tops of the upstanding blades of the side diverter elements of the trailing trolleys. As so configured, the diverter blades must either enter one of the channels 259, 260, 266 and 267, or enter the spaces laterally outward of guide plates 255 and 264, when the trolleys pass along track path 248. Specifically, when the trailing trolleys shown in Figs. 6, 9, and 11 are separately routed through track path 248 in a wall-stacking direction, diverter blade 139 passes along the outer side of guide plate 264, diverter blade 166 moves within channel 267, and diverter blade 187 moves within channel 266, thereby routing these trolleys into track path 250.

[0061] Although guide plates 255-257 and 262-264 are shown as having the same height, guide plates 255-257 and 262-264 could all be of different heights, so long as each plate is sufficiently tall so as to engage the appropriate trolley diverter blades during use.

[0062] With reference now to Figs. 14 and 15, the switch assembly 70 that during wall stacking cooperates with the trolley diverter elements to route the lead and trailing trolleys to their proper track sections is shown in top view and front view, respectively. In the illustrated embodiment, switch assembly 70 is formed from a single top plate 270, mounted in the room ceiling, and four bottom plate sections 272, 273, 274 and 275. Bottom plate

sections **272-275** are each connected to top plate **270** in a vertical spaced-apart relationship via spacing fasteners indicated at **280**.

[0063] Bottom plate sections **274** and **275** are horizontally spaced apart to provide a track path **282** into which enter trolleys being routed in a panel stacking direction. Plate sections **273** and **275**, and plate sections **272** and **274**, are horizontally spaced apart to provide arcuate track paths **283** and **284**, respectively, in communication with track path **282**. Plate sections **272** and **273** are horizontally spaced apart to provide a linear track path **285** in communication and aligned with track path **282**. Track paths **282**, **283**, **284** and **285** are aligned with the track paths of track sections **26**, **73**, **74** and **72**, respectively.

[0064] In order to maintain the downstream ends of track paths **283** and **284** in alignment with each other while at the same time, having the upstream ends of these track paths be staggered along the track path **282** to avoid relatively large gaps between the bottom plates, arcuate paths **283** and **284** are formed with different radiuses. One suitable radius for the tighter turn for the trolley is about eight inches, while a suitable radius for the more gentle turn can be about twelve inches. Other radiuses of curvature for either turn of the illustrated switch assembly, such as 16, or 20, or 24 inches and preferably greater than eight inches, may be employed. Different trolleys may allow use of still different radiuses of curvature, including larger and smaller radii.

[0065] Guides used to selectively route lead trolleys passing along track path **282** into either track path **283** or **284** include a series of plates mounted to the underside of top plate **270** on either side of track path **282**. Arcuate guide plates **290**, **291**, and straight guide plate **292** are fixedly attached to the underside of top plate section **270** left of track path **282** to form channels **294** and **295**. Two arcuate guide plates **298** and **299** and straight guide plate **297** are similarly attached to the underside of top plate **270** right of track path **282** to provide channels **301** and **302**. Each of guide plates **290-291** and **298-299** is shorter than guide plates **255-257** and **262-264** of switch assembly **80**. Specifically, guide plates **290-291** and **298-299** are made sufficiently tall so as to project down to a height slightly below the tops of the

upstanding blades of the side diverter elements of the lead trolleys, but not so tall as to extend below the tops of the shorter blades of the side diverter elements of the trailing trolleys. As a result, during operable wall stacking when the trolleys are passed through track path **282**, while the diverter pins of the trailing trolleys do not engage guide plates **290-291** and **298-299** so that these guide plates do not interfere with the motion of the trailing trolleys, the diverter blades of the lead trolleys are guided by these plates. Diverter blade **125** passes along the outer side of guide plate **299**, diverter blade **158** moves within channel **302**, and diverter blade **177** moves within channel **301**, thereby routing the trolleys of **Figs. 4, 8, and 10** into track path **283**.

[**0066**] In order to ensure the trailing trolleys, being moved in a stacking direction through track path **282** continue into track path **285** and not track paths **283** and **284**, straight guide plates **292** and **297** define a channel **305** into which the center diverter of each of the trailing trolleys of **Figs. 6, 9, and 11** upwardly extends.

[**0067**] Lead trolleys **100, 150, and 170** are depicted entering switch assembly **70** in **Figs. 16, 18, and 20** respectively. The side diverter blades of these trolleys operatively engage guide plates **297-299**. Trailing trolleys **130, 160, and 180** are depicted entering switch assembly **70** in **Figs. 17, 19, and 21** respectively. With these trolleys, only the center diverter operatively engages guide plates **292** and **297**.

[**0068**] With reference now to **Figs. 22 and 23**, the switch assembly **50** that during wall extension cooperates with the upstanding blades of the side diverter elements of the trolleys to route the trolleys to their proper track sections is shown in top view and rear view, respectively. Switch assembly **50** is formed from a single top plate **310**, mounted in the room ceiling, and four bottom plate sections **312, 313, 314** and **315**. Bottom plate sections **312-315** are each connected to top plate **310** in a vertical spaced-apart relationship by spacing fasteners indicated generally at **318**.

[**0069**] Bottom plate sections **312** and **313** are horizontally spaced apart to provide a track path **320** into which enter trolleys being moved into switch assembly **50** along track section

26 in a forward or wall extending direction. Plate sections 312 and 314, and plate sections 313 and 315, are horizontally spaced apart to provide track paths 321 and 322, respectively, that are in communication with track path 320 and that have different radiuses of curvature similar to the track paths of switch 70. Plate sections 314 and 315 are horizontally spaced apart to provide a linear track path 323 in communication and aligned with track path 320. Track paths 321, 322 and 323 feed the trolleys moving therealong into the track paths of track sections 27, 28 and 29, respectively.

[0070] Guides used to selectively route trolleys passing along track path 320 into one of track path 321, 322 or 323 include an arrangement of guide plates fixedly mounted to the underside of top plate 310. In order to ensure engagement with the upstanding diverter blades of both the lead trolleys and the trailing trolleys, each guide plate on switch assembly 50 is sufficiently tall so as to project down from the top plate to which it is attached to a height slightly below the tops of the shorter upstanding blades of the side diverter elements of the trailing trolleys. Plates of this standard height also naturally project below the tops of taller, upstanding blades of the side diverter elements of the lead trolleys.

[0071] Guide plate 325 serves to route trolleys moving along track path 320 into track path 321 in the process of forming a wall along track segment 27. Arcuate guide plate 325 is structured such that diverter blade 125 of trolley 100, and diverter blade 139 of trolley 130 slide along the laterally outer face of guide plate 325 to route trolleys 100 and 130 into track path 321. Straight guide plates 326 and 327 define a channel 328 through which slide diverter blade 158 of trolley 150 and diverter blade 166 of trolley 160. Guide plates 326 and 327 are structured to prevent trolleys 150 and 160 from entering track path 321 as the trolleys move forward in a wall extending direction along track path 320. Guide plate 330, which is aligned with guide plate 327, functions to prevent trolleys 150 and 160 from straying into track path 322, and thereby direct such trolleys into track path 323 by the engagement of diverter blades 158 and 166 against the laterally outward face of guide plate 330. Straight guide plate 332 and, guide plate 327 together define a channel 333 through which slide diverter blade 177 of trolley 170 and diverter blade 187 of trolley 180. Guide plates 327 and

332 prevent trolleys **170** and **180** from entering track path **321** as the trolleys move forward in a wall extending direction along track path **320**. Guide plate **335** is aligned with guide plate **332** and functions to prevent trolleys **170** and **180** from straying into track path **322**, and thereby direct such trolleys into track path **323**, by the engagement of diverter blades **177** and **187** against the laterally outward face of guide plate **335**. In a similar fashion, guide plates **340**, **342**, **344**, and **347** restrict access to track path **322** and track section **28**.

[0072] With reference now to **Figs. 24** and **25**, the switch assembly **60** that during wall extension cooperates with the upstanding blades of the side diverter elements of the trolleys to route the trolleys to their proper track sections **30-32** is shown in top view and rearview, respectively. Except for its guide plate design, switch assembly **60** is constructed and mounted in a similar fashion to switch assembly **50** and includes top plate **370**, bottom plate sections **372**, **373**, **374** and **375**, and spacing fasteners **378**.

[0073] Bottom plate sections **374** and **375** are spaced to provide track path **380**. Plate sections **372** and **374**, and plate sections **373** and **375**, are horizontally spaced apart to provide track paths **381** and **382**, respectively, with radiuses of curvature similar to the track paths of switch **50**. Plate sections **372** and **373** are spaced to provide a linear track path **383** in line with track path **380**. Track paths **380**, **381**, **382** and **383** are aligned with the track paths of track sections **29**, **30**, **31** and **32**, respectively.

[0074] Guides used to selectively route trolleys passing along track path **380** into one of track path **381**, **382** or **383** include guide plates fixedly mounted to the underside of top plate **370**. The guide plates, although shown in **Fig. 25** as having uniform heights, may be of different heights as long as each is sufficiently tall to engage the upstanding diverter blades of both the passing lead trolleys and the trailing trolleys. Arcuate guide plate **390** is structured such that diverter blade **158** of trolley **150**, and diverter blade **166** of trolley **160**, slide along the laterally outer face of guide plate **390** to route trolleys **150** and **160** moving along track path **380** into track path **381** in the process of forming a wall along track segment **30**. Straight guide plates **392** and **394**, together with a segment of guide plate **390**, define a

channel 396 through which slides diverter blade 177 of trolley 170 and diverter blade 187 of trolley 180. Guide plates 392 and 394 prevent trolleys 170 and 180 from entering track path 381 as the trolleys move forward in a wall extending direction along track path 380. Guide plate 398 is aligned with guide plate 392 and functions to prevent trolleys 170 and 180 from straying into track path 382, and thereby directs such trolleys into track path 383, by the engagement of diverter blades 192 and 186 against the laterally outward face of guide plate 398. In a similar fashion, guide plates 400, 402, and 404 restrict access to track path 382 and track section 31.

[0075] The automatic track switching system of the present invention will be further understood in view of the following description of its operation. When the panels are in the stacked arrangement shown in Fig. 2, to compartmentalize room 20 the panels are first removed from housing 24 manually by a user who subsequently pushes or pulls the panel along the various track sections to a wall-forming position. In particular, when a panel of the type 22a is moved from its stacked arrangement, the engagement of its trolleys with the switch assemblies 70 and 80 causes panel 22a to be routed into track section 26. Upon reaching switch assembly 50, the above-described engagement of the guide plates mounted on the switch assembly with the upstanding blades of the side diverter elements of its trolleys cause panel 22a to pass through switch assembly 50 into track segment 29. When panel 22a reaches switch assembly 60, the engagement of the guide plates of the switch assembly with the upstanding blades of the side diverter elements of the trolleys automatically switches panel 22a into the track path which leads to track section 30.

[0076] Panels of the type 22c are routed via switch assemblies 70 and 80 into track section 26, and are automatically routed by switch assembly 50 into track section 27. Panels of the type 22e are routed by switch assemblies 70 and 80 into track section 26, and, depending on the order in which they are moved from housing 24, such panels are aligned along track, segments 32, 29 and 26.

[0077] The process of moving the panels back to a stacked arrangement is performed in generally the reverse order of the wall-forming process. As the panels traveling along track section 26 are moved rearward, the trailing trolleys enter the switch assembly 70. Because the shorter upstanding pins of the side diverter elements of the trailing trolleys do not vertically extend upward to engage the guide plates of assembly 70, the trailing trolleys are not affected by such guide plates. However, the center diverter disposed at the top of each trailing trolley engages the innermost guides 292 and 297, thereby routing the trailing trolleys into track segment 72 and then ultimately to switch assembly 80. As the panels continue to move rearward, the guide plates of switch assembly 80 engage the upstanding pins of the side diverter elements of the trailing trolleys to route the trailing trolleys into the proper track section for stacking, and the guide plates of switch assembly 70 engage the upstanding pins of the side diverter elements of the lead trolleys to route the lead trolleys into the proper track section for stacking.

[0078] By utilizing diverter elements on the trolleys which are provided at different lateral spacings relative to the trolleys; it is possible to provide automatic track switching systems adaptable for use with a great variety of types of wall arrangements. Although trolleys with side diverter elements with three lateral pin positionings are shown, systems with fewer or possibly even greater lateral positionings are within the scope of the present invention.

[0079] While this invention has been shown and described as having multiple designs, the present invention may be further modified within the spirit and scope of this disclosure. For instance, although the lead and trailing trolley pairs have been described as having side diverter elements at the same lateral positioning, the invention contemplates combinations of lead and trailing trolley pairs wherein the side diverters are positioned at different lateral displacements from the trolley centerlines.

[0080] While the invention has been illustrated and described in detail in the drawings and foregoing description, the same is to be considered as illustrative and not restrictive in character. It should be understood that only the preferred embodiments have been shown and

described and that all changes and modifications that come within the spirit of the invention are desired to be protected.

WHAT IS CLAIMED IS:

1. A multi-program track and trolley apparatus for a movable wall system having multiple wall panels supported by and movable along multiple paths defined by multiple track sections to predetermined configurations, the apparatus comprising:

a plurality of track sections;

10 a switch assembly at a junction between track sections defining a first path along one track section and at least second and third paths along at least two other track sections branching from said first path, said switch assembly including an upper plate portion;

at least one guide member mounted on said switch assembly along said first path, said guide member being laterally offset relative to said first path; and

at least two trolleys attached to and supporting each wall panel of the movable wall system, each of said trolleys including a U-shaped channel having a transverse base portion and a pair of opposite upstanding sidewall portions, said sidewall portions defining a pair of axle bores therethrough for receiving a pair of axles, each said axle including a pair of wheel assemblies rotatably mounted thereon for rolling engagement with said track sections, and a connecting element downwardly extending from said base portion, said connecting element being configured to connect said trolley to one of the wall panels, each of said at least two trolleys
20 having a side diverter element for selectively engaging said at least one guide member as each of said trolleys travels along said first path to route the supported wall panel along either said second or said third paths, said side diverter element positioned on said trolley at a point laterally displaced from a center axis of said trolley, said center axis extending in the direction of the movement of said trolley, at least one of said at least two trolleys having a center diverter positioned at a center point on said center axis.

2. The track and trolley apparatus of claim 1, wherein each of said guide member includes at least one guide plate downwardly extending from said upper plate portion.

30 3. The track and trolley apparatus of claim 2, wherein said side diverter element includes a blade portion disposed above said wheel assemblies.

4. The track and trolley apparatus of claim 1, wherein said at least one guide member is a plurality of guide members each of said plurality of guide members being laterally offset relative to said first path at different lateral distances relative to each other.

5. The track and trolley apparatus of claim 3, wherein:
 said at least two trolleys includes a lead trolley and a trailing trolley and said blade portion of said side diverter on one of said lead or trailing trolleys is taller than said blade portion of said side diverter on the other of said lead or trailing trolleys; and
 10 said guide plate has a height sized to be engaged only by the taller of said blades.

6. The track and trolley apparatus of claim 3, wherein:
 said guide plate is disposed a first lateral distance from said first path; and
 said at least two trolleys includes a lead trolley and a trailing trolley and said diverter blade on one of said lead or trailing trolleys is disposed at said first lateral distance, while said diverter blade on the other of said lead or trailing trolleys is disposed at a second lateral distance different from said first lateral distance.

7. A multi-program track and trolley apparatus for a movable wall system having
 20 multiple wall panels supported by and movable along multiple paths defined by multiple track sections to predetermined configurations, the apparatus comprising:
 at least one switch assembly at a junction between track sections defining a first path along one track section and at least second and third paths along at least two other track sections branching from said first path said at least one switch assembly including an upper plate portion;
 a plurality of guide members mounted on and extending from said upper plate portion of said at least one switch assembly along said first path, said guide members being laterally offset relative to said first path at different lateral distances relative to each other; and
 a plurality of paired trolley assemblies, each pair of said plurality of paired trolley assemblies attached to and supporting different wall panels of the movable wall system, each of
 30 said trolley assemblies including a U-shaped channel having a transverse base portion and a pair

of opposite upstanding sidewall portions, said sidewall portions defining a pair of axle bores therethrough for receiving a pair of axles, each said axle including a pair of wheel assemblies rotatably mounted thereon for rolling engagement with said track sections, a connecting element downwardly extending from said base portion, said connecting element being configured to connect said trolley to one of the wall panels, and at least one side diverter element for selectively engaging said at least one guide member as each of said trolleys travels along said first path to route the supported wall panel along either said second or said third paths, said side
 10 diverter element disposed on said trolley assembly at a position offset from a center axis of said trolley assembly, said center axis extending in the direction of the movement of said trolley assembly, at least one of said paired trolley assemblies having a center diverter disposed on said trolley assembly at a position on said center axis, said center diverter selectively engaging at least one of said plurality of guide members.

8. The track and trolley apparatus of claim 7, in which each of the track sections defines a channel, wherein:

each of said guide members includes a guide plate extending vertically downward from said upper plate portion of said switch assembly; and

each of said at least one said diverter element includes a vertically oriented blade portion
 20 laterally offset relative to the path defined by each track section for engaging said guide plate of selected ones of said plurality of guide members.

9. The track and trolley apparatus of claim 8, wherein:

a first switch assembly includes at least two first guide members in which said guide plate of each of said at least two first guide members has a first height;

a second switch assembly includes at least two second guide members in which said guide plate of each of said at least two second guide members has a second height different from said first height;

said blade portion of selected ones of said trolley assemblies has a height sized to engage only said guide plate of said at least two first guide members and not said guide plates of said at
 30 least two second guide members; and

said blade portion of remaining ones of said trolley assemblies has a height sized to engage said guide plate of both said at least two first guide members and said at least two second guide members.

10 10. An automatic track switching apparatus for a movable wall system having multiple wall panels movable along a track having multiple paths defined by multiple track sections between a predetermined stored arrangement and a predetermined wall forming arrangement, said apparatus comprising:

a switch assembly at a junction between track sections defining a first path along one track section and at least second and third paths along at least two other track sections branching from said first path, said switch assembly including an upper plate portion;

at least one guide member mounted on and extending downwardly from said upper plate portion of said switch assembly;

20 a lead trolley and a trailing trolley attached to each wall panel, each said trolley including a U-shaped channel having a transverse base portion and a pair of opposite upstanding sidewall portions, said sidewall portions defining a pair of axle bores therethrough for receiving a pair of axles, each said axle including a pair of wheel assemblies rotatably mounted thereon for rolling engagement with said track sections, a connecting element downwardly extending from said base portion, said connecting element being configured to connect said trolley to one of the wall panels;

a first diverter element attached to each of said lead and trailing trolley laterally displaced from a centerline of said trolley in the direction of movement along said track for selective engagement with said at least one guide member to route the wall panel through said switch assembly in a predetermined manner to and from said wall forming arrangement; and

30 a second diverter element having an engagement member positioned on each of said trailing trolley substantially coincident with said trolley centerline of each said trailing trolley, said engagement member of said second diverter element selectively engaging said at least one guide member to control the movement of the wall panel when the wall panel is moved to said predetermined stored arrangement.

11. The apparatus of claim **10**, wherein said first diverter element of said lead trolley has a first height and said first diverter element of said trailing trolley has a second height different from said first height.

12. A multi-program track and trolley apparatus for a movable wall system having multiple wall panels supported by and movable along multiple paths defined by multiple track sections to predetermined configurations, the apparatus comprising:

a plurality of track sections;

10 a switch assembly at a junction between track sections defining a first path along one track section and at least second and third paths along at least two other track sections branching from said first path, said switch assembly including an upper plate portion;

a storage track connected to one of said track sections, said storage track including a first stacking section, a second stacking section, and a storage switch assembly, said first and second stacking sections each including at least a pair of parallel ones of said track sections;

at least two trolleys attached to and supporting each wall panel of the movable wall system, each of said trolleys including a trolley body rotatably supporting a pair of wheel assemblies for rolling engagement with said track sections, a connecting element extending from said trolley body, said connecting element being configured to connect said trolley to one of the wall panels, and a side diverter element disposed on said trolley at a position laterally offset from
20 a centerline of said trolley, said side diverter selectively engaging said storage switch assembly so as to direct said trolley to one of said first and second stacking sections, and one of said at least two trolley having a center diverter disposed on said trolley at a position on a center point of said centerline.

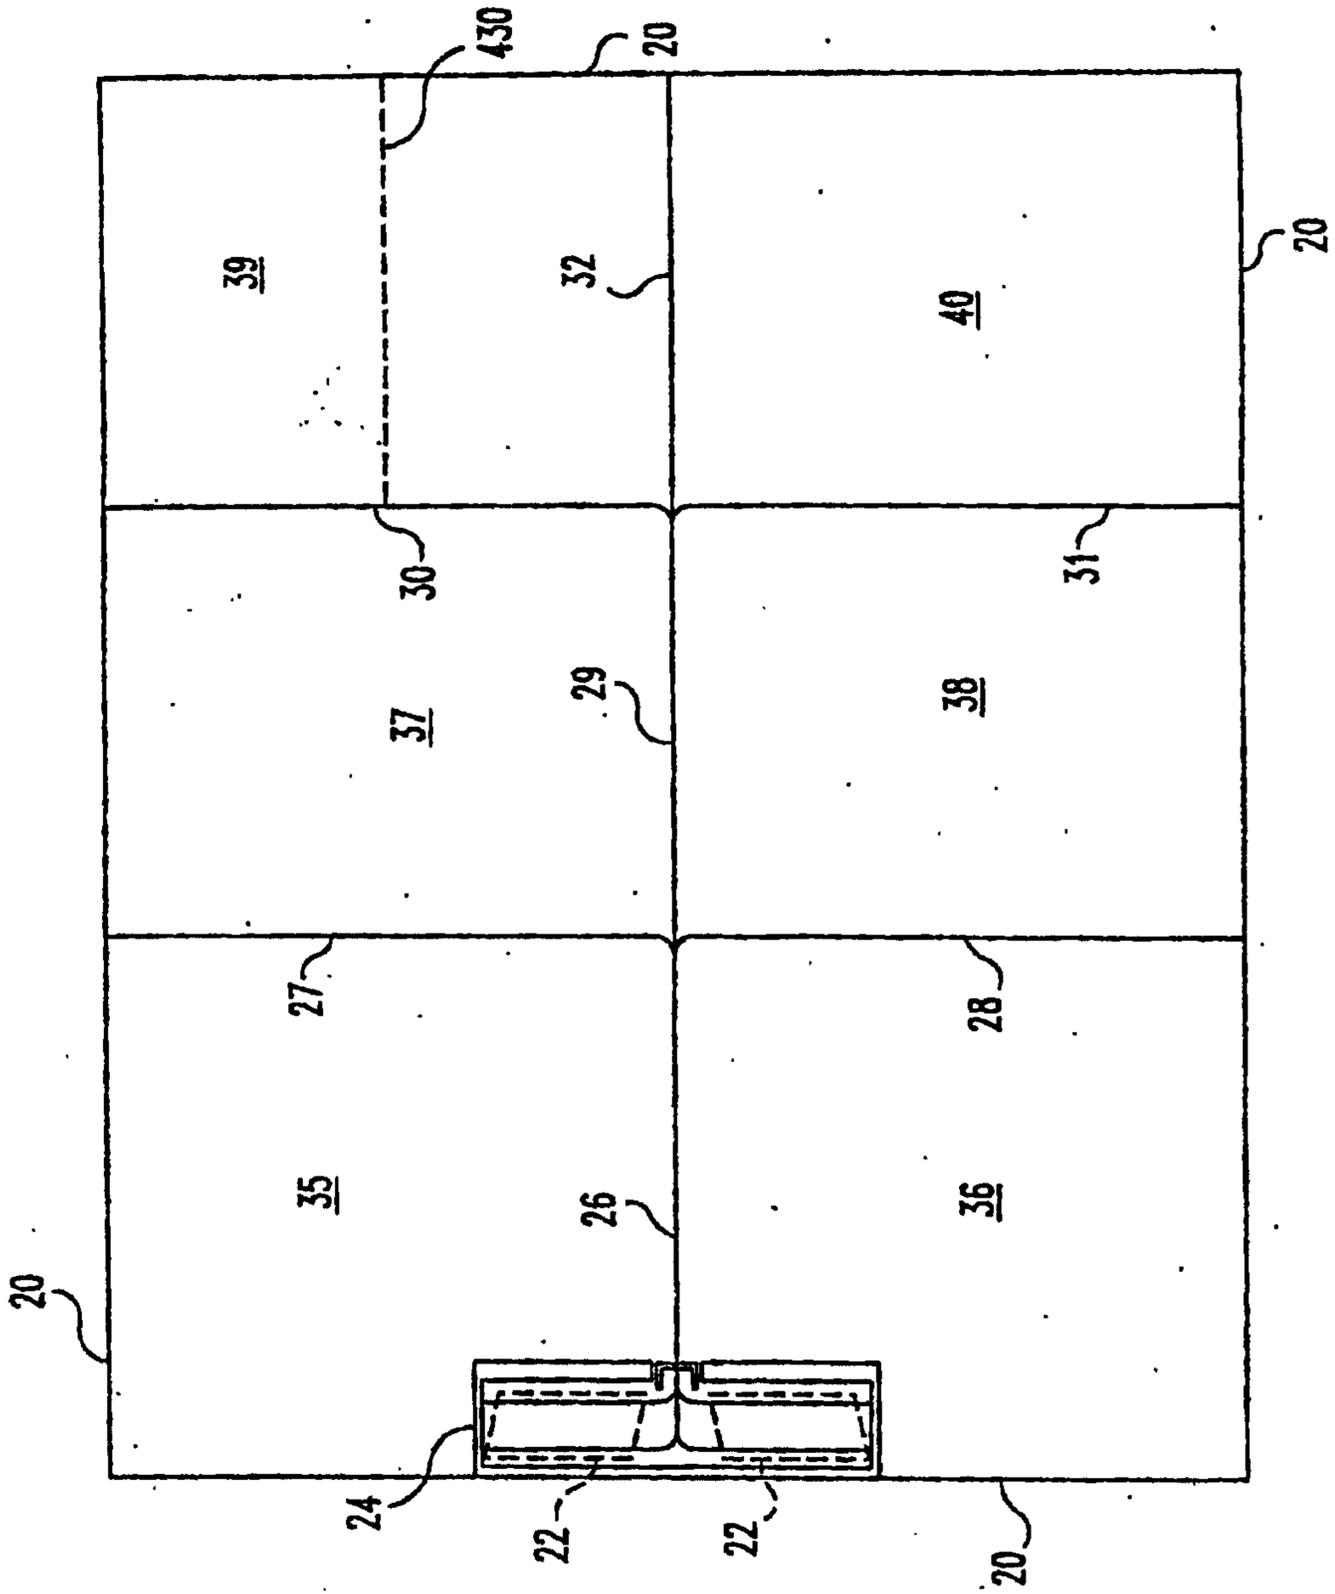


Fig. 1

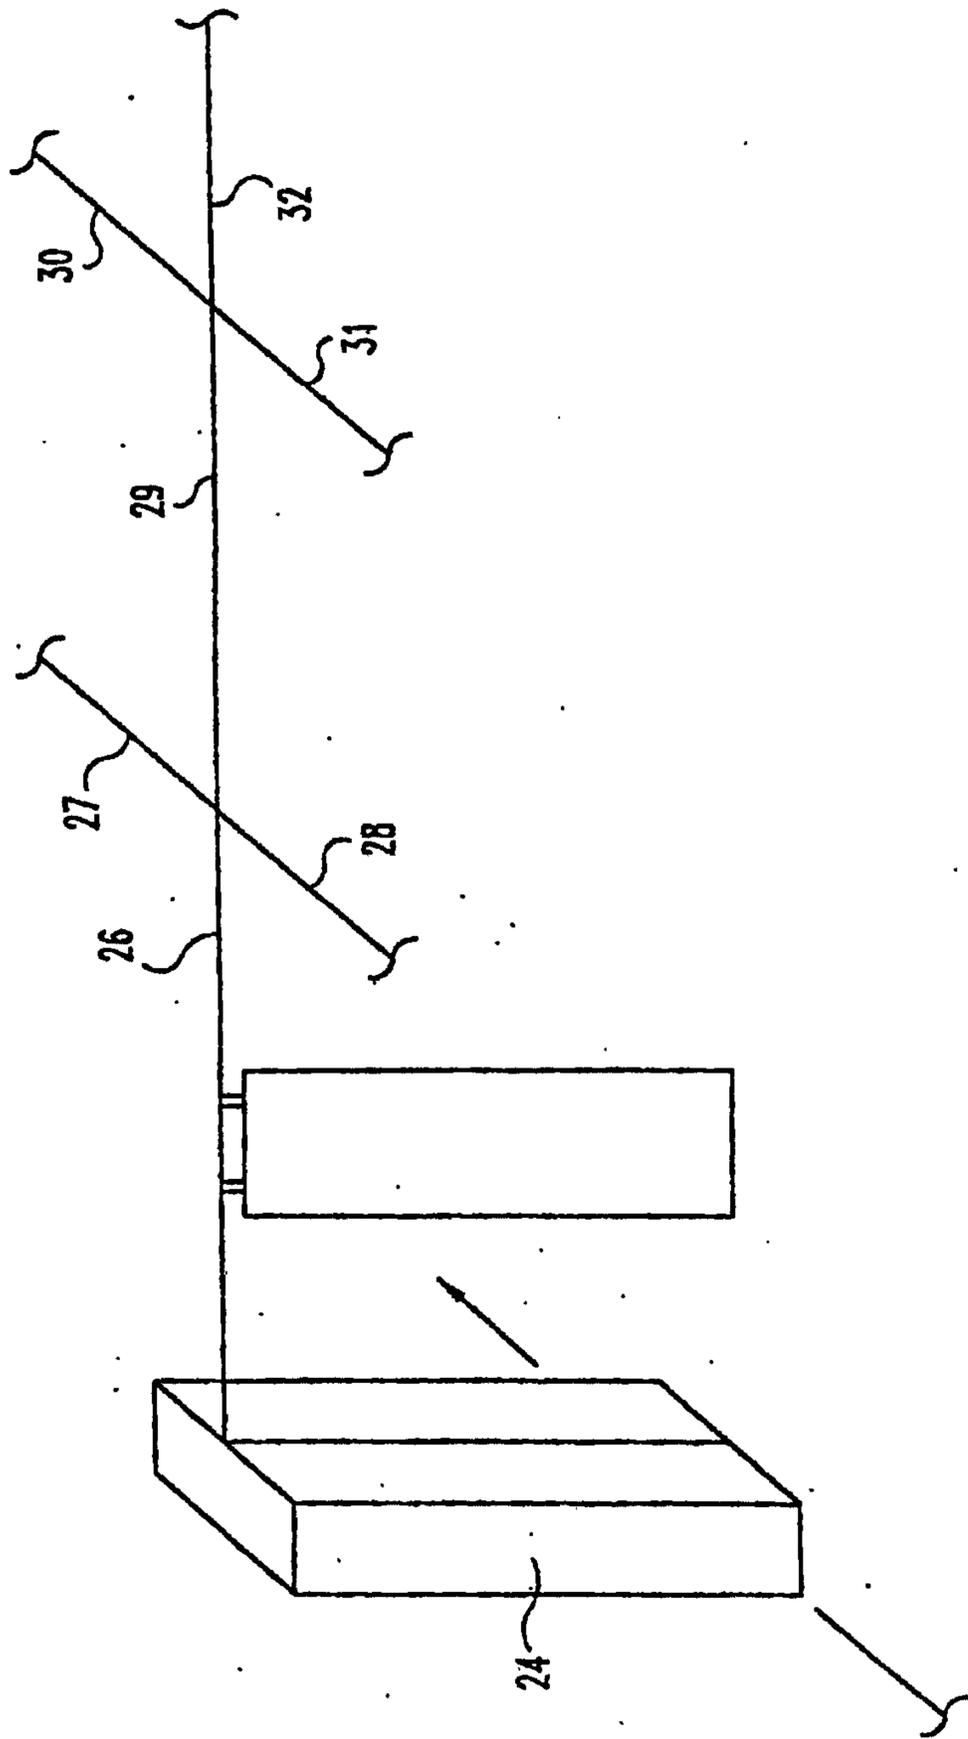
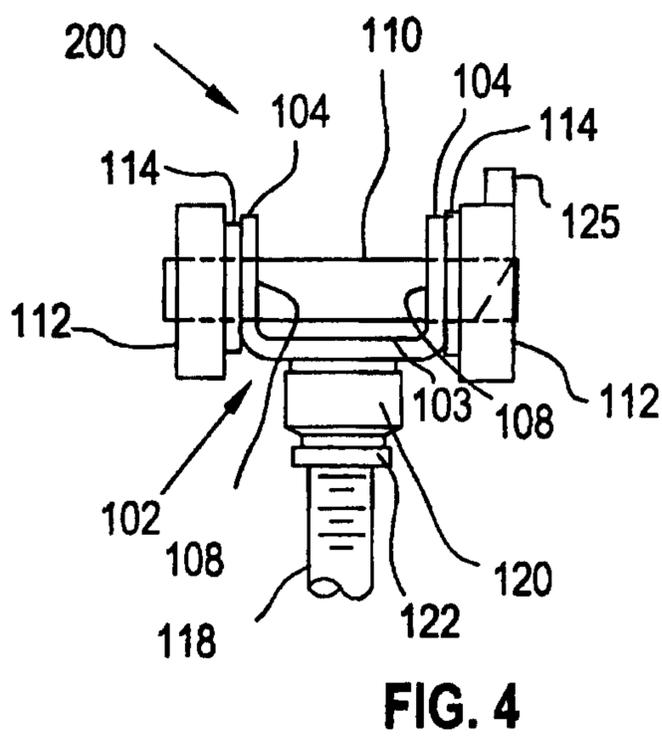
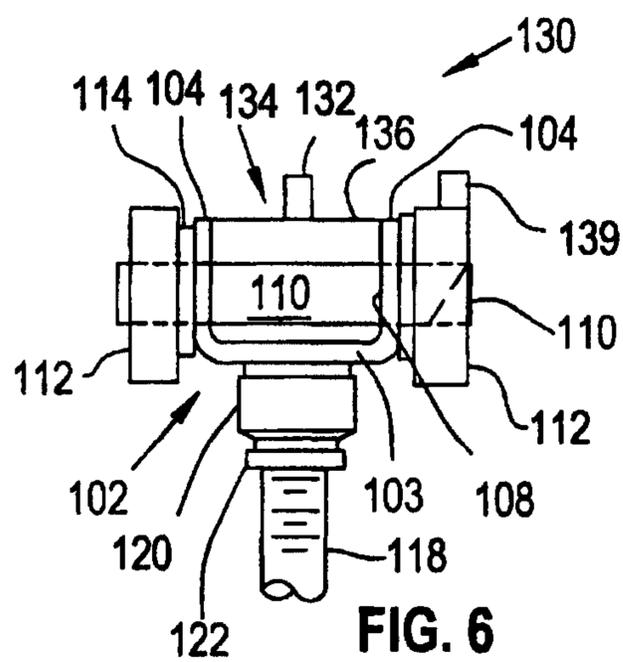
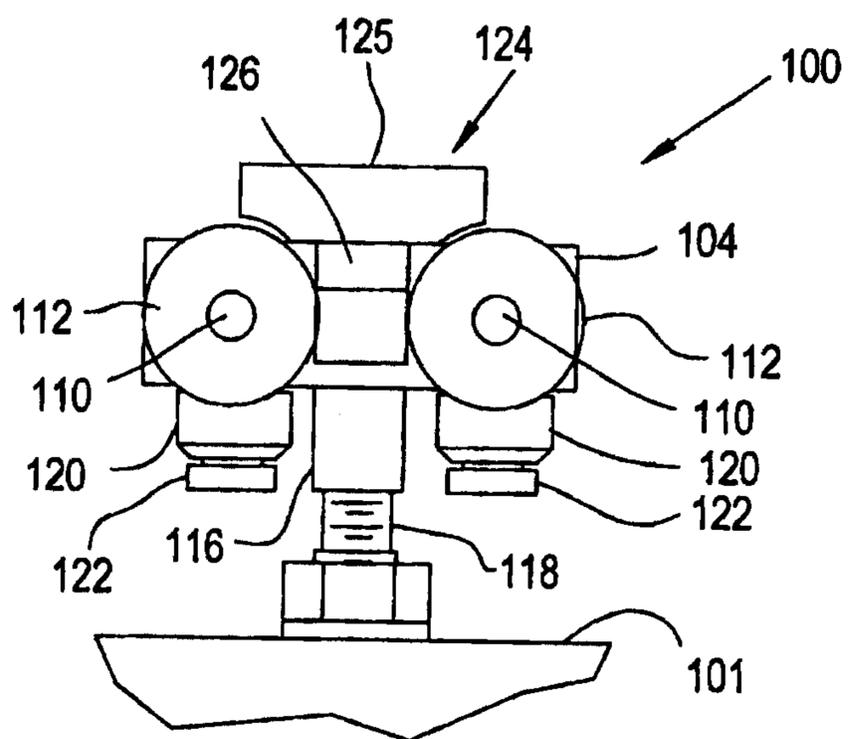
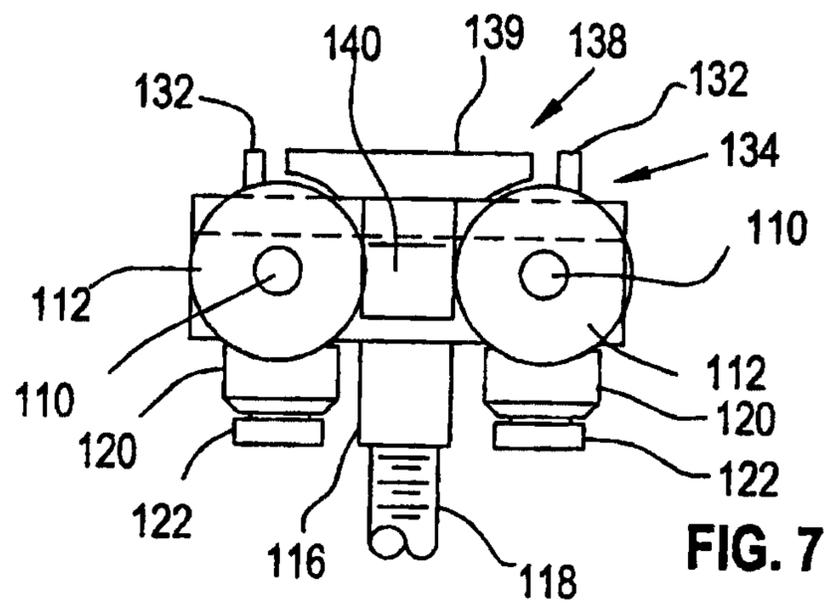


Fig. 2





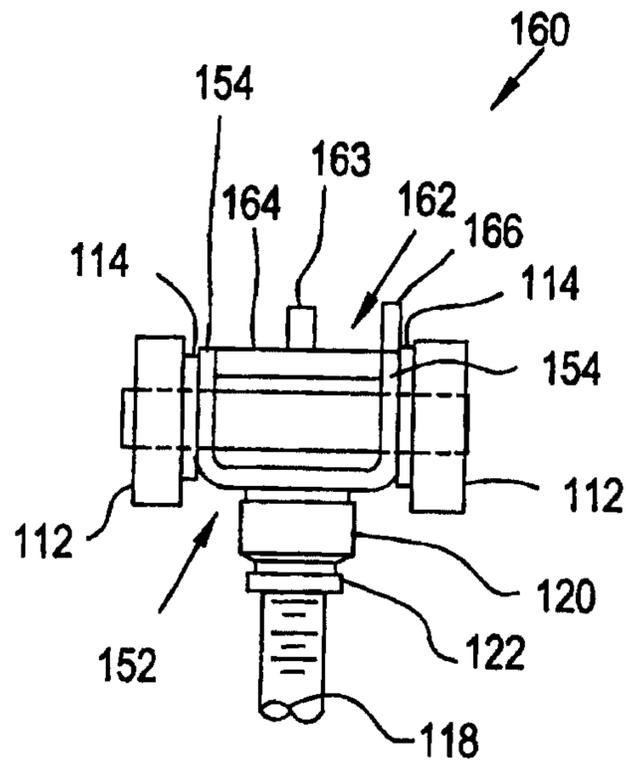


FIG. 9

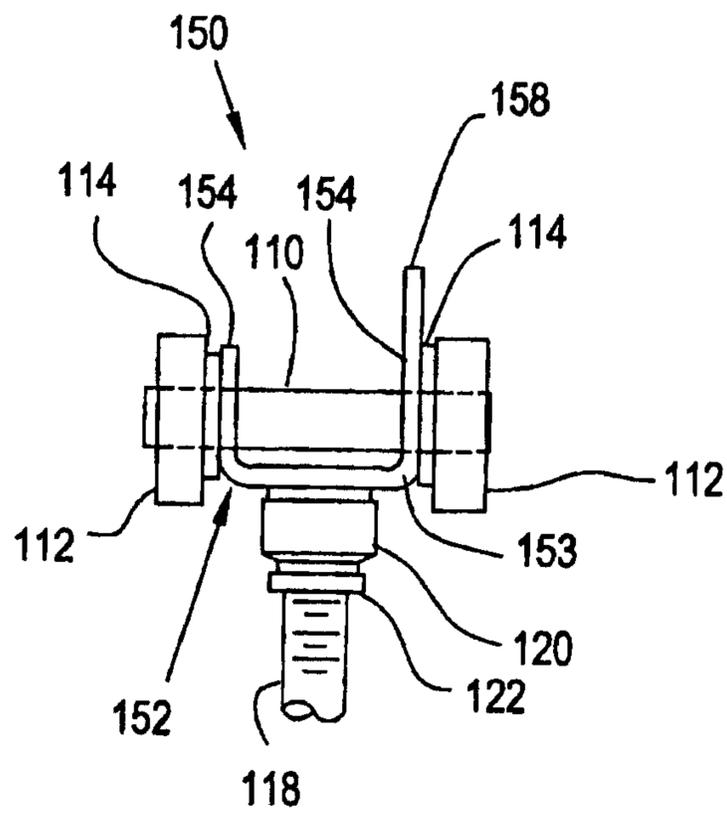


FIG. 8

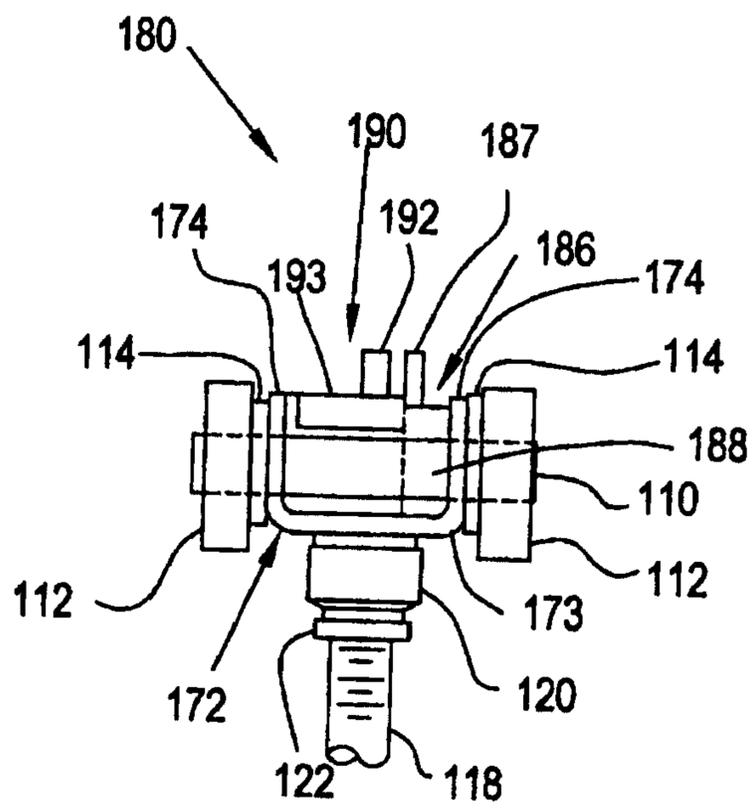


FIG. 11

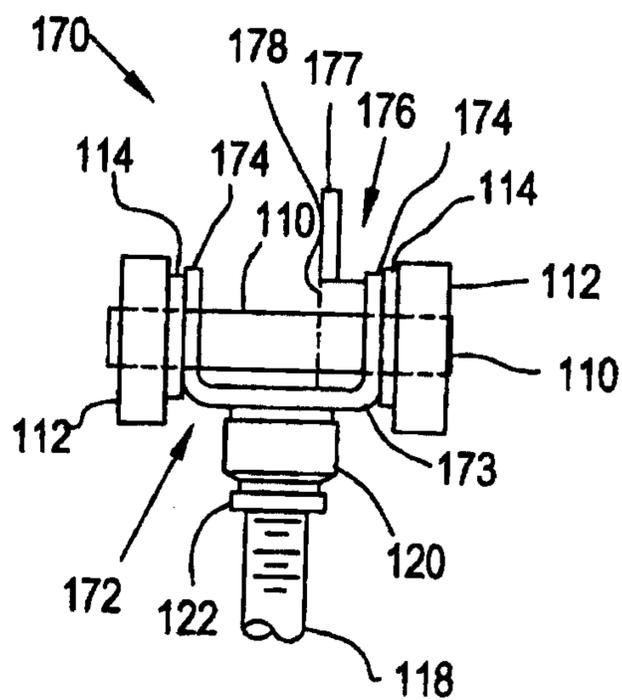


FIG. 10

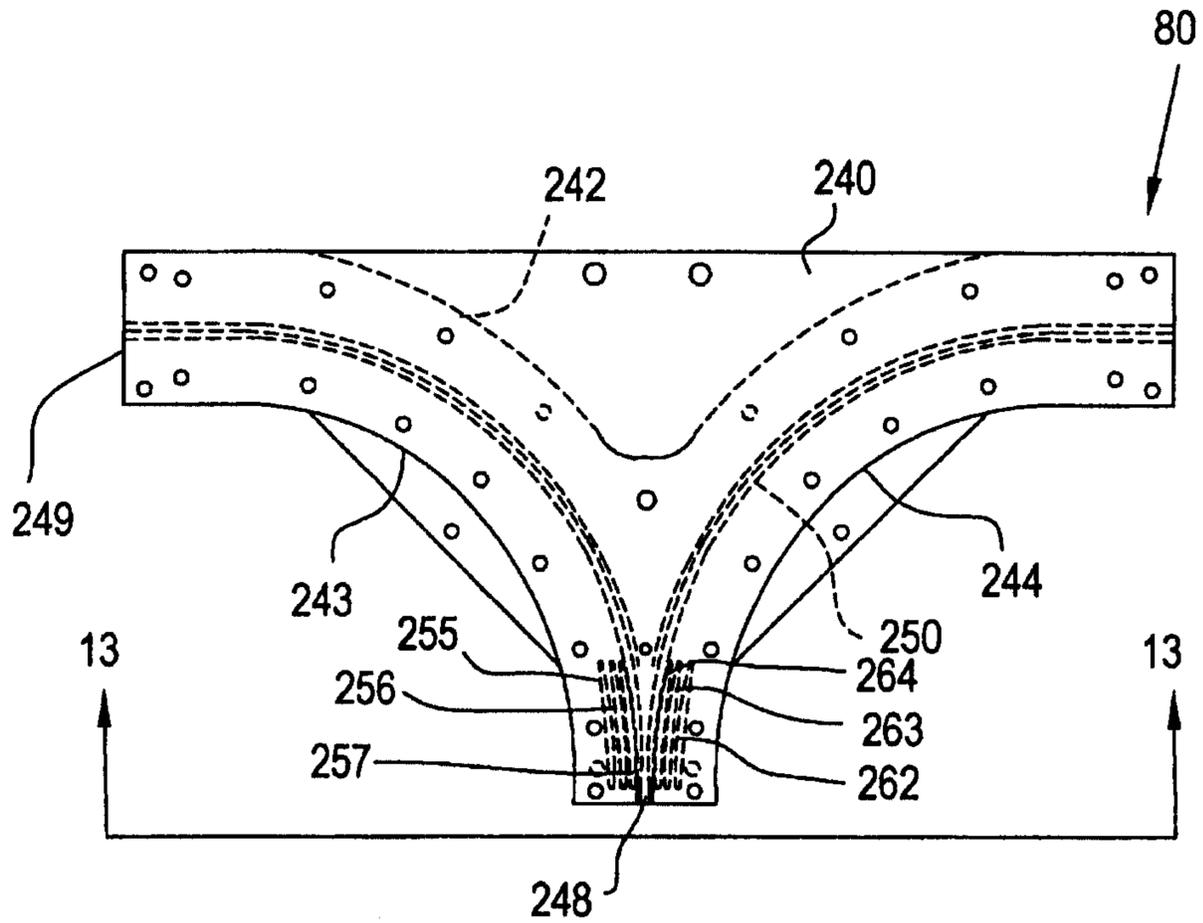


FIG. 12

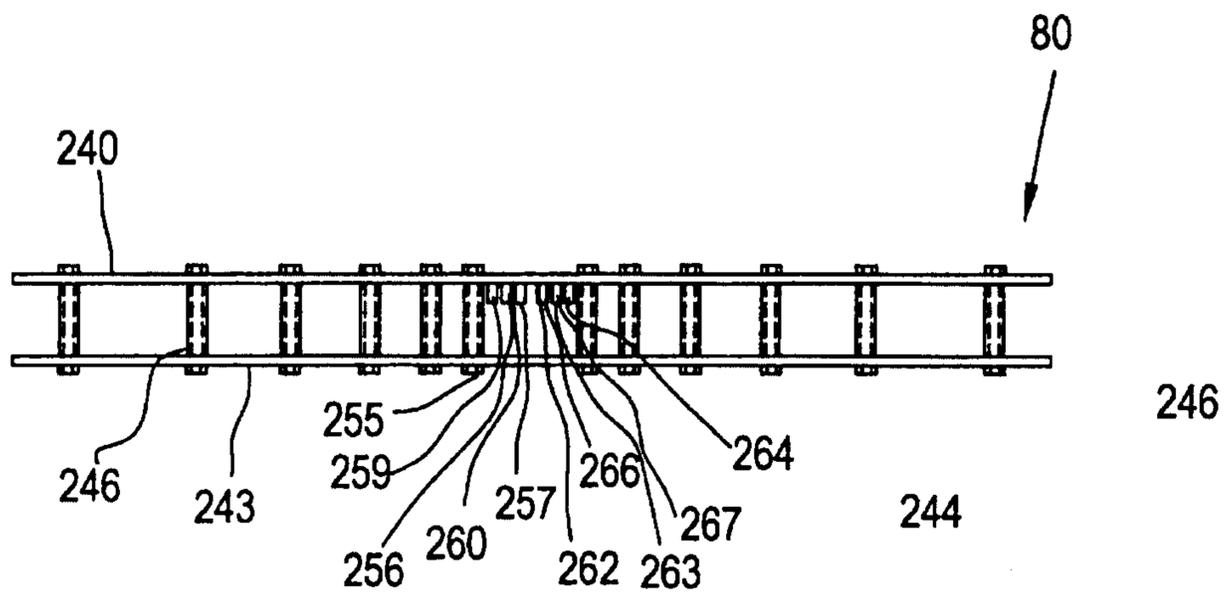


FIG. 13

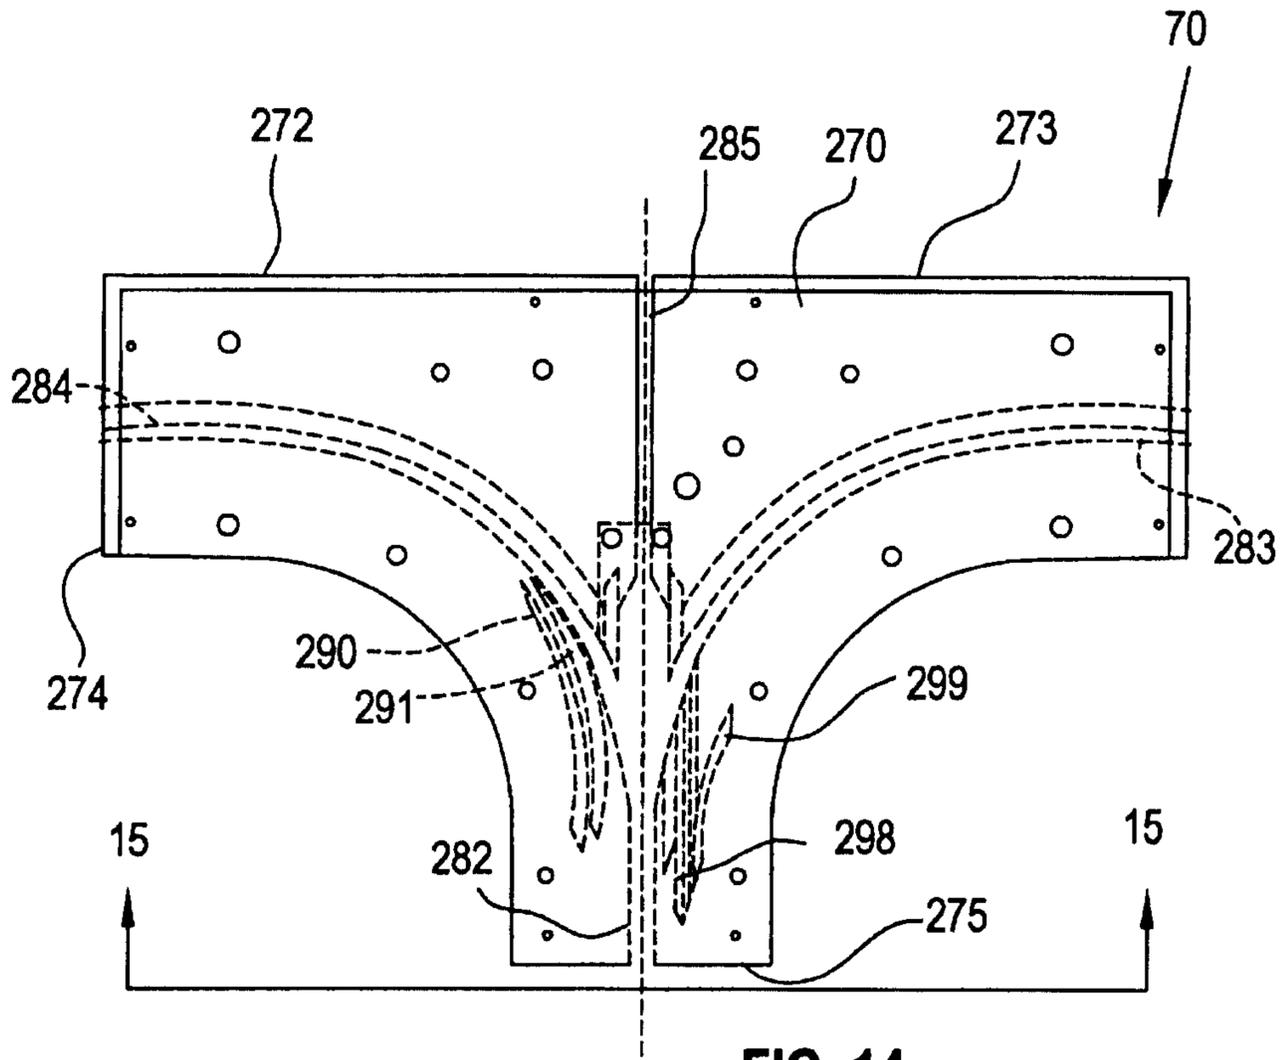


FIG. 14

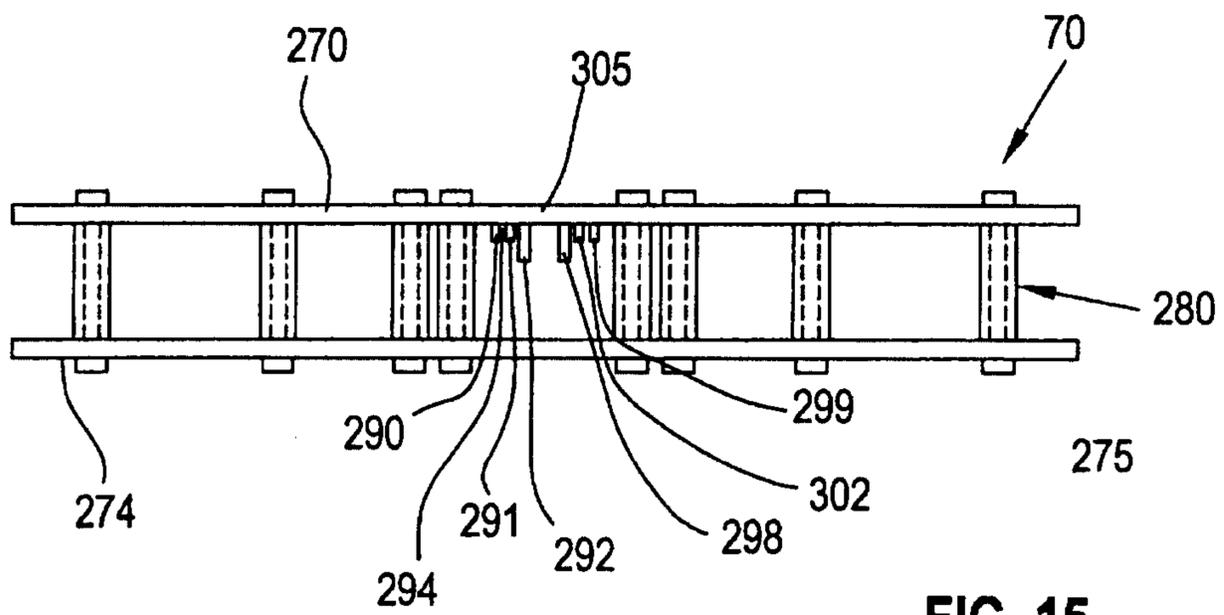


FIG. 15

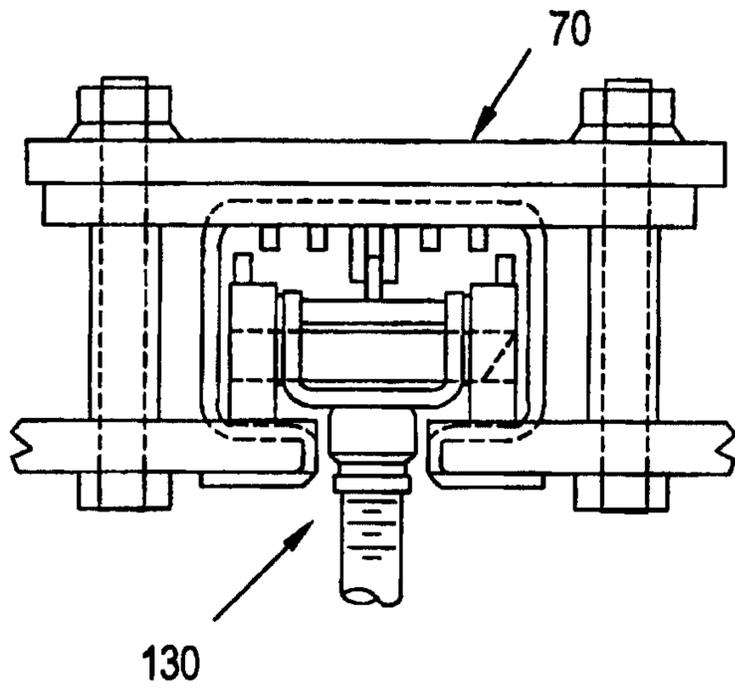


FIG. 17

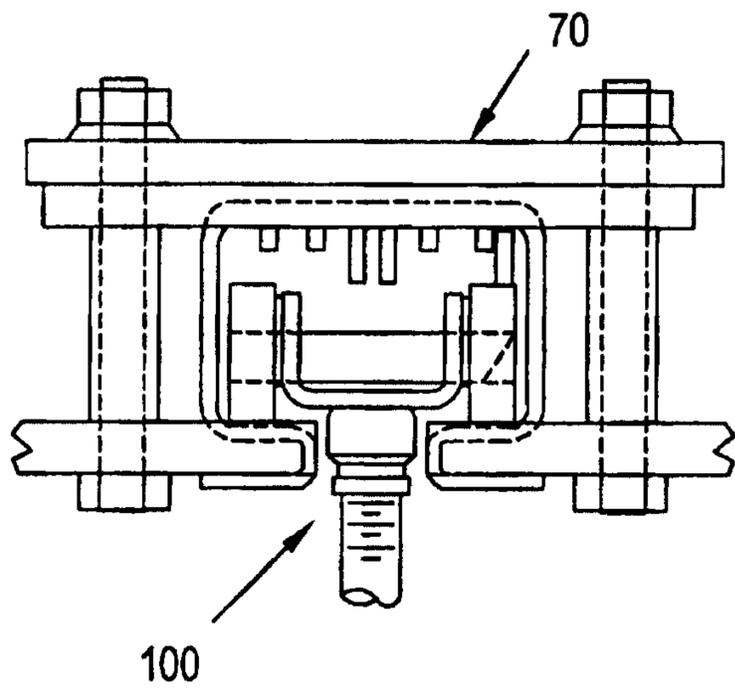


FIG. 16

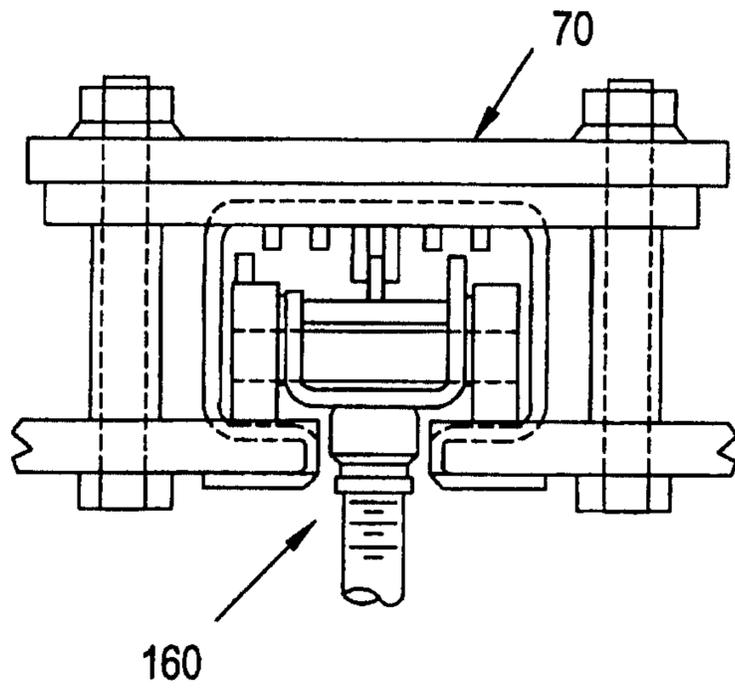


FIG. 19

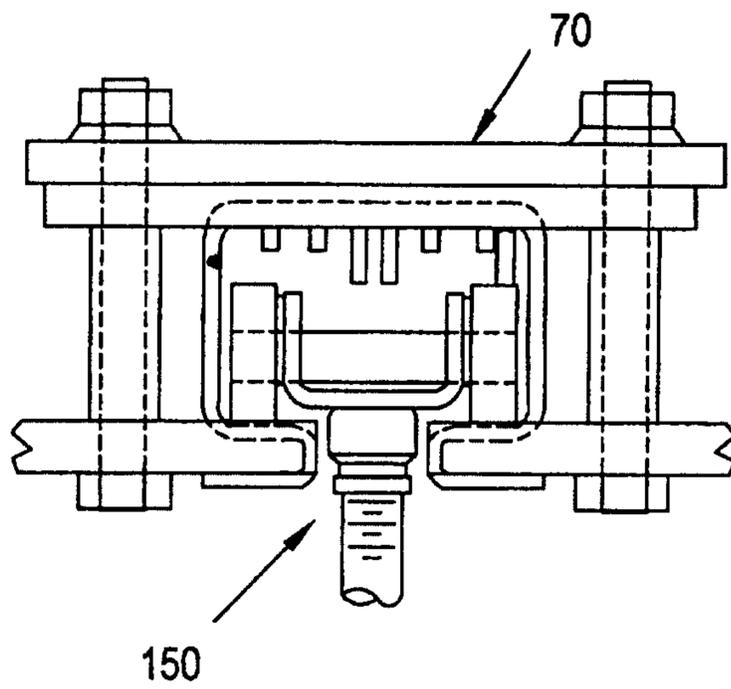


FIG. 18

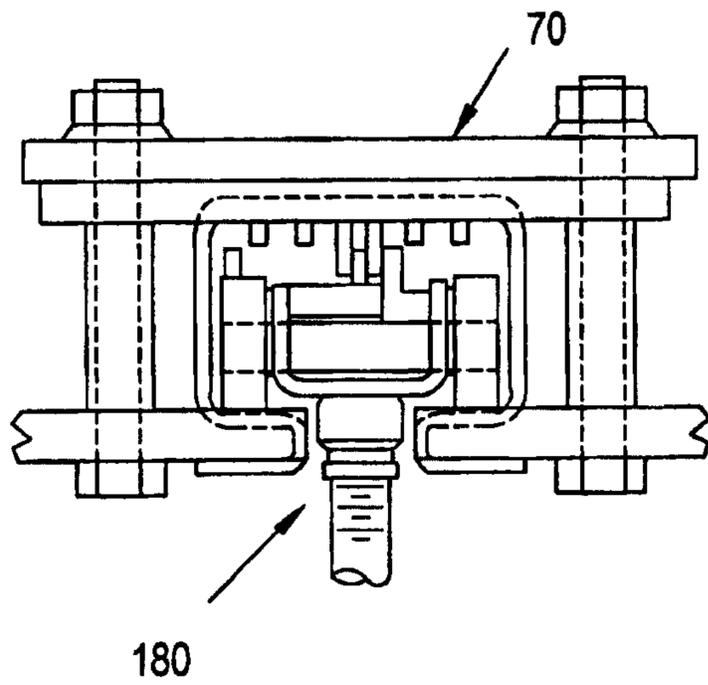


FIG. 21

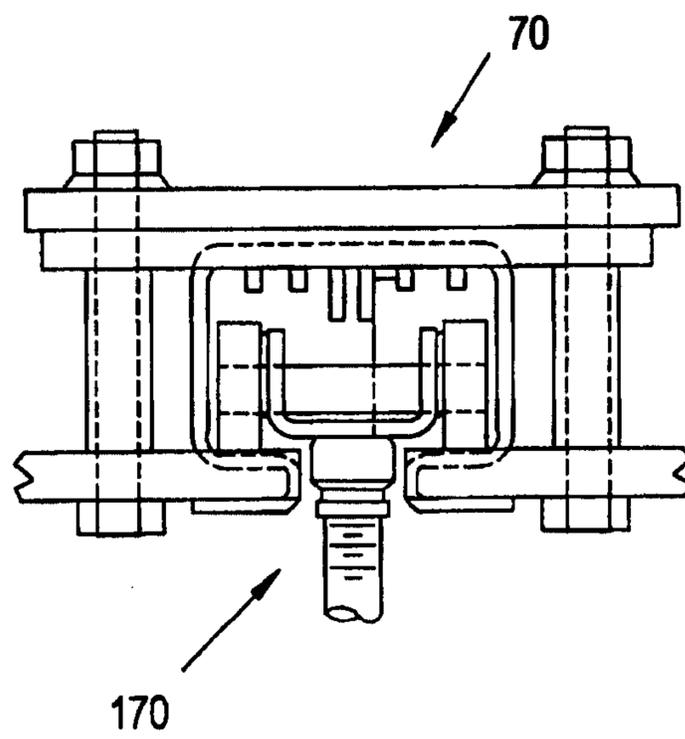


FIG. 20

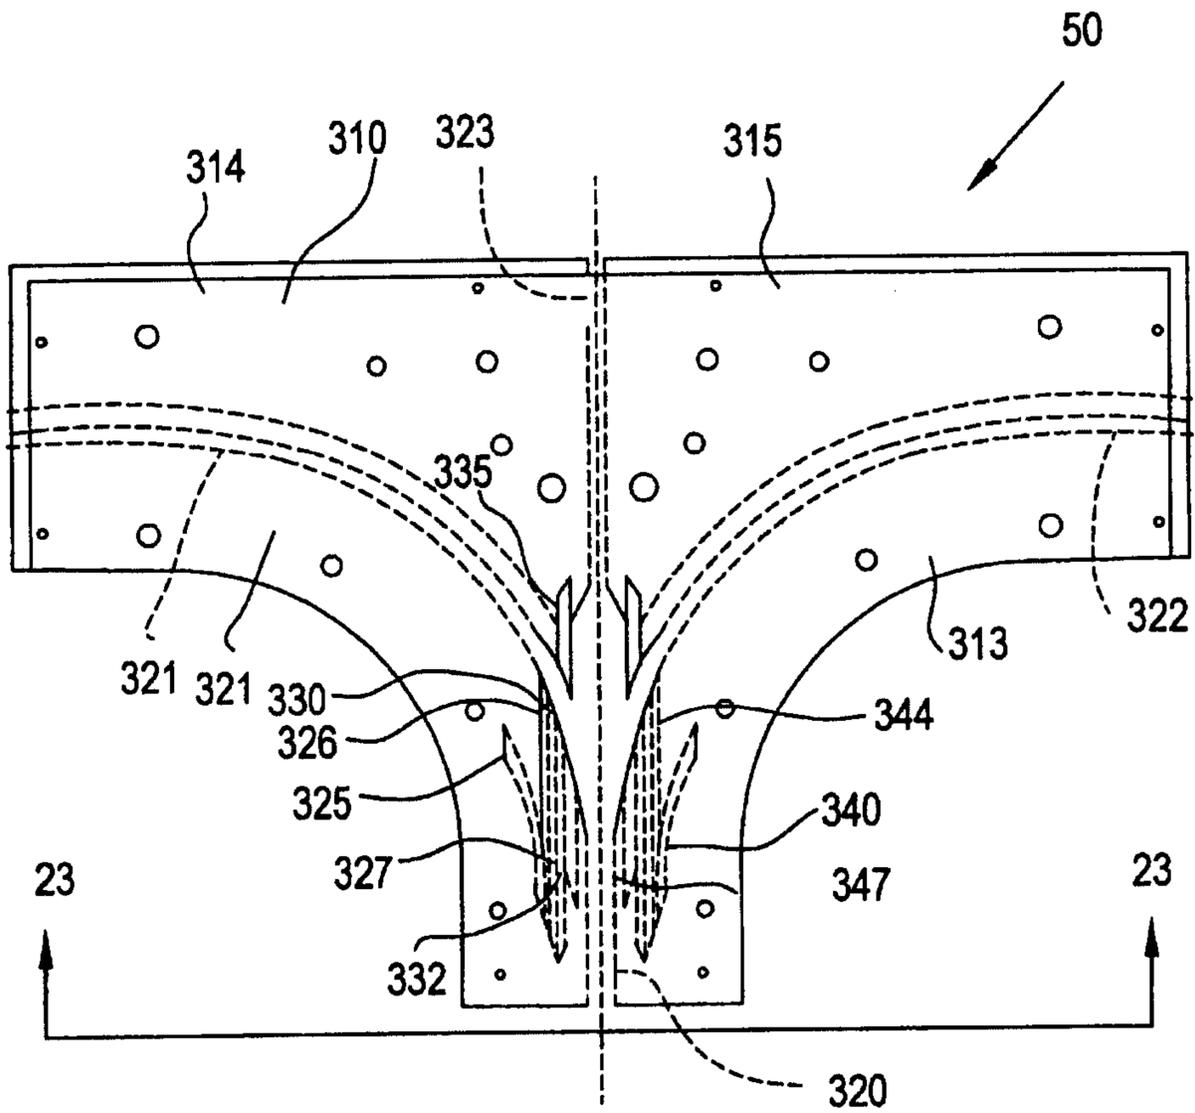


FIG. 22

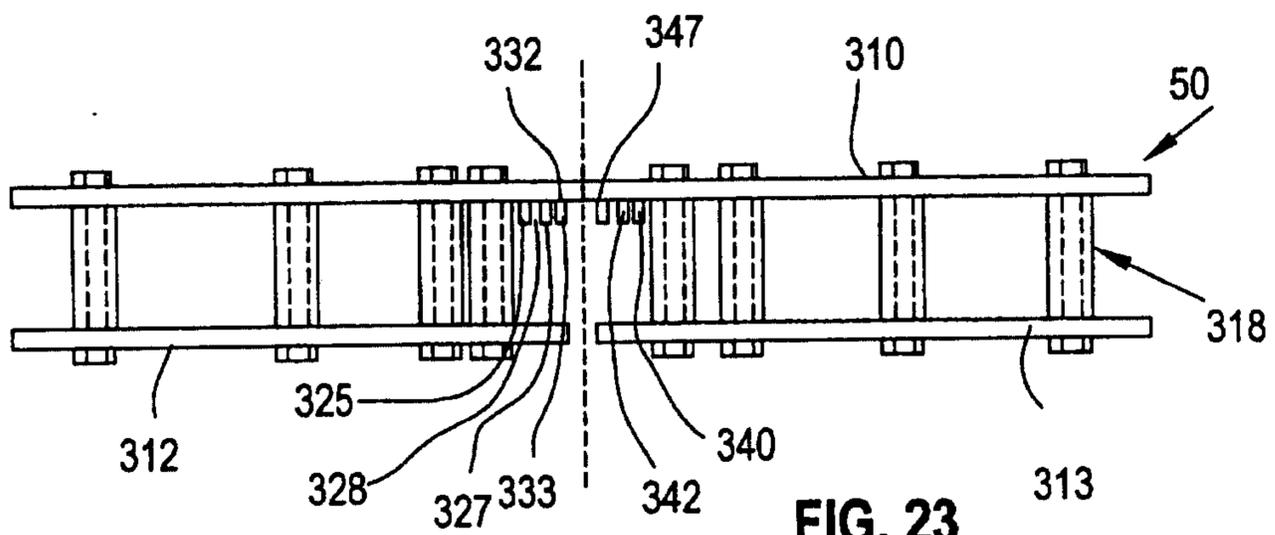


FIG. 23

