



US 20020053711A1

(19) **United States**

(12) **Patent Application Publication**
Chau et al.

(10) **Pub. No.: US 2002/0053711 A1**

(43) **Pub. Date: May 9, 2002**

(54) **DEVICE STRUCTURE AND METHOD FOR REDUCING SILICIDE ENCROACHMENT**

Related U.S. Application Data

(76) Inventors: **Robert S. Chau**, Beaverton, OR (US);
Ebrahim Andideh, Portland, OR (US);
Mitch C. Taylor, Lake Oswego, OR (US);
Chia-Hong Jan, Portland, OR (US);
Julie Tsai, Beaverton, OR (US)

(62) Division of application No. 09/654,315, filed on Sep. 1, 2000, which is a division of application No. 09/115,405, filed on Jul. 14, 1998, which is a division of application No. 08/884,912, filed on Jun. 30, 1997.

Publication Classification

(51) **Int. Cl.⁷** **H01L 31/113**; H01L 31/062;
H01L 29/94

(52) **U.S. Cl.** **257/412**

Correspondence Address:

Michael A. Bernadicou
BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN
LLP


Seventh Floor
12400 Wilshire Boulevard
Los Angeles, CA 90025-1030 (US)

(57) **ABSTRACT**

A semiconductor device having a novel spacer structure and method of fabrication. The present invention describes a semiconductor device which has an electrode with a first thickness. A silicide layer having a second thickness is formed on the electrode. A sidewall spacer which is formed adjacent to the electrode has a height which is greater than the sum of the thickness of the electrode and the thickness of the silicide layer.

(21) Appl. No.: **10/010,525**

(22) Filed: **Dec. 7, 2001**

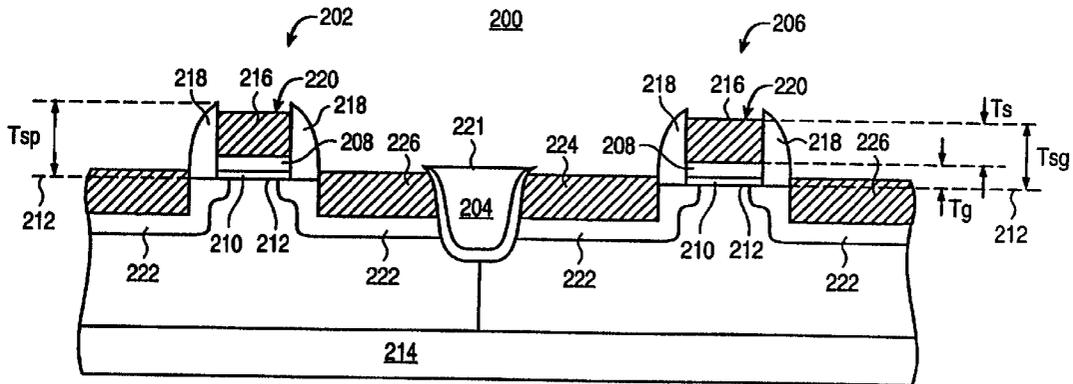

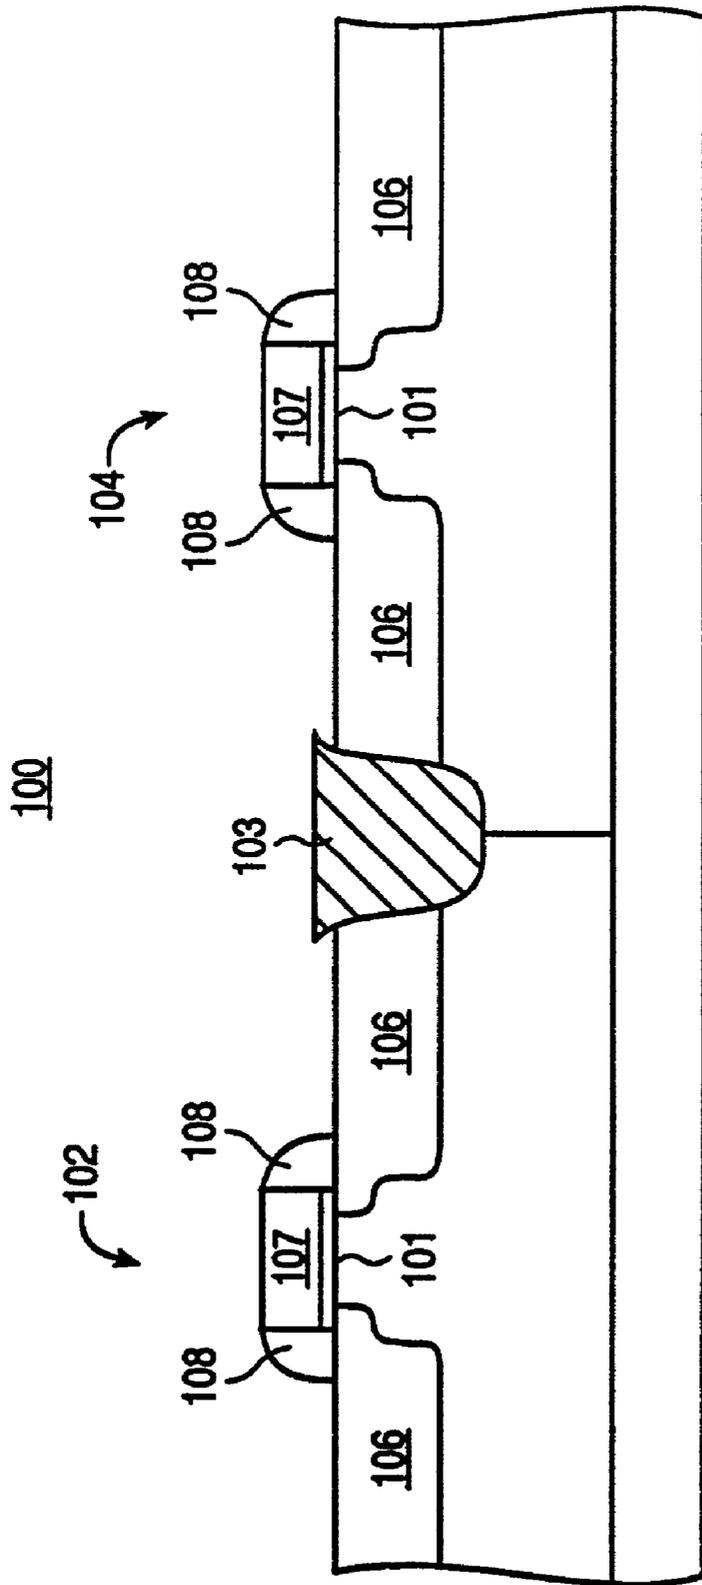


FIG. 1A

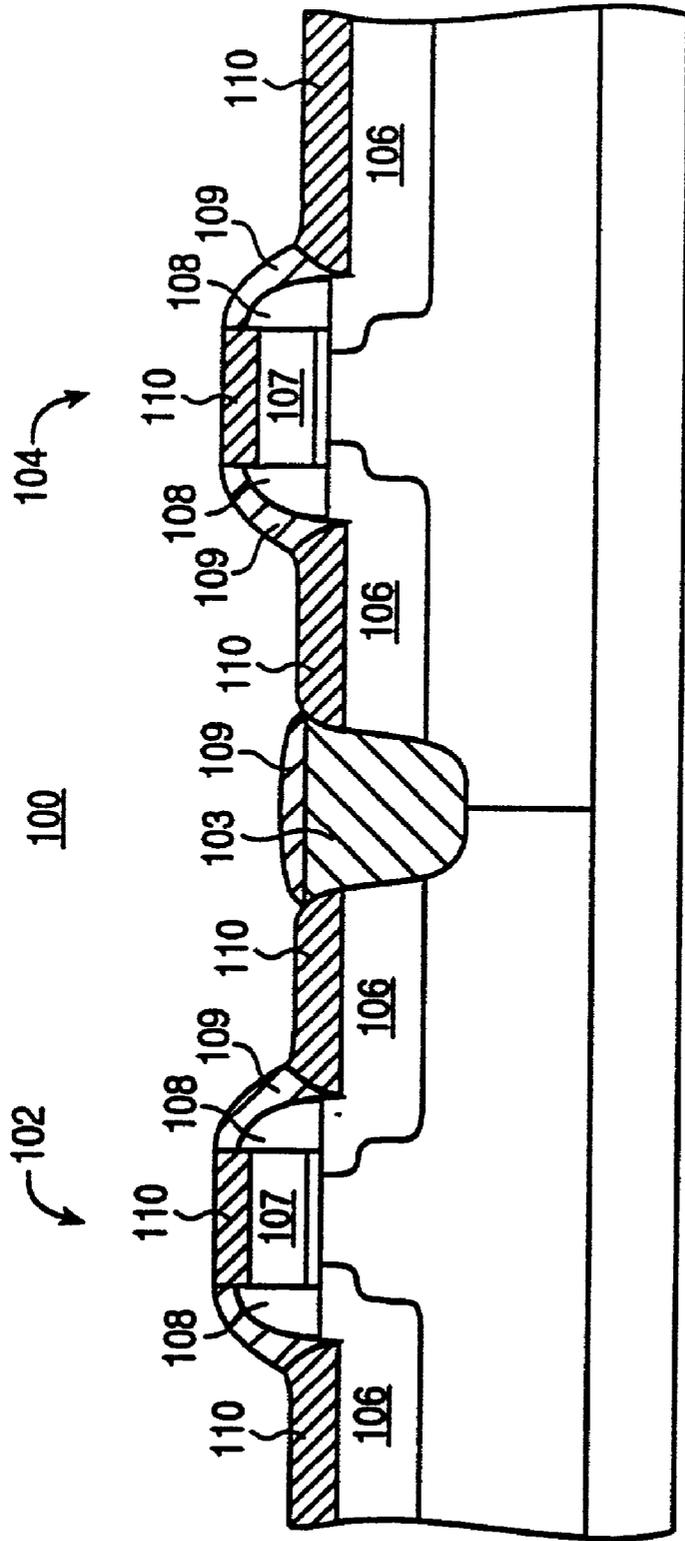


FIG. 1C

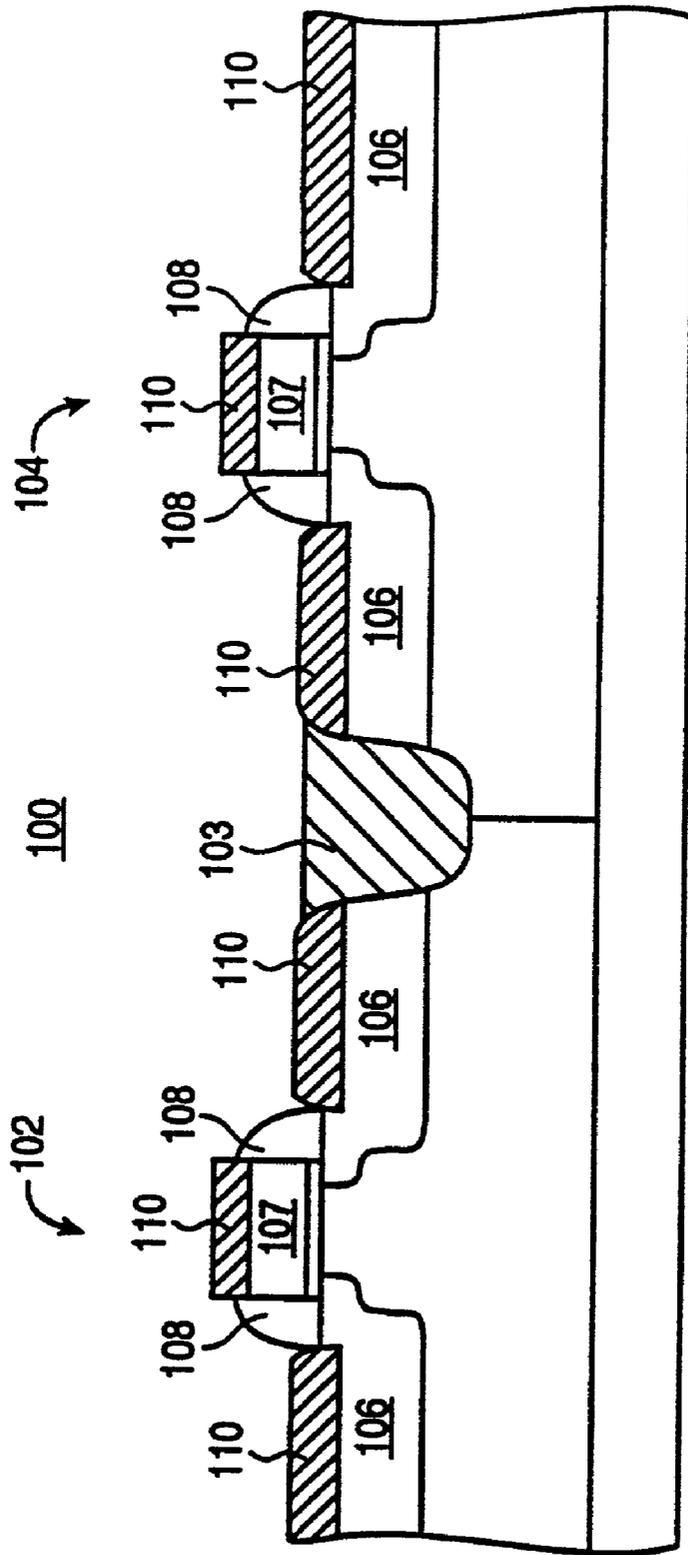


FIG. 1D

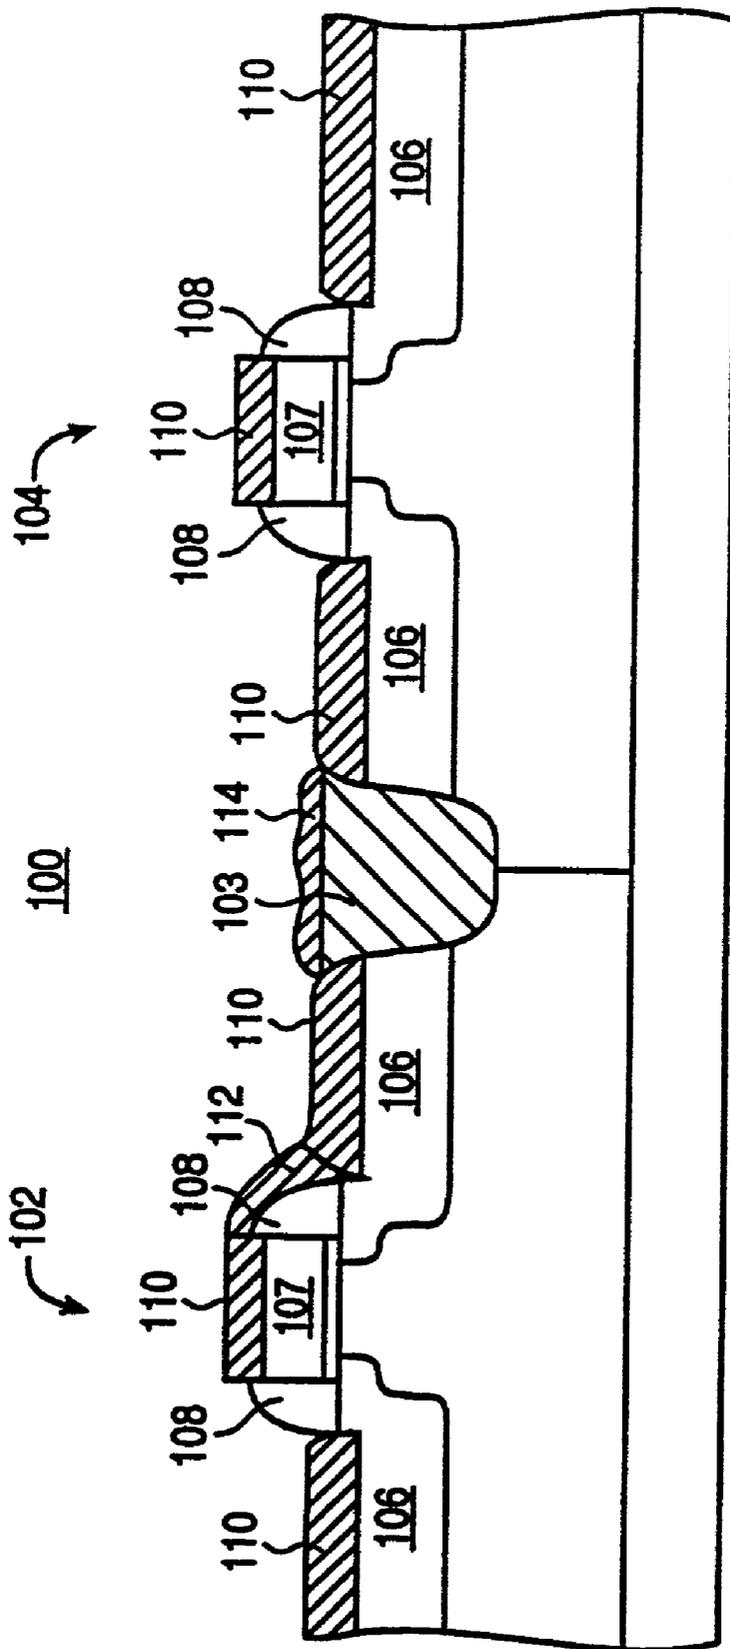


FIG. 1E

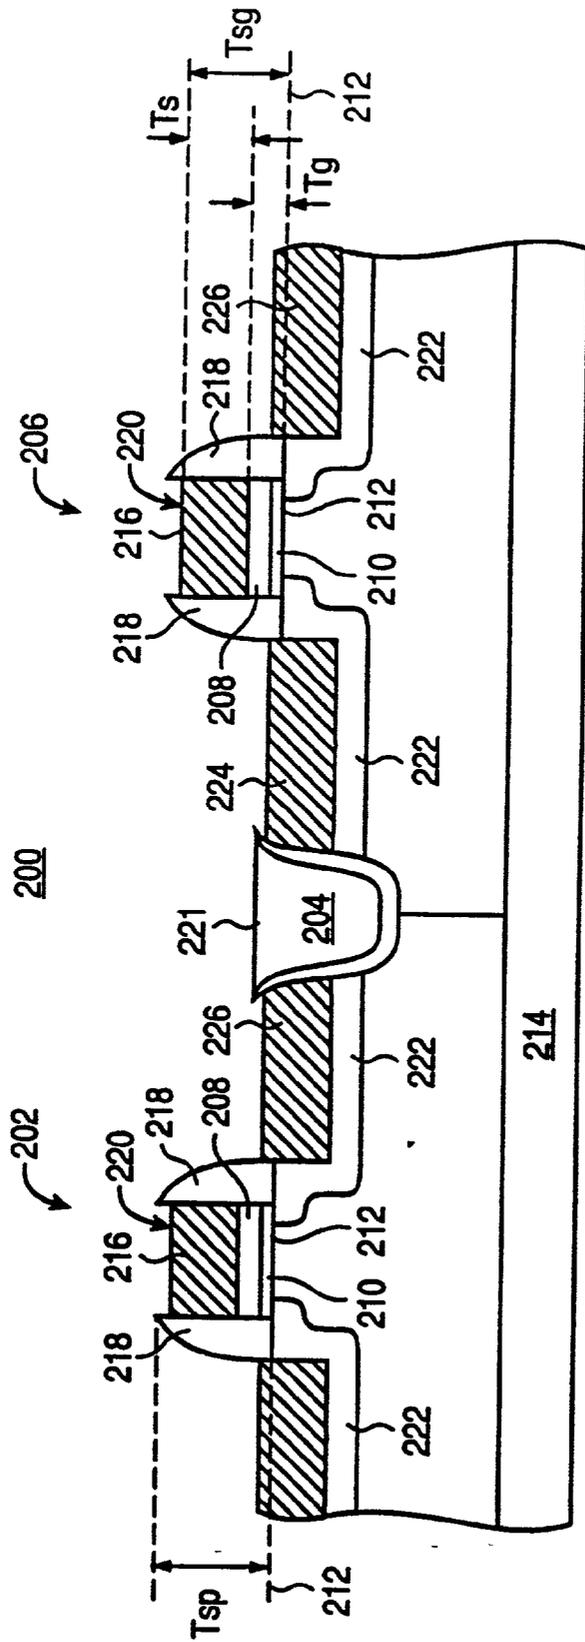


FIG. 2

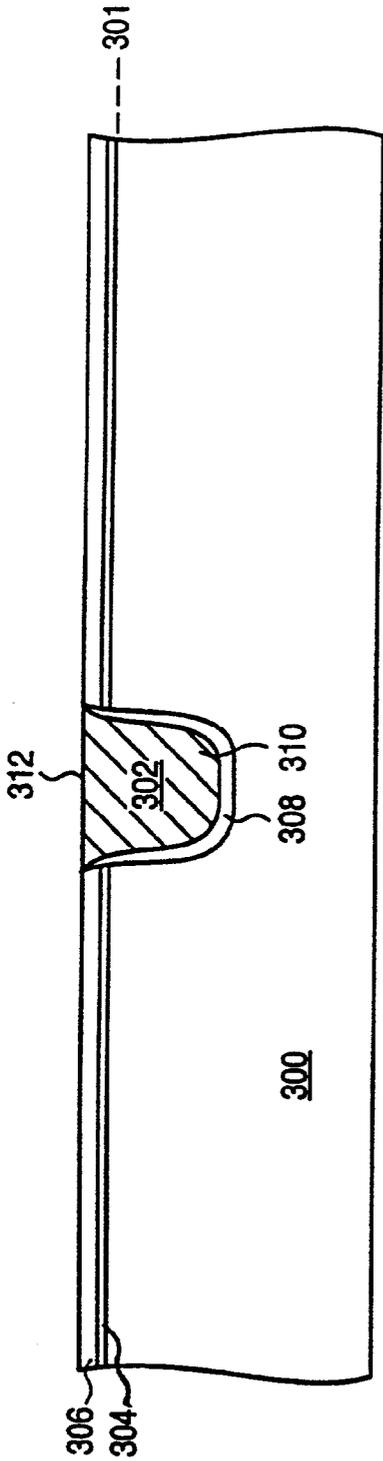


FIG. 3A

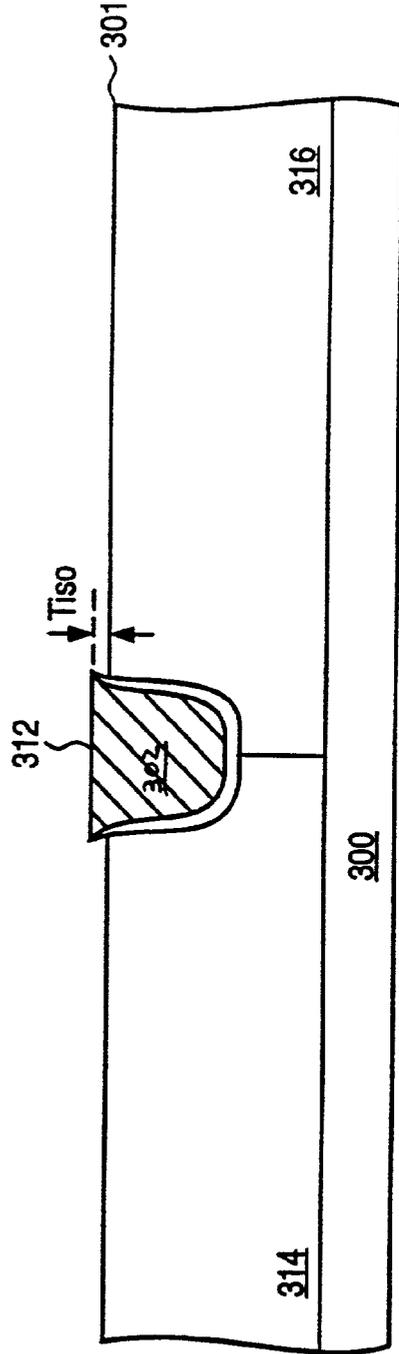


FIG. 3B

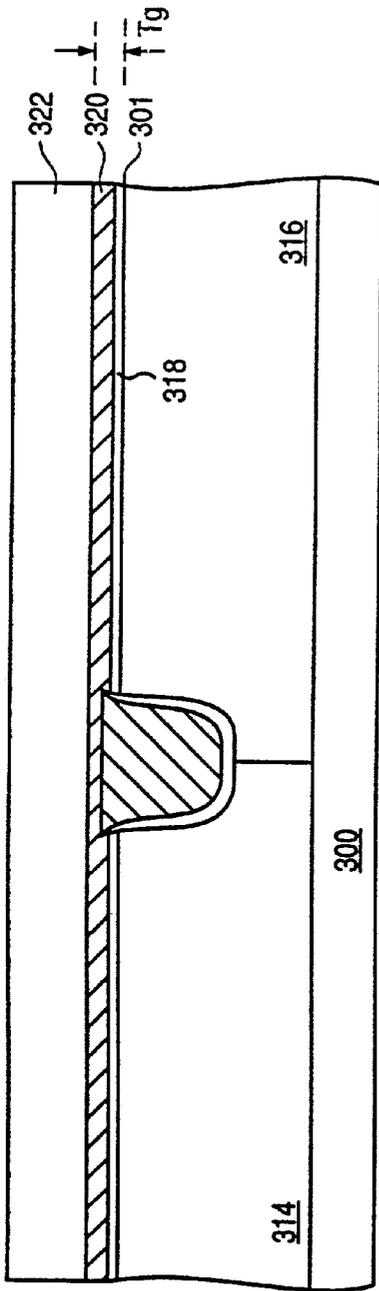


FIG. 3C

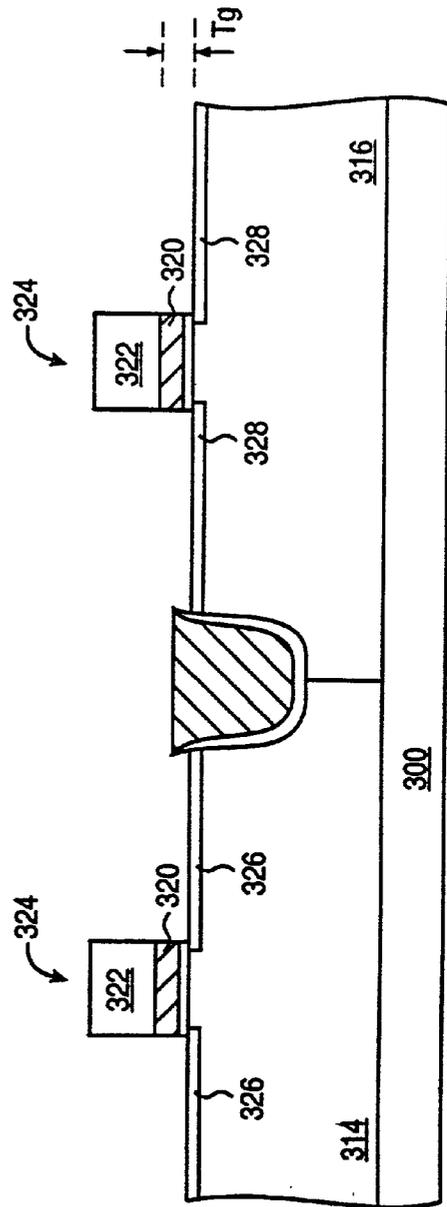


FIG. 3D

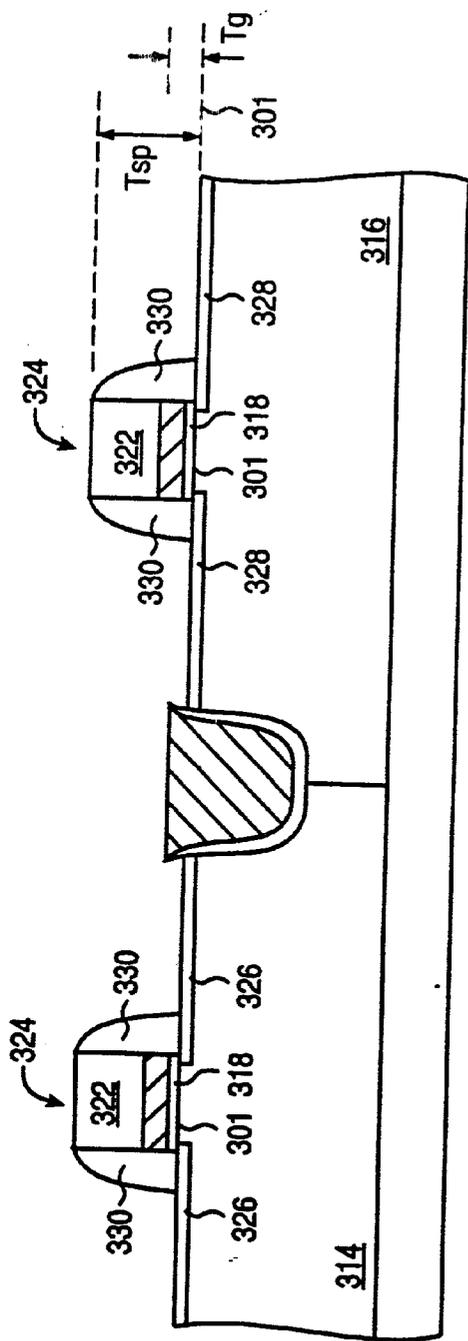


FIG. 3E

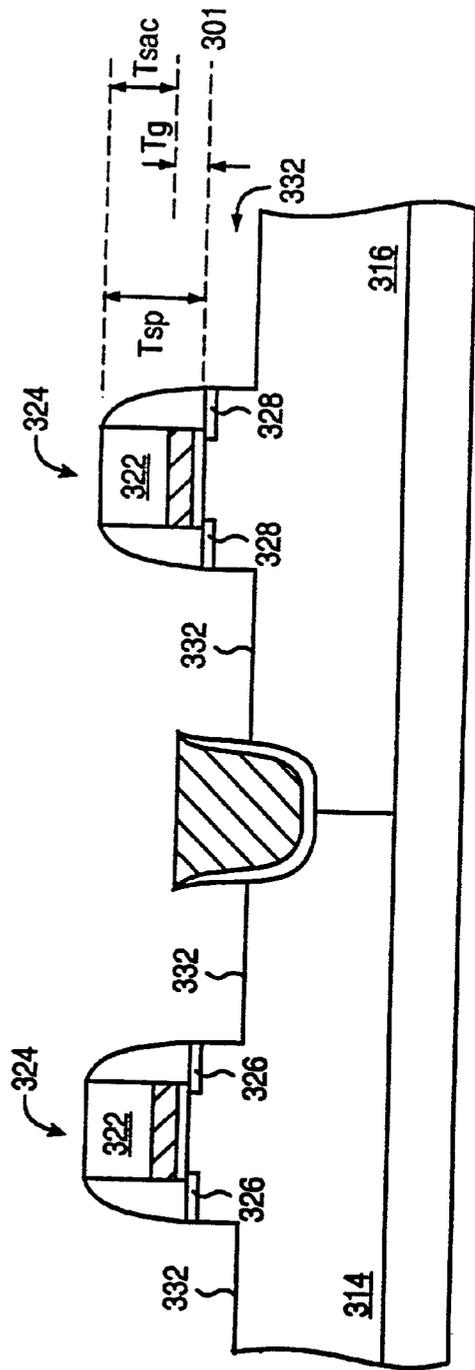


FIG. 3F

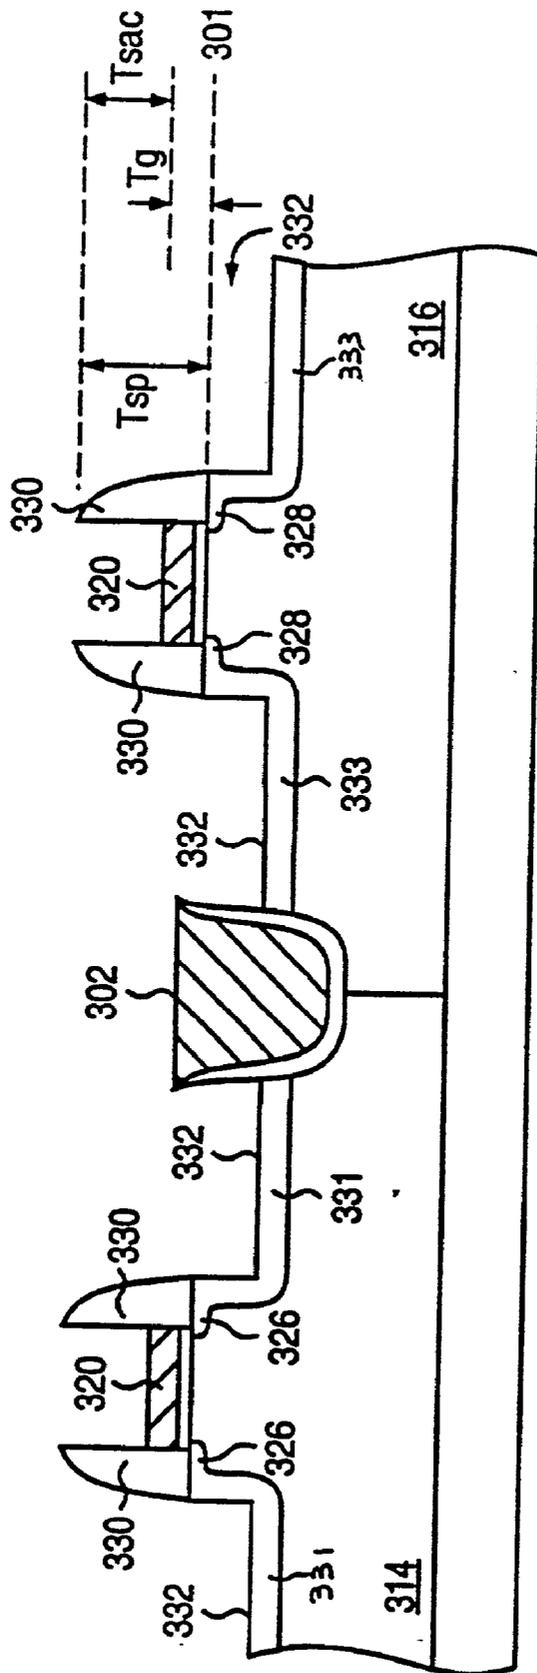


FIG. 3G

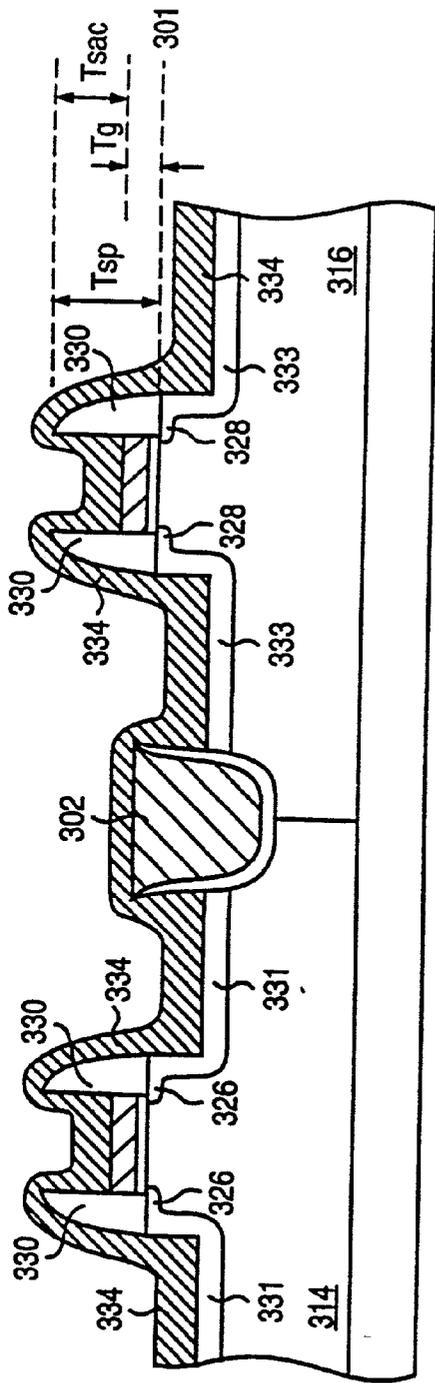


FIG. 3H

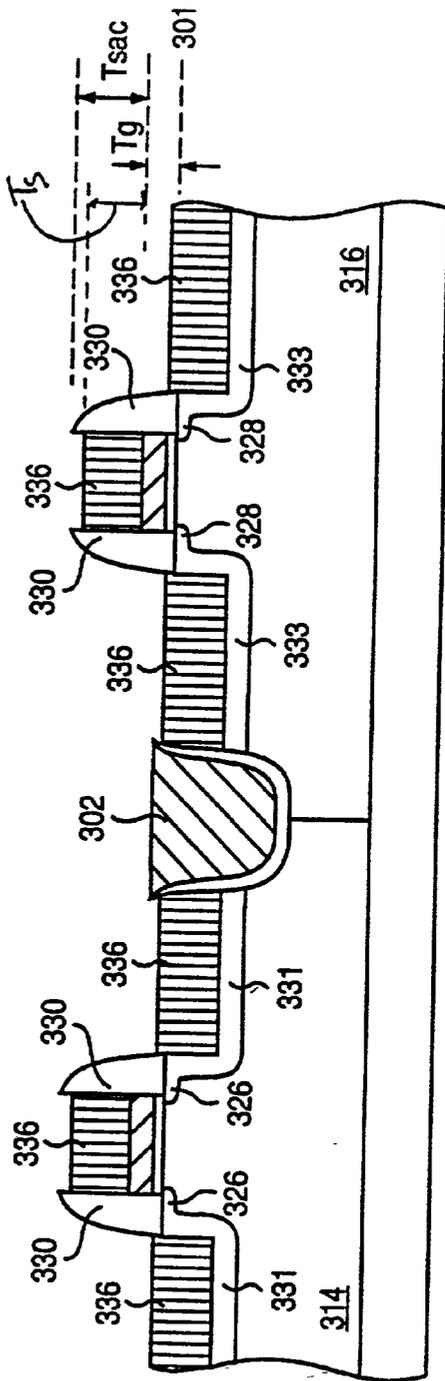


FIG. 3I

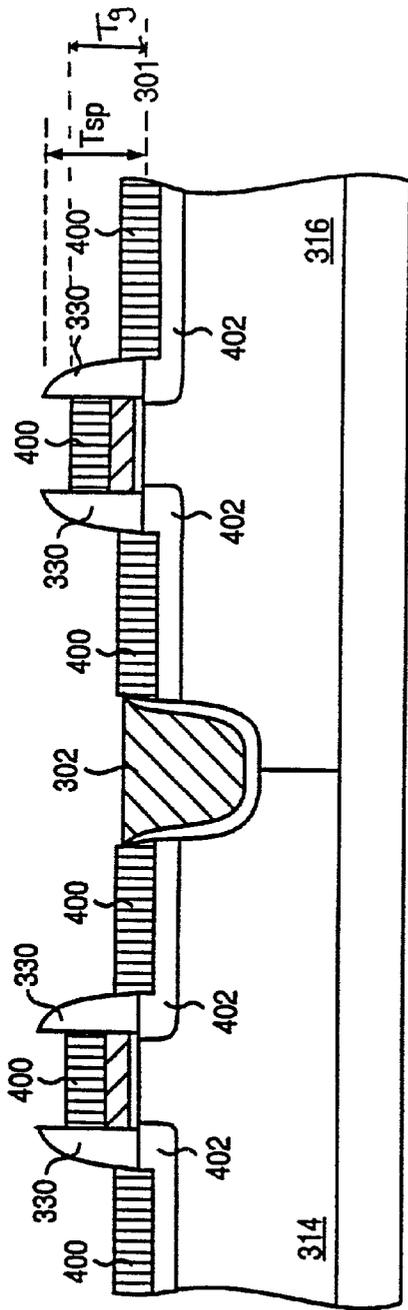


FIG. 4A

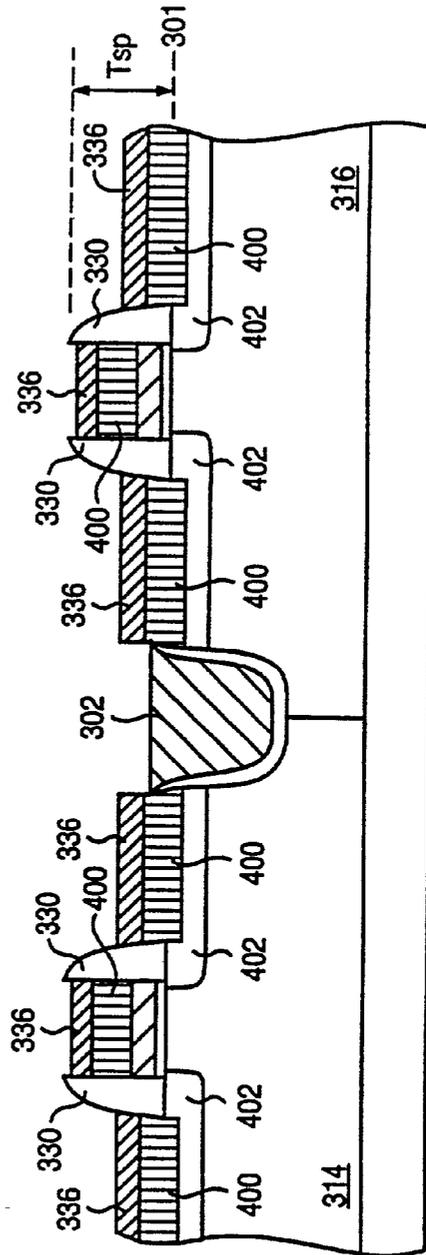


FIG. 4B

DEVICE STRUCTURE AND METHOD FOR REDUCING SILICIDE ENCROACHMENT

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to the field of semiconductor device fabrication, and more specifically to a method and structure for reducing silicide encroachment in an integrated circuit.

[0003] 2. Discussion of Related Art

[0004] Today integrated circuits are made up of literally millions of active and passive devices such as transistors, capacitors, and resistors. In order to improve device performance, low resistance silicide layers are generally formed on electrodes such as gate electrodes and on doped regions such as source/drain regions.

[0005] For example, FIG. 1A is an illustration of a portion of a complementary metal oxide semiconductor (CMOS) integrated circuit. Integrated circuit 100 includes a PMOS transistor 102 and an NMOS transistor 104 separated by an isolation region 103. NMOS and PMOS transistor 102 and 104 each include a pair of source/drain regions 106, a polysilicon gate electrode 107, and a gate dielectric layer 101. Insulative sidewall spacers 108 are formed along opposite sidewalls of gate electrode 107 as shown in FIG. 1A. In order to decrease the resistance of gate electrode 107 and source/drain regions 106, low resistance silicide is formed on gate electrode 107 and source/drain regions 106.

[0006] One method of forming a low resistance silicide is a self-aligned silicide process known as a SALICIDE process. In such a process, a refractory metal layer 109, such as titanium, tungsten, cobalt, nickel or palladium, is blanket deposited over the substrate and MOS devices 102 and 104 as shown in FIG. 1B. The substrate is then heated to cause a reaction between metal layer 109 and exposed silicon surfaces such as source/drain regions 106 and gate electrode 107 to form a low resistance silicide 110 as shown in FIG. 1C. Locations where no silicon is available for reaction, such as oxide spacers 108 and isolation region 103, metal layer 109 remains unreacted. Unreacted metal 109 can then be etched away leaving silicide only on source/drain regions 106 and on gate electrode 107 as shown in FIG. 1D.

[0007] A problem with the above described process is that circuits fabricated with the process are vulnerable to short circuits due to silicide encroachment. That is, during the high temperature anneal used to form silicide layer 110 or during subsequent anneal steps, silicide can diffuse or spill over from polysilicon gate electrode 107 and source/drain regions 106 and form an undesired silicide bridge 112 over sidewall spacers 108 and cause shorting of gate electrode 107 to source/drain region 106. Silicide encroachment is further compounded by silicides, such as nickel silicide (NiSi), which experience silicide volume increases over the combined volume of the consumed silicon and metal layer. For example, the reaction of nickel and silicon creates a nickel silicide/polysilicon gate electrode layer having an approximately 18% volume increase over the silicon electrode shown in FIG. 1A. As such is shown in FIG. 1C to silicide 110 reaches above spacer 108.

[0008] Silicide encroachment can also cause short circuits between source/drain regions of adjacent devices which are

separated by planar isolation regions. For example, as also shown in FIG. 1E, as isolation regions are made more planar and made more compact (less than 0.4 microns wide), such as with shallow trench isolation (STI), silicide from adjacent transistor source/drain regions 106 can diffuse or spill over isolation region 103 and cause silicide shorts 114 between adjacent devices.

[0009] In order to help reduce the potential for silicide shorts between source/drain regions and gate electrodes, polysilicon layer 107 is formed thick, (i.e., greater than 2000Å), in order to ensure that silicide 110 has a large distance to bridge over spacers 108. Unfortunately, however, by increasing the thickness of polysilicon gate 107, the ion implantation technique used to dope gate electrode 107 (typically the source/drain implantation) is unable to drive dopants sufficiently deep into the electrode 107 to provide a uniformly doped low conductivity gate electrode. When the lower portion (portion near gate dielectric layer 101) of the gate electrode has no or reduced doping, the device has increased gate resistance which detrimentally affects the drive current. This non uniform gate electrode doping is commonly referred to as "polysilicon depletion effects".

[0010] Additionally, in order to prevent silicide encroachment, silicide layer 110 is generally kept thin (i.e., thinner than the thickness of the polysilicon gate electrode). It would be desirable to be able to form silicide layers which are thicker than the polysilicon layer so that lower resistance electrodes can be fabricated and device performance improved.

[0011] Thus, what is desired is a device structure and method of fabrication which reduces silicide encroachment as well as poly depletion effects.

SUMMARY OF THE INVENTION

[0012] In a first embodiment of the present invention, a semiconductor device having a novel spacer structure and its method of fabrication is described. According to the first embodiment a semiconductor device having an electrode with a first thickness is formed. A silicide layer having a second thickness is formed on the electrode. A sidewall spacer formed adjacent to the electrode and has a height which is greater than the sum of the thickness of the electrode and the thickness of the silicide layer. In another embodiment of the present invention, regions of a device which are to receive silicide are etched below the top surface of isolation regions prior to silicide deposition. In this way silicide regions are formed below the top surface of the isolation regions.

DESCRIPTION OF THE DRAWINGS

[0013] FIG. 1A is an illustration of a cross-sectional view of a conventional CMOS integrated circuit.

[0014] FIG. 1B is an illustration of a cross-sectional view showing the formation of a metal layer over the substrate at FIG. 1A.

[0015] FIG. 1C is an illustration of a cross-sectional view showing the formation of a silicide layer from the metal layer on the substrate at FIG. 1B.

[0016] FIG. 1D is an illustration of a cross-sectional view showing the removal of unreacted metal from the substrate of FIG. 1C.

[0017] FIG. 1E is an illustration of a cross-sectional view showing silicide encroachment on the substrate of FIG. 1D.

[0018] FIG. 2 is an illustration of a cross-sectional view of a semiconductor substrate having silicide regions formed in accordance with the present invention.

[0019] FIG. 3A is an illustration of a cross-sectional view showing the formation of an isolation region in a semiconductor substrate.

[0020] FIG. 3B is an illustration of a cross-sectional view showing the formation of p type and n type conductivity regions in a semiconductor substrate.

[0021] FIG. 3C is an illustration of a cross-section view showing the formation of a gate dielectric layer, a polysilicon layer, and a sacrificial layer on the substrate of FIG. 3B.

[0022] FIG. 3D is an illustration of a cross-sectional view showing the formation of an intermediate gate electrode on the substrate of FIG. 3C.

[0023] FIG. 3E is an illustration of a cross-sectional view showing the formation of sidewall spacers on the substrate of FIG. 3D.

[0024] FIG. 3F is an illustration of a cross-sectional view showing the formation of recesses and source/drain regions in the substrate of FIG. 3E.

[0025] FIG. 3G is an illustration of a cross-section view showing the removal of the sacrificial layer from the substrate of FIG. 3F.

[0026] FIG. 3H is an illustration of a cross-sectional view showing the formation of a metal layer over the substrate of FIG. 3G.

[0027] FIG. 3I is an illustration of a cross-sectional view showing the formation of silicide regions.

[0028] FIG. 4A is an illustration of a cross-sectional view showing the formation of semiconductor material onto a semiconductor substrate.

[0029] FIG. 4B is an illustration of a cross-sectional view showing the formation of silicide on the substrate of FIG. 4A.

DESCRIPTION OF THE PRESENT INVENTION

[0030] A novel device structure and method for preventing silicide encroachment is described. In the following description numerous specific details are set forth such as specific materials and processes in order to provide a thorough understanding of the present invention. In other instances well known semiconductor processing techniques and machinery have not been set forth in detail in order to not unnecessarily obscure the present invention.

[0031] The present invention is a novel device structure and method for preventing silicide encroachment in an integrated circuit. In one embodiment of the present invention a sidewall spacer is formed adjacent to an electrode of a device onto which a silicide layer is to be formed. The spacer is fabricated so that it has a height which is greater than the combined thickness or height of the electrode plus the silicide layer. In this way the spacer extends above the height of the silicided electrode and prevents silicide from

expanding or diffusing from the electrode and causing shorts with adjacent devices or regions.

[0032] In another embodiment of the present invention where isolation regions are used to isolate adjacent devices, devices are fabricated in such a manner that the isolation region extends above the silicided regions. According to this embodiment of the present invention, regions which are to receive silicide are etched below the top surface of the isolation region prior to silicide deposition. In this way, silicide is unable to expand or diffuse over the isolation region and cause electrical coupling or shorts between adjacent devices.

[0033] An example of an integrated circuit 200 which incorporates the structures and methods of the present invention is illustrated in FIG. 2. Integrated circuit 200 includes a first metal oxide semiconductor device 202 and a second metal oxide semiconductor device 206 separated by an isolation region 204. Each MOS device includes a gate electrode 208 formed on a gate dielectric layer 210 which is formed on a first surface 212 of a substrate 214. Each gate electrode has a silicide layer 216 formed thereon. Semiconductor devices 202 and 206 each also include a pair of sidewall spacers 218 formed adjacent to and along opposite sides of the silicided gate electrodes 220 as shown in FIG. 2. Sidewall spacers 218 extend a spacer height (T_{sp}) above substrate surface 212. Spacers 218 have a height (T_{sp}) which is greater than the height (T_{sg}) which the silicided gate electrode 220 extends above substrate surface 212 (i.e., $T_{sp} > T_{sg}$). That is, spacer height (T_{sp}) is greater than the sum total of the gate electrode 208 thickness (T_g) and the silicide 216 thickness (T_s) (i.e., $T_{sp} > T_g + T_s$). Spacers 218 preferably extend at least 200Å above silicided gate electrode 220. Additionally, in an embodiment of the present invention, silicide layer 216 can be made much thicker, more than two times thicker, than the gate electrode 208. (i.e., $T_s > T_g$) In this way gate electrode resistance is substantially reduced and poly depletion effects eliminated.

[0034] In another embodiment of the present invention, integrated circuit 200 utilizes planar isolation regions 204, such as, shallow trench isolation (STI), as shown in FIG. 2. A planar isolation region 204 is characterized by the fact that the top surface 221 of isolation region 204 is substantially planar with substrate surface 212 on which gate dielectric layers 210 are formed. That is, the top surface 221 of isolation region 204 extends less than 1500Å above substrate surface 212. Shallow trench isolation regions are desirable because they can be formed planar and compact which dramatically improves device packing density. In the embodiment of the present invention where planar isolation regions (e.g., STI) are utilized, source/drain regions 222 are etched or recessed prior to depositing silicide 224 on to the source/drain regions. In this way, the top surface 221 of isolation region 204 extends above the top surface 226 of silicide regions 224. In this way silicide is confined to the source/drain regions and is prevented from diffusing or expanding over the isolation region 204 and causing short circuits between the source/drain regions 224 of adjacent devices 202 and 206.

[0035] An example of a method of fabricating an integrated circuit according to methods of the present invention will be described with respect to the fabrication of a CMOS integrated circuit. The example describes a method of pre-

venting silicide encroachment and thereby preventing shorts between a source/drain region and a gate electrode when forming a silicide on the gate electrode. Additionally the present example illustrates a method of preventing silicide encroachment between source/drain regions of adjacent transistors separated by a planar isolation region. The methods described herein can be used independently or integrated together to reduce or eliminate reliability issues associated with silicide encroachment. It is to be appreciated that the illustrated method of preventing silicide encroachment on a gate electrode is equally applicable to forming silicide layers on other electrodes such as but not limited to emitter electrodes of bipolar transistors and capacitor electrodes of DRAM cells. Similarly the illustrated method of preventing silicide encroachment between source/drain regions of adjacent transistors is equally applicable to preventing silicide encroachment over any isolation region separating other device regions such as base and collector contact regions and buried interconnects. The isolation process is especially useful when planar, compact isolation regions are used.

[0036] According to the present invention a substrate **300**, such as shown in **FIG. 3A**, is provided. Substrate **300** is generally a semiconductor substrate such as but not limited to a silicon substrate, a gallium arsenide substrate, a silicon germanium substrate, or a silicon on insulator (SOI) substrate. Additionally substrate **300** may or may not include additional epitaxial layers deposited thereon. Still further substrate need not necessarily be semiconductor substrate and can be other types of substrates such as those used for flat panel displays. For the purposes of the present invention a substrate is defined as a starting material on which devices of the present invention are fabricated.

[0037] According to an embodiment of the present invention, an isolation region **302** is formed on substrate **300**. In order to fabricate high density integrated circuits, isolation region **302** is preferably a planar isolation region such as a shallow trench isolation (STI). An STI region **302** can be fabricated by a well known technique such as by blanket depositing a pad oxide layer **304** of about 100Å onto surface **301** of substrate **300** and a nitride layer **306** of about 1000Å onto pad oxide layer **304**. Using standard photolithography and etching techniques, an opening can be formed through pad oxide layer **304** and silicon nitride layer **306** at locations where isolation regions are desired. Substrate **300** is then etched to form a trench in substrate **300** with well known techniques. Next, a thin (approximately 100-300Å) thermal oxide is grown within the trench. A fill material, such as silicon dioxide deposited by chemical vapor deposition (CVD), is then blanket deposited over silicon nitride layer **306** and into the trench. The fill material can then be polished back with chemical mechanical polishing until the top surface **312** of isolation region **302** is substantially planar with silicon nitride layer **306** as shown in **FIG. 3A**.

[0038] Next as shown in **FIG. 3B**, silicon nitride layer **306** and pad oxide layer **304** are removed with well known techniques to form a shallow and compact isolation region **302**. Isolation region **302** is said to be a planar isolation region when the top surface **312** of isolation region **302** has a height (T_{iso}) which is less than 1500Å above substrate surface **301**. Additionally with the technique described above compact isolation regions having a width of less than 0.4 microns can be fabricated. It is to be appreciated that the use of small and planar isolation regions enables the fabri-

cation of high density integrated circuits. Although STI regions are preferred, other types of planar isolation regions, such as recessed LOCOS and deep trench isolation may be utilized as well as non planar isolation regions, such as LOCOS isolation, if desired.

[0039] Next, as also shown in **FIG. 3B**, well known masking and ion implementation techniques are used to form a p type region **314** and an n type region **316** in substrate **300**.

[0040] Next, as illustrated in **FIG. 3C**, a thin, less than 100Å, gate dielectric layer **318** such as but not limited to silicon dioxide, silicon nitride or silicon oxynitride is formed on surface **301** of substrate **300**. A silicon film **320** is then deposited over gate dielectric layer **318** as shown in **FIG. 3C**. Silicon film **320** is generally polycrystalline silicon but may be other forms of silicon such as amorphous silicon. Polysilicon layer **320** can be planarized at this time by chemical mechanical polishing. In order to reduce polysilicon depletion effects as well as improve photolithography and etch processes, polysilicon layer **320** is formed as thin as possible. However, polysilicon layer **320** must be formed thick enough to prevent channel doping during subsequent source/drain doping. A planarized polysilicon layer having a thickness (T_p) of between 100-1500Å over substrate surface **301** is suitable. (It is to be noted gate thickness T_g over substrate surface **301** includes the nominal thickness of gate dielectric layer **318**).

[0041] Next, as also shown in **FIG. 3C**, a sacrificial layer **322** is deposited over polysilicon layer **320**. Sacrificial layer **320** can be any suitable material which can be selectively etched with respect to subsequently formed spacers and polysilicon layer **320**. Sacrificial layer **320** can be for example, a grown or CVD deposited oxide layer, a fluorine, phosphorous, or boron doped oxide layer, formed by any well known technique. Additionally sacrificial layer **320** can be a silicon/germanium semiconductor alloy. A silicon/germanium semiconductor alloy can be formed by a decomposition of SiH_2Cl_2 and GeH_4 in H_2 ambient at a temperature between 500-800° C. with 600° C. being preferred. It is to be appreciated that the thickness of sacrificial layer **322** sets the upper limit on the amount of silicide that can be subsequently formed on polysilicon layer **320**. Sacrificial layer **322** is preferably made thicker than polysilicon layer **320** and ideally at least twice as thick. In this way the electrode can have a silicide layer which is thicker than the polysilicon layer which will allow for the formation of a low resistance electrode.

[0042] Next, as shown in **FIG. 3D**, sacrificial layer **322**, polysilicon layer **320** and gate dielectric layer **318** are patterned with well known photolithography and etching techniques to form intermediate electrodes **324**. At this time if desired, tip regions or lightly doped regions can be formed. For example, well known photolithography and ion implantation techniques can be used to form n type conductivity tip regions **326** in p type conductivity region **314** and p type conductivity tip regions **328** and n type conductivity region **316** in alignment with the outside edges of intermediate gate electrodes **324**, as shown in **FIG. 3D**.

[0043] Next, a pair of sidewall spacers **330** are formed along opposite sides of intermediate gate electrode **324** as shown in **FIG. 3E**. Sidewall spacers **330** can be formed by any well known method such as by blanket depositing a

100-1000Å thick conformal layer of silicon nitride over substrate **300** and then anisotropically etching the film to form sidewall spacers **330**. Sidewall spacers **330** should be formed of a material which can be selectively etched with respect to sacrificial layer **322**. Sidewall spacers **330** need not necessarily be single material spacers and can be composite spacers such as silicon nitride spacers with a thin oxide layer formed adjacent to the intermediate gate electrode **324**. Sidewall spacers **330** have a height (T_{sp}) over substrate surface **301** which is equal to the combined thickness of polysilicon layer **320** (T_g) and sacrificial layer **322** (T_{sac}).

[0044] Next, if desired, substrate **300** can be etched in alignment with sidewall spacers **330** to form recesses **332** as illustrated in FIG. 3F. Recesses **332** are desirable when planar isolation regions **302** are used to isolate source/drain regions of adjacent devices. Recesses **332** can also be used when non planar isolation regions are used in order to provide increased margins for preventing silicide encroachment over the isolation region. Recesses **332** are formed to a depth beneath surface **301** sufficient to keep subsequently formed silicide beneath the top surface of isolation region **302**. Recesses having a depth beneath surface **301** of between 100-1000Å will generally be sufficient. Recesses **332** can be formed by any well known technique such as but not limited to reactive ion etching (RIE) with the chemistry comprising C_2H_6 and He at a ratio of 2:1. If a suitable spacer material is used, such as silicon nitride, recesses **332** can be formed by over etching into the silicon substrate **300** during the spacer etch.

[0045] Next, as illustrated in FIG. 3G, sacrificial layer **322** is removed from polysilicon layer **320**. If sacrificial layer **322** is an oxide, it can be removed with a diluted HF solution (50:1 H_2O to HF). If sacrificial layer **322** is silicon germanium it can be removed with a mixture of NH_4OH/H_2O_2 or sulfuric acid (H_2SO_4). Using a silicon germanium sacrificial layer **322** is advantageous because silicon germanium can be removed with an etchant which does not attack oxides which are generally used to fill STI region **302**.

[0046] After sacrificial layer **322** has been removed, n type conductivity source/drain regions **331** and p type conductivity source/drain regions **333** can be formed as shown in FIG. 3G. N type source/drain regions **331** and p type source/drain regions **333** can be formed by well known photolithography and ion implantation techniques. If polysilicon layer **320** is made as thin as practically possible, (i.e., less than 1000Å) the respective source/drain dopings will be able to dope the entire thickness of polysilicon layer **320**, and thereby prevent polysilicon depletion effects. Additionally, by having a thin polysilicon layer, low energy (less than 30 Kev) source/drain implant energies can be used to form shallow source/drain junctions, and still ensure complete polysilicon doping. It is to be noted, that if desired deep source/drain regions **331** and **333** can be formed directly after spacer formation in FIG. 3E. Recesses **332** can then be subsequently etched into the source/drain regions **331** and **333**.

[0047] Next, a silicide layer is formed on polysilicon layer **320** and on source/drain regions **331** and **333**. In one embodiment of the present invention the silicide layers are formed with a self-aligned silicide process or SALICIDE process. In a salicide process, a metal layer **334** is blanket

deposited over substrate **300** as illustrated in FIG. 3H. Metal layer **334** is generally a refractory metal such as but not limited to, titanium, tungsten, nickel, cobalt and palladium which can react with silicon to form a low resistance silicide. Metal layer **334** can be deposited by any well known technique such as by sputtering.

[0048] Substrate **300** is now annealed (heated) to cause a chemical reaction between those portions of metal layer **334** which are in direct contact with exposed silicon to form a silicide. That is, silicide is formed wherever silicon is available to react with metal layer **334** such as over source/drain regions **331** and **333** and on polysilicon gate electrode **320**. Since no silicon is available from sidewall spacers **330** or on STI region **302** no silicide forms thereon. Substrate **300** is heated to a sufficient temperature and for a sufficient period of time in order to initiate the reaction and produce low resistance silicide. Substrate **300** can be thermally cycled with well known techniques such as a rapid thermal anneal or a furnace anneal. Next, substrate **300** is subjected to an etchant which selectively removes the unreactive portions of metal layer **334** while leaving silicide **336** on polysilicon layer **320** and on source/drain regions **331** and **333**.

[0049] It is to be appreciated that for preventing silicide encroachment on gate electrode **320**, metal layer **334** is deposited to a thickness so that after the silicide reaction, spacers **330** extend above the formed silicide **336** and thereby confine the silicide layer between spacers **330**. That is, metal layer **334** is deposited to a thickness so that after silicide formation the spacer height T_{sp} is greater than the sum of a polysilicon gate thickness (T_g) plus the silicide thickness (T_s), (i.e., $T_{sp} > T_g + T_s$). Similarly, for preventing silicide encroachment over isolation region **302**, metal layer **334** is deposited to a thickness so that after silicide reaction silicide layer **336** on source/drain regions **331** and **333** are beneath the top surface of isolation region **302**. That is, silicide **336** on source/drain regions **331** and **333** has a height less than T_{isc} over substrate surface **301**. In this way silicide **336** is confined to the source/drain regions **331** and **333** between spacers **330** and isolation region **302**.

[0050] It is to be appreciated that when volume expanding silicides are utilized, such as nickel silicide, additional margin should be provided to ensure that the silicide is unable to expand over spacers **330** and/or isolation region **302**. The confining techniques of the present invention enable the use of volume expanding silicide layers without worrying about silicide encroachment problems associated with the prior art.

[0051] In an alternative to forming silicide **336** by a self-aligned process, silicide layer **336** can be selectively deposited onto source/drain regions **331** and **333** and polysilicon layer **320**. For example, titanium silicide can be selectively deposited onto source/drain regions **331** and **333** and gate electrode **320** by chemical vapor deposition (CVD) using reactive gasses comprising $TiCl_4$, SiH_2Cl_2 and/or SiH_4 with a hydrogen carrier gas at a temperature ranging from 600-900° C. and a pressure between 5-100 torr. Such a process is said to be a selective process because it will form silicide only on exposed silicon surfaces, such as source/drain regions **331** and **333** and polysilicon gate electrode **320** and not on insulative regions such as spacers **330** or STI isolation region **302**. It is recommended to utilize an HF dip prior to selective silicide deposition to ensure complete

removal of all native oxide layers formed on silicon surfaces. A subsequent high temperature rapid thermal anneal can be used to convert the as deposited titanium silicide phase (C49) into low resistance phase (C54).

[0052] In a selective deposition process, insignificant amounts of silicon are consumed during the deposition as compared to a silicide process. Since less silicon is needed to support the silicide deposition, when a selective silicide process is used polysilicon layer 320 can be formed very thin to further decrease poly depletion effects and improve photolithography and etching processes.

[0053] It is to be appreciated that it may be desirable to selectively deposit semiconductor material prior to silicide formation. For example, after forming sidewall spacers 330 and recesses 332, and removing sacrificial layer 322 it may be desirable to selectively deposit a semiconductor material, such as silicon germanium, into recesses 332 and onto polysilicon layer 320 as shown in FIG. 4A. Ion implementation or insitu doping, can be used to dope the semiconductor material to the desired conductivity type and concentration. Additionally, a subsequent anneal step can be used to out diffuse dopants from the semiconductor material to form ultra shallow tip regions as discussed in U.S. patent application Ser. No. 08/363,749, filed Dec. 23, 1994. Additionally depositing additional semiconductor material on source/drain regions enables the manufacture of "raised" source/drain regions which reduce resistances of the device and improves performance. Silicide 336 is then subsequently formed on the deposited semiconductor material 400 as shown in FIG. 4B. In such a case, the deposited semiconductor material 400 combines with the previously deposited polysilicon layer 320 to set the gate electrode height (T_g). In such a case, sacrificial layer 322 should be made sufficiently thick to compensate for the additional volume occupied by the deposited semiconductor material 400.

[0054] It is to be appreciated that an advantage of the present method of confining silicide onto an electrode is the fact that it enables thin sidewall spacers (less than 300Å wide) to be used. In prior art processes, spacers having a width of at least 2000Å were required to ensure that they provided a sufficient gap or distance to prevent silicide encroachment. The use of thin spacers to confine silicide enables the further scaling of semiconductor devices. Additionally thin sidewall spacers allow solid source diffusion to be used to form ultra shallow tip regions since dopants have only a short distance (less than 300Å) to diffuse underneath the gate electrode. Low resistance ultra shallow tips allow the fabrication of high performance semiconductor devices.

[0055] Thus, device structures and methods for preventing silicide encroachment have been described.

We claim:

1. A semiconductor device comprising:

- an electrode having a first thickness;
- a silicide layer on said electrode, said silicide layer having a second thickness; and
- a sidewall spacer adjacent to said electrode, wherein said sidewall spacer has a height greater than the sum of said first thickness and said second thickness.

2. A metal oxide semiconductor device comprising:

- a gate electrode having a first thickness;
- a silicide layer on said gate electrode, said silicide layer having a second thickness;
- a pair of sidewall spacers on opposite sides of said gate electrode, said sidewall spacers having a height which is greater than the sum of said first thickness and said second thickness; and
- a pair of source/drain regions formed on opposite sides of said gate electrode.

3. The semiconductor device of claim 2 wherein said gate electrode comprises polysilicon.

4. The semiconductor device of claim 2 wherein said gate electrode further comprises selectively deposited semiconductor on said polysilicon layer.

5. A semiconductor device comprising:

- a gate electrode formed on a gate dielectric layer formed on a first surface of a substrate;
- a pair of source/drain regions formed on opposite sides of said gate electrode;
- an isolation region having a top surface extending less than 1500Å above said first substrate surface; and

a silicide layer formed on said source/drain regions wherein said silicide layer has a top surface with a height less than said top surface of said isolation region.

6. The semiconductor device of claim 5 further comprising:

- a gate silicide layer having a first thickness formed on said gate electrode, said gate electrode having a second thickness; and

a pair of sidewall spacers formed on opposite sides of said gate electrode, wherein said sidewall spacers have a height which is greater than the sum of said first thickness and said second thickness.

7. A method of forming a semiconductor device comprising the steps of:

- forming an electrode having a first thickness;
- forming a silicide layer having a second thickness on said electrode; and
- forming a sidewall spacer adjacent to said gate electrode wherein said sidewall spacer has a height which is greater than the sum of said first thickness and said second thickness.

8. A method of forming an MOS transistor comprising the steps of:

- forming a gate electrode on a gate dielectric layer formed on a first surface of a substrate;
- forming a pair of source/drain regions on opposite sides of said gate electrode;
- forming an isolation region having a top surface extending less than 1500Å above said first substrate surface; and
- forming a silicide layer on said pair of source/drain regions wherein said silicide layer has a top surface with a height less than the top surface of said isolation region.

9. The method of claim 8 further comprising the steps of:
forming a gate silicide layer having a first thickness on said gate electrode, wherein said gate electrode has a second thickness; and
forming a pair of sidewall spacers on opposite sides of said gate electrode, wherein said sidewall spacers have a height which is greater than the sum of said first thickness and said second thickness.
10. A method of forming a semiconductor device, said method comprising the steps of:
forming a gate dielectric layer on a silicon substrate;
forming a silicon layer over said gate dielectric layer said silicon layer having a first thickness;
a sacrificial layer over said silicon layer;
patterning said silicon layer and said sacrificial layer into an electrode;
forming a pair of spacers on opposite sides of said electrode said spacers having a first height;
removing said sacrificial layer from over said silicon layer; and
forming a silicide having a second thickness on said silicon layer and on said substrate adjacent to the outside edges of said spacers, wherein said first height is greater than the sum of said first thickness and said second thickness.
11. The method of claim 10 wherein said sacrificial layer is silicon germanium.
12. The method of claim 10 wherein said spacers comprise silicon nitride.
13. The method of claim 10 wherein said sacrificial layer comprises silicon dioxide.
14. The method of claim 13 wherein said silicon dioxide layer is doped with fluorine.
15. The method of claim 10 wherein said sacrificial layer is removed with a wet etchant.
16. The method of claim 10 further comprising the step of:
polishing said silicon layer prior to forming said sacrificial layer.
17. The method of claim 10 further comprising the step of:
doping said silicon layer after removing said sacrificial layer.
18. The method of claim 10 wherein said step of forming said silicide layer comprises the steps of:
blanket depositing a refractory metal over said substrate, said pair of sidewall spacers, and said silicon layer;
thermally reacting said refractory metal with said substrate and said silicon layer to form a refractory metal silicide; and
removing said refractory metal from said pair of spacers.
19. The method of claim 10 wherein said step of forming said silicide layer comprises the step of:
selectively depositing said silicide layer on said silicon layer and on said substrate.
20. The method of claim 10 wherein said spacers have a height greater than the sum of the thickness of said silicon layer and said silicide layer.
21. The method of claim 10 wherein said silicon layer is polycrystalline silicon.
22. The method of claim 10 wherein said spacer height is greater than the sum of said silicon thickness plus said gate dielectric thickness.
23. A method of forming a device, said method comprising the steps of:
forming a silicon electrode having a first thickness;
forming a metal layer on said silicon electrode; and
forming a silicide on said silicon electrode by reacting said metal layer and said silicon gate electrode, wherein said silicide has a second thickness, said second thickness at least twice said first thickness.
24. A method of forming a semiconductor device in a semiconductor substrate comprising the steps of:
forming an isolation region in said semiconductor substrate;
etching said semiconductor substrate adjacent to said isolation region to form a recess region; and
forming a silicide in said recessed region.
25. A method of forming an integrated circuit comprising the steps of:
forming an isolation region in a semiconductor substrate, said isolation region having a top surface extending less than 1500Å above said semiconductor substrate.
forming a first and second diffusion region adjacent to and on opposite sides of said isolation region in said semiconductor substrate; and
forming silicide on said first and second diffusion regions wherein said silicide has a top surface with a height less than the top surface of said isolation region.
26. A method of forming a semiconductor device, said method comprising the steps of:
forming a silicon film above a substrate;
forming a silicon germanium film on said silicon film;
patterning said silicon film and said silicon germanium film into an intermediate electrode;
forming a pair of sidewall spacers on opposite sides of said intermediate electrode;
removing said silicon germanium film from said intermediate electrode to reveal said silicon film; and
forming a silicide film on said silicon film.
27. The method of claim 26 wherein said silicon film is polycrystalline silicon.
28. The method of claim 26 wherein said silicon germanium film is removed with a mixture of NH_4OH and H_2O_2 .
29. The method of claim 26 wherein said silicon germanium film is removed with sulfuric acid (H_2SO_4).