

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 September 2007 (27.09.2007)

PCT

(10) International Publication Number
WO 2007/108705 A1

(51) International Patent Classification:
B63B 22/02 (2006.01) **B63B 21/50** (2006.01)

(74) Agents: **ONSAGERS AS** et al.; P.O. Box 6963 St. Olavs plass, N-0130 Oslo (NO).

(21) International Application Number:
PCT/NO2007/000115

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 23 March 2007 (23.03.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20061335 23 March 2006 (23.03.2006) NO

(71) Applicant (*for all designated States except US*): **FRAMO ENGINEERING AS** [NO/NO]; P.O. Box 174 Sandsli, N-5862 Bergen (NO).


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **INGEBRIGTSEN, Atle** [NO/NO]; Tveiteråsveien 18, N-5232 Paradis (NO). **SEIM, Lars** [NO/NO]; Hardangerveien 831, N-5267 Espeland (NO). **ERSTAD, Jostein** [NO/NO]; Hanevik, N-5307 Ask (NO).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CONNECTION SYSTEM AND METHOD FOR CONNECTING AND DISCONNECTING A FLOATING UNIT TO AND FROM A BUOY WHICH IS CONNECTED TO A SUBSEA INSTALLATION

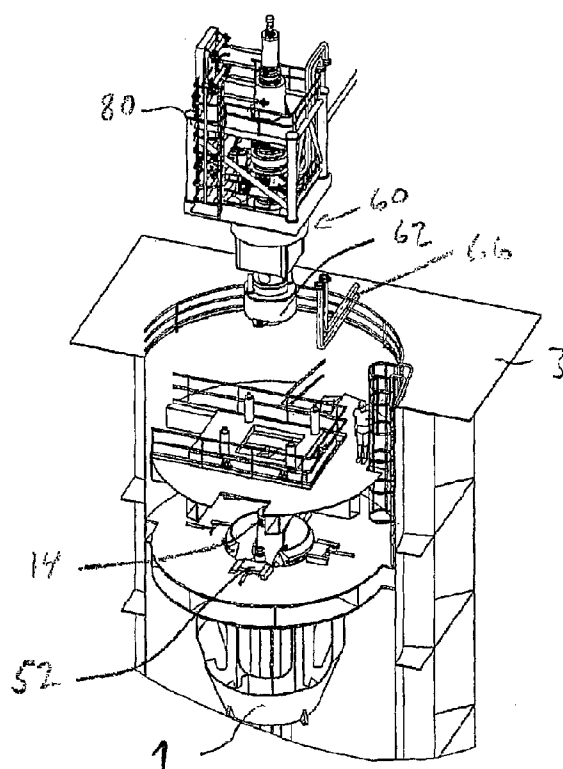

(57) Abstract: The present invention relates to a connection system and a method for connecting and disconnecting a floating unit to and from a buoy which is connected to a subsea installation, where the buoy comprises a first connection device for connecting pipes and/or lines for transfer of fluid, control signals and/or electric power between the buoy and the floating unit. The connection system further comprises a support structure which is laterally movable relative to the floating unit and a swivel stack arrangement movably mounted on the support structure. The swivel stack arrangement comprises a second connection device for connecting to the first connection device in the buoy; shut-off devices for opening and closing at least one of the pipes and/or lines in the first and second connection devices by connecting and disconnecting the buoy; and a turret bearing for rotating the buoy relative to the floating unit.

WO 2007/108705 A1

**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Connection system and method for connecting and disconnecting a floating unit to and from a buoy which is connected to a subsea installation.

Technical field

The present invention relates to a method and a system for connecting a floating unit to a buoy in a subsea system.

5 The prior art

In the field of offshore oil and gas production, the use is known of a vessel with (and without) dynamic positioning (DP). For example, wells are located on the seabed, and pipe connections for oil and/or gas, umbilical pipes, control cables, power supply cables etc. lead from the wells up to a buoy. Alternatively, the vessel
10 may be used to transfer oil, gas and other media, which are naturally transported and stored in ships, from ship to ship, from shore to ship or from ship to shore. The buoy comprises buoyancy elements which enable it to float at a desired distance (for example 40-70m) under the sea surface, and the buoy is further adapted to be pulled into and attached to the vessel.

15 The connection between the buoy and the vessel may be implemented by an ROV from the vessel being manoeuvred to the buoy and attaching a wire thereto, whereupon the wire with the buoy is pulled up towards and into a connection system in the vessel, for example a dedicated turret/swivel compartment internally in the vessel, in an external turret solution, in a moon pool or towards a
20 swivel/turret system on the side of the ship. In order to locate the buoy, it is usually equipped with a location transponder. Alternatively, the buoy may be pulled in towards the ship by means of a surface buoy which is connected to the submerged buoy.

25 The vessel may therefore be a production vessel, a storage vessel and/or an offloading vessel for oil and/or gas, or alternatively LNG, or other types of floating units, such as floating platforms etc.

With dynamic positioning the vessel is not normally anchored to the seabed, or it may be very lightly anchored; in both cases this means that the vessel has to use its engines to stay in the correct position. The vessel comprises propulsion units in the
30 form of propellers and thrusters connected to a navigation system, which ensure that the vessel is kept in position at the buoy within given limits, even when influenced by wind and waves. However, bad weather may cause the vessel to be unable to stay in position, with the result that for reasons of safety a controlled shut-down of the transmission lines will occur, followed by disconnection of the vessel from the
35 buoy, thereby enabling the vessel to move freely independently of the equipment under the surface. In given cases the buoy may also be equipped with anchoring devices to the seabed.

There are a number of requirements associated with this connection between the buoy and the vessel. First of all, the vessel must be able to rotate round the buoy, while the buoy must maintain its original orientation relative to the wells on the seabed in order to avoid damage to the pipe and cable connections between the installation and the buoy.

Furthermore, it is important for the connection, and particularly the disconnection to occur in a rapid and controlled manner in the event of sudden weather changes. It is also important for the relevant valves and pipes in the connection system and in the buoy to be emptied of hydrocarbon compounds before disconnection, in order to avoid polluting the water.

Another object of the invention is that the connection system can be employed with as many types of vessel as possible and therefore that the connection system is also flexible in relation to where it is mounted on the vessel. It is also an object that the vessel should require as little conversion as possible in order to be able to employ the connection system.

Summary of the invention

The present invention relates to a connection system for connecting and disconnecting a floating unit to and from a buoy which is connected to a subsea installation, where the buoy comprises a first connection device for connecting pipes and/or lines for transfer of fluid, control signals and/or electric power between the buoy and the floating unit; where the connection system further comprises:

- a support structure which is laterally movable relative to the floating unit;
- a swivel stack arrangement movably mounted on the support structure, where the swivel stack arrangement comprises
 - a second connection device for connecting to the first connection device on the buoy;
 - shut-off devices for opening and closing at least one of the pipes and/or lines in the first and second connection device when connecting and disconnecting the buoy; and
 - a turret bearing for rotating the buoy relative to the floating unit.

The present invention also relates to a method for connecting a floating unit to a buoy which is connected to a subsea installation, for connecting pipes and/or lines for transfer of fluid, control signals and/or electric power between the buoy and the floating unit, characterised in that the method comprises the following stages:

- pulling the buoy into an opening in the floating unit;
- temporary locking of the buoy to the vessel;
- lateral movement of a support structure with a swivel stack arrangement, thereby placing it centrally over the buoy;
- 5 - connecting a second connection device in the swivel stack arrangement with a first connection device on the buoy;
- disconnecting the temporary locking arrangement;
- opening the shut-off devices in the buoy and the swivel stack arrangement, in order to start the transfer between the buoy and the floating unit.

10

When disconnecting the buoy from the floating unit the method further comprises the following stages:

- closing shut-off devices in the buoy and the swivel stack arrangement;
- draining the pipes between the shut-off devices by means of a drainage system;
- 15 - connecting the temporary locking arrangement;
- disconnecting the first and the second locking devices from each other;
- disconnecting the temporary locking arrangement in order thereby to uncouple the buoy from the floating unit.

20

Further preferred embodiments will become apparent from the dependent patent claims.

Detailed description

25 A preferred embodiment of the present invention will now be described in detail with reference to the attached drawings:

Figs. 1a-e illustrate the different stages in the connection of the buoy to the vessel;

Fig. 1f illustrates an enlargement of parts in fig. 1e;

Fig. 2 is a sectioned perspective view of the buoy, the swivel stack arrangement and parts of the vessel;

30 Figs. 3a and 3b illustrate a rapid disconnection of the buoy from the vessel;

Fig. 4 illustrates the drainage system for removing fluid from the connection device before disconnection;

Fig. 5 is a perspective view of the swivel stack arrangement, where the turret bearing can be seen; and

5 Fig. 6 illustrates details of the turret bearing.

Referring to fig. 1, a buoy 1 is shown in the process of being pulled into a turret/swivel compartment 2 on a vessel 3. The vessel 3 is preferably of the type mentioned in the introduction above, and has propulsion units in the form of propellers and thrusters connected to a navigation system which ensures that the
10 vessel stays in position at the buoy within given limits. The vessel will preferably rotate with wind and wave direction in order to facilitate navigation.

The buoy must maintain its orientation relative to the seabed in order to avoid damage to the buoy or pipe connections and cables coupled thereto. The connection system according to the invention therefore comprises a turret bearing 70 (figs. 5
15 and 6) integrated in a swivel stack arrangement 60. The turret bearing 70 is preferably hydraulically driven and provides controlled orientation of the buoy relative to the vessel.

A swivel stack arrangement 60 and its function are further described in Norwegian Patent 306416. This publication is hereby incorporated in its entirety as reference.

20 The connection system according to the invention is preferably connected to the vessel's navigation system and provides control of the buoy and the vessel relative to each other and relative to the seabed, although it should be noted that the vessel does not need to have a dynamic positioning system in order for the present invention to work.

25 Referring now to fig. 1a, the buoy 1 comprises one or more pipe connections 10 for oil, gas or other fluids from a subsea installation in addition to, for example, umbilicals, control cables and power supply cables (not shown in figs. 1a-c). Each pipe connection has an actuator-controlled isolation valve integrated as a part of the buoy. The buoy may further comprise mooring wires 12 for attaching the buoy to
30 the seabed. The buoy contains buoyancy elements which keep the buoy afloat at a distance of approximately 40-70m under the surface of the sea.

In the centre of the upper part of the buoy 1 there is mounted a first connection device 14, which in the preferred embodiment is a multichannel connection device adapted for connecting pipes and possibly also cables to a second connection device
35 in the vessel, which will be described in detail below.

5 The buoy further comprises a protective cover 16 with a lift eye 18, adapted to permit an ROV to attach a pull-in wire 20 from the vessel to the lift eye 18. The buoy also comprises a location means (not shown), for example an acoustic transponder, for locating the buoy and for orientation of the buoy relative to the installation on the seabed. In an alternative solution the buoy is connected to a surface buoy, which the vessel employs for locating and pulling up the buoy 1.

10 In this embodiment the turret/swivel compartment 2 is provided as a separate compartment internally in the vessel (indicated by the numeral 3). In the floor 50 in this compartment 2 is mounted a temporary locking arrangement 52 with an opening 54 for the buoy 1. It can be seen from the figures that the opening 54 and the locking arrangement 52 are adapted to fit the shape of the buoy 1.

15 Over the opening 54 is mounted a swivel stack arrangement 60 attached to the vessel by means of a support structure 80. At the bottom the swivel stack arrangement 60 contains a second connection device 62, adapted to be connected to the first connection device 14. The second connection device 62 is also a multichannel connection, and provides both locking of the swivel stack arrangement 60 to the buoy 1 as well as permitting fluid transfer between the buoy 1 and the vessel via the swivel stack arrangement 60.

20 The connection devices 14, 62 typically comprise two pipe connections with a diameter of 5-6" together with electrical and hydraulic control cables. It is preferred that the connection devices are capable of being disconnected from each other with a certain tensile stress and with relatively large angular deviation, which may be necessary to enable the disconnection to be performed rapidly in bad weather conditions.

25 The swivel stack arrangement 60 further comprises actuator-controlled isolation valves in each pipe connection. In this way the pipe connections can be closed both by means of the isolation valves in the buoy and by the isolation valves in the swivel stack arrangement, which is necessary when disconnecting the buoy. The isolation valves are further described below with reference to fig 4.

30 The pipe connections in the swivel stack arrangement 60 lead to a processing unit, storage tanks or the like in the vessel by means of other pipe connections 66, as illustrated in fig. 1e.

35 As mentioned above, the swivel stack arrangement 60 comprises a turret bearing 70, which provides controlled rotation of the second connection device 62 and thereby rotation of the buoy 1. The turret bearing 70 is preferably driven by hydraulic motors (see figs. 5 and 6).

The support structure 80 supports the swivel stack arrangement 60 relative to the vessel. The support structure comprises a plurality of impellers 82 which permit the support structure 80 with the swivel stack arrangement 60 to be laterally movable along rails in the compartment 2. This means that the swivel stack arrangement 60
5 can be pushed away from the buoy when required for conducting operations thereon. The support structure 80 may of course be locked to the vessel when the desired positions have been achieved, thereby preventing undesired movement from occurring.

The support structure 80 also comprises a lifting device for raising and lowering the
10 swivel stack arrangement relative to the buoy 1. This will be apparent from the description below.

When the buoy is attached to the swivel stack arrangement 60, the support structure 80 the turret bearing 70 and the second connection device 62 transfer torque forces from the buoy to the vessel.

15 The connection system preferably comprises a drainage system for removal of fluid in the system before disconnecting the buoy. This is an operation which is conducted after the isolation valves in the swivel stack arrangement and the buoy respectively are closed. The drainage system 90 is illustrated in fig. 4. Shown here are the hydraulic isolation valve 91 in the swivel stack arrangement and the
20 hydraulic isolation valve 92 in the buoy, each of which closes off the fluid connection between the buoy and the vessel. The reference numeral 93 designates a nitrogen tank connected to the fluid connection for injecting nitrogen into the fluid connection through an injection channel. The injection valve can be controlled by means of a valve.

25 Reference numeral 94 designates a waste accumulator connected to the fluid connection for collecting fluid and nitrogen pressed out of the fluid connection through an exhaust channel due to the nitrogen injection. The channel between the fluid connection and the accumulator may be closed by means of a valve.

The use of the connection system according to the invention will now be described.
30 As mentioned above, an ROV is employed for attaching a pull-in wire 20 to the lift eye 18. A winch pulls the pull-in wire 20 and the buoy is guided into the turret/swivel compartment 2 (see fig. 1a) via the opening 52.

The temporary locking arrangement 54 locks the buoy to the vessel, thereby enabling the pull-in wire 20 to be removed. The cover 16 with the lift eye 18 is then
35 removed (see fig. 1b).

The support structure 80 with the swivel stack arrangement 60 are then pushed sideways with the result that the first and second connection devices in the buoy and

the swivel stack arrangement respectively are centrally located above each other (see fig. 1c). The second connection device in the swivel stack arrangement is also rotated by means of the turret bearing 70, thereby obtaining the correct orientation relative to the first connection device 14 in the buoy.

5 After the correct orientation has been achieved, and everything generally is ready for connection, the swivel stack arrangement 60 is lowered towards the buoy. The first connection device 14 in the buoy is connected to the second connection device 62 in the swivel stack arrangement and the connection is compression tested. Control cables, power supply cables and hydraulic connections will then be
10 connected between the buoy and the swivel stack arrangement (see figs. 1d-f).

It should be noted that pipe connections 68 may also be connected on the outside of the connection devices 14, 62, as illustrated in fig. 1f. These pipe connections may either have their own hydraulic connection devices, or they may be of a simpler design.

15 The temporary locking arrangement is now uncoupled, thereby causing the buoy to be suspended in the swivel stack arrangement via the connection devices 14, 62.

The connection system according to the invention is now ready for use, and the valves can be opened for transfer of fluid, any control signals and electric power or the like.

20 Before disconnection is carried out, the pipe connections will always be drained of fluid by means of the drainage system 90, as described above.

During a normal disconnection of the buoy from the connection system, the above stages will usually be carried out in reverse order.

25 During a rapid disconnection the cover 16 with the lift eye 18 will not be mounted on the buoy before it is disconnected. Instead, the buoy will be dropped into the water after all the equipment is disconnected, and the cover will be mounted under water by means of an ROV.

It should be noted that forces and torque in the present invention are transferred through the connection devices via the turret bearing in the swivel stack
30 arrangement to the vessel.

In the prior art the turret bearing is integrated as a part of the opening 54 in the vessel, which requires a greater modification of the vessel than in the present invention, where the turret bearing is integrated in the actual swivel stack arrangement. The present invention therefore achieves greater flexibility with
35 regard to the kind of vessels or other floating units on which it can be mounted, and the mounting operation will also be less expensive.

CLAIMS

1. A connection system for connecting and disconnecting a floating unit to and from a buoy which is connected to a subsea installation, where the buoy comprises a first connection device for connecting pipes and/or lines for transfer of fluid,
5 control signals and/or electric power between the buoy and the floating unit; where the connection system further comprises:
- a support structure which is laterally movable relative to the floating unit;
 - a swivel stack arrangement movably mounted on the support structure, where the swivel stack arrangement comprises
- 10 • a second connection device for connecting to the first connection device at the buoy;
- shut-off devices for opening and closing at least one of the pipes and/or lines in the first and second connection device by connecting and disconnecting the buoy; and
- 15 • a turret bearing for rotating the buoy relative to the floating unit.
2. A connection system according to patent claim 1, characterised in that it further comprises a drainage system for removing fluid in the connection system before disconnecting the buoy.
3. A connection system according to patent claim 1 or 2,
20 characterised in that it further comprises a temporary locking arrangement (52) for temporary locking of the buoy to a receiving opening (54) in the floating unit.
4. A connection system according to patent claim 1, characterised in that the pipes are pipes for oil and/or gas or other fluids that have to be transferred from a floating unit to shore, from shore to a floating unit or between
25 floating units.
5. A connection system according to patent claim 1, characterised in that the lines are signal lines for transmitting electrical or other types of signals, power transmission lines for transmitting electric, hydraulic/chemical or other types of power, or the like.
- 30 6. A connection system according to one of the above patent claims, characterised in that the swivel stack arrangement can be raised and lowered relative to the support structure.

7. A connection system according to one of the above patent claims, characterised in that the first and second connection devices are multichannel connection devices.
- 5 8. A connection system according to one of the above patent claims, characterised in that the floating unit is positioned beside the buoy by means of a dynamic positioning system.
- 10 9. A connection system according to patent claim 8, characterised in that positioning data from the positioning system are employed in order to maintain the rotational position of the buoy relative to the subsea installation.
- 10 10. A connection system according to one of the above patent claims, characterised in that it comprises a winch with a wire adapted for attachment to a lift eye in a protective cover on the buoy, for pulling the buoy in towards the floating unit.
- 15 11. A method for connecting a floating unit to a buoy which is connected to a subsea installation, for connecting pipes and/or lines for transfer of fluid, control signals and/or electric power between the buoy and the floating unit, characterised in that the method comprises the following stages:
- pulling the buoy into an opening in the floating unit;
 - 20 - temporary locking of the buoy to the vessel;
 - lateral movement of a support structure with a swivel stack arrangement, thereby placing it centrally over the buoy;
 - connecting a second connection device in the swivel stack arrangement with a first connection device in the buoy;
 - 25 - disconnecting the temporary locking arrangement;
 - opening shut-off devices in the buoy and the swivel stack arrangement, in order to start the transfer between the buoy and the floating unit.
- 30 12. A method according to patent claim 11, characterised in that disconnection of the buoy from the floating unit is performed by the following stages:
- closing shut-off devices in the buoy and the swivel stack arrangement;
 - draining the pipes between the shut-off devices by means of a drainage system;

- connecting the temporary locking arrangement;
- disconnecting the first and the second locking devices from each other;
- disconnecting the temporary locking arrangement in order thereby to uncouple the buoy from the floating unit.

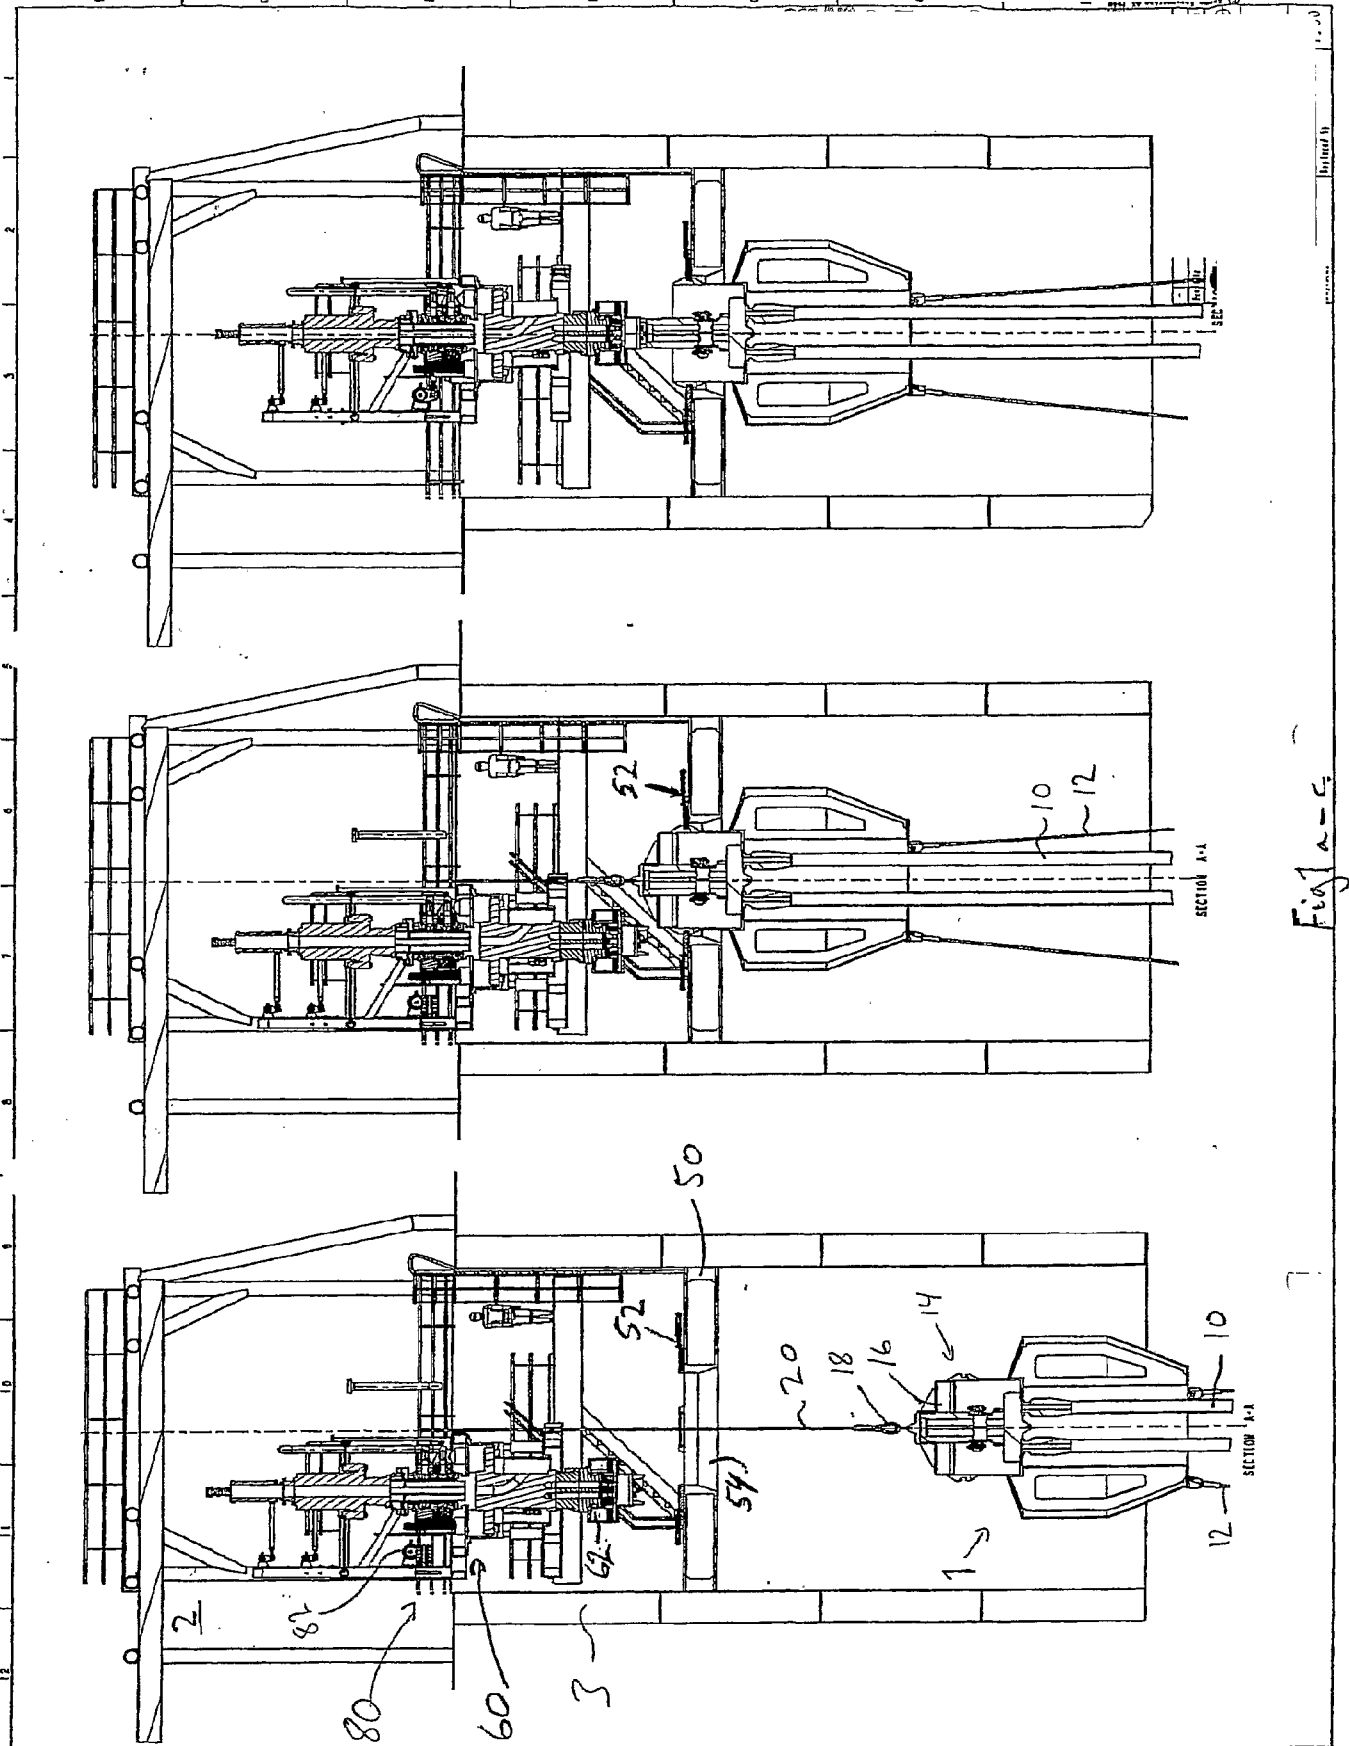
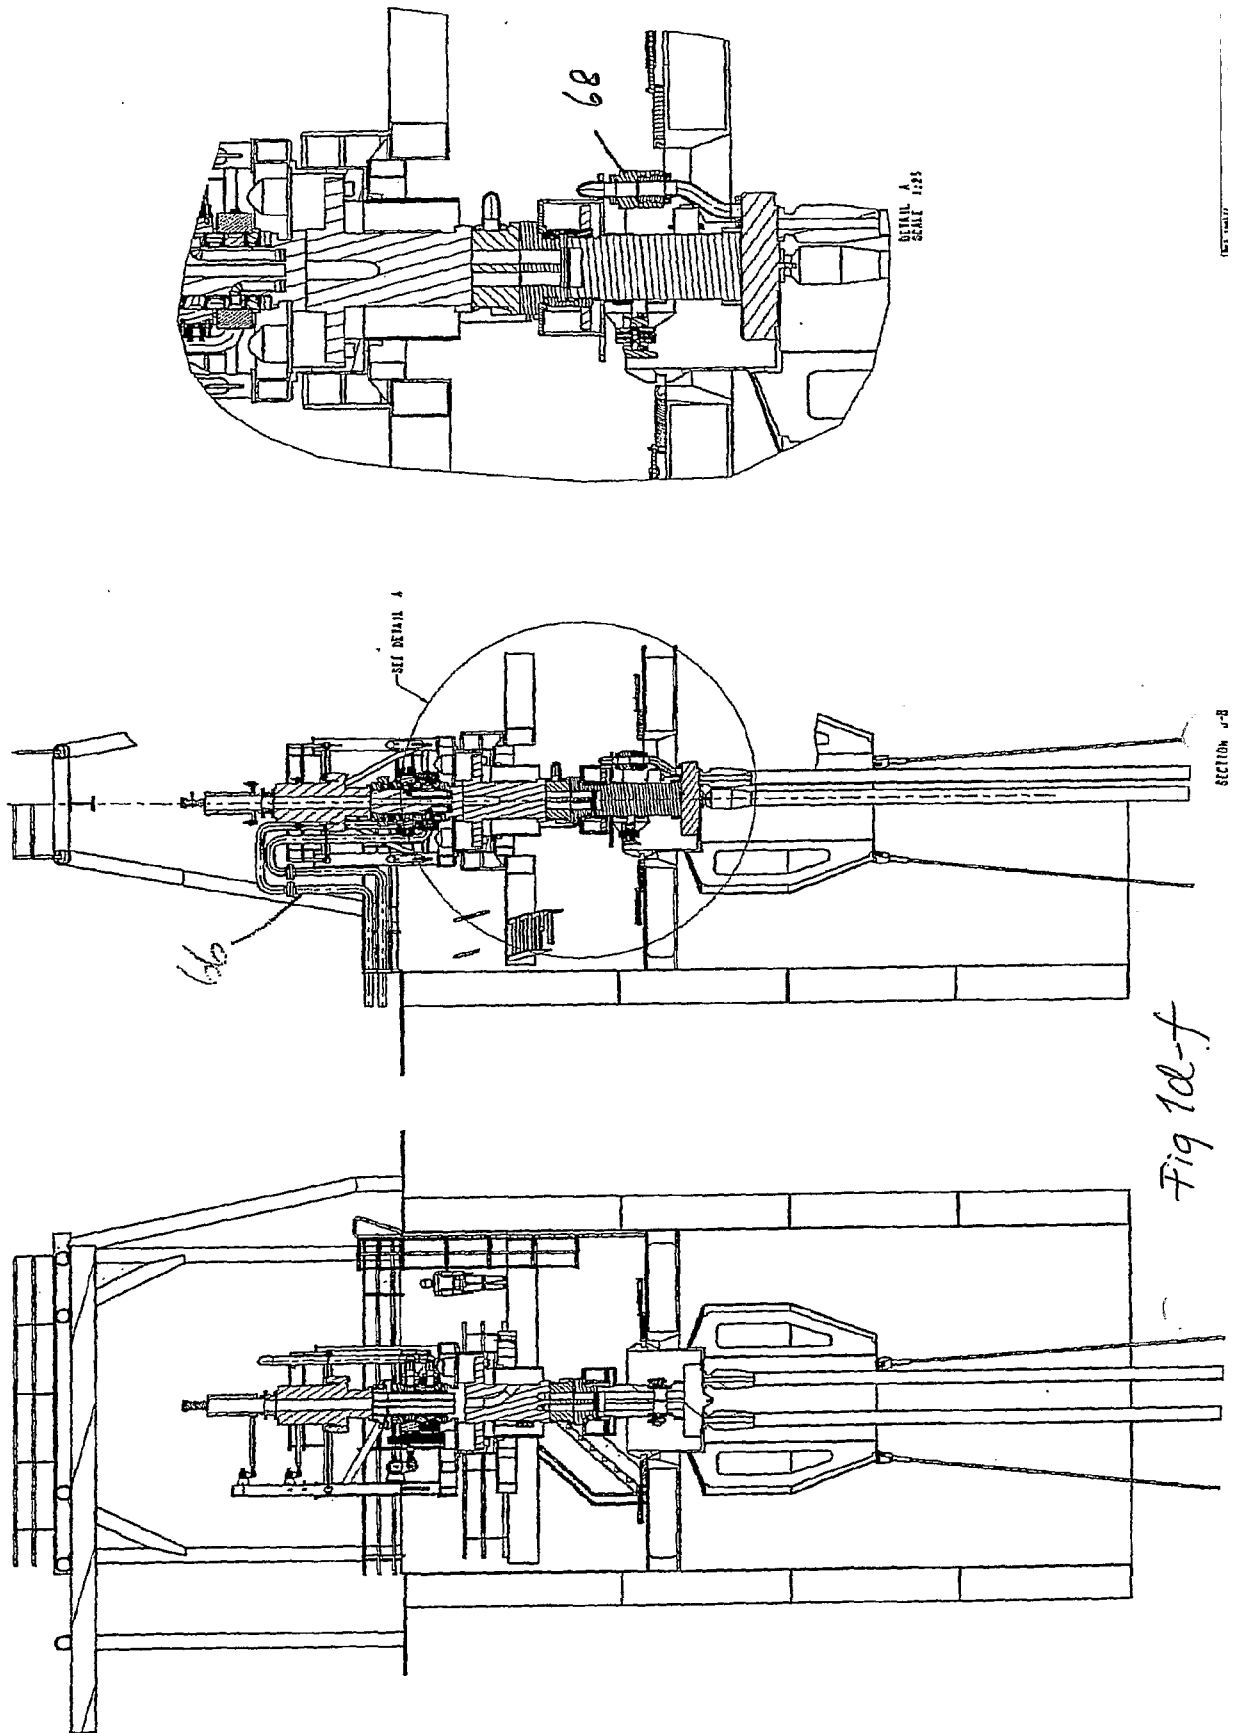


Fig 1a-c



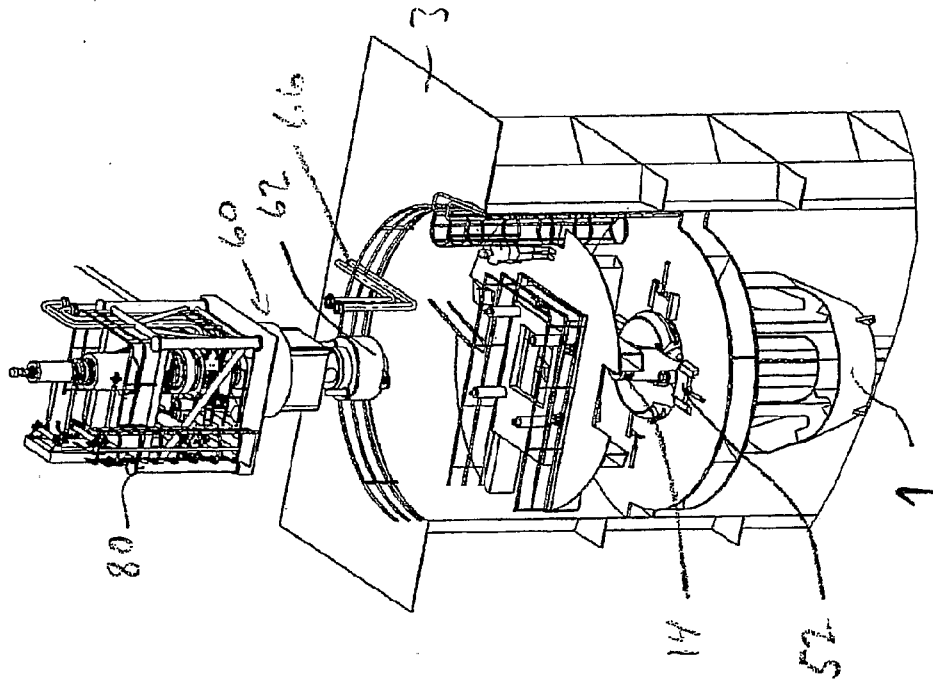


Fig. 2

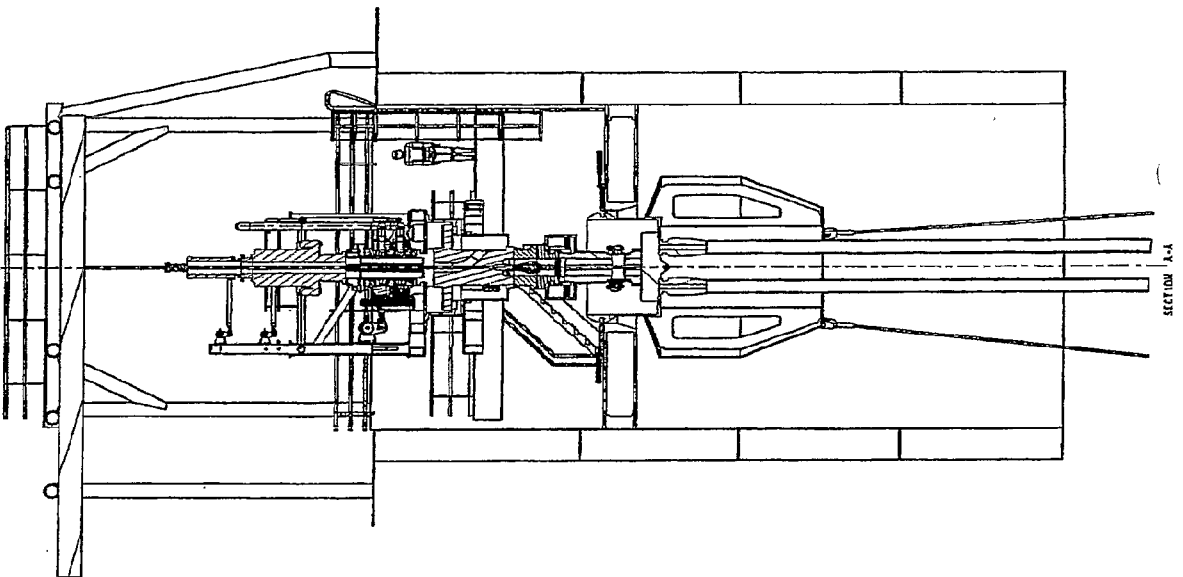
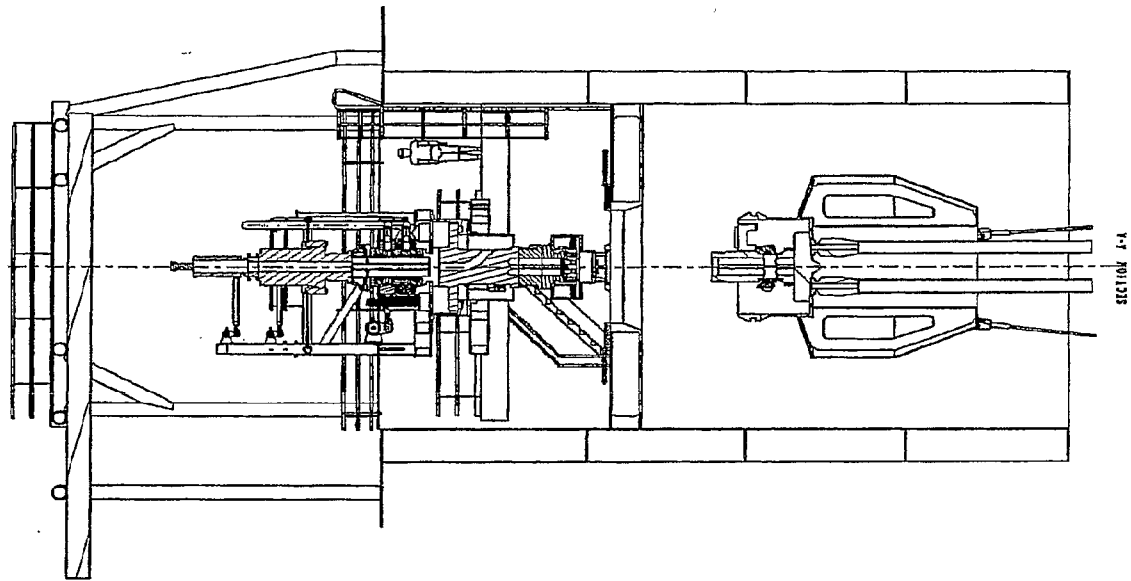


Fig. 3

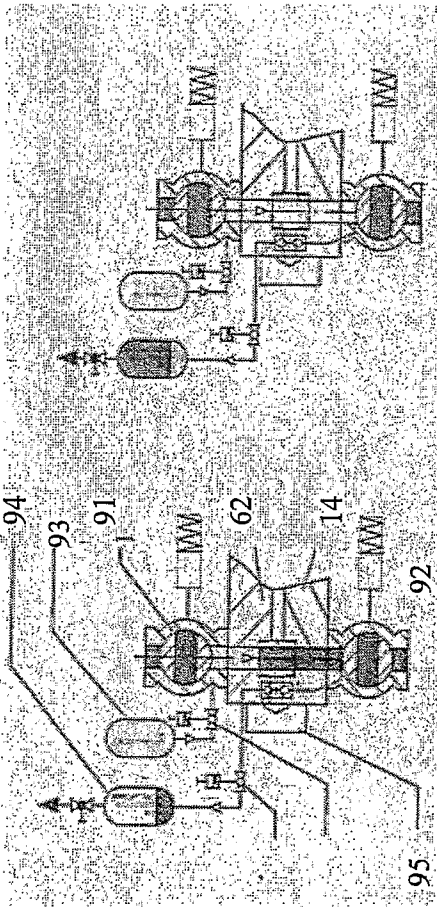


Fig. 4

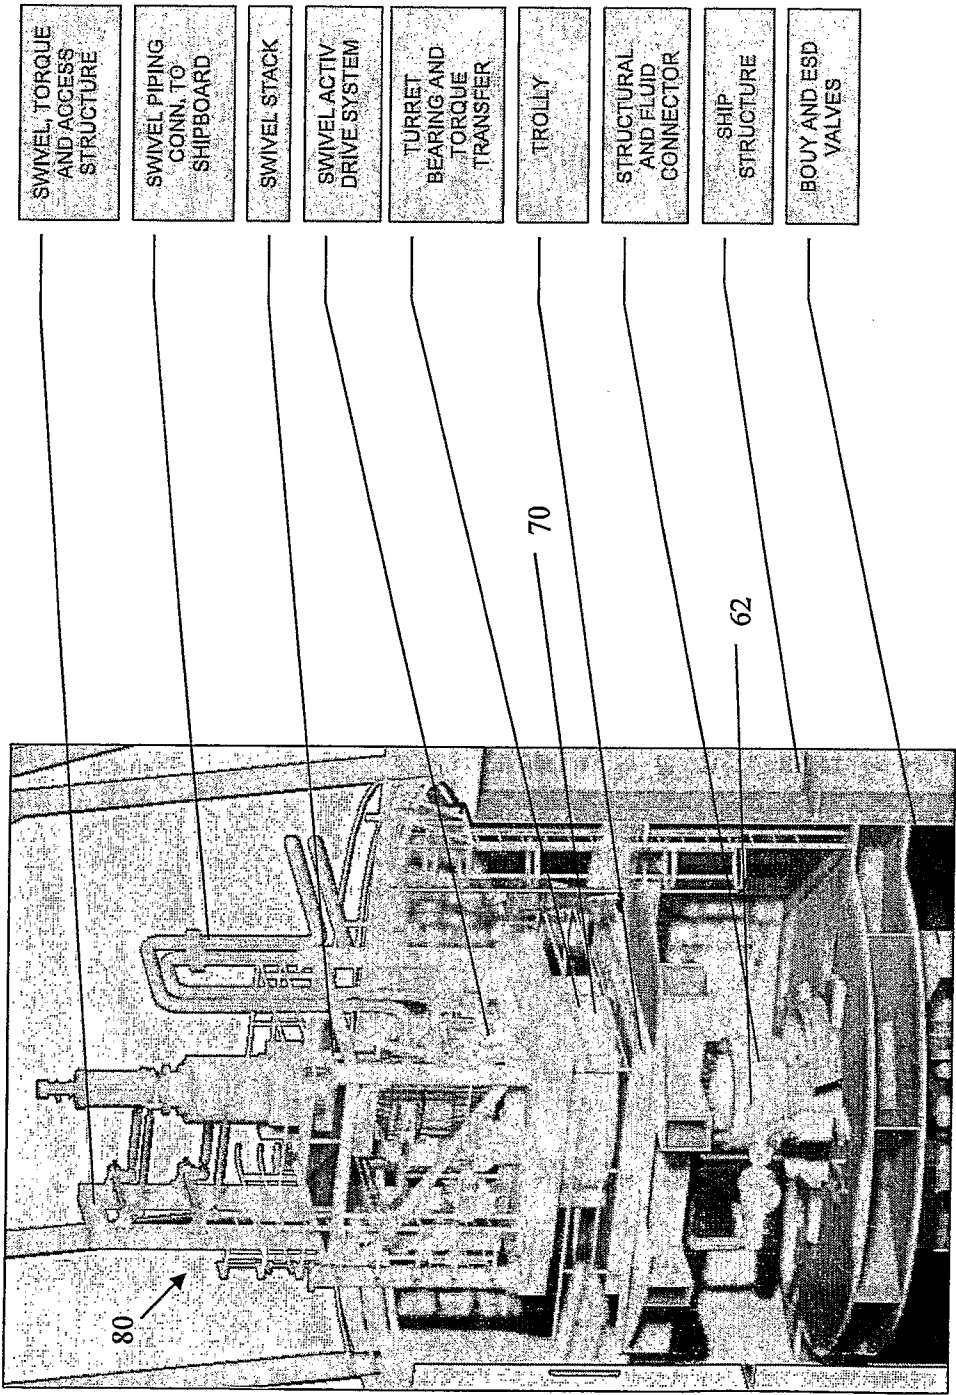


Fig. 5

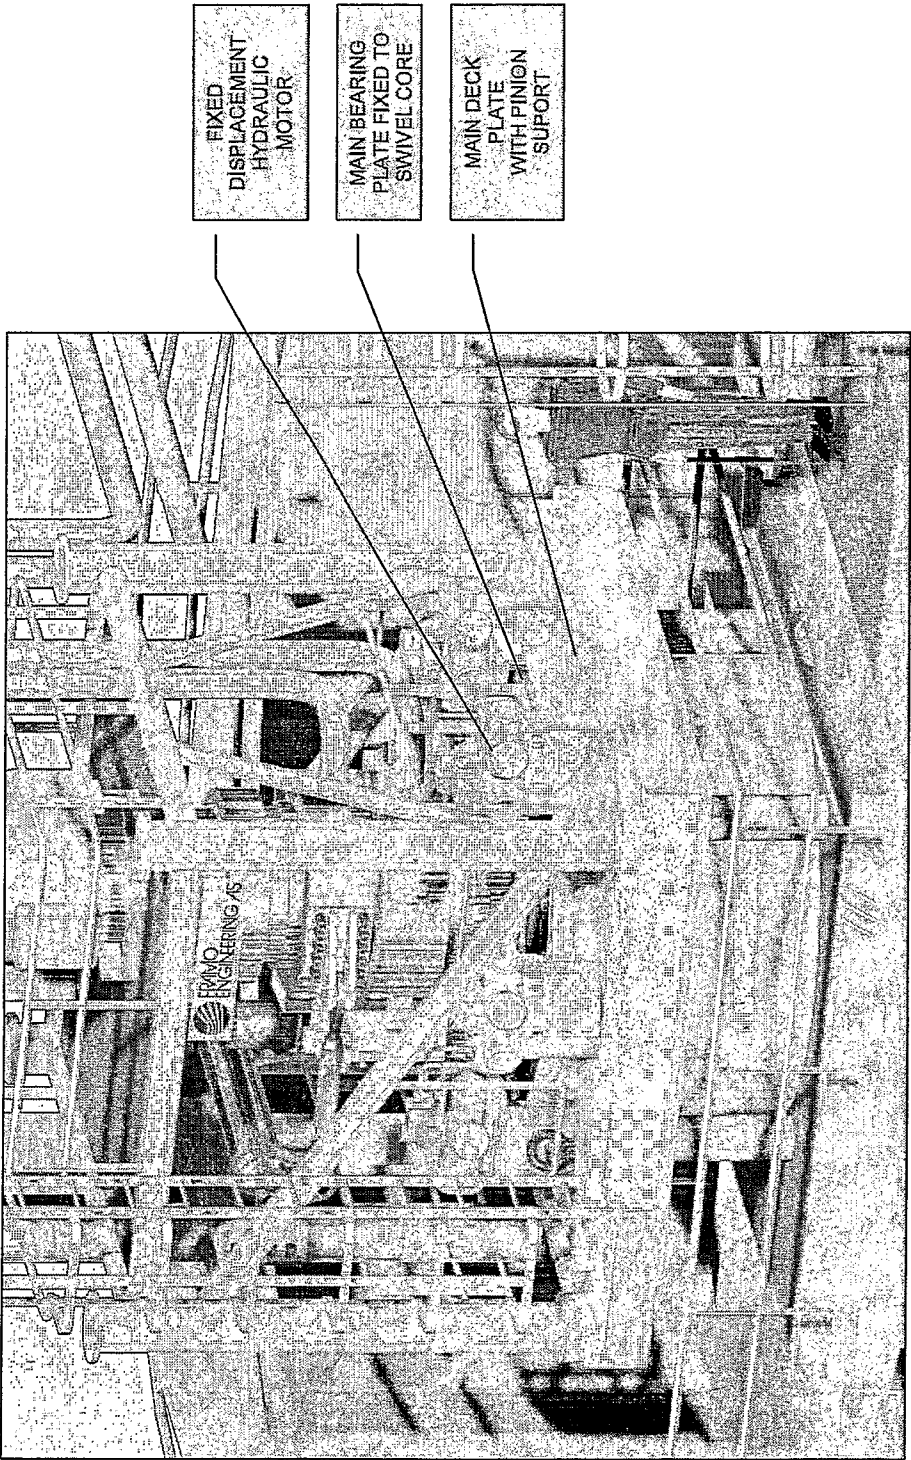


Fig. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO2007/000115

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: B63B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9324731 A1 (DEN NORSKE STATS OLJESELSKAP AS), 9 December 1993 (09.12.1993), figures 3,4, abstract --	1-12
A	GB 2387188 A (BLUEWATER ENERGY SERVICES B V), 8 October 2003 (08.10.2003), figures 3a,3b, abstract --	1-12
A	WO 9930963 A1 (PETROLEUM GEO-SERVICES ASA), 24 June 1999 (24.06.1999), figure 1, abstract -- -----	1-12

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

12 July 2007

Date of mailing of the international search report

16 -07- 2007

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Carl Fröderberg/EK

Telephone No. +46 8 782 25 00

International patent classification (IPC)**B63B 22/02** (2006.01)**B63B 21/50** (2006.01)**Download your patent documents at www.prv.se**

The cited patent documents can be downloaded at www.prv.se by following the links:

- In English/Searches and advisory services/Cited documents (service in English) or
- e-tjänster/anförda dokument (service in Swedish).

Use the application number as username.

The password is **BFGCVTKELJ**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT

Information on patent family members

30/06/2007

International application No.

PCT/NO2007/000115

WO	9324731	A1	09/12/1993	AU	4359593 A	30/12/1993
				NO	176129 B,C	31/10/1994
				NO	922043 A	26/11/1993

GB	2387188	A	08/10/2003	GB	0207832 D	00/00/0000
				NO	20031514 A	06/10/2003

WO	9930963	A1	24/06/1999	NO	310604 B	30/07/2001
				NO	962506 A	31/03/1998
				AU	5350398 A	05/07/1999
