

(19)



(11)

EP 3 461 365 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

16.08.2023 Bulletin 2023/33

(51) International Patent Classification (IPC):

A45D 29/00 ^(2006.01) **A45D 29/22** ^(2006.01)
A47B 23/00 ^(2006.01) **A47B 13/16** ^(2006.01)

(21) Application number: **17194247.7**

(52) Cooperative Patent Classification (CPC):

A45D 29/00; A45D 29/22; A47B 23/002;
A47B 13/16

(22) Date of filing: **29.09.2017**

(54) IMPROVEMENTS IN OR RELATING TO SUPPORTS

VERBESSERUNGEN AN ODER IM ZUSAMMENHANG MIT STÜTZEN

PERFECTIONNEMENTS APPORTÉS OU SE RAPPORTANT À DES SUPPORTS

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO RS SE SI SK SM TR

• **SALMON, James Robert**

London, W5 4EU (GB)

• **SALMON, Caroline Emma**

London, W5 4EU (GB)

(43) Date of publication of application:

03.04.2019 Bulletin 2019/14

(74) Representative: **Peel, James Peter et al**

J.P. Peel & Co Ltd

5 Kew Road

Richmond, Surrey TW9 2PR (GB)

(73) Proprietor: **Nailpad Ltd**

Twickenham TW1 2BE (GB)

(56) References cited:

US-A- 1 728 431 **US-A- 2 392 626**

US-A- 2 647 678 **US-A- 3 121 576**

US-A- 4 679 757 **US-A- 5 248 030**

US-A1- 2006 157 630 **US-B1- 6 349 729**

US-B1- 9 062 819

(72) Inventors:

• **DEELY, Joseph Daniel**

Twickenham, Middlesex TW1 2BE (GB)

• **DEELY, Victoria Jane**

Twickenham, Middlesex TW1 2BE (GB)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 461 365 B1

Description

[0001] The present invention relates to a support for use in supporting an activity such as a cosmetic treatment in a reclined position.

[0002] Cosmetic treatments such as fingernail care require a number of tools. A stable work surface is needed because the treatment uses sharp tools and an oil based polish which is difficult to clear up if spilled. People in need of such cosmetic treatment usually do it while seated at a table but would prefer to do in a more relaxed posture. Examples of supports are known from US 2 392 626 A, US 2 647 678 A, US 9 062 819 B1, or from US 6 349 729 B1.

[0003] A way of ameliorating these problems has been sought.

[0004] According to the invention there is provided a support for use in a leisure activity or cosmetic treatment, as defined in claim 1. The support comprises two sections connected by a section hinge wherein a first section has a single leg which is suitable for being held between a user's legs wherein the leg is connected by a leg hinge to the first section and where the leg hinge is substantially perpendicular to the section hinge; wherein the section hinge is arranged to divide the support into the two sections such that the two sections have substantially corresponding shapes; and wherein the leg hinge is arranged across the middle of the first section such that the support is balanced when its leg is gripped between a user's legs; wherein the leg is shaped to fold into half of the first section; wherein the leg has one or more stops to prevent its over-rotation beyond an angle of about 90° to a lower surface of the first section.

[0005] Advantages of the invention include that by having the leg hinge substantially perpendicular to the section hinge, a user may easily use the support in a reclined position by securing the first section in a substantially horizontal position on their knees by extending the leg from the support and gripping the leg between their knees such that the section hinge allows the support to fold in a manner corresponding to the angle between the person's knees and upper legs such that the other section rests on the person's thighs and can be used as a convenient support for the treatment or the activity. When the leg is in a stored position, the support may be used on a flat surface such as a table top.

[0006] In some embodiments, the first section may form a container holder on its upper surface for receiving a container for use in a cosmetic treatment such as a nail polish bottle or a container for use in a leisure activity such as a food or drinks container. Advantages of having a container holder in the first section include that a bottle or cup placed in the holder should not spill because in use the first section is supported in a substantially horizontal position.

[0007] In some embodiments, the support may be a compact support such that it may be a portable support, for example having two configurations which comprise

an open configuration and a close configuration. In some embodiments, the support may have a circular shape; the section hinge may be diametric; the support may have a clam shell shape when in a closed configuration. In some embodiments, the support may have a rectilinear shape, for example a rectangular or square shape.

[0008] In some embodiments, the support has two arrangements when in an open configuration which are a table top arrangement where the leg is in a stored position such that the support may be used on a flat surface such as a table top; and a reclined arrangement where the leg is rotated to an extended position such that the support can be used by a person in a reclined position.

[0009] In some embodiments, the two sections may have correspondingly shaped circumferential features which engage when the support is in a closed configuration to form a sealed container. In some embodiments, the two sections may comprise a resilient material to reduce slipping when the support is used on a smooth surface.

[0010] In some embodiments, the support may comprise a container closure to secure the support in its closed configuration.

[0011] In some embodiments, the container holder may have a flexible shape such that containers of different sizes may be supported by it.

[0012] In some embodiments, the one or more stops may comprise a leg lip or one or more leg tabs. In some embodiments, the leg may comprise a leg lock to secure the leg in its extended position. In some embodiments, the leg may form a finger hole for ease of use in moving the leg. In some embodiments, the leg may be an extendable leg; for example, the leg may have a telescopic section.

[0013] In some embodiments, the leg may have a planar shape, in particular the leg may be formed from a plate of plastics material. Having a planar-shape, leg is easier for a user to grip between their legs.

[0014] The invention will now be illustrated with reference to the following Figures of the accompanying drawings which are not intended to limit the scope of the claimed invention:

FIGURE 1 shows a schematic perspective view of a first embodiment of the support according to the invention;

FIGURE 2 shows a schematic plan view of the first section of the first embodiment of the support;

FIGURE 3 shows a schematic side view of the first embodiment of the support in a closed configuration;

FIGURE 4 shows a schematic overhead plan view of the first embodiment of the support;

FIGURE 5 shows a schematic plan view of the first embodiment of the support from below;

FIGURE 6 shows a schematic side view of the first embodiment of the support in an open configuration and with the leg extended;

FIGURE 7 shows a schematic overhead plan view of a second embodiment of the support not according to the invention with an electronic device; and

FIGURE 8 shows a schematic plan view from below the second embodiment of the support with an electronic device.

[0015] A first embodiment of the support according to the invention is indicated generally at 10 on Figure 1 of the drawings. Support 10 is further illustrated in Figures 2, 3, 4, 5 and 6 of the drawings. Support 10 has a circular shape when in an open configuration shown in Figure 1. Support 10 has a diametric section hinge 19 such that support 10 is formed from two semi-circular sections which are first section 16A and a second section 16B. Support 10 has a clam shell-shape when in a closed configuration shown in Figure 2. First and second sections 16A, 16B have rounded circumferential edges 33 and tubular hinge-forming sections 20 along their straight diametric edge. Section hinge 19 is formed by the inter-engaging tubular sections 20 and hinge pin 21. In an alternative embodiment, the support 10 may have a different shape such as a square, rectangular or polygonal shape and section hinge 19 may be positioned so as to divide the support 10 into two sections 16A, 16B having a corresponding shape.

[0016] First section 16A has a circumferential flange 17 and second section 16B has an indented circumferential rim 18 such that when the support 10 is folded about section hinge 19 into a closed configuration, flange 17 engages rim 18 such that support 10 forms a sealed container. In an alternate embodiment, flange 17 and rim 18 may be formed from a resilient material such that the support 10 may be used on a smooth surface without sliding across when pressure is applied to it.

[0017] First section 16A and second section 16B form a container closure 41 on their outer edge. Container closure 41 comprises a container closure hook 39 provided on first section 16A and a container closure clip 37 on second section 16B. In use when the support 10 is in its closed configuration, container closure hook 39 engages container closure clip 37 to secure the support 10 in its closed configuration.

[0018] First section 16A has an upper surface which forms a container holder 12 at its centre and a lower surface having a quadrant-shaped leg 34. Container holder 12 has a generally circular shape with outdented corners 26 such that the container holder 12 can accommodate bottles (not shown) having a range of different sizes. In an alternative embodiment, the container holder 12 may be lined with a resilient material to support a bottle. In an alternative embodiment, the container holder 12 may have a plurality of concentric foam rings such

that by selection of the appropriately sized ring, bottles of different diameters may be accommodated and supported.

[0019] Quadrant-shaped leg 34 is attached to the lower surface of first section 16A by a two-part radial leg hinge 35 where each part of leg hinge 35 is arranged on each side of container holder 12. Support 10 thus has a single leg 34. Leg 34 has a planar shape and is formed from a plate of plastics material. Having a planar-shape, leg 34 is suitable for being held between a user's legs. Leg 34 is quadrant-shaped so that it can be folded into half of the semi-circular shaped first section 16A. By being formed on the lower surface of first section 16A, leg 34 is folded inside support 10 when it is in its closed configuration. Leg hinge 35 is substantially perpendicular to section hinge 19. Leg hinge 35 is arranged across the middle of section 16A such that it substantially bisects section 16A so that the support 10 is balanced when leg 34 is gripped between a user's legs. Leg hinge 35 is substantially perpendicular to diametric hinge 19. Leg 34 is shaped to fit around container holder 12 when it is folded into a stored position. Leg 34 has a lip 50 which is shaped to engage the lower surface of first section 16A when the leg 34 is extended by supporting the leg 34 when it is in its extended position which is a position substantially perpendicular to the lower surface of first section 16A and to prevent leg 34 from over-rotating beyond an angle of about 90° to the first section 16A. Lip 50 further helps a user grip leg 34 between their legs by helping to stop leg 34 from sliding when the support 10 is in use. Leg 34 forms a finger hole 48 for ease of use in moving leg 34. In an alternative embodiment, instead of lip 50, leg 34 may have one or more tabs at its hinge end wherein the tabs are shaped to engage the lower surface of first section 16A when the leg 34 is extended and to prevent leg 34 from over-rotating beyond an angle of about 90° to the first section 16A. In an alternative embodiment, the leg 34 may have a leg lock comprising a resilient formation at the hinge end of leg 34 which is arranged to engage with a corresponding indent on the leg hinge 35 or on the lower surface of the first section 16A such that the leg lock secures the leg 34 when it is in its extended position. In a further alternative embodiment, the leg lock may comprise a resilient formation arranged on the leg hinge 35 or on the lower surface of the first section 16A and an indent may be arranged on leg 34. In a further alternative embodiment, the leg 34 may be an extendable leg with a telescopic section to help stability of the support in use.

[0020] Second section 16B has an upper surface which forms a work surface for a cosmetic treatment. Second section 16B has a lower surface provided with one or more clips (not shown) for storing one or more tools for use in a cosmetic treatment such as a manicure tool for example a nail file, nail clipper, pair of tweezers, cuticle cutters and/or a brush.

[0021] In use, a person may use support 10 whilst applying a cosmetic treatment such as nail polish to their finger nails in a reclined position by using support 10 in

its open configuration with its leg 34 in its extended position. The person can secure the first section 16A in a substantially horizontal position on their knees by gripping leg 34 between their knees. Section hinge 19 then allows the support 10 to fold in a manner corresponding to the angle between the person's knees and upper legs such that the second section 16B rests on the person's thighs and can be used as a convenient support for the treatment. A nail polish bottle can be placed in container holder 12 of the first section 16A which bottle will not spill because the first section 16A is supported in a substantially horizontal position.

[0022] A second embodiment of a support not according to the invention is indicated generally at 110 on Figures 7 and 8 of the accompanying drawings. In Figures 7 and 8, like reference numerals are used for the second embodiment of the support 110 to the reference numerals used for the first embodiment of the support 10. Support 110 is shown in Figures 7 and 8 with an electronic device 70 mounted on it. Support 110 has a generally square shape which is divided into two sections 16A, 16B by section hinge 19 such that sections 16A, 16B have substantially the same rectangular shape. First section 16A has a leg 34 on its lower side. Leg 34 is attached to the first section 16A by a leg hinge 35 which is positioned on first section 16A to be at an angle of about 90° to the section hinge 19 as for support 10. Leg 34 forms a finger hole 48. In an alternative embodiment, first section 16A may form a container holder (not shown) to accommodate a drinks bottle or cup.

[0023] Support 110 has a single leg 34. Leg 34 has a planar shape and is formed from a plate of plastics material. Having a planar-shaped, leg 34 is easier for a user to grip between their legs. Leg 34 is square-shaped so that it can be folded into half of the rectangular first section 16A. By being formed on the lower surface of first section 16A, leg 34 is folded inside support 110 when it is in its closed configuration. Leg hinge 35 is arranged across the middle of section 16A such that it substantially bisects section 16A so that the support 10 is balanced when leg 34 is gripped between a user's legs.

[0024] Second section 16B has a support hinge 60 on its other longitudinal edge opposing section hinge 19. Support hinge 60 has a magnetic fastening 65 for attachment to the electronic device 70. The electronic device 70 is shown on Figure 7 to have a camera 72 on its rear side and on Figure 8 to have a display screen 74 and a control button 76. The electronic device 70 may be a tablet computer or smart phone. In use, electronic device 70 may be folded on to the upper side of second section 16B such that its screen 74 faces a user. Depending upon the size of the electronic device 70, the support 110 may act as a protective container for the electronic device 70.

[0025] In use, a person may use support 110 whilst using the electronic device 70 in a reclined position by using support 110 in its open configuration with its leg 34 in its extended position. The support 110 allows a person to watch a movie or engage in a video call without having

to hold the electronic device 70; in other words, the support 110 allows hands-free use of the electronic device 70. The person can secure the first section 16A in a substantially horizontal position on their knees by gripping leg 34 between their knees. Section hinge 19 then allows the support 110 to fold in a manner corresponding to the angle between the person's knees and upper legs such that the second section 16B rests on the person's thighs and can be used as a convenient support for the electronic device 70.

Claims

1. A support (10) for use in a leisure activity or cosmetic treatment wherein the support comprises two sections (16A, 16B) connected by a section hinge (19) wherein a first section (16A) has a single leg (34) suitable for being held between a user's legs wherein the leg is connected by a leg hinge (35) to the first section and where the leg hinge is substantially perpendicular to the section hinge; wherein the section hinge is arranged to divide the support into the two sections such that the two sections have substantially corresponding shapes; wherein the leg hinge is arranged across the middle of the first section such that the support is balanced when its leg is gripped between a user's legs; wherein the leg is shaped to fold into half of the first section; and wherein the leg has one or more stops to prevent its over-rotation beyond an angle of about 90° to a lower surface of the first section.
2. A support as defined in Claim 1 wherein the first section may form a container holder (12) on its upper surface for receiving a container for use in a cosmetic treatment or a container for use in a leisure activity; preferably the container holder has a flexible shape such that it can hold containers of different sizes.
3. A support as defined in any one of the preceding Claims wherein the support is a compact support.
4. A support as defined in any one of the preceding Claims wherein the support has a circular shape and the section hinge is diametric.
5. A support as defined in any one of the preceding Claims wherein the support has a rectilinear shape.
6. A support as defined in any one of the preceding Claims wherein the two sections have correspondingly shaped circumferential features which engage when the support is in a closed configuration to form a sealed container.
7. A support as defined in any one of the preceding Claims wherein the two sections comprise a resilient

material to reduce slipping when the support is used on a smooth surface.

8. A support as defined in any one of the preceding Claims wherein the support comprises a container closure to secure the support in its closed configuration.
9. A support as defined in any one of the preceding Claims wherein the one or more stops comprises a leg lip (50) or one or more leg tabs.
10. A support as defined in any one of the preceding Claims wherein the leg comprises a leg lock to secure the leg in its extended position.
11. A support as defined in any one of the preceding Claims wherein the leg forms a finger hole (48) for ease of use in moving the leg.
12. A support as defined in any one of the preceding Claims wherein the leg is an extendable leg; preferably the leg has a telescopic section.
13. A support as defined in any one of the preceding claims wherein the leg has a planar shape; preferably the leg is formed from a plate of plastics material.

Patentansprüche

1. Stütze (10) zur Verwendung bei einer Freizeitaktivität oder kosmetischen Behandlungen, wobei die Stütze zwei Abschnitte (16A, 16B) umfasst, die durch ein Abschnittsscharnier (19) verbunden sind, wobei ein erster Abschnitt (16A) ein einzelnes Bein (34) aufweist, das dazu geeignet ist, zwischen den Beinen eines Benutzers gehalten zu werden, wobei das Bein durch ein Beinscharnier (35) mit dem ersten Abschnitt verbunden ist und wobei das Beinscharnier im Wesentlichen senkrecht zu dem Abschnittsscharnier steht; wobei das Abschnittsscharnier so angeordnet ist, dass es die Stütze in zwei Abschnitte unterteilt, sodass die zwei Abschnitte im Wesentlichen entsprechende Formen aufweisen; wobei das Beinscharnier über der Mitte des ersten Abschnitts angeordnet ist, sodass die Stütze im Gleichgewicht ist, wenn ihr Bein zwischen den Beinen eines Benutzers festgehalten wird; wobei das Bein so geformt ist, dass es sich in die Hälfte des ersten Abschnitts klappt; und wobei das Bein einen oder mehrere Anschläge aufweist, um seine Überdrehung über einen Winkel von etwa 90° hinaus zu einer unteren Oberfläche des ersten Abschnitts zu verhindern.
2. Stütze nach Anspruch 1, wobei der erste Abschnitt auf seiner oberen Oberfläche einen Behälterhalter (12) zum Aufnehmen eines Behälters zur Verwen-

dung bei einer kosmetischen Behandlung oder eines Behälters zur Verwendung bei einer Freizeitaktivität bilden kann; wobei vorzugsweise der Behälterhalter eine flexible Form aufweist, sodass er Behälter unterschiedlicher Größe halten kann.

3. Stütze nach einem der vorhergehenden Ansprüche, wobei die Stütze eine kompakte Stütze ist.
4. Stütze nach einem der vorhergehenden Ansprüche, wobei die Stütze eine kreisförmige Form aufweist und das Abschnittsscharnier diametrisch ist.
5. Stütze nach einem der vorhergehenden Ansprüche, wobei die Stütze eine geradlinige Form aufweist.
6. Stütze nach einem der vorhergehenden Ansprüche, wobei die zwei Abschnitte entsprechend geformte Umfangsmerkmale aufweisen, die ineinandergreifen, wenn sich die Stütze in einer geschlossenen Konfiguration befindet, um einen versiegelten Behälter zu bilden.
7. Stütze nach einem der vorhergehenden Ansprüche, wobei die zwei Abschnitte ein elastisches Material umfassen, um ein Verrutschen zu verringern, wenn die Stütze auf einer glatten Oberfläche verwendet wird.
8. Stütze nach einem der vorhergehenden Ansprüche, wobei die Stütze einen Behälterverschluss umfasst, um die Stütze in ihrer geschlossenen Konfiguration zu sichern.
9. Stütze nach einem der vorhergehenden Ansprüche, wobei der eine oder die mehreren Anschläge eine Beinlippe (50) oder einen oder mehrere Beinlaschen umfassen.
10. Stütze nach einem der vorhergehenden Ansprüche, wobei das Bein eine Beinarretierung umfasst, um das Bein in seiner ausgezogenen Position zu sichern.
11. Stütze nach einem der vorhergehenden Ansprüche, wobei das Bein ein Fingerloch (48) zur leichten Handhabbarkeit beim Bewegen des Beins bildet.
12. Stütze nach einem der vorhergehenden Ansprüche, wobei das Bein ein ausziehbares Bein ist; wobei vorzugsweise das Bein einen Teleskopabschnitt aufweist.
13. Stütze nach einem der vorhergehenden Ansprüche, wobei das Bein eine ebene Form aufweist; wobei vorzugsweise das Bein aus einer Platte aus Kunststoffmaterial gebildet ist.

Revendications

1. Support (10) destiné à être utilisé dans une activité de loisir ou un traitement cosmétique, dans lequel le support comprend deux sections (16A, 16B) reliées par une charnière de section (19) dans lequel une première section (16A) a une jambe unique (34) appropriée pour être maintenue entre les jambes d'un utilisateur dans lequel la jambe est reliée par une charnière de jambe (35) à la première section et où la charnière de jambe est sensiblement perpendiculaire à la charnière de section ; dans lequel la charnière de section est agencée pour diviser le support en deux sections de sorte que les deux sections aient des formes sensiblement correspondantes ; dans lequel la charnière de jambe est agencée au milieu de la première section de sorte que le support soit équilibré lorsque sa jambe est saisie entre les jambes d'un utilisateur ; dans lequel la jambe est profilée pour se replier dans la moitié de la première section ; et dans lequel la jambe comporte une ou plusieurs butées pour empêcher sa rotation excessive au-delà d'un angle d'environ 90° par rapport à une surface inférieure de la première section. 5
2. Support selon la revendication 1, dans lequel la première section peut former un porte-récipient (12) sur sa surface supérieure pour recevoir un récipient à utiliser dans un traitement cosmétique ou un récipient à utiliser dans une activité de loisir ; de préférence, le porte-récipient a une forme flexible de sorte qu'il puisse porter des récipients de différentes tailles. 10
3. Support selon l'une quelconque des revendications précédentes, dans lequel le support est un support compact. 15
4. Support selon l'une quelconque des revendications précédentes, dans lequel le support a une forme circulaire et la charnière de section est diamétrale. 20
5. Support selon l'une quelconque des revendications précédentes, dans lequel le support a une forme rectiligne. 25
6. Support selon l'une quelconque des revendications précédentes, dans lequel les deux sections ont des caractéristiques circonférentielles de forme correspondante qui viennent en prise lorsque le support est dans une configuration fermée pour former un récipient scellé. 30
7. Support selon l'une quelconque des revendications précédentes, dans lequel les deux sections comprennent un matériau élastique pour réduire le glissement lorsque le support est utilisé sur une surface lisse. 35
8. Support selon l'une quelconque des revendications précédentes, dans lequel le support comprend une fermeture de récipient pour fixer le support dans sa configuration fermée. 40
9. Support selon l'une quelconque des revendications précédentes, dans lequel l'une ou plusieurs butées comprennent une lèvre de jambe (50) ou une ou plusieurs pattes de jambe. 45
10. Support selon l'une quelconque des revendications précédentes, dans lequel la jambe comprend un verrou de jambe pour fixer la jambe dans sa position étendue. 50
11. Support selon l'une quelconque des revendications précédentes, dans lequel la jambe forme un trou pour les doigts (48) pour faciliter l'utilisation lors du déplacement de la jambe. 55
12. Support selon l'une quelconque des revendications précédentes, dans lequel la jambe est une jambe extensible ; de préférence la jambe a une section télescopique.
13. Support selon l'une quelconque des revendications précédentes, dans lequel la jambe a une forme plane ; de préférence la jambe est formée d'une plaque de matière plastique.

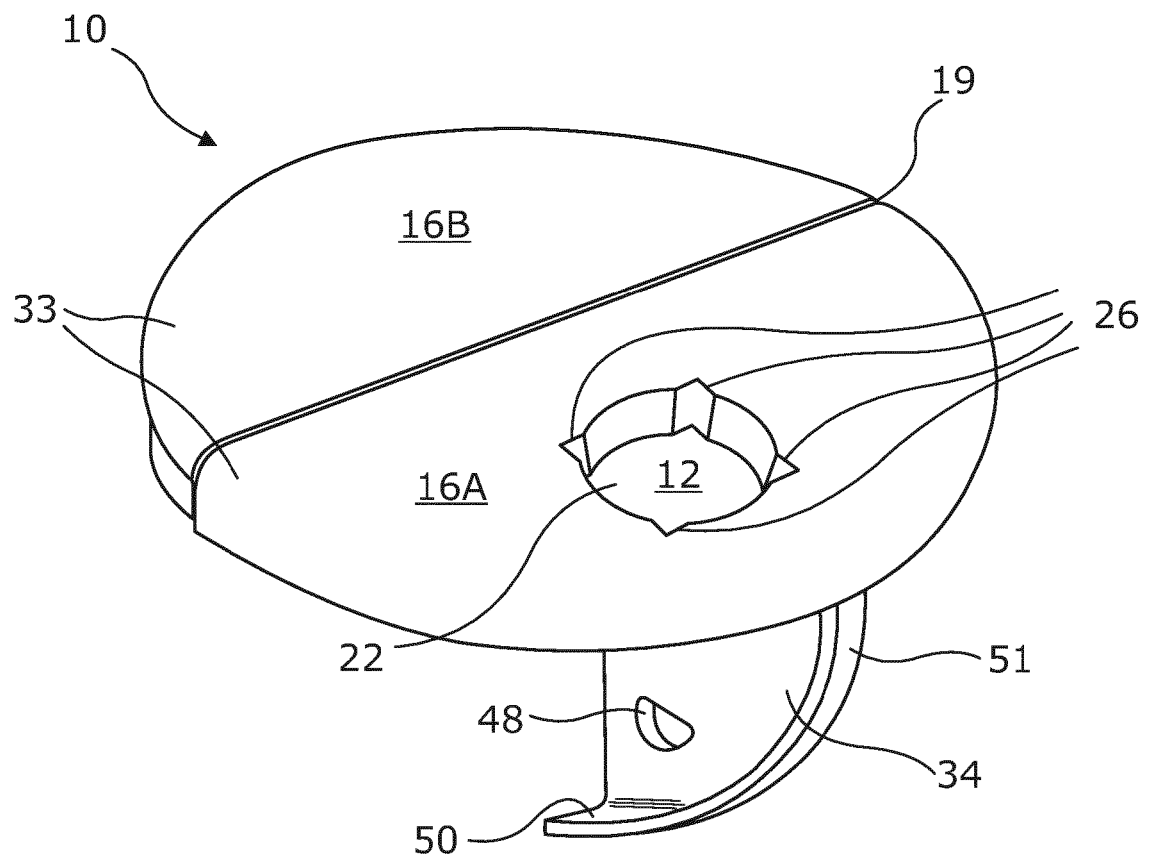


Figure 1

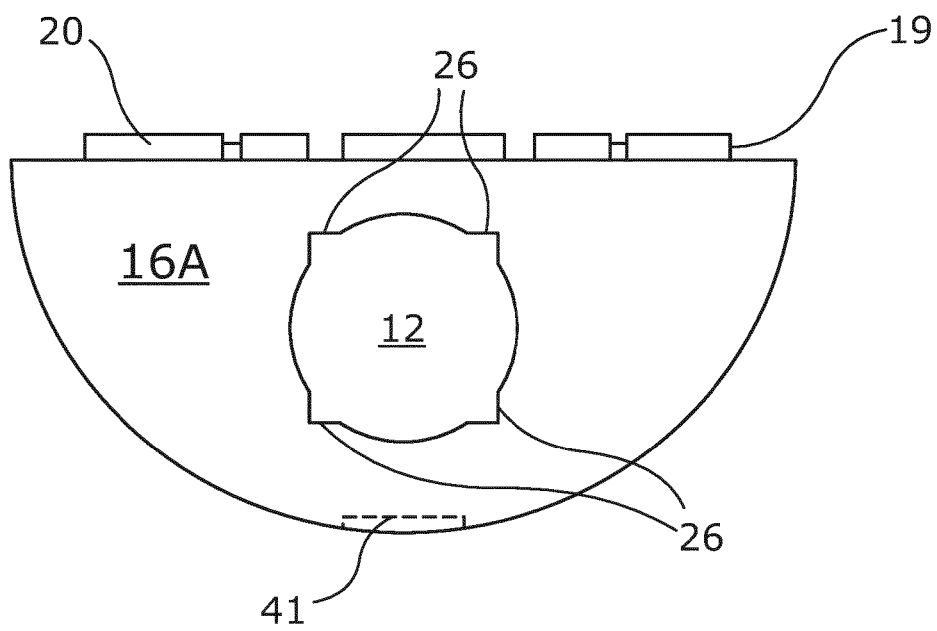


Figure 2

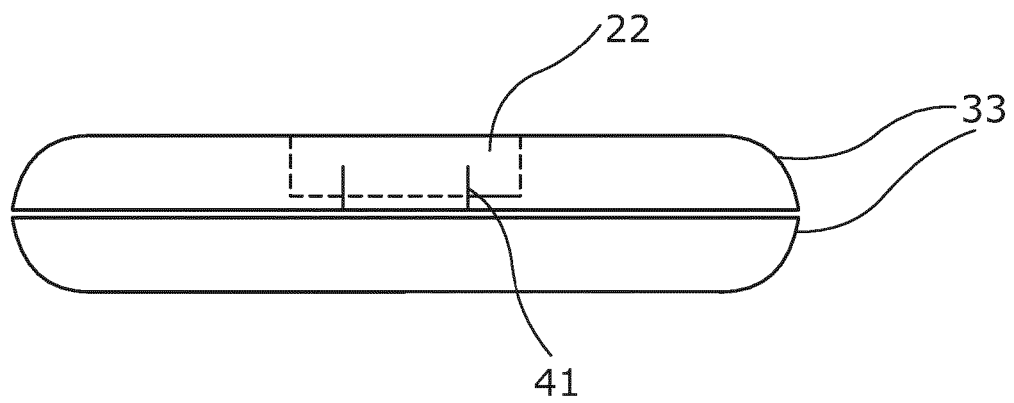


Figure 3

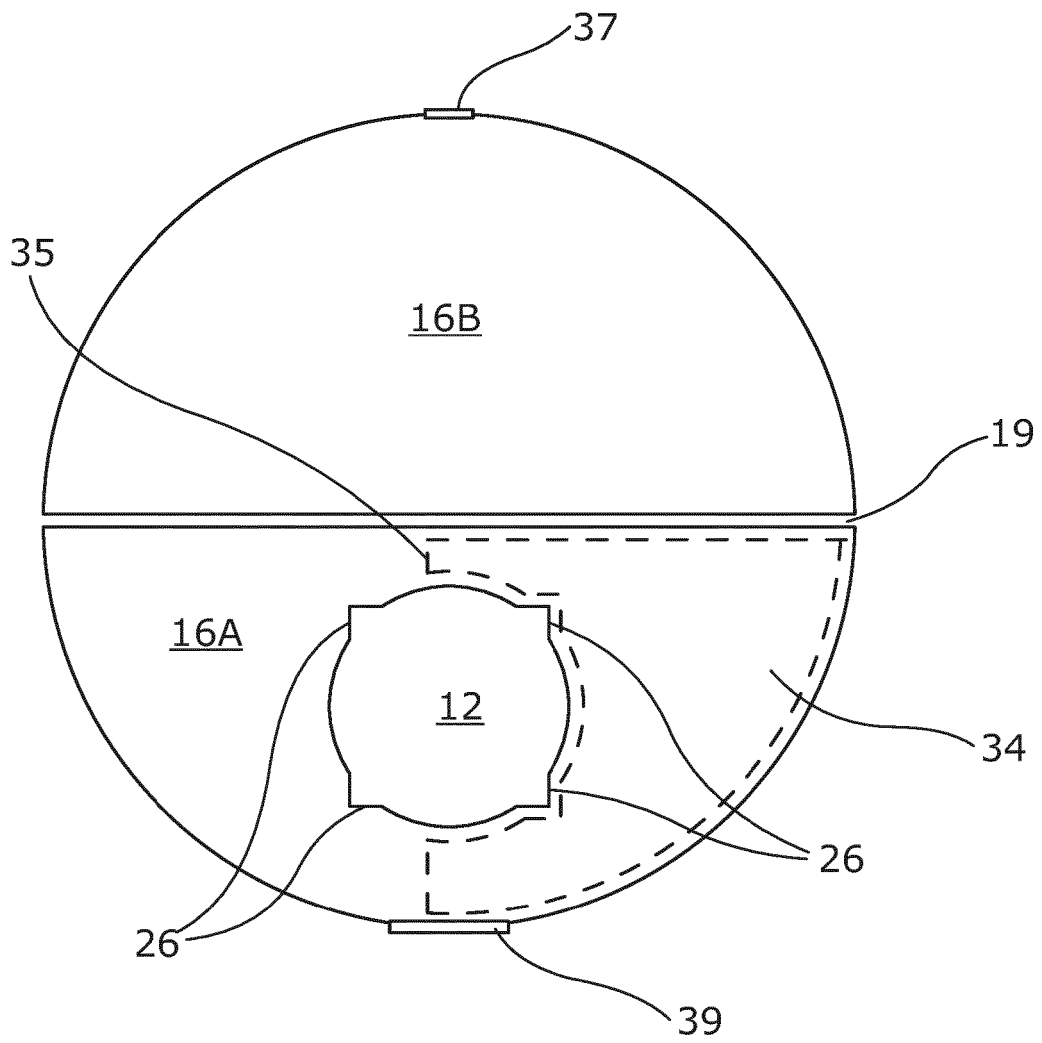


Figure 4

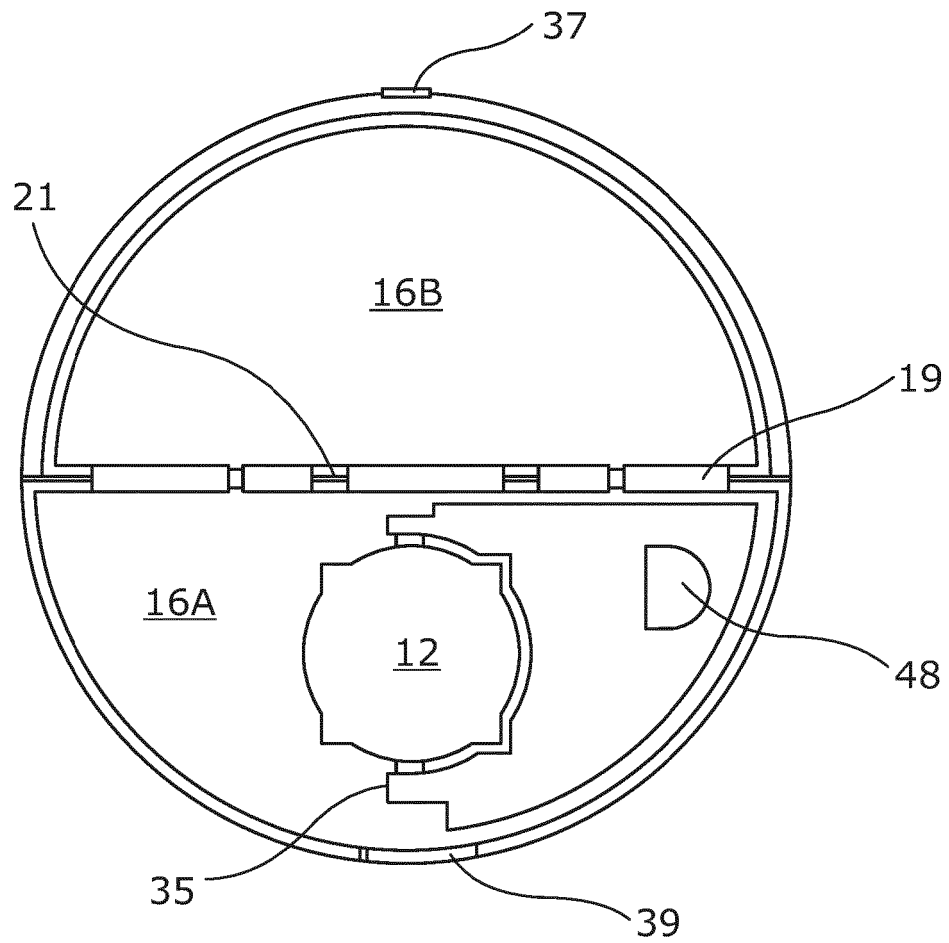


Figure 5

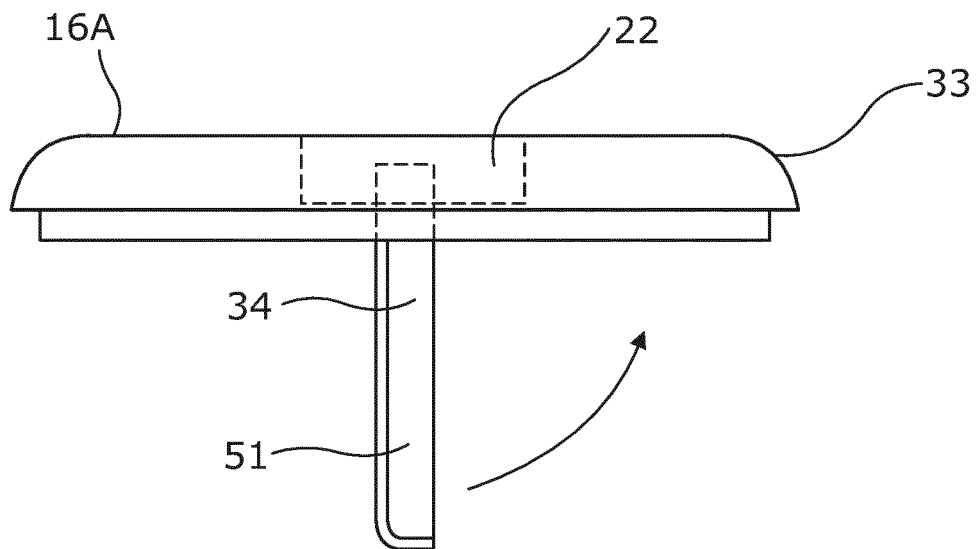


Figure 6

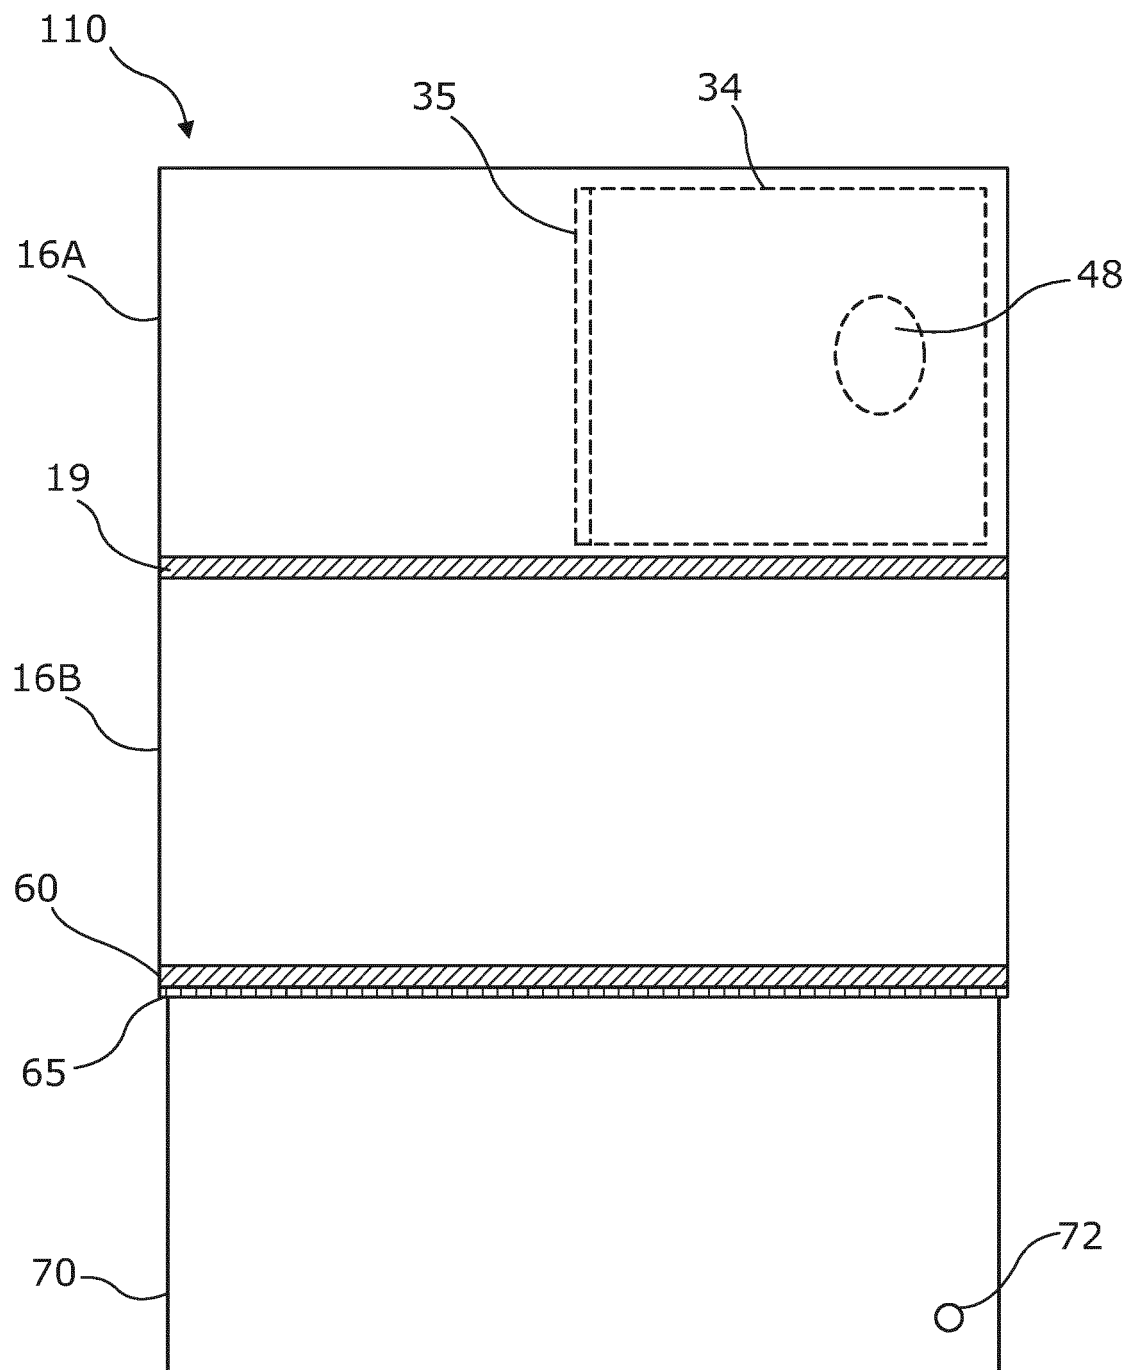


Figure 7

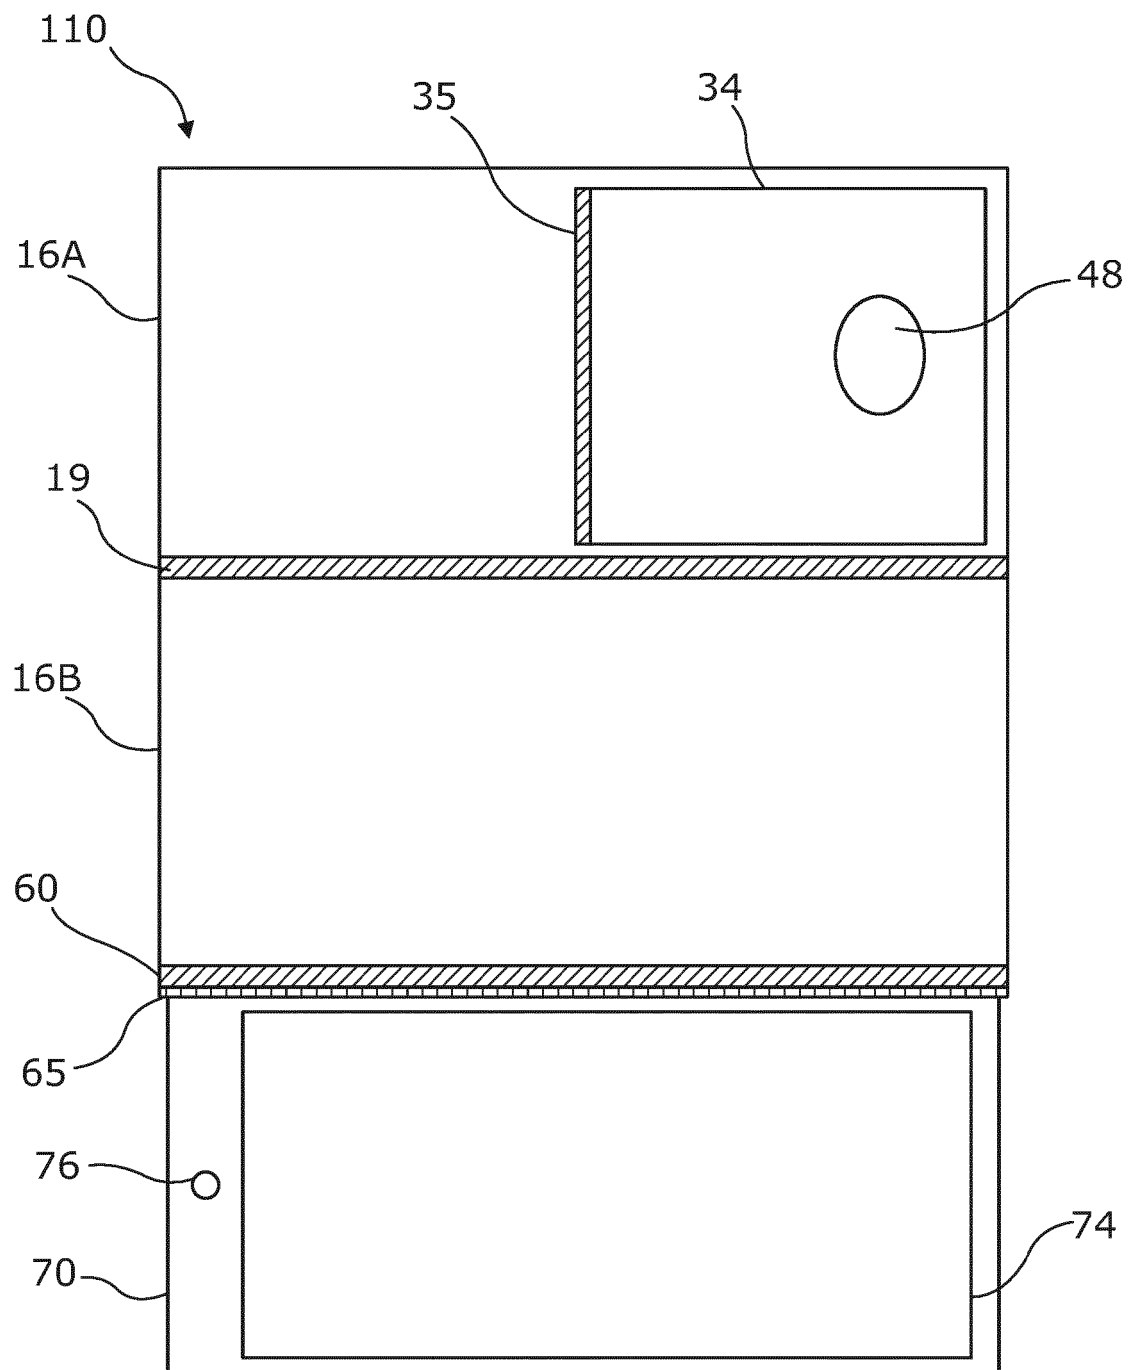


Figure 8

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2392626 A [0002]
- US 2647678 A [0002]
- US 9062819 B1 [0002]
- US 6349729 B1 [0002]