

(19)



(11)

EP 3 124 128 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

02.03.2022 Bulletin 2022/09

(51) International Patent Classification (IPC):

B08B 9/34 ^(2006.01) **B05B 1/30** ^(2006.01)
B05B 12/12 ^(2006.01) **B05B 15/658** ^(2018.01)
B05B 13/02 ^(2006.01)

(21) Application number: **15179125.8**

(52) Cooperative Patent Classification (CPC):

(22) Date of filing: **30.07.2015**

B08B 9/34; B05B 1/3026; B05B 12/122;
B05B 15/658; B05B 13/0221

(54) **SPRINKLING DEVICE AND CORRESPONDING WASHING UNIT**

SPRÜHVORRICHTUNG UND ENTSPRECHENDE WASCHANLAGE

DISPOSITIF D'ASPERSION ET UNITÉ DE LAVAGE CORRESPONDANTE

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

- **COMPOSTA, Michele**
37139 VERONA (IT)
- **FASANI, Rino**
37139 VERONA (IT)

(43) Date of publication of application:

01.02.2017 Bulletin 2017/05

(74) Representative: **Sidel Group**

c/o Gebo Packaging Solutions France
5-7 Rue du Commerce
ZI - CS 73445 Reichstett
67455 Mundolsheim Cedex (FR)

(73) Proprietor: **Sidel End of Line & Tunnels Solutions**
Srl

43126 Parma (IT)

(72) Inventors:

- **BERZAGHI, Claudio**
37139 VERONA (IT)

(56) References cited:

EP-A1- 2 724 793 EP-A2- 1 728 565

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 124 128 B1

Description

[0001] The current invention belongs to the domain of washing units for empty containers like bottles, comprising a washing tunnel in which the containers are conveyed through treatment zones, said containers being organized in successive lines perpendicular to the movement direction. The object of the present invention is a sprinkling device, for spraying a liquid, as well as a washing unit comprising such a sprinkling device.

[0002] In this domain, sprinkling devices are used to spray a liquid in or on containers, which are turned upside down. This sprinkling device is located under the conveying device, which moves the containers thanks to pockets of complementary shapes.

[0003] The sprinkling device normally comprises a pressure pipe, in which the liquid is fed under pressure, as well as a rotating shaft, provided on the top of and along said pressure pipe. The rotating shaft is provided with radial bores, through which said liquid is received from the pressure pipe and sprayed to the containers.

[0004] Hollow nozzles are provided as interfaces between the pressure pipe and the rotating shaft. The top end of the nozzle has a shape which is complementary to the rotating shaft, and the opposite end is fixed in the pressure pipe.

[0005] A special focus on these nozzles is given in this invention.

[0006] US5092356 discloses nozzles as a tubular extension or sleeve, extending from the pressure pipe.

[0007] EP1728565 discloses a pressure pipe having radial extensions, on the top of which an additional element is fixed, for interacting with the rotating shaft. The top end of this additional element is of a shape which is complementary to the rotating shaft.

[0008] DE4216665 discloses a nozzle as an additional piece, fixed to the pressure pipe, and made of two separate elements. The upper element interacts with the rotating shaft and has a top portion of strictly identical circular shape. A clamp presses the rotating shaft on the upper element, for liquid tightness purposes.

[0009] DE10315866 discloses a nozzle as a single additional piece, fixed to the pressure pipe and in which the rotating shaft is clipped.

[0010] EP2724793 A1 discloses a pressure pipe with nozzles for interacting with a rotating shaft; a gap is provided between a part on the top of the nozzle and the rotating shaft.

[0011] A common problem of the existing art is that the working environment of this nozzle can be made of liquid comprising rigid and little particles, like sand. Such an unfiltered liquid can even flow through the nozzle. As the rotating shaft moves relative to the nozzles, these solid particles generate an excessive wear of said nozzles.

[0012] A consequence of an excessive wear is the shortening of the nozzle, leading to liquid tightness issues, either between the nozzle and the rotating shaft or even between the nozzle and the pressure pipe. Insuffi-

cient water tightness hinders a proper working condition for the sprinkling device. Also, an excessive wear leads to more frequent maintenance operations.

[0013] In this context, the invention aims at proposing a sprinkling device which can sustain working conditions with unclean liquids, comprising solid particles.

[0014] In order to reach this, the invention proposes to provide cavities at the top end of the nozzle, at the rotating shaft side, for allowing a flow of liquid at said end, between the nozzle and the rotating shaft.

[0015] According to the invention, there is provided a sprinkling device for cleaning bottles in a bottle washing unit in which said bottles are moved by a conveyor through at least a washing zone, said sprinkling device comprising a pressure pipe in which a fluid flows, a rotating shaft extending along the pressure pipe, and at least one sprinkling means comprised of an aperture of the pressure pipe, a nozzle, positioned in said aperture, between said pressure pipe and said rotating shaft, and at least one radial bore in the rotating shaft, located at the level of the nozzle, for receiving the liquid from the nozzle.

[0016] This device is characterized in that the top end of the at least one nozzle and the rotating shaft located thereon have globally complementary shapes, said top end being provided with a clearance zone at the interface with the rotating shaft, so that a portion of the top end surface does not come into contact with the rotating shaft.

[0017] Another object of the present invention is a washing unit, for washing empty containers for liquid, like bottles or flasks, comprising a washing tunnel, in which containers are conveyed line by line in a conveying direction by an internal conveying means for being cleaned and further rinsed.

[0018] This washing unit is characterized in that it comprises, in the washing tunnel, at least one such sprinkling device, for spraying a liquid, the rotating shaft being transversal to the conveying direction, the washing unit further comprising means for synchronizing the rotation of the rotating shaft to the movement of the internal conveying means.

[0019] Further features and advantages of the present invention will be better understood from the description of possible features and preferred embodiments, which is given below by way of a non-limiting illustration, with reference to the accompanying drawings, in which:

- figure 1 shows an end of a sprinkling device according to the invention;
- figure 2 focuses on the design of a nozzle;
- figure 3 is a cut-out section of the nozzle of figure 2;
- figure 4 is a front section of a nozzle and the rotating shaft;
- figure 5 and 6 show a section of the sprinkling device.

[0020] As said above, a first object of the present invention is a sprinkling device 1 for cleaning bottles in a bottle washing unit in which said bottles are moved by a

conveyor through at least a washing zone, said sprinkling device 1 comprising a pressure pipe 2 in which a fluid flows, a rotating shaft 3 extending along the pressure pipe 2, and at least one sprinkling means comprised of an aperture of the pressure pipe 2, a nozzle 4, positioned in said aperture, between said pressure pipe 2 and said rotating shaft 3, and at least one radial bore 5 in the rotating shaft 3, located at the level of the nozzle 4, for receiving the liquid from the nozzle 4.

[0021] The bottles are conveyed in the bottle washing unit thanks to a conveyor having pockets, each dedicated to receive a bottle. Bottles are arranged aside each other, along a transversal direction 13, perpendicular to the direction of the movement of the conveyor in the washing unit. The rotating shaft 3 extends on the top of the pressure pipe 2, at a little distance thereof, and is parallel to said pipe 2. The liquid is fed to the pressure pipe 2, and flows in it. This liquid can be a rinsing liquid, a cleaning liquid, with or without chemical agents like detergents, etc. The pressure pipe 2 has at least one aperture in its top surface, and a nozzle 4 is inserted in each said aperture, between the pressure pipe 2 and the rotating shaft 3, for leading the liquid out of the pressure pipe 2, thanks to the central hole 9 of said nozzle 4.

[0022] The sprinkling device 1 is to spray liquid onto the bottles. For this purpose, the rotating shaft 3 is provided with radial bores 5, at the level of the nozzle 4. When the radial bore 5 faces the top end of the nozzle 4, the cleaning or rinsing liquid, under pressure in the pressure pipe 2, flows through the central hole 9 of the nozzle 4, through the radial bore 5, and is projected onto the bottle.

[0023] According to the invention, the top end 6 of the at least one nozzle 4 and the rotating shaft 3 located thereon have globally complementary shapes, said top end 6 being provided with a clearance zone 7 at the interface with the rotating shaft 3, so that a portion of the top end 6 surface does not come into contact with the rotating shaft 3, for allowing a free flow of liquid between the rotating shaft 3 and the nozzle 4 at the top end 6 thereof.

[0024] The rotating shaft 3 lies on the top end 6 of the nozzle 4, and rotates in it. Therefore, at least a part of the top end 6 of the nozzle 4 is a cylindrical concavity, complementary to the circular rotating shaft 3. The fact that the shapes are complementary allows the rotating shaft 3 to be supported on the nozzle 4 and freely rotate on it.

[0025] Despite the fact that the top end 6 has an overall cylindrical concave shape, a certain zone of it is further offset, so that channels are created between the rotating shaft 3 and the nozzle 4, named clearance zone 7. This offset can be for example of a couple of millimeters, and in any case, of a high enough value for obtaining of free flow of liquid, even of a dirty liquid with solid particles like sand. This clearance zone 7 reaches the side periphery of the nozzle 4, in order to allow liquid to flow out from the top end 6. The cylindrical concavity of the top end 6,

on which the rotating shaft 3 rests, can be obtained with curved surfaces or only supporting points. It is understood that, for tightness purposes, the mouth of the central hole 9 is part of the cylindrical concavity, so as to reach a good contact between the nozzle 4 and the rotating shaft 3, avoiding any leakage. The contact surface of said mouth can be reduced down to a minimum value, contributing to reducing its friction wear and maintaining water tightness for a longer time.

[0026] Having a mouth surface of a reduced contact area with the rotating shaft 3 also reduces the tangential friction forces, which otherwise tend to create an inclination of the nozzle 4, leading to liquid leakages.

[0027] Thanks to the clearance zone 7, created by the offset zone of the concave cylindrical portion of the top end 6, liquid and particles are not stuck between the rotating shaft 3 and the nozzle 4, but can easily flow out of the interface zone between them. The damages to which the nozzle 4 and the rotating shaft 3 are subjected because of particles between them are then removed from the hydraulic seal area, between the mouth of the central hole 9 and the rotating shaft 3. As will be described later on, the flow of particles is also made easier by the fact that the supporting pillars 10 are far away from the mouth of the central hole 9.

[0028] According to another possible feature, the at least one nozzle 4 comprises a support base 8, resting on the pressure pipe 2. This allows a proper stand and stable position of the nozzle 4 on the pressure pipe 2. The interaction between the pressure pipe 2 and the nozzle 4 is achieved at the level of said support base 8. This support base 8 extends from the bottom of the nozzle 4, but does not reach the rotating shaft 3, for the purposes of obtaining a clearance zone 7, see figures 4 and 5. As already introduced, in some embodiments, the at least one nozzle 4 comprises a central hole 9, through which the liquid flows from the pressure pipe 2 to the rotating shaft 3, as well as pillars 10, located around said central hole 9, for contacting the rotating shaft 3. The cylindrical concavity of the top end 6 of the nozzle 4 is therefore achieved by, on the one hand, the mouth of the central hole 9, and, on the other hand, the ends of the pillars 10. The clearance zone 7 is obtained between said pillars 10, as well as between the mouth of the central hole 9 and each pillar 10.

[0029] The pillars 10 create the required guidance and mechanical support for the rotating shaft 3. The rotating shaft 3 is urged against the nozzle 4, and the corresponding force is mainly supported by said pillars 10, thereby reducing the friction force and corresponding wear at the mouth of the central hole 9, corresponding to the zone of required liquid tightness. The two functions, liquid flowing to the rotating shaft 3 and rotating shaft 3 mechanical supporting, are well separated in space and achieved by different elements: the central hole 9 and corresponding mouth on one side, and the pillars 10 on the other side. This helps in limiting the wear of the nozzle 4 in the water tight requirements area.

[0030] The nozzle 4 is sloped from the central hole 9 to the support base 8, from the top mouth of the central hole 9 down to the periphery of the support base 8. This slope extends from the mouth of the central hole 9, at the top end 6 of the nozzle 4, from the circumference thereof. This slope reaches the periphery of the support base 8 and contributes to the easy flush of dirt or liquid with wearing particles which can otherwise stay between the nozzle 4 and the rotating shaft 3. This slope forms a part of the bottom of the clearance zone 7. Particles and liquid can easily flow off the interaction zone between the nozzle 4 and the rotating shaft 3, thanks to this slope.

[0031] The at least one nozzle 4 comprises four pillars 10 located at the corners of a rectangular configuration, the central hole 9 being approximately located at the center of said rectangular configuration. Furthermore, in some embodiments, the rectangular configuration of the four pillars 10 has a long pair of sides, extending along the direction of the axle of the rotating shaft 3, i.e. along the transversal direction 13.

[0032] The rotating shaft 3 can therefore be supported and even urged against the nozzle 4, because the contact force will be mainly driven by the pillars 10. It is necessary to have a certain force between the nozzle 4 and the rotating shaft 3, for ensuring a good guiding of the rotating shaft 3. According to said feature, this force is mainly exerted by the pillars 10, thereby reducing the friction at the level of the mouth of the central hole 9. The top of the pillars 10 has a curved shape corresponding to the cylindrical shape of the rotating shaft 3, thereby improving the quality of the contact with the nozzle 4. The ends of the pillars 10 are part of the cylindrical concave shape of the top end 6 of the nozzle 4, complementary to the cylindrical shape of the rotating shaft 3.

[0033] The fact that the distance between pillars 10 is higher in the transversal direction 13 than in its perpendicular direction leads to a better guiding of the rotating shaft 3, and also a better flow of material between the nozzle 4 and the rotating shaft 3. Due to the circular section of the rotating shaft 3, it is better to have a limited distance between pillars 10 in a direction perpendicular to the transversal direction 13, in order to have a better support from the pillars 10.

[0034] In some embodiments, wear indicating notches 11 are provided at the end of the pillars 10. Preferably, the notch 11 of one pillar 10 differs from the notch 11 of at least another pillar 10, so that it is possible to see the evolution of the wear.

[0035] According to another possible additional feature, the rotating shaft 3, on the one side, and both the top end of the pillars 10 and the top end of the central hole 9, on the other side, are of a complementary shape, a liquid passage of the clearance zone 7 being provided under the rotating shaft 3, between each pillar 10 and the central hole 9. The portion of the top end 6 of the nozzle 4 which is entirely complementary to the rotating shaft 3 is therefore composed of both the end of the central hole 9, i.e. its mouth, and the ends of the pillars 10.

This is the portion in contact with the rotating shaft 3. Due to the clearance zone 7, the rest of the top end 6 is offset from the rotating shaft 3 when it rests on the nozzle 4, allowing fluid and particles flow, as already explained.

5 The lips of the mouth of the central hole 9 are brought to a minimum thickness, as it is dedicated to the liquid tightness only, the contact force being mainly exerted on the supporting pillars 10.

10 **[0036]** Furthermore, according to another possible additional feature, the pillars 10 extend from the support base 8. This means that the walls of the central hole 9 extend approximately from the center of the support base 8, and the pillars 10 extend approximately from the corners of a rectangle in said support base 8. Therefore, the nozzle 4 has a sort of cone, the top of which being formed by the mouth of the central hole 9, and the pillars 10 extending from the periphery of said cone.

15 **[0037]** A second object of the present invention is a washing unit, for washing empty containers for liquid, like bottles or flasks, comprising a washing tunnel, in which containers are conveyed line by line in a conveying direction by an internal conveying means for being cleaned and further rinsed. Bottles are conveyed upside down on said conveying means, which moves through the washing tunnel, in a direction which is perpendicular to the transversal direction 13.

20 **[0038]** According to this invention, the washing unit comprises, in the washing tunnel, at least one sprinkling device 1 as described before, for spraying a liquid, the rotating shaft 3 being transversal to the conveying direction, the washing unit further comprising means for synchronizing the rotation of the rotating shaft 3 to the movement of the internal conveying means, for example a mechanical cam 12. This mechanical cam is engaged by the conveying means and guarantees the coordination of the angle of the radial bore 5 of the rotating shaft 3, to make sure that the liquid, coming from the pressure pipe 2, is correctly directed onto the bottles. The rotating shaft 3 rotates on the nozzles 4, to the extent the conveying means is moving.

30 **[0039]** In the embodiment shown in the attached drawings, the sprinkling device 1 is mounted in a tunnel for cleaning and further rinsing bottles with jets of water or other liquid. The sprinkling device 1 is mounted underneath the bottles and liquid is sprayed upwardly. The bottles are positioned upside down, in a conveyor, which moves them along the tunnel cleaning and rinsing zones. The conveyor moves products in a longitudinal direction, and bottles are arranged in rows, extending in a transversal direction 13, which is perpendicular to said longitudinal direction.

35 **[0040]** The sprinkling device 1 is located in a cleaning or a rinsing zone, and sprays a liquid on or in the bottles. This liquid can serve as a cleaning liquid or as a rinsing liquid.

40 **[0041]** The sprinkling device 1 comprises a pressure pipe 2 in which the liquid is received from an external tank. The liquid is under pressure in said pressure pipe

2 so that the liquid will flow out of the pressure pipe 2 through any existing hole. The pressure pipe 2 extends parallel to the transversal direction 13, for treating simultaneously each and every product of a row. The pressure pipe 2 can have a rectangular or circular base shape.

[0042] As can be seen from figure 1, the sprinkling device 1 is provided with a set of nozzle 4, positioned on the top surface of the pressure pipe 2. The pressure pipe 2 has a set of apertures, located next to each other in the transversal direction 13. Each nozzle 4 is inserted in one aperture, in a liquid tight relation, thanks to an o-ring seal, as seen in figures 4 and 5. The nozzle 4 has a support base 8 which rests on the external surface of the pressure pipe 2 and is therefore of a corresponding shape, preferably flat. Figure 5 shows a flat top surface of the pressure pipe 2, corresponding to a flat bottom surface of the support base 8.

[0043] The nozzle 4 and the aperture preferably have a corresponding circular shape, with a central symmetry axis. A seal is provided between the nozzle 4 and the pressure pipe 2, preferably as an O-ring.

[0044] The nozzle 4 has a central hole 9, in which the liquid flows out from the pressure pipe 2. As can be seen, the sprinkling device 1 also has a rotating shaft 3, parallel to the pressure pipe 2 and therefore extending along the transversal direction 13. This rotating shaft 3 has a circular shape and is fixed to the pressure pipe 2 by a set of clamps 14, allowing a free rotation of the rotating shaft 3.

[0045] The rotating shaft 3 has a set of radial bores 5, through which liquid flows from one end to the other. Thanks to these radial bores 5 the liquid can go through the rotating shaft 3. The rotating shaft 3 is positioned so that the open end of each radial bore 5 can face the open end of the central hole 9 of the nozzle 4.

[0046] The rotating shaft 3 is moved for a rotation to its own axis, corresponding to a rotation around the transversal direction 13. When the rotation of the rotating shaft 3 is such that an open end of the radial bore 5 faces the open end of the central hole 9 of the corresponding nozzle 4, the liquid under pressure in the pressure pipe 2 can flow through the nozzle 4 and then through the radial bore 5, to the opposite end of said radial bore 5. The liquid is then sprayed to the bottle.

[0047] A mechanical cam 12 is provided at an end of the rotating shaft 3, said cam 12 being engaged directly or indirectly by the conveyor, in order to ensure that the liquid jet, coming from the radial bore 5 and directed thereby, reaches the bottles moved by said conveyor.

[0048] It is understood that the nozzles 4 are blocked between, on the one hand, the pressure pipe 2, and, on the other hand, the rotating shaft 3. The top end of the nozzles 4 is therefore adapted to the rotating shaft 3. The end surface of the nozzles 4 is then of a circular profile, at least for a part of its geometry.

[0049] The fact that the shape of the end of the nozzle 4 and the shape of the rotating shaft 3 are complementary helps in maintaining the position of the rotating shaft 3

along a predefined axis, and also in avoiding liquid leakages.

[0050] As best seen in figures 4 and 5, it is proposed that the top end of the nozzle 4 is provided with a clearance zone 7, in order to allow a liquid flow between the nozzle 4 and the rotating shaft 3. The bottom of the clearance zone 7 is offset from the rotating shaft 3, the rest of the top end 6 being in contact with the rotating shaft 3.

[0051] In other words, the top end of the nozzle 4 has two functional areas. First, a portion of the end of the nozzle 4 creates the mouth of the central hole 9, with a limited contact surface with the rotating shaft 3. This portion mainly ensures the liquid tightness with the rotating shaft 3. Second, another portion of the end of the nozzle 4 creates the mechanical support and positioning of the rotating shaft 3. The ends of these two portions are complementary to the rotating shaft 3. The shape of the rest of the end of the nozzle 4 has an offset to the rotating shaft 3, thereby creating the clearance zone 7. This clearance zone 7 forms a gap between the rotating shaft 3 and the nozzle 4 material, through which liquid can flow, thereby allowing solid particles to flow and avoiding obstruction and blockages, which would lead to excessive wear.

[0052] It should be noted here that the pressurized liquid inside the pressure pipe 2 creates a force pressing the nozzle 4 against the rotating shaft 3. This contributes to the stability of the sprinkling device 1 and to the proper guiding of the rotating shaft 3.

[0053] The main function of the mouth of the central hole 9 is therefore linked to liquid tightness and its surface contacting the rotating shaft 3 can be reduced, thereby facilitating the flow of liquid with solid particles. The mechanical function of the nozzle 4 is mainly not performed by the mouth of the central hole 9, but by another dedicated portion, which can then be sized for this mechanical function.

[0054] The ability, provided by the clearance zone 7, for the liquid to easily flow around the mouth reduces its wear, thereby improving the tightness over time. Also, the mechanical pressure needed to obtain a proper guiding of the rotating shaft 3 does not apply to the mouth area, further contributing to reduce the friction wear.

[0055] As can be seen from figure 2, the nozzle 4 has, at a certain distance from the central hole 9, supporting pillars 10 dedicated to the mechanical pressure to be exerted on the rotating shaft 3. The pressure of the liquid inside the pressure pipe 2 urges the nozzle 4 against the rotating shaft 3. The wear of the nozzle 4 is directly linked to the contact pressure between the nozzle 4 and the rotating shaft 3. It is proposed that the contact pressure between the nozzle 4 and the rotating shaft 3 is mainly concentrated on a portion of the top end of the nozzle 4 which is in fact dedicated to bearing this pressure and the corresponding friction. The top end of the nozzle 4 therefore has one pressure portion exerting pressure on the rotating shaft 3, and one tightness portion dedicated to the liquid tightness, passages being provided by the

clearance zone 7 between said rotating shaft 3, and, on the one hand, the pressure portion, and, on the other hand, the tightness portion.

[0056] The pressure portion is formed by a set of pillars 10, extending parallel to the central hole 9, from the support base 8. The shape of the top end of these pillars 10 is complementary to the circular rotating shaft 3. Therefore, the top end of a pillar 10 has a circular shape, fitting the shape of the rotating shaft 3. As the contact force is concentrated on the pillars 10, the wear is also concentrated on said pillars 10 and not at the mouth of the central hole 9.

[0057] The nozzle 4 preferably has four pillars 10, positioned with a rectangular configuration around the central hole 9. The central hole 9 is then approximately at the center of this rectangle. Preferably, the distance between two pillars 10 in the transversal direction 13 is higher than the distance between two pillars 10 in the perpendicular direction. With such a configuration, it is possible to have a satisfying space between the central hole 9 and each pillar 10, so that obstruction can be avoided between them.

[0058] Figure 3 shows that the pillars 10 are provided with notches 11 near their top end surface, normally in contact with the rotating shaft 3. These notches 11 help in assessing the wear of the pillars 10. The distance between the top surface and the notches 11 represents the level of wear. Ideally, the distance between the notch 11 and the top surface of one pillar 10 differs with the distance between the notch 11 and the top surface of at least another pillar 10. The level of wear can then be assessed by an easier comparison of the size of the notches, or by the number of notches 11 which are still visible.

[0059] As already explained, the risks of leakages due to the wear created by the rotation of the rotating shaft 3 in the nozzle 4 are reduced, on the one hand, thanks to the reduction of the contact pressure at the level of the central hole 9, and, on the other hand, thanks to the clearance zone 7, preventing solid particles from being blocked between the nozzle 4 and the rotating shaft 3.

[0060] The clearance zone 7 provided at the end of the nozzle 4 creates a passage for liquid and particles between the rotating shaft 3 and the nozzle 4 material. This flow is further enhanced by a slope on the nozzle 4 from the top end of the central hole 9 to the support base 8. The mouth of the central hole 9 is offset to the bottom of the support base 8, in the direction of the rotating shaft 3, and the nozzle 4 has a descending slope between said mouth and the periphery of the support base 8. Any particle, dirt, or even liquid, therefore tends to flow away from the mouth of the central hole 9, which is a sensitive area, the wear of which is directly influencing the liquid tightness.

[0061] While specific embodiments of the invention have been described in detail, it will be appreciated by those skilled in the art that various modifications and alternatives to those details, in addition to those discussed

above, could be developed in light of the overall teachings of the disclosure. Accordingly, the particular arrangements disclosed are meant to be illustrative only, and not limiting as to the scope of the invention which is to be given the full breadth of the claims appended.

Claims

1. Sprinkling device (1) for cleaning bottles in a bottle washing unit in which said bottles are moved by a conveyor through at least a washing zone, said sprinkling device (1) comprising a pressure pipe (2) in which a fluid flows, a rotating shaft (3) extending along the pressure pipe (2), and at least one sprinkling means comprised of an aperture of the pressure pipe (2), a nozzle (4) having a central hole (9), positioned in said aperture, between said pressure pipe (2) and said rotating shaft (3), a support base (8) resting on the pressure pipe (2) and pillars (10) located around said central hole (9), for contacting the rotating shaft (3), and at least one radial bore (5) in the rotating shaft (3), located at the level of the nozzle (4), for receiving the liquid under pressure in the pressure pipe (2) from the nozzle (4), wherein a top end (6) of the at least one nozzle (4) and the rotating shaft (3) located thereon have globally complementary shapes, said top end (6) being provided with a clearance zone (7) at the interface with the rotating shaft (3), so that a portion of the top end (6) surface does not come into contact with the rotating shaft (3), **characterised in that** said nozzle (4) has a cone with a top formed by the mouth of said central hole (9), said nozzle (4) being sloped from said central hole (9) to the periphery of the support base (8), said pillars (10) extending from the periphery of said cone, said clearance zone (7) being provided between said pillars (10) and between said mouth of said central hole (9) and each pillars (10).
2. Sprinkling device (1) according to claim 1, wherein the at least one nozzle (4) comprises four pillars (10) located at the corners of a rectangular configuration, the central hole (9) being approximately located at the center of said rectangular configuration.
3. Sprinkling device (1) according to claim 2, wherein the rectangular configuration of the four pillars (10) has a long pair of sides, extending along the direction of the axle of the rotating shaft (3).
4. Sprinkling device (1) according to any of claims 1 to 3, wherein wear indicating notches (11) are provided at the end of the pillars (10).
5. Sprinkling device (1) according to any of claims 1

to4, wherein

the rotating shaft (3), on the one side, and both the top end of the pillars (10) and the top end of the central hole (9), on the other side, are of a complementary shape, a liquid passage of the clearance zone (7) being provided under the rotating shaft (3), between each pillar (10) and the central hole (9).

6. Sprinkling device (1) according to claims 1 to 5, wherein the pillars (10) extend from the support base (8).
7. Washing unit, for washing empty containers for liquid, like bottles or flasks, comprising a washing tunnel, in which containers are conveyed line by line in a conveying direction by an internal conveying means for being cleaned and further rinsed,

characterized in that

the washing unit comprises, in the washing tunnel, at least one sprinkling device (1) according to any of claims 1 to 6, for spraying a liquid, the rotating shaft (3) being transversal to the conveying direction, the washing unit further comprising means for synchronizing the rotation of the rotating shaft (3) to the movement of the internal conveying means.

Patentansprüche

1. Sprühhvorrichtung (1) zum Reinigen von Flaschen in einer Flaschenwaschanlage, in der die Flaschen durch eine Fördereinrichtung durch mindestens eine Waschzone bewegt werden, wobei die Sprühhvorrichtung (1) ein Druckrohr (2), in dem ein Fluid strömt, eine sich entlang dem Druckrohr (2) erstreckende Drehwelle (3) und mindestens ein Sprühmittel, das durch eine Öffnung des Druckrohrs (2), eine Düse (4) mit einem mittleren Loch (9), die in der Öffnung zwischen dem Druckrohr (2) und der Drehwelle (3) positioniert ist, eine Stützbasis (8), die auf dem Druckrohr (2) und Säulen (10), die sich um das mittlere Loch (9) herum zum Berühren der Drehwelle (3) befinden, aufliegt, und mindestens eine radiale Bohrung (5) in der Drehwelle (3), die sich auf Höhe der Düse (4) zur Aufnahme von unter Druck stehender Flüssigkeit im Druckrohr (2) von der Düse (4) befindet, gebildet wird, umfasst, wobei ein oberes Ende (6) der mindestens einen Düse (4) und die sich darauf befindende Drehwelle (3) allgemein komplementäre Formen aufweisen, wobei das obere Ende (6) mit einer Freiraumzone (7) an der Grenzfläche mit der Drehwelle (3) versehen ist, so dass ein Teil der Oberfläche des oberen Endes (6) nicht mit der Drehwelle (3) in Kontakt kommt, **dadurch gekennzeichnet, dass** die Düse (4) einen

Kegel mit einem durch die Mündung des mittleren Lochs (9) gebildeten Oberteil aufweist, wobei die Düse (4) von dem mittleren Loch (9) zu dem Umfang der Stützbasis (8) geneigt ist, wobei sich die Säulen (10) von dem Umfang des Kegels erstrecken, wobei die Freiraumzone (7) zwischen den Säulen (10) und zwischen der Mündung des mittleren Lochs (9) und den jeweiligen Säulen (10) vorgesehen ist.

2. Sprühhvorrichtung (1) nach Anspruch 1, wobei die mindestens eine Düse (4) vier Säulen (10) umfasst, die sich an den Ecken einer rechteckigen Konfiguration befinden, wobei sich das mittlere Loch (9) ungefähr in der Mitte der rechteckigen Konfiguration befindet.
3. Sprühhvorrichtung (1) nach Anspruch 2, wobei die rechteckige Konfiguration der vier Säulen (10) ein langes Paar Seiten aufweist, die sich entlang der Richtung der Achse der Drehwelle (3) erstrecken.
4. Sprühhvorrichtung (1) nach einem der Ansprüche 1 bis 3, wobei Verschleißanzeigekerben (11) am Ende der Säulen (10) vorgesehen sind.
5. Sprühhvorrichtung (1) nach einem der Ansprüche 1 bis 4, wobei die Drehwelle (3) auf der einen Seite und sowohl das obere Ende der Säulen (10) und das obere Ende des mittleren Lochs (9) auf der anderen Seite eine komplementäre Form aufweisen, wobei ein Flüssigkeitsdurchgang der Freiraumzone (7) unter der Drehwelle (3) zwischen jeder Säule (10) und dem mittleren Loch (9) vorgesehen ist.
6. Sprühhvorrichtung (1) nach den Ansprüchen 1 bis 5, wobei sich die Säulen (10) von der Stützbasis (8) erstrecken.
7. Waschanlage zum Waschen von leeren Behältern für Flüssigkeit wie Flaschen oder Flakons, umfassend einen Waschtunnel, in dem Behälter durch ein inneres Fördermittel zum Säubern und weiteren Spülen Reihe für Reihe in einer Förderrichtung befördert werden, **dadurch gekennzeichnet, dass** die Waschanlage im Waschtunnel mindestens eine Sprühhvorrichtung (1) nach einem der Ansprüche 1 bis 6 zum Sprühen einer Flüssigkeit umfasst, wobei die Drehwelle (3) quer zu der Förderrichtung verläuft, wobei die Waschanlage ferner ein Mittel zum Synchronisieren der Drehung der Drehwelle (3) mit der Bewegung der inneren Fördermittel umfasst.

Revendications

1. Dispositif d'aspersion (1) pour nettoyer des bouteilles dans une unité de lavage de bouteilles dans laquelle lesdites bouteilles sont déplacées par un transporteur à travers au moins une zone de lavage, ledit dispositif d'aspersion (1) comprenant un tuyau de pression (2) dans lequel un fluide s'écoule, un arbre rotatif (3) s'étendant le long du tuyau de pression (2), et au moins un moyen d'aspersion constitué d'une ouverture du tuyau de pression (2), d'une buse (4) ayant un trou central (9), positionné dans ladite ouverture, entre ledit tuyau de pression (2) et ledit arbre rotatif (3), une base de support (8) reposant sur le tuyau de pression (2) et des piliers (10) situés autour dudit trou central (9), pour entrer en contact avec l'arbre rotatif (3), et au moins un alésage radial (5) dans l'arbre rotatif (3), situé au niveau de la buse (4), pour recevoir le liquide sous pression dans le tuyau de pression (2) provenant de la buse (4),

5

10

15

20

25

30

35

40

45

50

55

60

65

70

75

80

85

90

95

100

105

110

115

120

125

130

135

140

145

150

155

160

165

170

175

180

185

190

195

200

205

210

215

220

225

230

235

240

245

250

255

260

265

270

275

280

285

290

295

300

305

310

315

320

325

330

335

340

345

350

355

360

365

370

375

380

385

390

395

400

405

410

415

420

425

430

435

440

445

450

455

460

465

470

475

480

485

490

495

500

505

510

515

520

525

530

535

540

545

550

555

560

565

570

575

580

585

590

595

600

605

610

615

620

625

630

635

640

645

650

655

660

665

670

675

680

685

690

695

700

705

710

715

720

725

730

735

740

745

750

755

760

765

770

775

780

785

790

795

800

805

810

815

820

825

830

835

840

845

850

855

860

865

870

875

880

885

890

895

900

905

910

915

920

925

930

935

940

945

950

955

960

965

970

975

980

985

990

995

1000

1005

1010

1015

1020

1025

1030

1035

1040

1045

1050

1055

1060

1065

1070

1075

1080

1085

1090

1095

1100

1105

1110

1115

1120

1125

1130

1135

1140

1145

1150

1155

1160

1165

1170

1175

1180

1185

1190

1195

1200

1205

1210

1215

1220

1225

1230

1235

1240

1245

1250

1255

1260

1265

1270

1275

1280

1285

1290

1295

1300

1305

1310

1315

1320

1325

1330

1335

1340

1345

1350

1355

1360

1365

1370

1375

1380

1385

1390

1395

1400

1405

1410

1415

1420

1425

1430

1435

1440

1445

1450

1455

1460

1465

1470

1475

1480

1485

1490

1495

1500

1505

1510

1515

1520

1525

1530

1535

1540

1545

1550

1555

1560

1565

1570

1575

1580

1585

1590

1595

1600

1605

1610

1615

1620

1625

1630

1635

1640

1645

1650

1655

1660

1665

1670

1675

1680

1685

1690

1695

1700

1705

1710

1715

1720

1725

1730

1735

1740

1745

1750

1755

1760

1765

1770

1775

1780

1785

1790

1795

1800

1805

1810

1815

1820

1825

1830

1835

1840

1845

1850

1855

1860

1865

1870

1875

1880

1885

1890

1895

1900

1905

1910

1915

1920

1925

1930

1935

1940

1945

1950

1955

1960

1965

1970

1975

1980

1985

1990

1995

2000

2005

2010

2015

2020

2025

2030

2035

2040

2045

2050

2055

2060

2065

2070

2075

2080

2085

2090

2095

2100

2105

2110

2115

2120

2125

2130

2135

2140

2145

2150

2155

2160

2165

2170

2175

2180

2185

2190

2195

2200

2205

2210

2215

2220

2225

2230

2235

2240

2245

2250

2255

2260

2265

2270

2275

2280

2285

2290

2295

2300

2305

2310

2315

2320

2325

2330

2335

2340

2345

2350

2355

2360

2365

2370

2375

2380

2385

2390

2395

2400

2405

2410

2415

2420

2425

2430

2435

2440

2445

2450

2455

2460

2465

2470

2475

2480

2485

2490

2495

2500

2505

2510

2515

2520

2525

2530

2535

2540

2545

2550

2555

2560

2565

2570

2575

2580

2585

2590

2595

2600

2605

2610

2615

2620

2625

2630

2635

2640

2645

2650

2655

2660

2665

2670

2675

2680

2685

2690

2695

2700

2705

2710

2715

2720

2725

2730

2735

2740

2745

2750

2755

2760

2765

2770

2775

2780

2785

2790

2795

2800

2805

2810

2815

2820

2825

2830

2835

2840

2845

2850

2855

2860

2865

2870

2875

2880

2885

2890

2895

2900

2905

2910

2915

2920

2925

2930

2935

2940

2945

2950

2955

2960

2965

2970

2975

2980

2985

2990

2995

3000

3005

3010

3015

3020

3025

3030

3035

3040

3045

3050

3055

3060

3065

3070

3075

3080

3085

3090

3095

3100

3105

3110

3115

3120

3125

3130

3135

3140

3145

3150

3155

3160

3165

3170

3175

3180

3185

3190

3195

3200

3205

3210

3215

3220

3225

3230

3235

3240

3245

3250

3255

3260

3265

3270

3275

3280

3285

3290

3295

3300

3305

3310

3315

3320

3325

3330

3335

3340

3345

3350

3355

3360

3365

3370

3375

3380

3385

3390

3395

3400

3405

3410

3415

3420

3425

3430

3435

3440

3445

3450

3455

3460

3465

3470

3475

3480

3485

3490

3495

3500

3505

3510

3515

3520

3525

3530

3535

3540

3545

3550

3555

3560

3565

3570

3575

3580

3585

3590

3595

3600

3605

3610

3615

3620

3625

3630

3635

3640

3645

3650

3655

3660

3665

3670

3675

3680

3685

3690

3695

3700

3705

3710

3715

3720

3725

3730

3735

3740

3745

3750

3755

3760

3765

3770

3775

3780

3785

3790

379

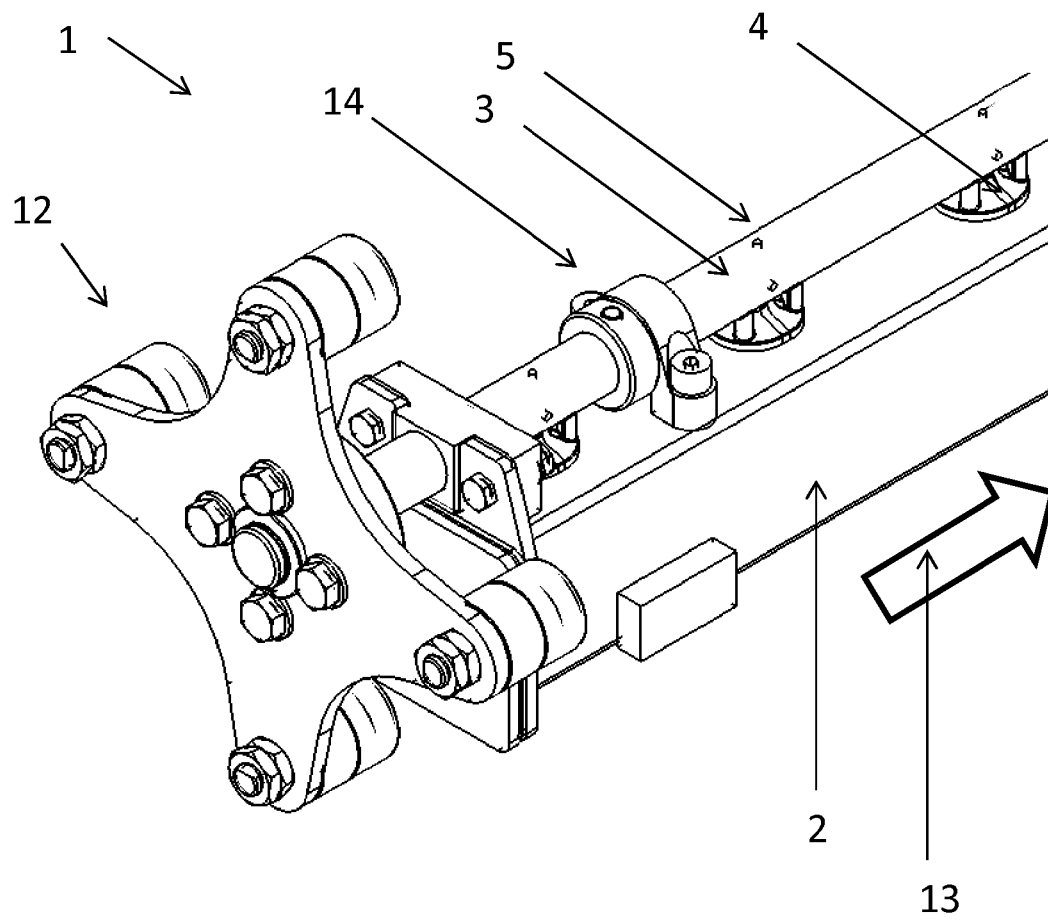


Fig. 1

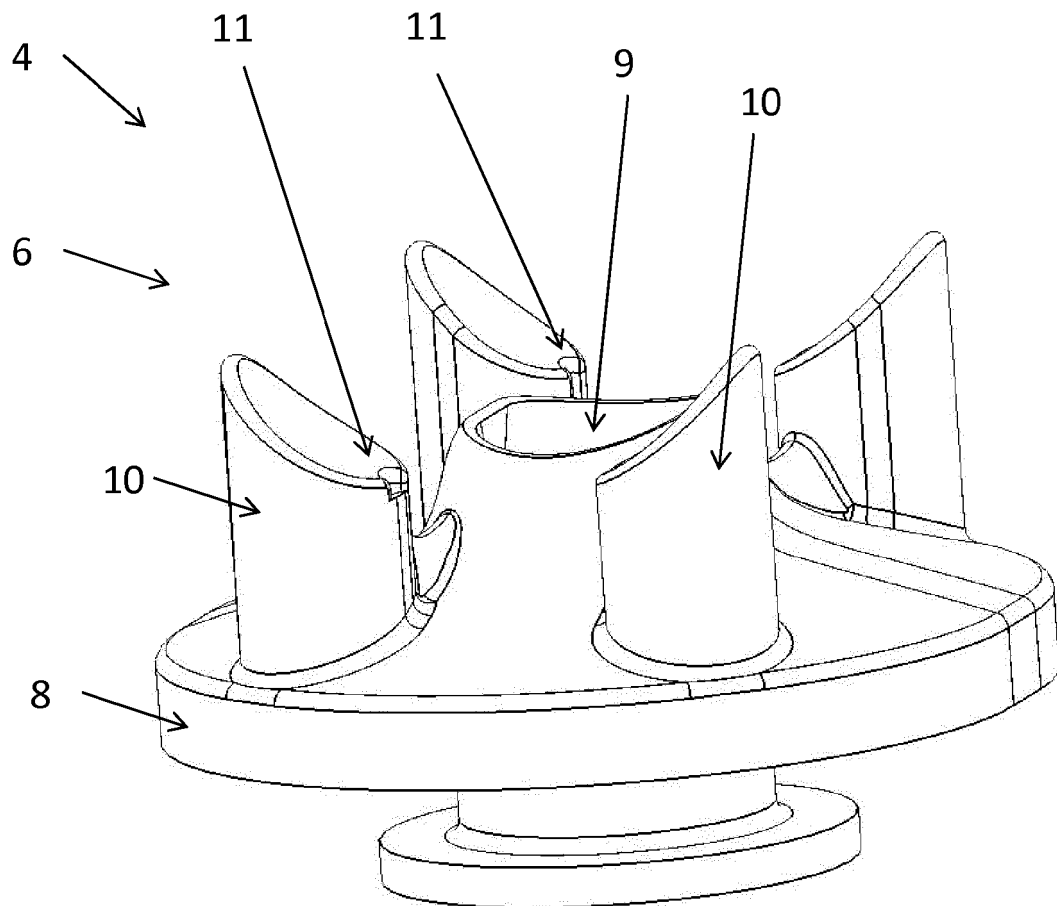


Fig. 2

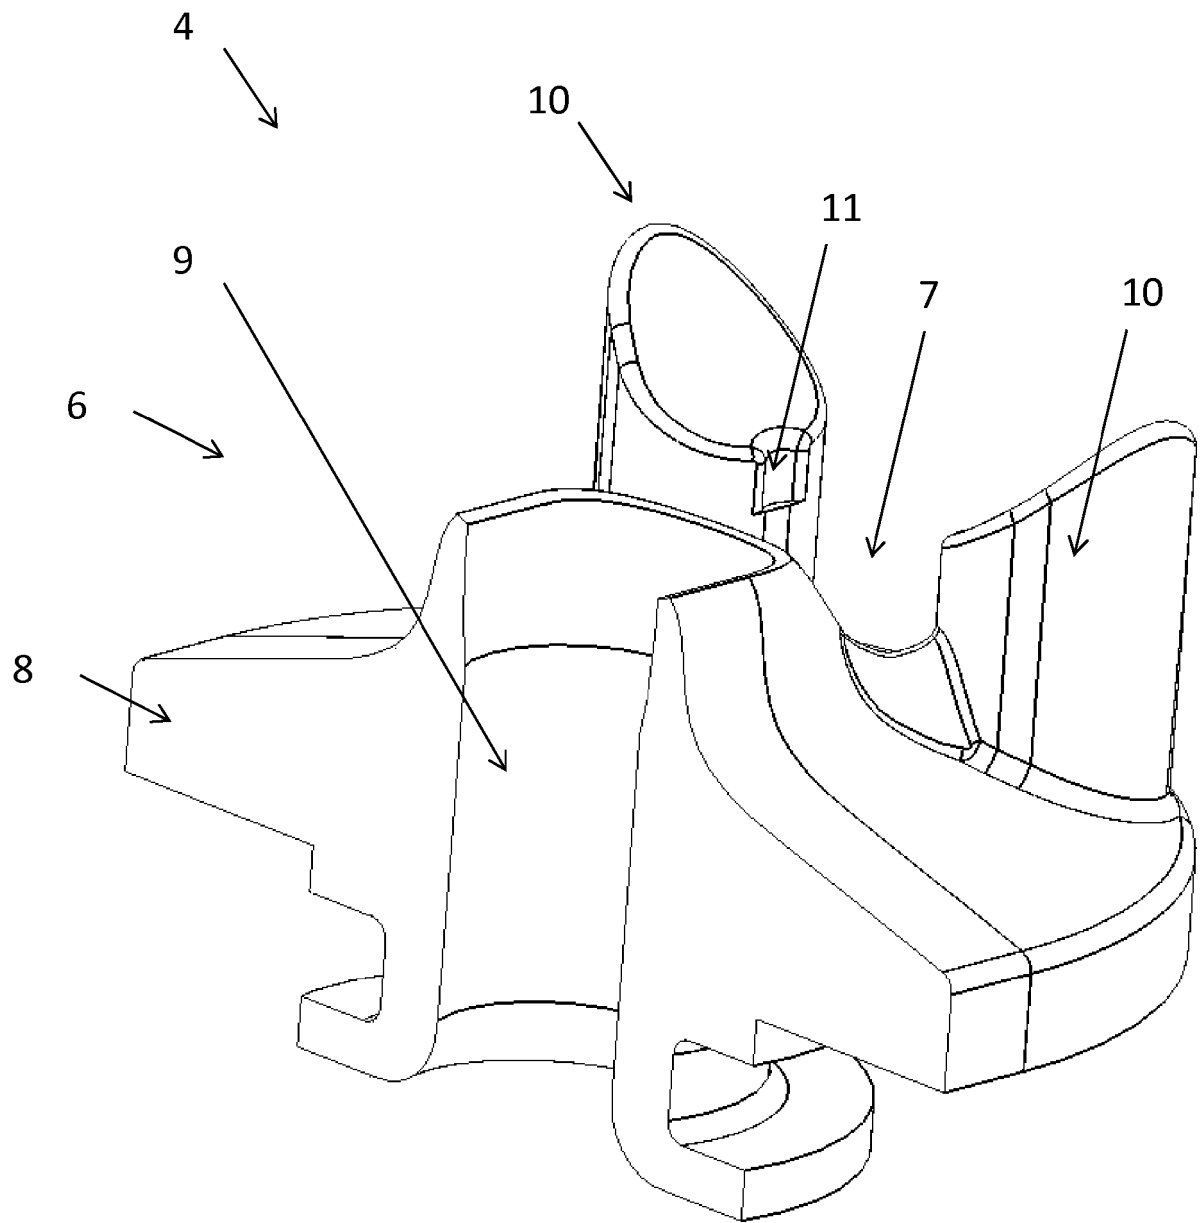


Fig. 3

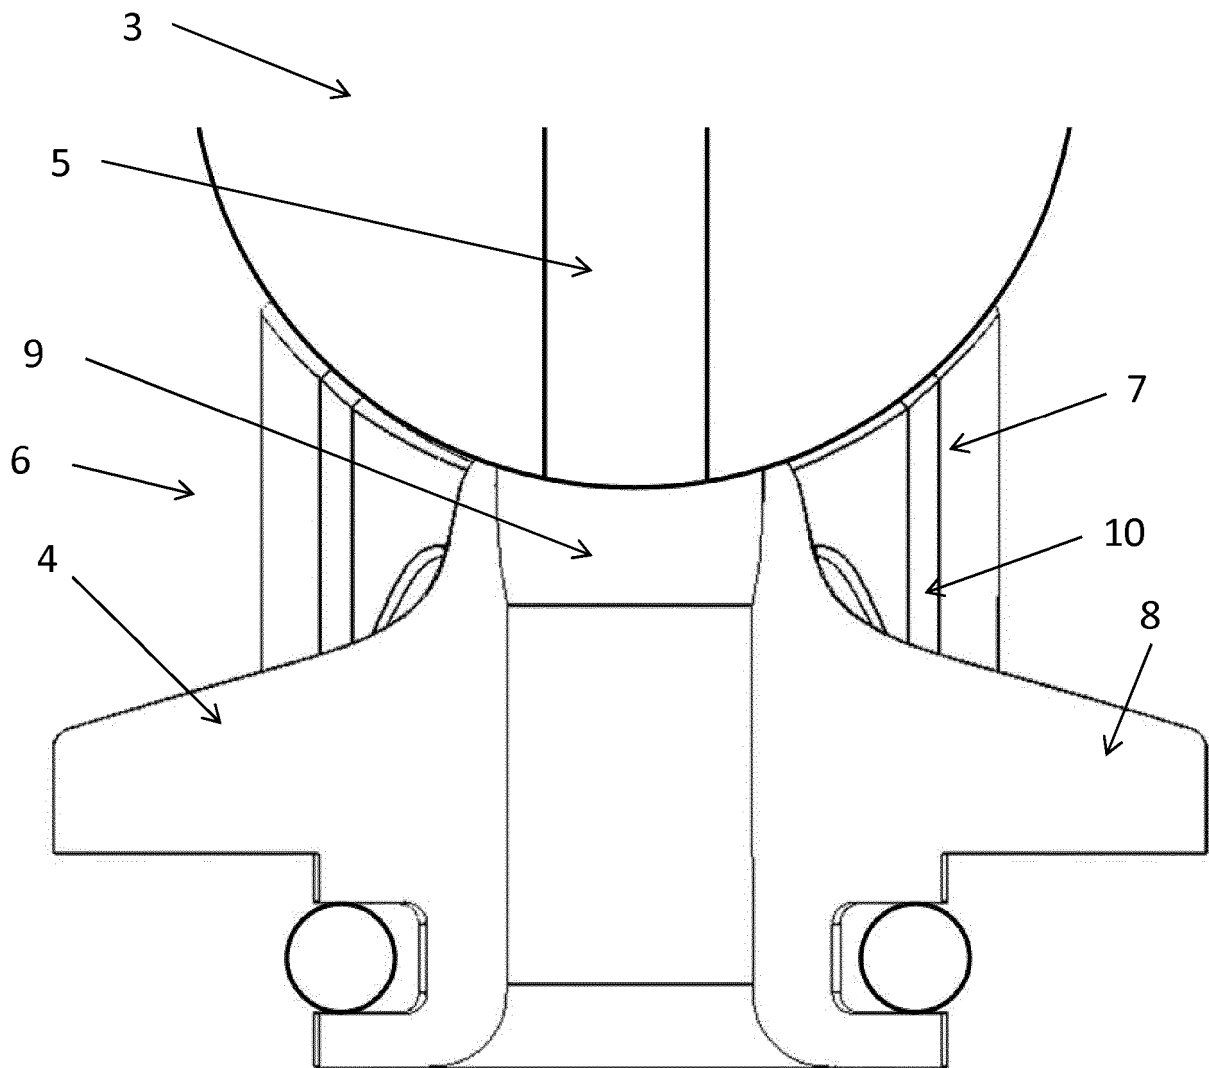


Fig. 4

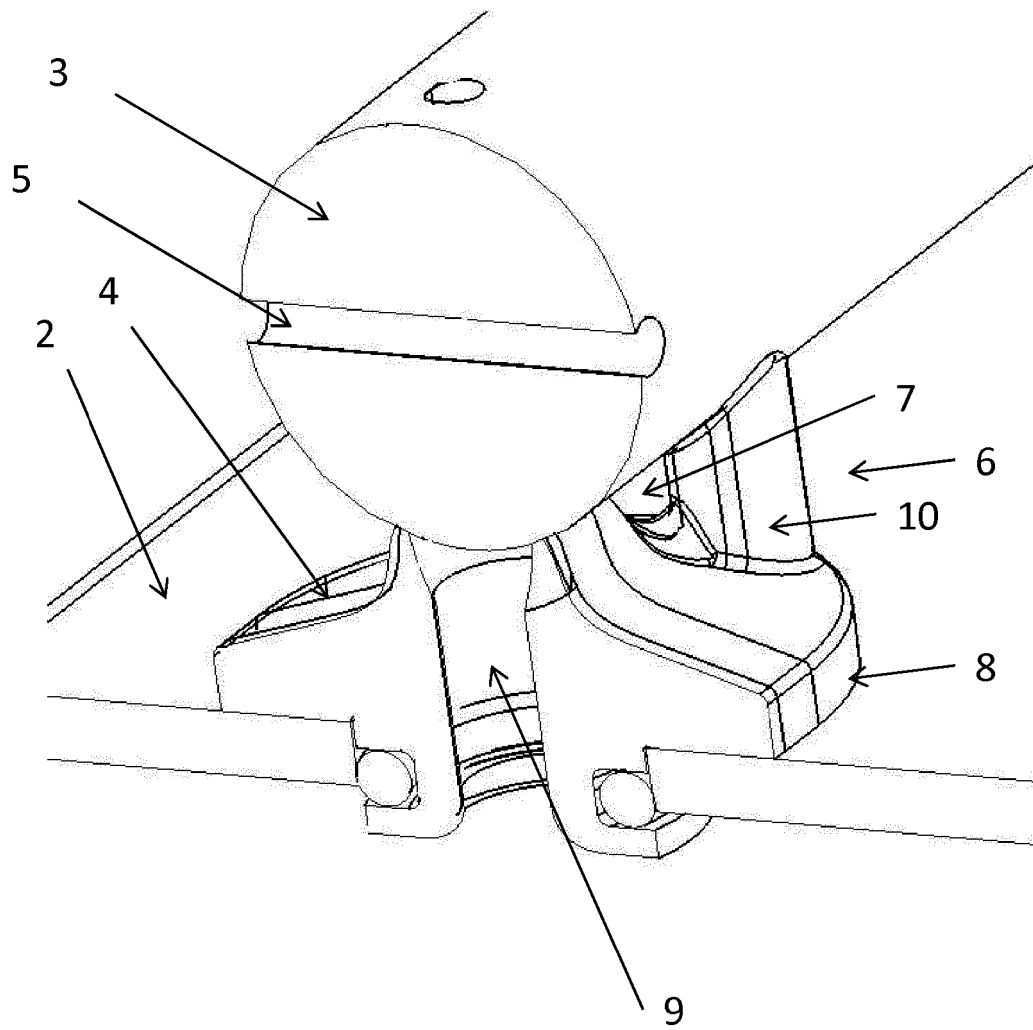


Fig. 5

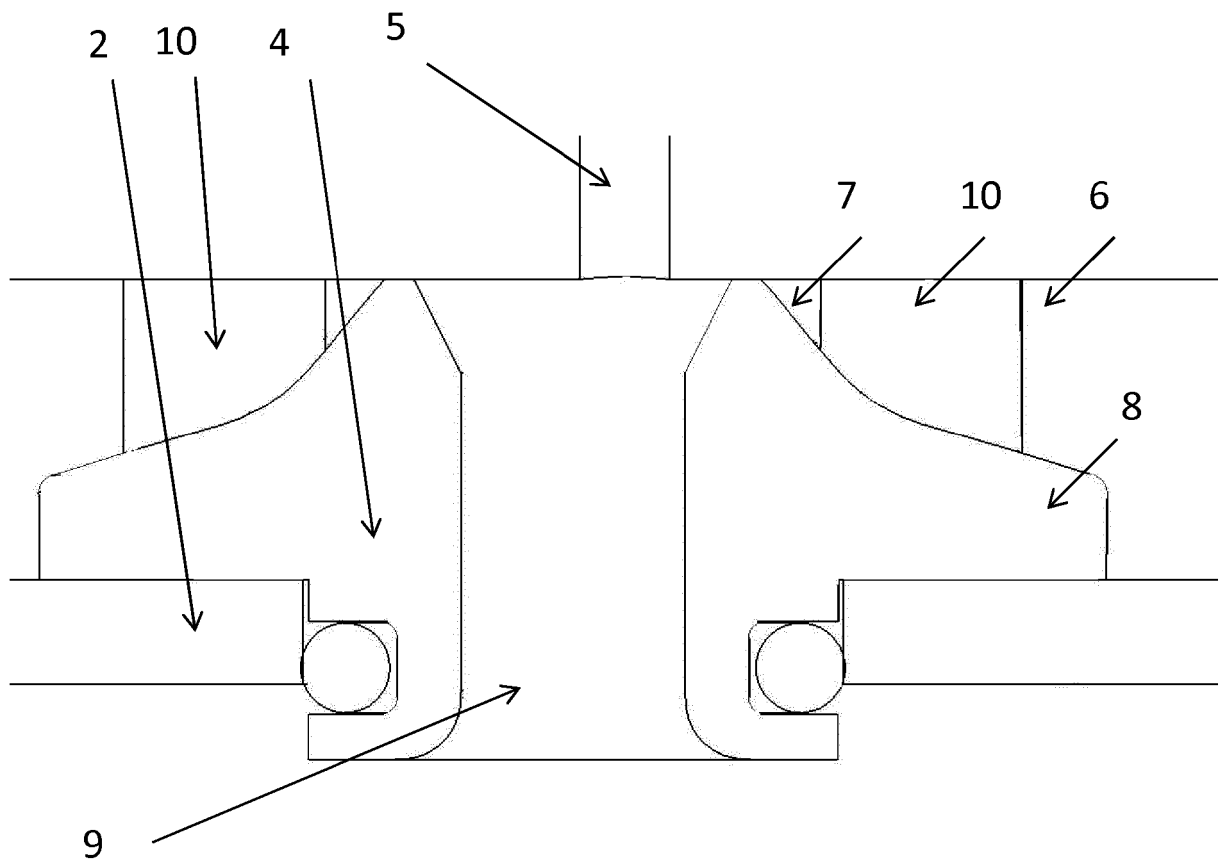


Fig. 6

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5092356 A **[0006]**
- EP 1728565 A **[0007]**
- DE 4216665 **[0008]**
- DE 10315866 **[0009]**
- EP 2724793 A1 **[0010]**