




(22) Date de dépôt/Filing Date: 2005/02/28
 (41) Mise à la disp. pub./Open to Public Insp.: 2005/08/27
 (45) Date de délivrance/Issue Date: 2011/08/09
 (30) Priorité/Priority: 2004/02/27 (EP04251154.3)

(51) Cl.Int./Int.Cl. *H04W 4/10* (2009.01),
H04M 3/20 (2006.01), *H04M 3/436* (2006.01)
 (72) Inventeurs/Inventors:
XUE, HAO, CA;
ISLAM, MUHAMMAD KHALEDUL, CA
 (73) Propriétaire/Owner:
RESEARCH IN MOTION LIMITED, CA
 (74) Agent: SMART & BIGGAR

(54) Titre : METHODE, SYSTEME ET DISPOSITIF DE NEUTRALISATION SELECTIVE DE LA FONCTION NE-PAS-DERANGER
 (54) Title: METHOD, SYSTEM, AND DEVICE FOR SPECIFYING SELECTIVE OVERRIDE OF DO-NOT-DISTURB FUNCTIONALITY

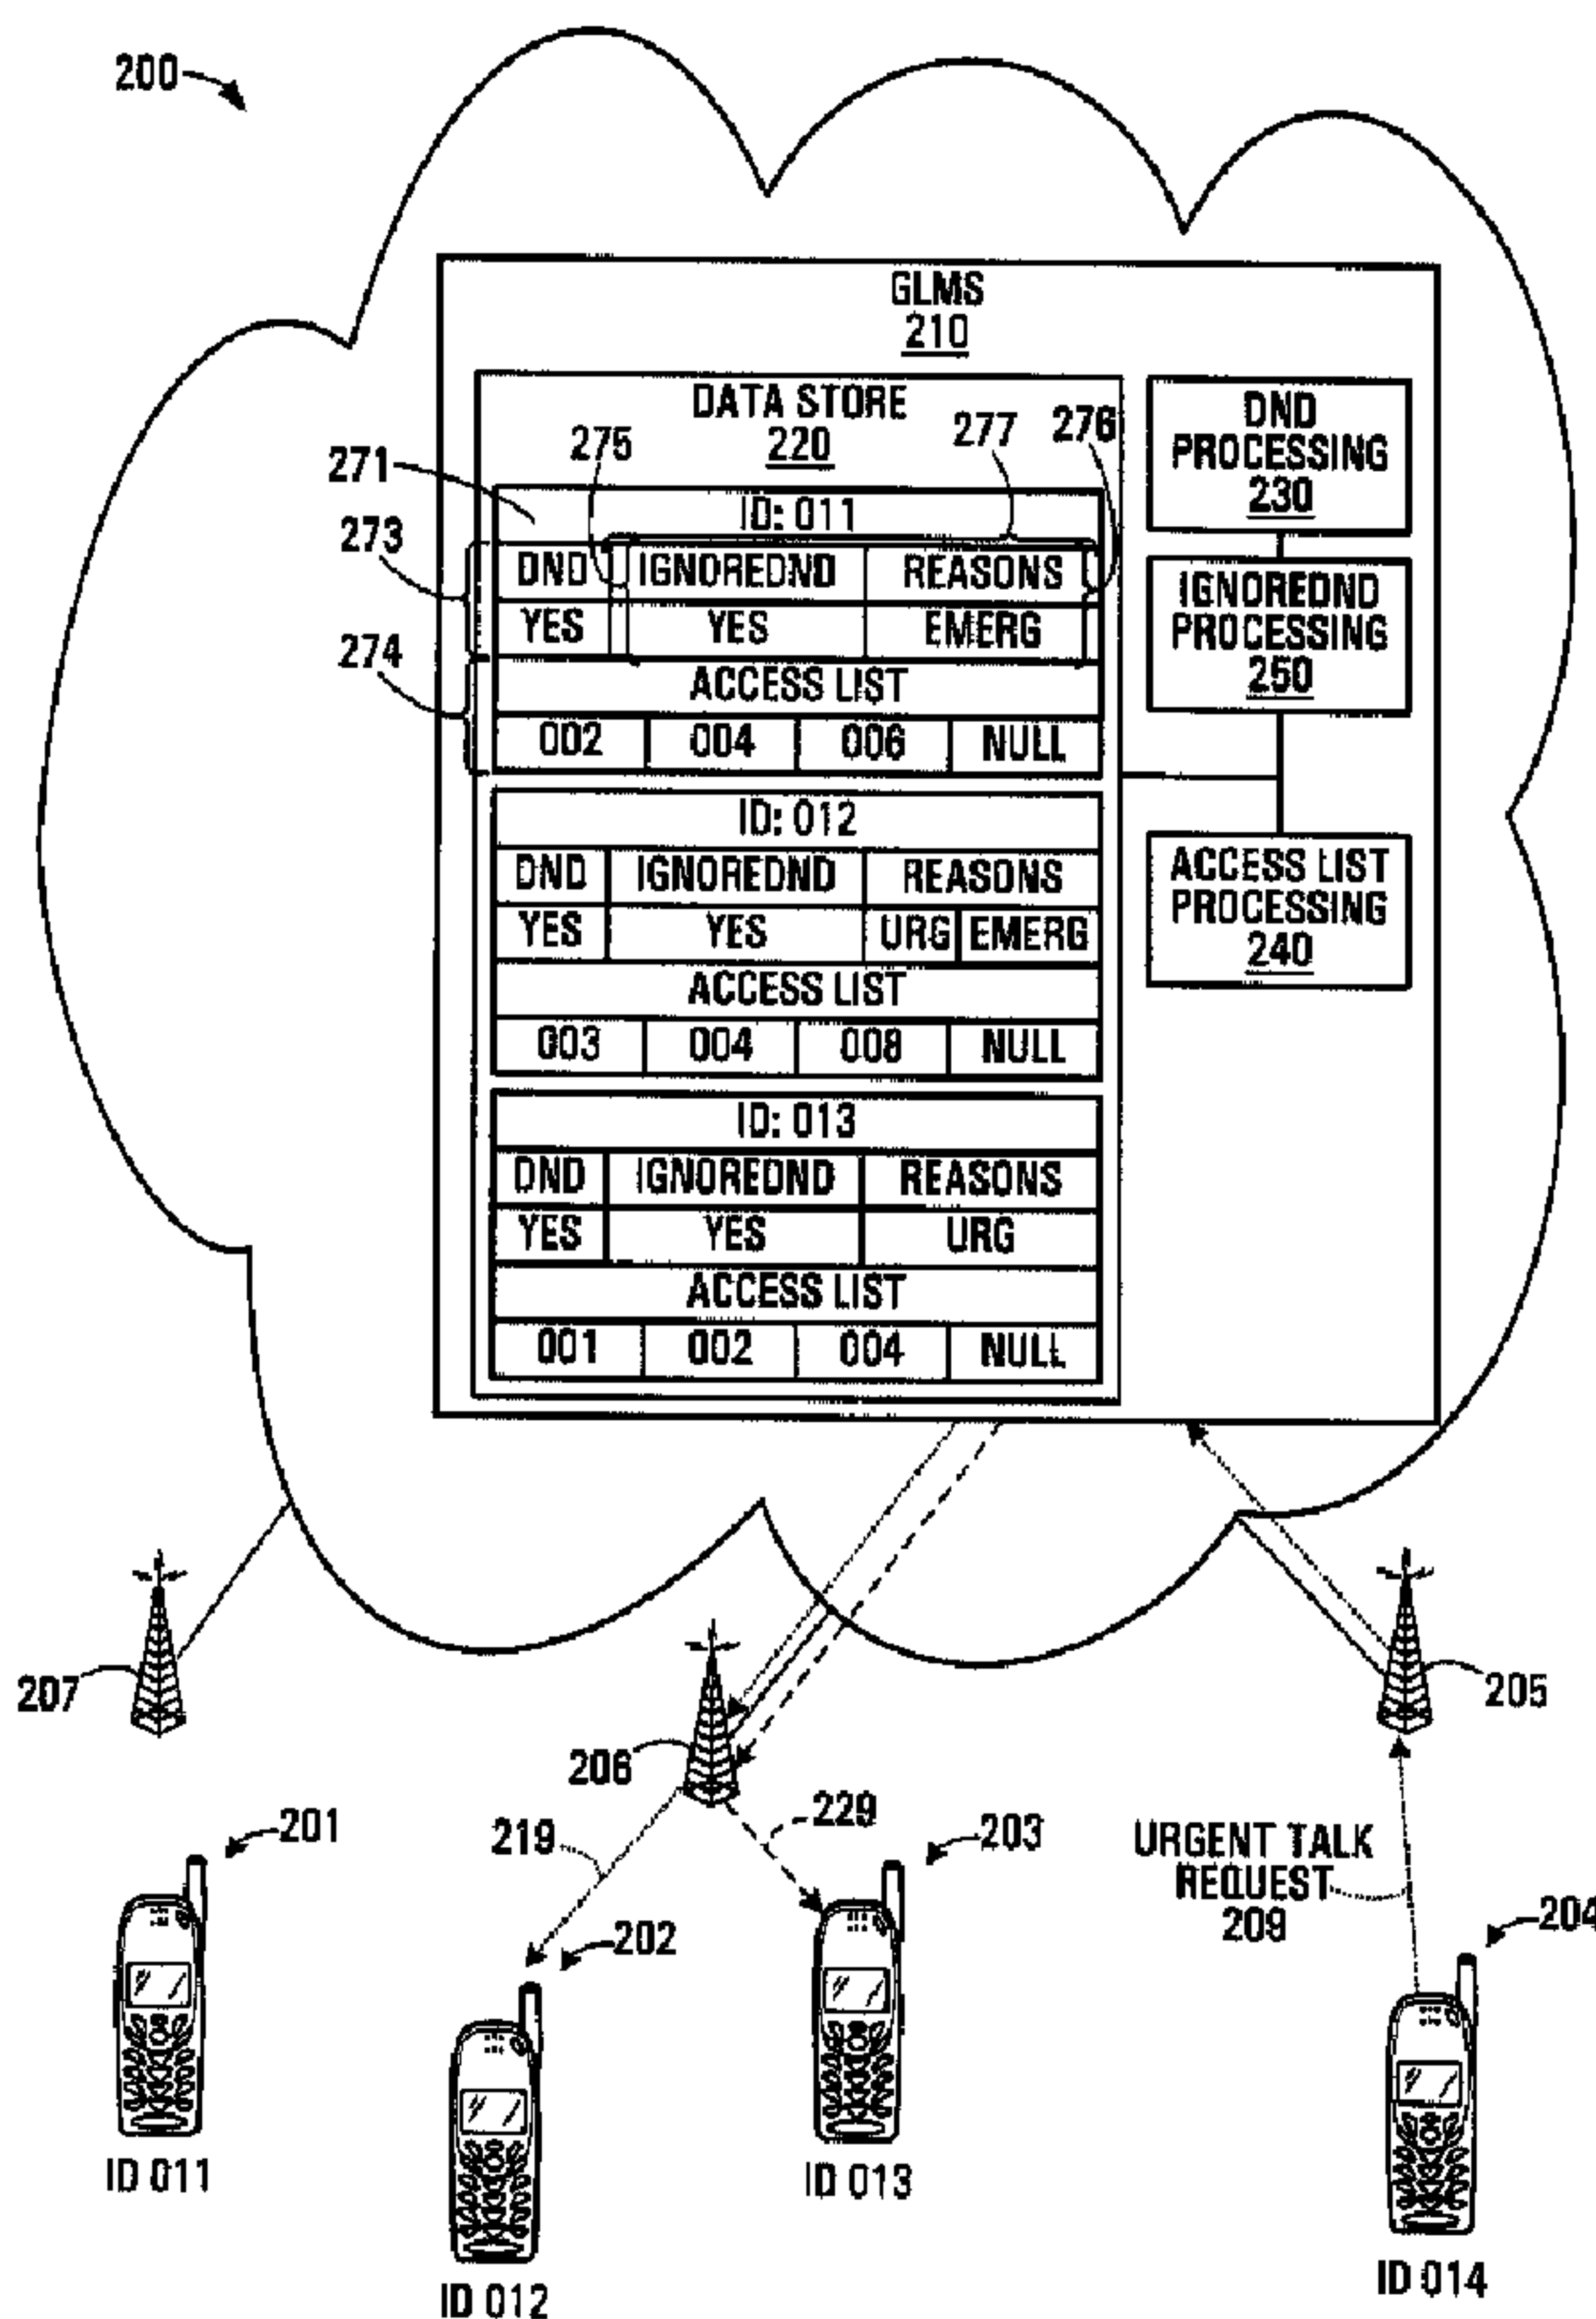

(57) Abrégé/Abstract:

The present invention provides methods, systems, and devices for selective override of do-not-disturb in a wireless communications network, in which a user is provided with the option to query and modify the ignoring of do-not-disturb (DnD) for

(57) **Abrégé(suite)/Abstract(continued):**

certain reasons. In some embodiments, DnD is ignored when an incoming call is an urgent call. In other embodiments DnD is ignored when an incoming call is an emergency call. In some embodiments a call processing server manages and performs selective override of do-not-disturb in an OMA compatible system. In yet other embodiments, a mobile device is adapted to send to a dispatch network a request to query or set an ignoreDnD flag, along with associated ignoreDnD reasons.

ABSTRACT

The present invention provides methods, systems, and devices for selective override of do-not-disturb in a wireless communications network, in which a user is provided with the option to query and modify the ignoring of do-not-disturb (DnD) for certain reasons. In some embodiments, DnD is ignored when an incoming call is an urgent call. In other embodiments DnD is ignored when an incoming call is an emergency call. In some embodiments a call processing server manages and performs selective override of do-not-disturb in an OMA compatible system. In yet other embodiments, a mobile device is adapted to send to a dispatch network a request to query or set an ignoreDnD flag, along with associated ignoreDnD reasons.

**METHOD, SYSTEM, AND DEVICE FOR SPECIFYING SELECTIVE OVERRIDE
OF DO-NOT-DISTURB FUNCTIONALITY**

FIELD OF THE INVENTION

The invention relates to communication systems and
5 more particularly to call management for systems which
provide do-not-disturb (DnD) functions.

BACKGROUND OF THE INVENTION

In communications systems with voice call
features, a user of a device or near a device is often
10 alerted to an incoming call via an indication to the user in
audible form such as a tone or ring, in kinesthetic form
such as a vibration, or in visual form such as a flashing
light. Some communications systems provide devices which
alert the user in a relatively non-intrusive manner.
15 However, there are situations when a user may decide not to
receive an incoming call. In some communications systems,
due to the way in which they operate, an incoming call and
its alert can be intrusive and distracting or even
dangerous.

20 In wireless communication systems which provide
dispatch services, push-to-talk™ (PTT™) services are often
provided. Push-to-talk™ services typically provide
walkie-talkie-like functionality or two-way half-duplex
voice communication which enables a single user to
25 communicate with another single user (as in a private
session) or enables the single user to communicate with a
group of other users (as in a group session). When referred
to herein, walkie-talkie-like functionality and half-duplex
voice functionality are to be taken generally to mean any
30 network delivered voice communication functionality which at
any one time is capable of transmitting voice communication

from a talking or transmitting party's device to a listening or receiving party's device, but does not simultaneously transmit voice communication from the receiving party's device to the talking party's device, while the talking party's device is transmitting voice to the receiving party's device. Groups can operate in automatic answer mode or in manual answer mode. In push-to-talk™, for a group in automatic answer mode, voice reception is instantaneous, and requires no recipient action. For a group in manual answer mode, before voice reception, recipient action is required to accept or decline the incoming talk request. Situations may arise where automatic communication or a request for communication would be intrusive, and a user may wish to have no interruptions from calls for a period of time. Additionally, the user may wish not to have to take any action to deny talk requests during that period.

In known systems, do-not-disturb (DnD) functionality is provided so that the user's device and hence the user are not disturbed by an incoming call. When this feature is active, no incoming call is offered to the user. DnD also blocks other forms of alerting, such as Message Waiting Notification alerting. Do-not-disturb makes the user inaccessible for call delivery. This DnD functionality is provided for users of half-duplex voice systems and full duplex voice systems, who do not want to be disturbed. This feature is also defined in IS-41-based systems.

In known systems providing DnD such as the Push-to-Talk™ over Cellular (PoC) system (part of the OMA standard), a user typically requests activation of DnD from the user device, which sends a request to a GLMS (group list management server) or similar call processing server to

52404-310

3

activate a DnD setting resident at the GLMS for the user device. Once the DnD setting has been changed in the GLMS to a state of do-not-disturb, the GLMS stops all subsequent incoming talk session requests directed to the user's
5 device. According to some standards this is accompanied by the GLMS sending a busy indication to the calling party.

In addition to DnD management the GLMS performs access list management. Access lists are used to specify who is permitted or not permitted to establish a PTT™
10 session with a specific user device. Both a reject list, and an accept list can be stored for a user device, so that calls from specific user devices on these lists are respectively rejected or accepted automatically.

A standard system architecture in which wireless
15 dispatch call management is performed is defined by the OMA (open mobile alliance) standard. Depicted in Figure 1 is an OMA compliant system which includes push-to-talk™ over cellular (PoC) services. The overall architecture of the known OMA compliant system is generally indicated by
20 reference numeral 100, and includes a known GLMS (group list management server) 110 which manages groups and lists (e.g. contact and access lists) that are needed for the PoC service. Also shown are the BTSS (base transceiver stations) 105, 106, 107 through which users can access the
25 system. The illustrated example shows four user devices 101, 102, 103, 104 having respective identifiers (ID) 001, 002, 003, and 004.

The known GLMS 110 provides list management operations to create, modify, retrieve and delete groups and
30 lists, and to provide storage therefor. Data store 120 provides storage for the known GLMS which includes access lists and DnD flags stored by the user device. The data for the

52404-310

4

DnD flags and access lists are shown in respect of known user devices 101, 102, and 103 in association with IDs 001,002,003. The access list is provided for each known user device (101, 102, 103) and specifies which other known user devices are permitted to reach the respective known user device (101, 102, or 103) over PoC. For example, for user device 101 having ID 001, the access list contains 002,004,006, indicating that the device having these IDs are allowed to reach the user device 101. The known GLMS 110 also stores for each known user device a DnD flag which may either be a "YES" or a "NO" value which dictates whether or not the user device is in a state of do-not-disturb. Each user device's DnD flag and access list helps facilitate management of talk requests directed to that user device.

15 According to the OMA standard, the user device is permitted to query and set the value of the DnD flag of that user device, but generally is not permitted to directly query or set the value of a DnD flag of another user device.

Figure 1 depicts a known user device 104 with ID 004 which is sending a group talk request 109 for a session with other known user devices 101, 102, and 103, all of which are part of the group as defined by OMA. The talk request 109 is received and forwarded by the Radio Access Network (RAN) 105 to the known system 100. Once the request is forwarded to the known GLMS 110, DnD Processing 130 and Access List Processing 140 take place to determine if the talk request 109 is forwarded. Since each of the known user devices 101, 102, and 103, has an associated DnD flag of "YES" in the data store 120 of the known GLMS 110, none of the known user devices 101, 102, and 103, are forwarded the talk request 109 which would take place over RANs 106 and 107.

Figure 2 shows the steps performed by a known GLMS in a known OMA compliant system to manage incoming calls for a user device using the stored DnD flag and access list for that user device. At step 115, the known GLMS receives an incoming talk request specifying the user device as the device being called. In step 135 the known GLMS checks the DnD flag associated with the user device identified in the talk request. If the DnD flag is set to "NO" then processing of the call continues at step 145 wherein the access lists are processed to assess whether the talk request should be forwarded to the user device or not. If the DnD flag 130 is set to "YES" then the talk request is rejected in step 155, and the user's device is not disturbed.

15

SUMMARY OF THE INVENTION

The present invention provides methods, systems, and devices for selective override of do-not-disturb in a wireless communications network, in which a user is provided with an option to query and modify the ignoring of do-not-disturb (DnD) for certain reasons associated with an incoming call. In some embodiments, the DnD is ignored when the incoming call is an urgent call. In other embodiments DnD is ignored when an incoming call is an emergency call. In some embodiments a network call processing server manages and performs selective override of do-not-disturb in an OMA compatible system. In yet other embodiments, a mobile device is adapted to send to a dispatch network of the wireless communications network a request to query or modify an ignoreDnD attribute, including an ignoreDnD flag, along with associated ignoreDnD reasons.

30

According to one broad aspect, the invention provides a method of talk request processing in a do-not-

51085-57

- 6 -

disturb (DnD) capable communication system, the method comprising: receiving a talk request for a requested walkie-talkie-like communications session involving a user device capable of walkie-talkie-like functionality; and selectively overriding DnD functionality for the requested walkie-talkie-like communications session based on an ignoreDnD attribute for the user device applied to a criterion or condition of the talk request other than a user device identifier; wherein the user device is a wireless device; wherein the ignoreDnD attribute comprises an ignoreDnD flag, and wherein selectively overriding said DnD functionality is a function of the ignoreDnD flag; wherein the ignoreDnD attribute comprises at least one predetermined ignore reason value, and wherein selectively overriding said DnD functionality is a function of the at least one predetermined ignore reason value; and wherein the talk request has a current state associated therewith, the current state being one of a number of possible current states for the talk request, wherein each predetermined ignore reason value represents a corresponding possible current state for the talk request, the method further comprising: evaluating the ignoreDnD flag to determine whether further ignoreDnD processing is to be performed, and if evaluating the ignoreDnD flag determines that further ignoreDnD processing is to be performed: a) determining the current state of the talk request; and b) for each of the at least one predetermined ignore reason value: comparing the corresponding possible current state with the current state of the talk request; wherein said DnD functionality is overridden if any corresponding possible current state matches the current state of the talk request.

According to another broad aspect, there is provided a non-transitory computer readable medium having computer executable instructions stored thereon for execution on a processor so as to implement the method summarised above.

According to another broad aspect, there is provided a talk request processing system in a do-not-disturb (DnD) capable communication system, the talk request processing system comprising: a receiver adapted to receive a talk request for a requested walkie-talkie-like communications session involving a user device capable of walkie-talkie-like functionality; and a network call processing

51085-57

- 6a -

function adapted to selectively override DnD functionality for the requested walkie-talkie-like communications session based on an ignoreDnD attribute for the user device applied to a criterion or condition of the talk request other than a user device identifier; wherein the user device is a wireless device; wherein the network call processing function comprises: a data store adapted to store the ignoreDnD attribute for the user device; a DnD processing function adapted to provide DnD functionality; and an ignoreDnD processing function adapted to override DnD functionality for the requested walkie-talkie-like communications session as a function of the ignoreDnD attribute stored in the data store for the user device; wherein the ignoreDnD attribute comprises an ignoreDnD flag and at least one predetermined ignore reason value, and wherein the ignoreDnD processing function selectively overrides said DnD functionality as a function of the ignoreDnD flag and the at least one predetermined ignore reason value; and wherein the talk request has a current state associated therewith, the current state being one of a number of possible current states for the talk request, wherein each predetermined ignore reason value represents a corresponding possible current state for the talk request, wherein the ignoreDnD processing function: retrieves the ignoreDnD attribute from the data store; and evaluates the ignoreDnD flag to determine whether further ignoreDnD processing is to be performed, and if evaluating the ignoreDnD flag determines that further ignoreDnD processing is to be performed: a) determines the current state of the talk request; and b) for each of the at least one predetermined ignore reason value: compares the corresponding possible current state with the current state of the talk request; wherein said DnD functionality is overridden if any corresponding possible current state matches the current state of the talk request.

According to yet another broad aspect, the invention provides a user device capable of walkie-talkie-like functionality for a do-not-disturb (DnD) capable communication system, the user device comprising: a user interface adapted to accept an external input to modify an ignoreDnD attribute for the user device, the ignoreDnD attribute concerning a criterion or condition of a talk request other than a user device identifier; an ignoreDnD attribute request generator responsive to

51085-57

- 6b -

said external input adapted to send a network call processing server a request to update the ignoreDnD attribute of the user device; and a user interface display for displaying modifications for the ignoreDnD attribute indicated by the external input; wherein the user device is a wireless device; and wherein the user interface

5 is further adapted to accept an external query input to retrieve the ignoreDnD attribute for the user device, the ignore DnD attribute request generator being further adapted to: (a) send a network call processing server a query to retrieve the ignoreDnD attribute of the user device; and b) receive a response to said query from the network; wherein the user interface display is adapted to, in

10 response to the ignoreDnD attribute request generator receiving the response to said query, display the ignoreDnD attribute for the user device.

Other aspects and features of the present invention will become apparent to those of ordinary skill in the art upon review of the following description of specific embodiments of the invention in conjunction with the
5 accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the invention will now be described with reference to the accompanying diagrams, in which:

10 FIG. 1 is a block diagram depicting elements of a known communications system participating in services having do-not-disturb functionality;

FIG. 2 is a flow diagram illustrating the steps performed by a GLMS of a known communications system having
15 do-not-disturb functionality in processing an incoming talk request to a user device;

FIG. 3 is a block diagram depicting elements of a modified communications system participating in modified services having modified do-not-disturb functionality
20 according to an embodiment of the invention;

FIG. 4 is a flow diagram illustrating the steps performed by a modified communications system having modified do-not-disturb functionality for processing an incoming talk request to a user device according to another
25 embodiment of the invention;

FIG. 5A is a block diagram representation of a datagram for a modified DnD attribute according to a further embodiment of the invention;

FIG. 5B is a block diagram representation of a datagram for a DnD flag and a datagram for a new ignoreDnD attribute according to yet another embodiment of the invention; and

5 FIG. 6 is a block representation of a modified user device incorporating elements according to an alternate embodiment of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

In certain circumstances, it would be desirable
10 that an incoming call be forwarded to a particular user device even if that user device has its DnD flag set at a call processing server not to disturb the user. Such a situation may occur for example, in an emergency, or when the call is urgent or for any other reason the subscriber or
15 user would deem that this should be the case. In such a situation, there is provided by various embodiments of the invention, methods, systems, and devices for ignoring the DnD flag under certain circumstances, and hence overriding the DnD flag, and for querying and modifying data stored for
20 use in overriding the DnD flag.

The examples which follow employ PTT™ capable PoC networks and wireless devices. More generally embodiments described herein are applicable in the context of the network and wireless devices participating in walkie-talkie-
25 like functionality, of which PTT™ is but one example.

Referring to Figure 3, a modified OMA system implementing a modified OMA standard in which an example embodiment of the invention operates, will now be discussed.

The modified OMA system of Figure 3 provides a
30 modified push-to-talk™ over cellular (PoC) service according

to the example embodiment, and incorporates a new ignoreDnD flag in conjunction with a new ignore reason list of ignore reason values to determine whether or not, for any particular talk request, the DnD flag of the called device
5 is to be ignored, and hence DnD functionality overridden.

With respect to structure, the specific modified system of Figure 3 generally indicated by reference numeral 200, includes a modified GLMS (group list management server) 210. The GLMS 210 is a specific example of a call
10 processing server. The GLMS 210 includes a data store 220, an access list processing unit 240, an ignoreDnD processing unit 250, and a DnD processing unit 230. The data store 220, access list processing unit 240, ignoreDnD processing unit 250, and DnD processing unit 230 are coupled to each
15 other for data exchange.

Other embodiments employ different elements of the system to perform similar functionality to that performed by the units 250, 240, 230, of the GLMS 210 of Figure 3. In some embodiments, each one of the GLMS 210 and the units
20 250, 240, 230, may be implemented in hardware, software, firmware, or any combination of hardware, software and firmware.

Also shown are three RANs (radio access networks) 205, 206, and 207 of the system coupled through the system
25 200 to the GLMS 210, and four user devices 201, 202, 203, and 204 having identifiers 011,012,013,014 respectively which may be actively coupled to the system via RANs 205, 206, and 207.

The example of Figure 3 shows DND processing unit
30 230, ignoreDnD processing unit 250 and access list processing unit 240 as separate elements. More generally, these may be implemented separately, or in combination, and

52404-310

10

may be implemented in hardware, software, firmware, or any combination of hardware, software and firmware. In a preferred embodiment, this functionality is included as software which is added to call processing functionality
5 which would be conventionally provided in the GLMS 210. This new functionality may be provided on the GLMS 210 as shown in Figure 3, and/or may be implemented on a separate device or devices, in a distributed or consolidated manner. Alternatively, this functionality may be provided independent
10 of the GLMS, such as would necessarily be the case in systems not having a GLMS.

The example of Figure 3 is particular to GLMS in an OMA context. However, OMA implementations are not limited to the example of Figure 3. Furthermore, while OMA
15 is employed as the basis for the example of Figure 3, more generally, embodiments of the invention are applicable in any context in which DnD functionality (or DnD-like functionality) is being employed in networks providing a walkie-talkie-like function.

Also, the example of Figure 3 shows a network
20 consisting of three RANs 205, 206, 207, and a GLMS 210. More generally, any appropriate network capable of providing walkie-talkie-like connectivity can be employed. This may employ greater or fewer than three RANs, or may employ
25 different equipment altogether. Also, the example of Figure 3 shows four user devices 201, 202, 203, 204. The actual number of users in a given system will typically be a transient characteristic. A greater or fewer number of users may be present at any given instant.

10 The data store 220 contains DnD flags and access lists in respect of user devices having identifiers 011, 012, and 013. By way of example, the data for the user

device 201 having identifier 011 is indicated generally by 271. The device identifiers may be of any suitable form depending upon the system and network in which they are implemented. The access list, such as access list 274 for
5 user device 201, is provided for each user device (201, 202, 203) and specifies which other users are permitted to reach the respective user device (201, 202, or 203) over PoC. The modified GLMS 210 also stores for each user device a DnD flag, such as DnD flag 273 for user device 201, which may
10 either be a "YES" or a "NO". Other embodiments utilize a DnD flag 273 which is a logical boolean flag having two possible values; true and false. In further embodiments, the DnD flag 273 may be any form of data or data type which may have any number of possible values capable of
15 representing the presence or absence of a do-not-disturb state, or equivalently the presence or absence of a "free-to-disturb" state. Additionally, the modified GLMS 210 stores an ignoreDnD flag for each user device, such as ignoreDND flag 275 for user device 011 (which may have a
20 value of "YES" or "NO") and an ignore reason list 276 for each user device. The ignoreDnD flag 275 and the ignore reason list 276 together form an ignoreDnD attribute 277. In some embodiments the ignoreDnD flag 275 is a logical boolean flag having two possible values; true and false. In
25 other embodiments, the ignoreDnD flag 275 may be any form of data or data type which may have any number of possible values, capable of representing whether or not the DnD flag (or other information) is to be ignored (overriden). The ignore reason list is for storing one or more reasons which
30 a user may select to narrow down the circumstances in which the DnD flag is to be ignored. Examples of reasons are "urgent" and "emergency", but any suitable set of reasons may be allowed in a given system. Furthermore, in some embodiments, no ignore reasons list is employed at all.

52404-310

12

Rather ignoreDnD processing proceeds solely on the basis of the ignoreDnD flag. Each user device's DnD flag, ignoreDnD flag, ignore reason list, and access list helps facilitate management of talk requests directed to that user device.

5 In operation, the modified GLMS 210 manages groups and lists (e.g. contact and access lists) that are used for the modified PoC service. Specifically, the GLMS 210 provides list management operations to create, modify, retrieve and delete groups and lists, and to provide storage
10 therefor. Data store 220 provides storage for the modified GLMS 210 including access lists 274, DnD flags 271, ignoreDnD flags 275, and ignore reason lists 276 by user device. The DnD processing unit 230 performs modified DND processing, the ignoreDnD processing unit 250 performs
15 new ignoreDnD processing, and access list processing unit 240 performs access list processing.

As with the DnD flags of the standard OMA system, in the modified system depicted in Figure 3, a user is allowed to select the value of the ignoreDnD flag and the
20 ignore reason list stored in the GLMS 110 for the user's device. This can be done by enhancing the current method that is used to update the access list in GLMS.

In some embodiments the user can also query the current values of the ignoreDnD flag and ignore reasons
25 list.

In this embodiment the user is not permitted to query or set the value of the ignoreDnD flag or any value of the ignore reason list of any other user's device. In other embodiments, a class of special users such as administrators
30 may be given permissions to query and/or modify the value of the ignoreDnD flag and the values in the ignore reason list of other user's devices.

52404-310

13

RANs 205, 206, and 207 are for transmitting and receiving signals over channels between the network 200, and user devices. An example of a specific configuration is shown in Figure 3, in which at one moment in time user device 204 is in communication with RAN 205. RAN 206 is in communication with user devices 202 and 203. User device 201 is neither receiving nor transmitting to any particular RAN. Radio access network 207 is neither receiving nor transmitting any signals to any particular user device. It should be understood that the particular configuration of user devices and base transceiver stations represents a "snapshot" of a possible configuration of user devices in communication with the system 200, and in general at different times will have different numbers of user devices and different types of connections to different user devices depending upon what is happening within the network at that time.

In the specific call and talk request processing example shown in Figure 3, the user device 204 with ID 014 sends a group talk request as per the underlying PTT™ initiation protocol for a session with user devices 201, 202, and 203, all of which are part of the group. The talk request 209 is marked as "urgent" and is received and forwarded by RAN 205 to the modified system 200. The existing PTT™ initiation protocol can be enhanced to include a priority of each call request. Once the request is forwarded to the modified GLMS 210, ignoreDnD processing takes place in ignoreDnD processing unit 250, DnD processing takes place in DnD processing unit 230, and access list processing 240 takes place to determine if the talk request 209 is to be forwarded.

In the illustrated example, each of the user devices 201, 202, and 203, have an associated DnD flag 273 of "YES" in the data store 220 of the GLMS 110. If all of the user devices had ignoreDnD flag 275 values of "NO", then
5 none of the user devices 201, 202, and 203, would be forwarded the talk request 209.

In the example given in Figure 3, the ignoreDnD flag 275 of each of devices 201, 202, and 203 is set to "YES". User device 201 (ID 011) has one ignore reason
10 value, namely "EMERG" for emergency, associated with it. User device 202 (ID 012) has two ignore reason values, namely "URG" for urgent, and "EMERG", associated with it. User device 203 (ID 013) has one ignore reason value, namely
20 "URG", associated with it.

15 The user device requesting to talk has sent an "urgent" talk request, and hence only those user devices for which there is an ignore reason value of "urgent" will be forwarded the talk request. Any users whose DnD flag is not set will also be forwarded the talk request. As such only
20 user devices 202 and 203 (having IDs 012 and 013) are forwarded respective talk requests 219 and 229 via RAN 206.

Figure 4 shows the steps performed by a modified call service management server in a modified communications system according to an example embodiment to manage incoming
25 calls for a user device. A call processing function, for example a call processing server (CPS), manages the incoming calls with use of a new ignoreDnD flag, a new ignore reason list, and a stored DnD flag, and an access list for the user device.

30 At step 215, the network receives an incoming talk request specifying the user device as the target device which is being sent the talk request. In step 255 the

modified GLMS checks the ignoreDnD flag associated with the target device.

If the ignoreDnD flag is set to "NO" then DnD functionality is not overridden and processing of the talk request continues at step 235 wherein the DnD flag is tested, and if the DnD flag is "YES", the talk request is rejected in step 265 and if the tested DnD flag is "NO", processing of the talk request continues to the step of processing access lists 245.

10 If the ignoreDnD flag is set to "YES" then processing of the talk request continues at step 257 wherein the ignore reason list is compared to a criterion or condition of the talk request. If any of the ignore reason values matches a criterion or condition of the talk request, 15 processing of the talk request proceeds to the step of processing access lists 245, and the DnD functionality (step 235) is ignored and overridden. If none of the ignore reason values match the criteria of the talk request, the DnD functionality is not overridden, the DnD flag is tested 20 at step 235, and if the DnD flag is "YES", the talk request is rejected in step 265 and if the DnD flag is "NO", processing of the talk request continues to the next step of processing access lists 245.

In some embodiments, the step 235 along with 265 25 and 245 collectively are responsible for DnD functionality. In some embodiments, the steps 255 and 257 collectively are responsible for ignoreDnD attribute processing.

It should be noted that although the particular embodiments depicted have utilized an ignoreDnD flag, in 30 some embodiments, no ignoreDnD flag is used, and instead, the talk request processing proceeds directly from receiving the talk request at step 215 to comparing the ignore reason

52404-310

16

list of step 257. In such an embodiment, DnD functionality is ignored only if any one of the ignore reason values matches a current state of the talk request. If a user wishes always to ignore DnD functionality, the ignore reason list is set to contain every possible criteria of a talk request, and if the user wanted not to be disturbed by any call, the list would contain no possible status for any talk request.

Referring to Figure 5A, a datagram depicting an example of a modified DnD attribute 30 of a modified OMA system according to a preferred embodiment of the invention will now be described.

In this particular preferred embodiment the ignoreDnD flag 306 and ignore reason list 308 are incorporated into an ignoreDnD attribute 305 of a modified DnD attribute 300. The standard DnD flag 302 forms part of the DnD attribute 300 and its value is a 1-bit boolean 302. The ignoreDnD attribute 305 includes an ignoreDnD flag 306 which has as its value a 1-bit boolean, and an ignore reason list 308, which lists up to four possible reasons why the DnD should be ignored, each reason having as its value a 2-bit value. Each of these variables may be of longer or shorter bit-length depending upon the specific implementation. In some embodiments, there may be more than four ignore reasons and hence the bit-length would be longer than 2-bits. The example of Figure 5A shows headings "DnD attribute" etc. In an actual data store, these headings do not need to be stored as the location of contents is known.

In other embodiments, the DnD flag is always ignored if the incoming call is an emergency call, and hence the ignoreDnD flag would not be required, as long as the ignore reasons were always processed. Conversely, in such

52404-310

17

an embodiment, an ignoreDnD flag could be set to "YES" and no reason provided as long as the ignoreDnD is only set to "YES" for emergency calls, and if the method step 257 of determining if any ignore reasons match a criterion of the request is always skipped.

In some embodiments, any one 2-bit encoded reason may represent a state that the talk request must meet. In the particular preferred embodiment illustrated in Figure 5A, each of the 2-bit encoded reasons may be any one selected from the group of, 00 (Emergency), 01 (Urgent), reserve1, 11 reserve2. In this embodiment, the GLMS can be updated by a user at any time as part of a user's change of profile. These reasons are not encoded in the PTT™ request itself, only the PTT™ call type (for example an emergency call or an urgent call) is encoded in the PTT™ request. The existing protocol can be enhanced to include the call type in the call request and ignore DnD reason in the user change request.

Referring to Figure 5B, datagrams depicting a standard DnD flag 401 which has a single 1-bit boolean value 402, and a new ignoreDnD attribute 405 according to a second preferred embodiment of the invention will now be described.

In this second preferred embodiment an ignoreDnD flag 406 and an ignore reason list 408 are incorporated into a new ignoreDnD attribute 405. The standard DnD flag 401 is separate from the ignoreDnD attribute 405 and its value is a 1-bit boolean 402. The ignoreDnD flag has as its value a 1-bit boolean 406. Each entry in the ignore reason list 408, which lists possible reasons why the DnD should be ignored, is a 2-bit value 408.

In some embodiments, any one 2-bit encoded reason may represent a state or criterion that the talk request must meet. For example, the 2-bit reason could represent a 2-bit state flag accompanying the talk request or a 2-bit state flag rendered in response to receipt of the talk request to reflect the state of the talk request. In the particular preferred embodiment illustrated in Figure 5A, each of the 2-bit encoded reasons may be any one selected from the group of, 00 (Emergency), 01 (Urgent), 10 reserve, and 11 reserve, and any talk request may, but not necessarily, be characterized as being an emergency request (00), an urgent request (01), or neither.

Referring now to Figure 6, a modified user device in the form of a wireless mobile device generally indicated by reference number 500 according to a specific embodiment of the invention, will now be discussed.

In this embodiment, to provide a user of the user device the ability to query and set the new ignoreDnD and ignore reason values, new functionality is incorporated in the user device 500 itself. In this embodiment a user would make a selection using any suitable form of user interface (UI) which could be, for example, but not limited to, keys 515, touch screen capability of a user interface (UI) display screen 510, or a voice command responsive interface, to select, query or modify a value for one of the ignoreDnD flag, or ignore reason values. In response to the user selecting this function from the interface modified by new functionality for request data input editor 530, the user interface displays choices of which of the new variables to change and provide functionality for editing them in accordance with the possible range of values each may have. Once the user has finished editing the query request or modify setting request, the new request generator 520 is

adapted to send a request to query and/or modify settings of the new variables in the network, for example in the GLMS. In a preferred embodiment, the request generator, and the request data input/editor are implemented as

5 additions/modifications to software running on the device 500. Alternatively separate hardware and/or software and/or firmware may be used. The existing protocol can be enhanced for users to change their DnD setting profiles.

Although the specific embodiments presented herein

10 are in respect of PoC versions of PTT™, any voice communications system which uses do-not-disturb functionality could be adapted in accordance with the invention to provide functionality to ignore the do-not-disturb state in certain circumstances.

15 It should be understood that although the specific embodiments presented herein are in accordance with an adapted OMA system and standard, that other communications systems and standards for example but not limited to GSM, TDMA, and CDMA, could be adapted according to the invention

20 to provide functionality to ignore or bypass do-not-disturb functionality in certain circumstances or for certain talk requests.

In other embodiments, the method and system are adapted to provide peripheral support for a wired device

25 which is capable of participating in wireless sessions with various talkgroups, and which has an associated ignoreDnD attribute and services provided therefor. Such a wired device participates via a network interworking function, so that although the wired device is not within the wireless

30 network, it appears as though it is, and participates in a group call like a wireless device. Hence, according to these embodiments, the wired user device is provided with

services to enable query and modifications to the ignoreDnD attribute so that DnD may be overridden. For these embodiments, talk request processing along with do-not-disturb functionality occurs in a manner analogous to the
5 manner described hereinabove.

Numerous modifications and variations of the present invention are possible in light of the above teachings. It is therefore to be understood that within the scope of the appended claims, the invention may be practiced
10 otherwise than as specifically described herein.

51085-57

- 21 -

CLAIMS:

1. A method of talk request processing in a do-not-disturb (DnD) capable communication system, the method comprising:

5 receiving a talk request for a requested walkie-talkie-like communications session involving a user device capable of walkie-talkie-like functionality; and

10 selectively overriding DnD functionality for the requested walkie-talkie-like communications session based on an ignoreDnD attribute for the user device applied to a criterion or condition of the talk request other than a user device identifier;

wherein the user device is a wireless device;

wherein the ignoreDnD attribute comprises an ignoreDnD flag, and wherein selectively overriding said DnD functionality is a function of the ignoreDnD flag;

15 wherein the ignoreDnD attribute comprises at least one predetermined ignore reason value, and wherein selectively overriding said DnD functionality is a function of the at least one predetermined ignore reason value; and

20 wherein the talk request has a current state associated therewith, the current state being one of a number of possible current states for the talk request, wherein each predetermined ignore reason value represents a corresponding possible current state for the talk request, the method further comprising:

25 evaluating the ignoreDnD flag to determine whether further ignoreDnD processing is to be performed, and if evaluating the ignoreDnD flag determines that further ignoreDnD processing is to be performed:

a) determining the current state of the talk request; and

51085-57

- 22 -

b) for each of the at least one predetermined ignore reason value:

comparing the corresponding possible current state with the current state of the talk request;

5 wherein said DnD functionality is overridden if any corresponding possible current state matches the current state of the talk request.

2. The method of claim 1 wherein each possible current state of the number of possible current states for the talk request is a priority state of the talk request at the time it was received.

10 3. The method of claim 1 or claim 2 wherein the ignoreDnD flag comprises a boolean value, and wherein:

evaluating the ignoreDnD flag comprises identifying the boolean values and comparing the boolean value to a predetermined boolean value indicative of whether further processing is to be performed.

15 4. The method of any one of claims 1 to 3 wherein the number of possible current states for the talk request comprise at least one of "urgent", and "emergency".

5. A non-transitory computer readable medium having computer executable instructions stored thereon for execution on a processor so as to
20 implement the method of any one of claims 1 to 4.

6. A talk request processing system in a do-not-disturb (DnD) capable communication system, the talk request processing system comprising:

25 a receiver adapted to receive a talk request for a requested walkie-talkie-like communications session involving a user device capable of walkie-talkie-like functionality; and

a network call processing function adapted to selectively override DnD functionality for the requested walkie-talkie-like communications session

51085-57

- 23 -

based on an ignoreDnD attribute for the user device applied to a criterion or condition of the talk request other than a user device identifier;

wherein the user device is a wireless device;

wherein the network call processing function comprises:

5 a data store adapted to store the ignoreDnD attribute for the user device;

a DnD processing function adapted to provide DnD functionality; and

an ignoreDnD processing function adapted to override DnD functionality for the requested walkie-talkie-like communications session as a
10 function of the ignoreDnD attribute stored in the data store for the user device;

wherein the ignoreDnD attribute comprises an ignoreDnD flag and at least one predetermined ignore reason value, and wherein the ignoreDnD processing function selectively overrides said DnD functionality as a function of the ignoreDnD flag and the at least one predetermined ignore reason value; and

15 wherein the talk request has a current state associated therewith, the current state being one of a number of possible current states for the talk request, wherein each predetermined ignore reason value represents a corresponding possible current state for the talk request, wherein the ignoreDnD processing function:

20 retrieves the ignoreDnD attribute from the data store; and

evaluates the ignoreDnD flag to determine whether further ignoreDnD processing is to be performed, and if evaluating the ignoreDnD flag determines that further ignoreDnD processing is to be performed:

a) determines the current state of the talk request; and

25 b) for each of the at least one predetermined ignore reason value:

51085-57

- 24 -

compares the corresponding possible current state with the current state of the talk request;

5 wherein said DnD functionality is overridden if any corresponding possible current state matches the current state of the talk request.

7. The talk request processing system of claim 6 wherein each possible current state of the number of possible current states for the talk request is a priority state of the talk request at the time it was received.

8. The talk request processing system of claim 6 or claim 7 wherein the
10 ignoreDnD flag comprises a boolean value, and wherein:

evaluating the ignoreDnD flag comprises identifying the boolean and comparing the boolean value to a predetermined boolean value indicative of whether further processing is to be performed.

9. The talk request processing system of any one of claims 6 to 8
15 wherein the number of possible current states for the talk request comprise at least one of "urgent", and "emergency".

10. A user device capable of walkie-talkie-like functionality for a do-not-disturb (DnD) capable communication system, the user device comprising:

20 a user interface adapted to accept an external input to modify an ignoreDnD attribute for the user device, the ignoreDnD attribute concerning a criterion or condition of a talk request other than a user device identifier;

an ignoreDnD attribute request generator responsive to said external input adapted to send a network call processing server a request to update the ignoreDnD attribute of the user device; and

25 a user interface display for displaying modifications for the ignoreDnD attribute indicated by the external input;

wherein the user device is a wireless device; and

51085-57

- 25 -

wherein the user interface is further adapted to accept an external query input to retrieve the ignoreDnD attribute for the user device, the ignore DnD attribute request generator being further adapted to:

(a) send a network call processing server a query to retrieve the
5 ignoreDnD attribute of the user device; and

b) receive a response to said query from the network;

wherein the user interface display is adapted to, in response to the ignoreDnD attribute request generator receiving the response to said query, display the ignoreDnD attribute for the user device.

1/6

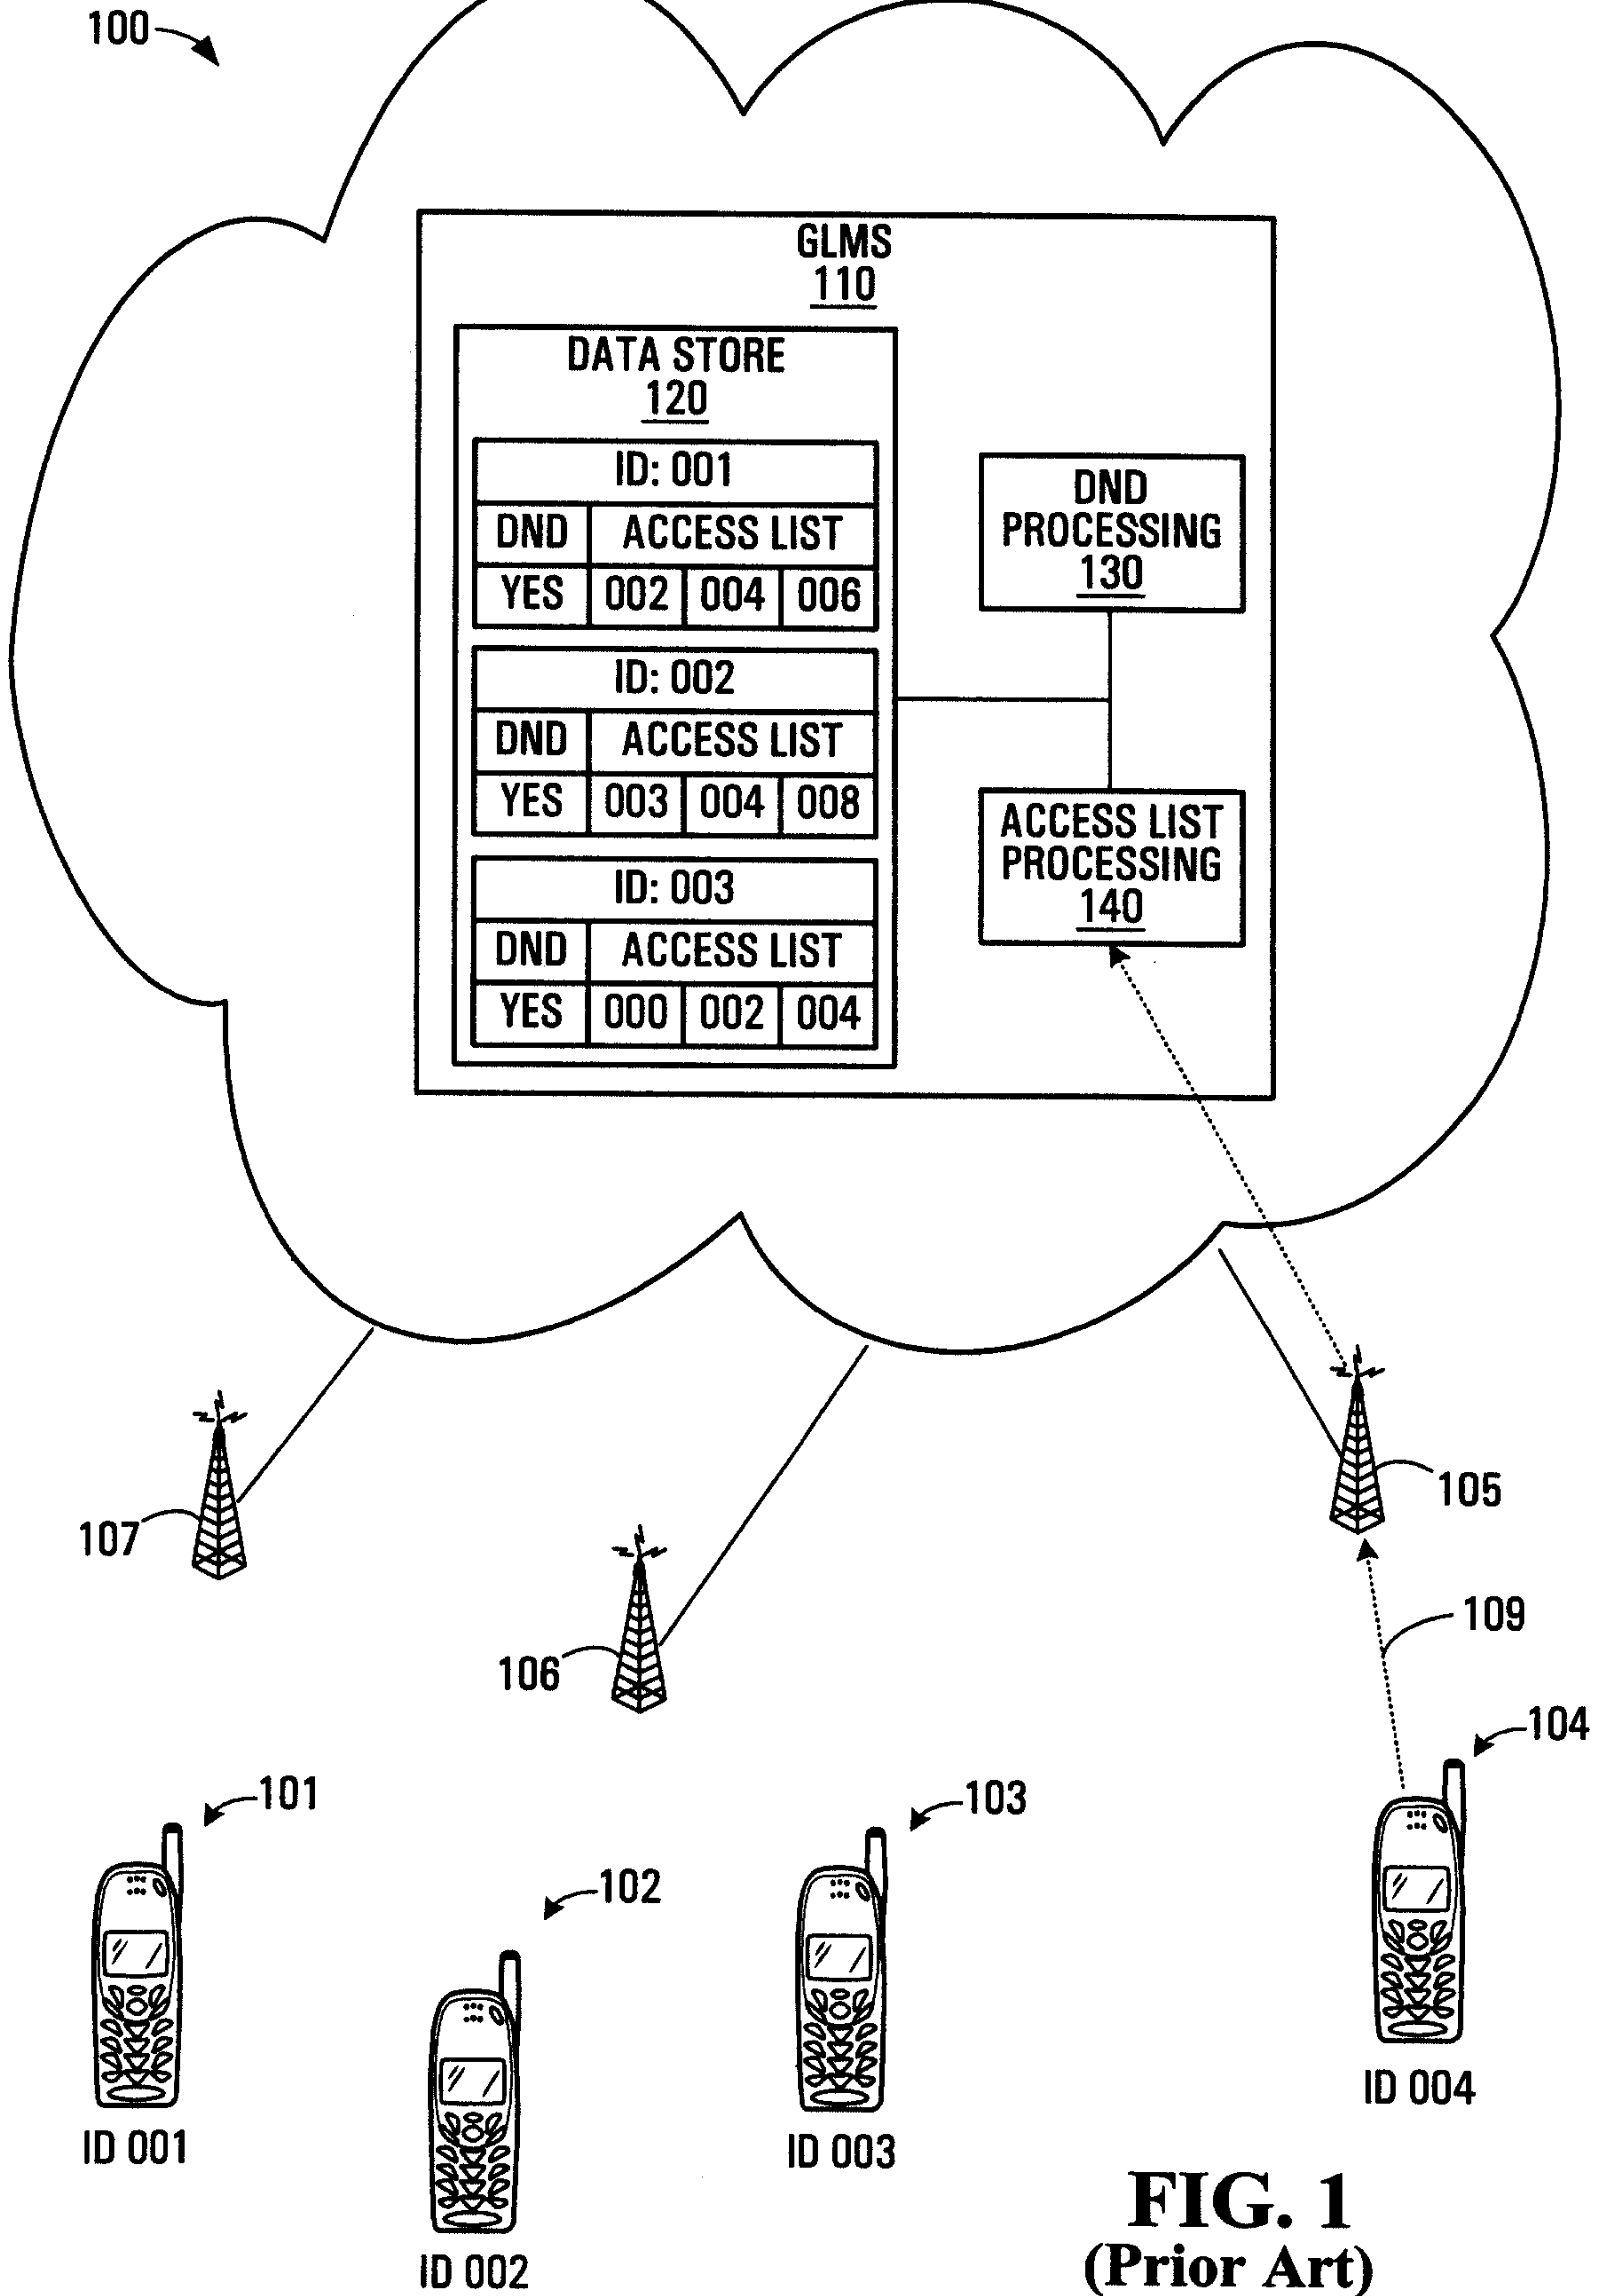


FIG. 1
(Prior Art)

2/6


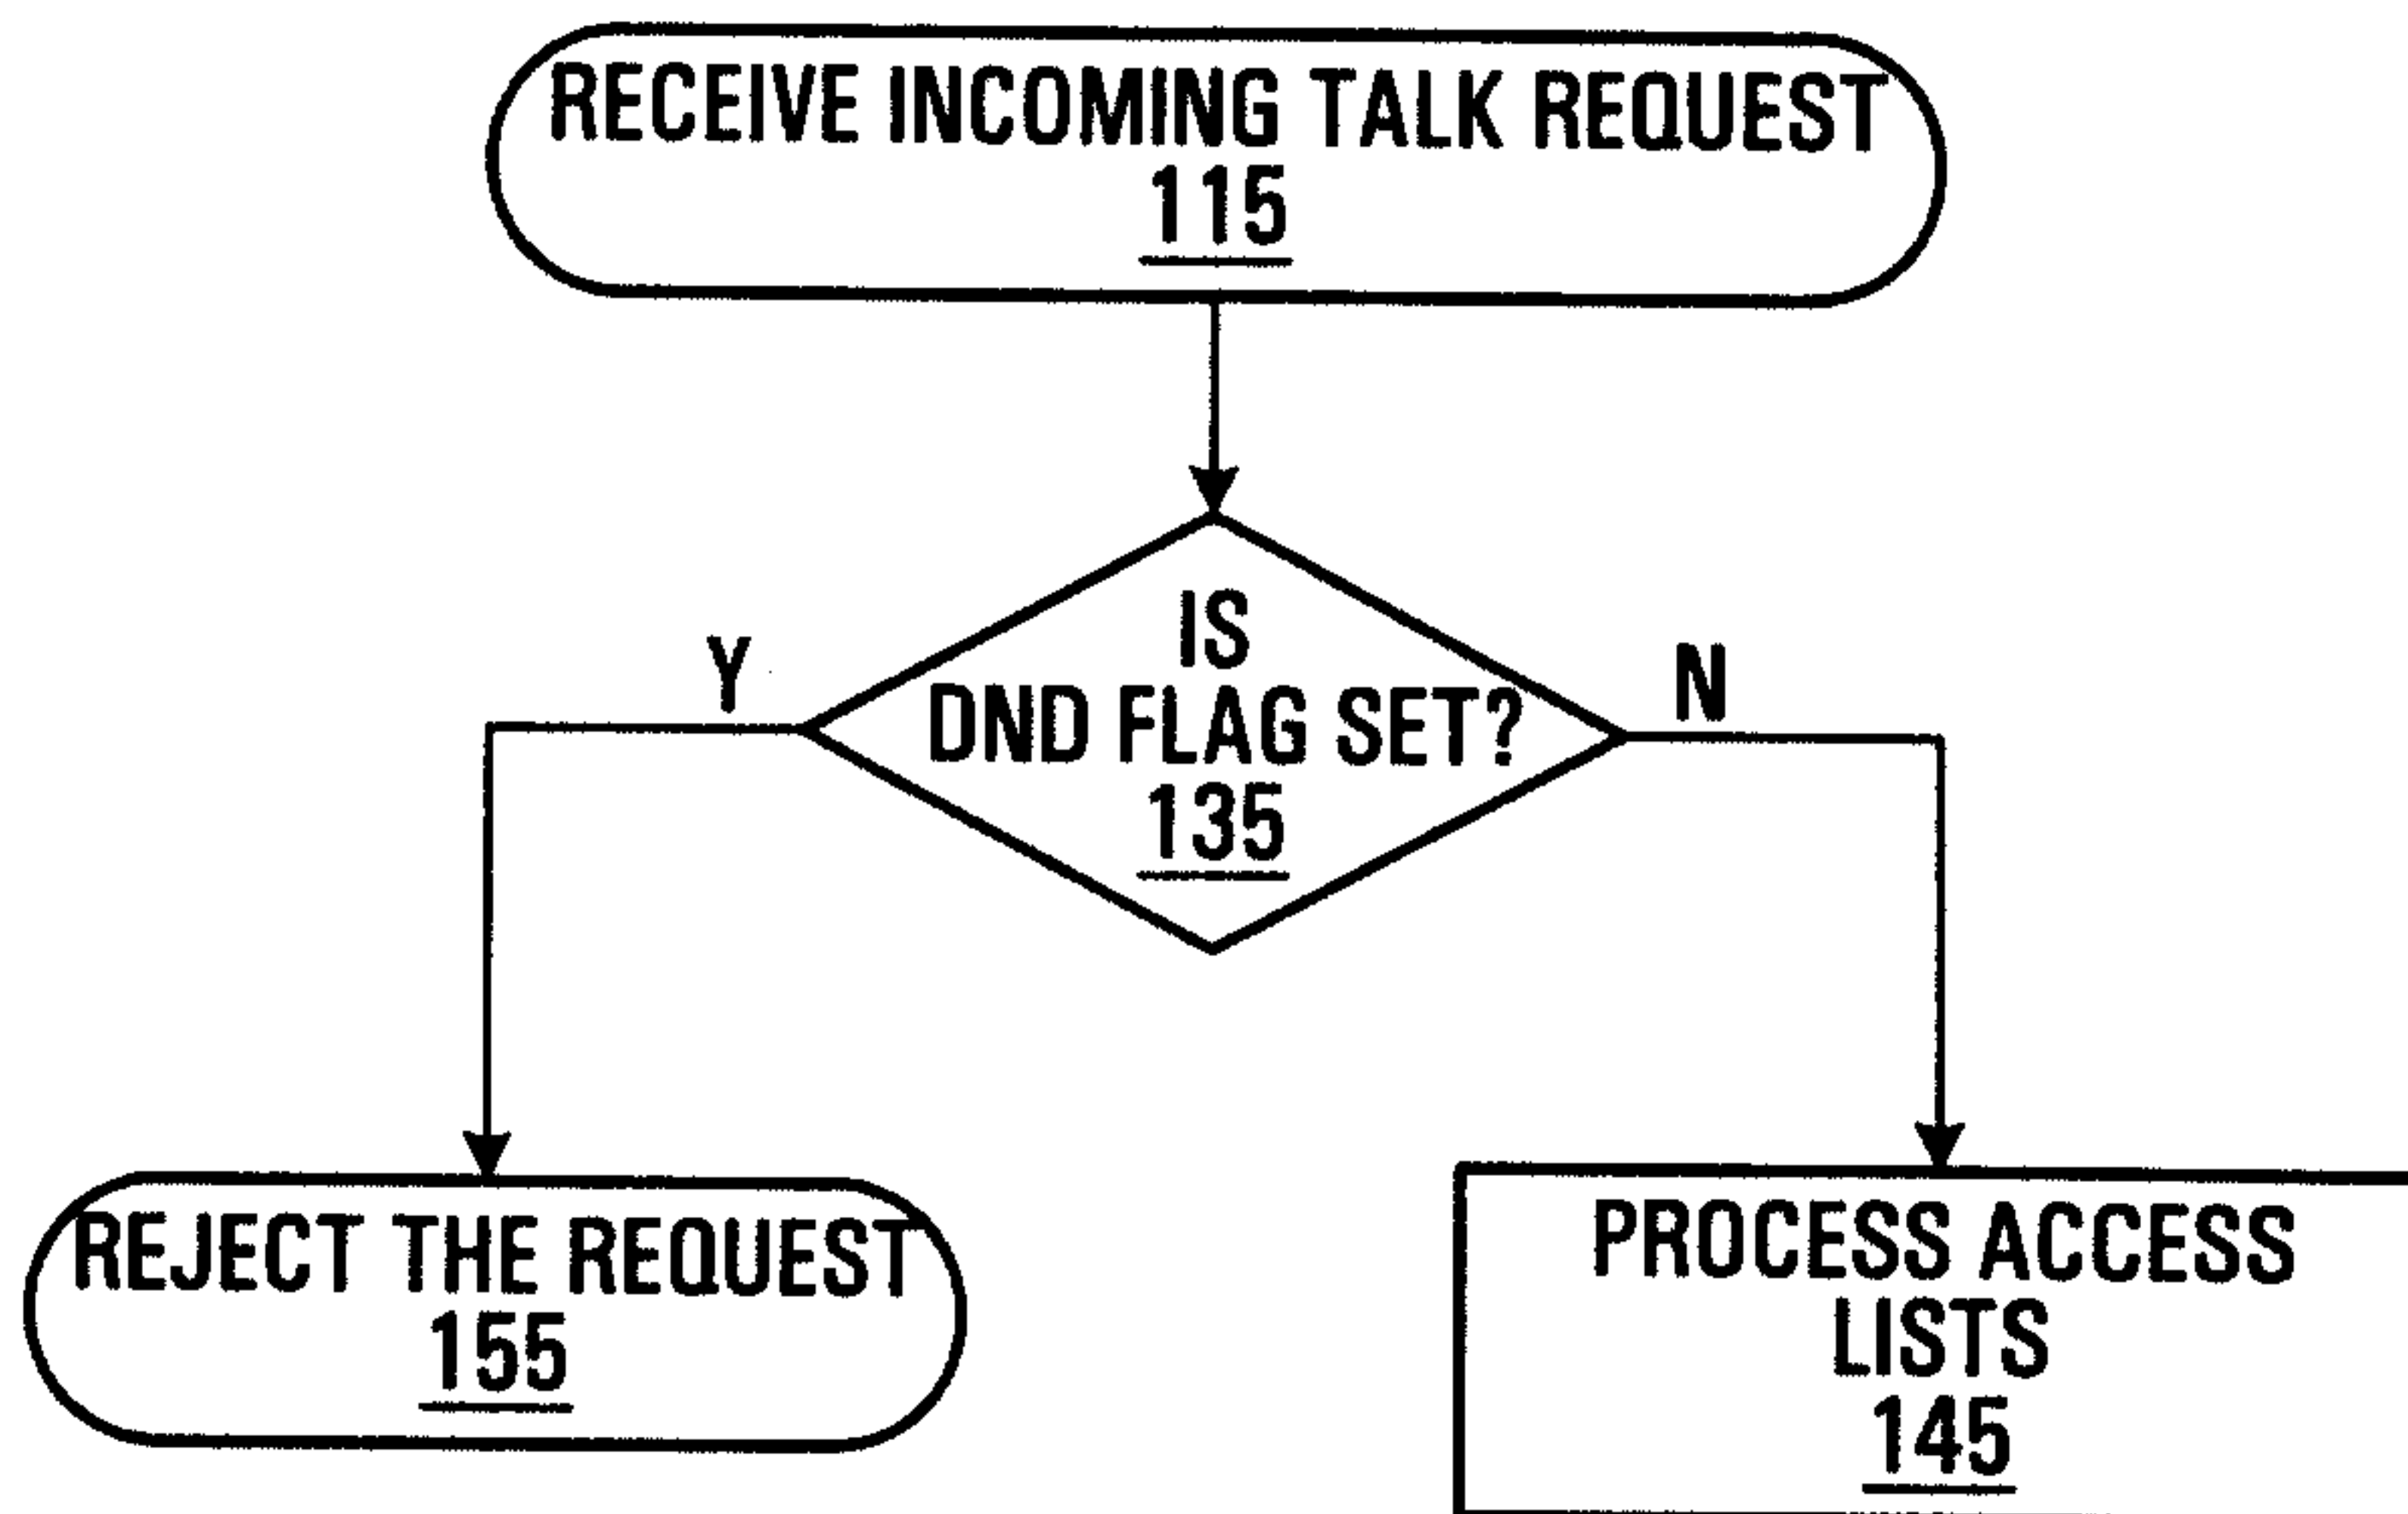


FIG. 2
(PRIOR ART)

FIG. 3

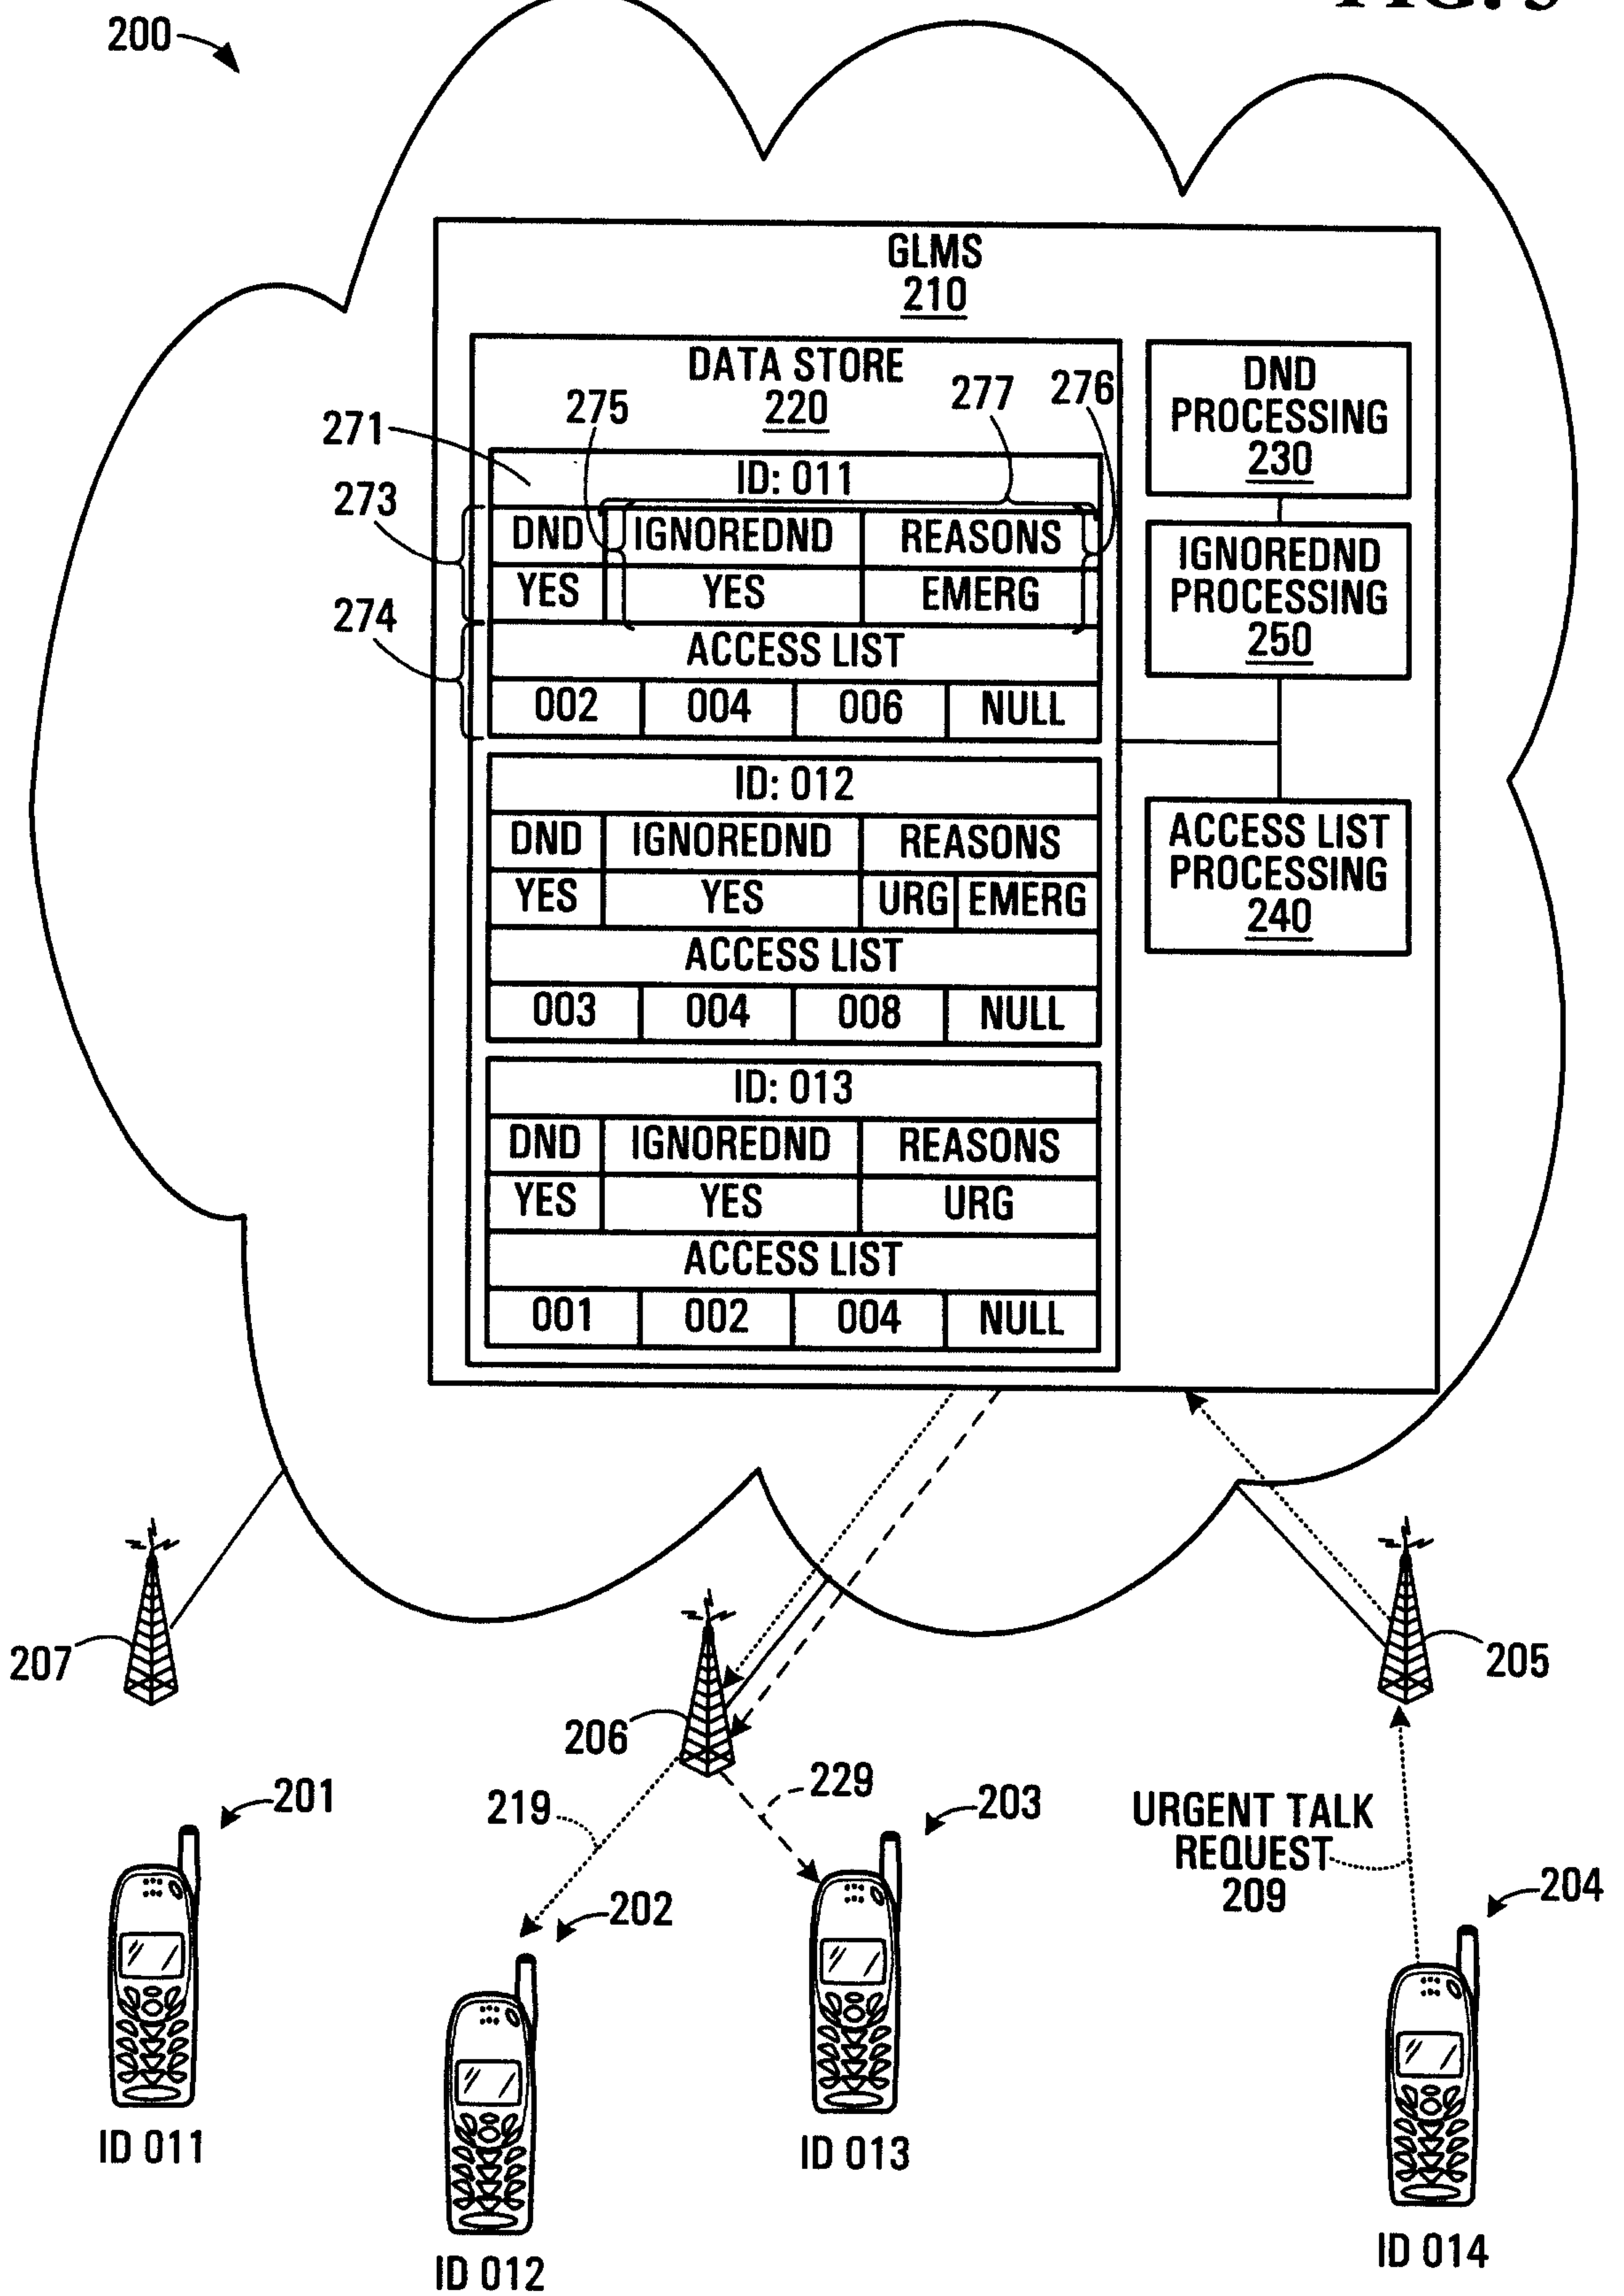

4/6

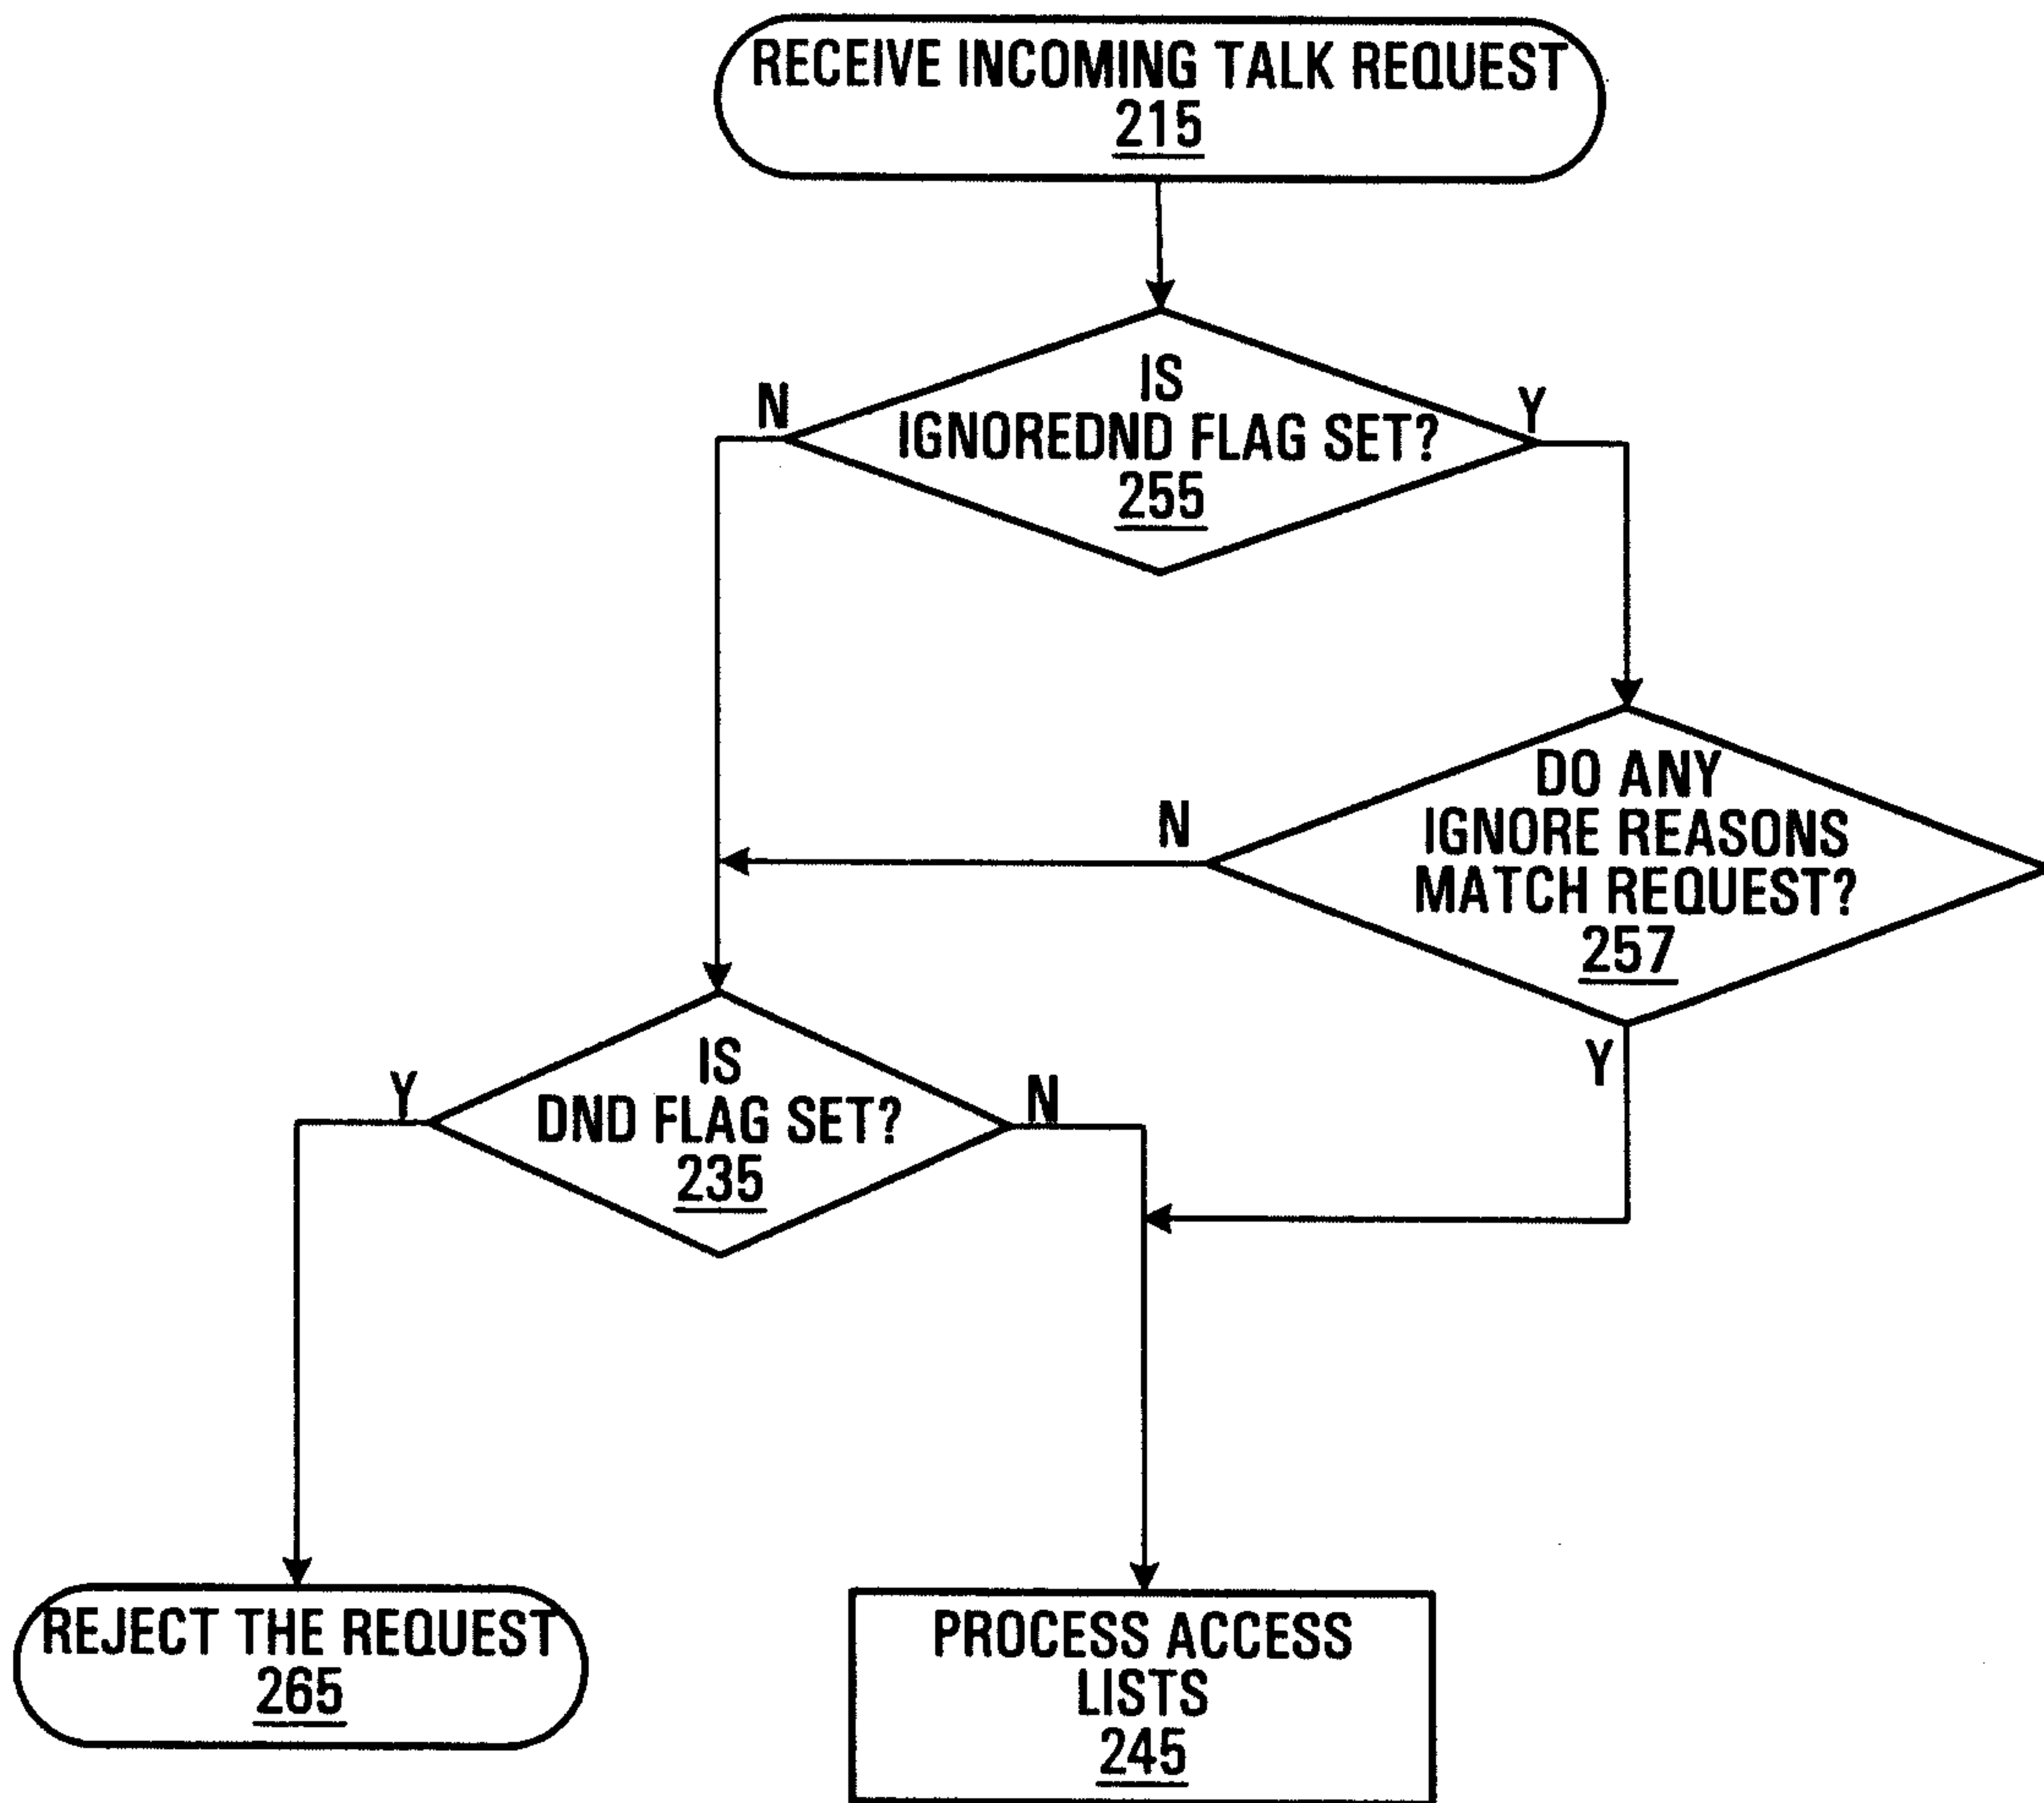


FIG. 4

5/6

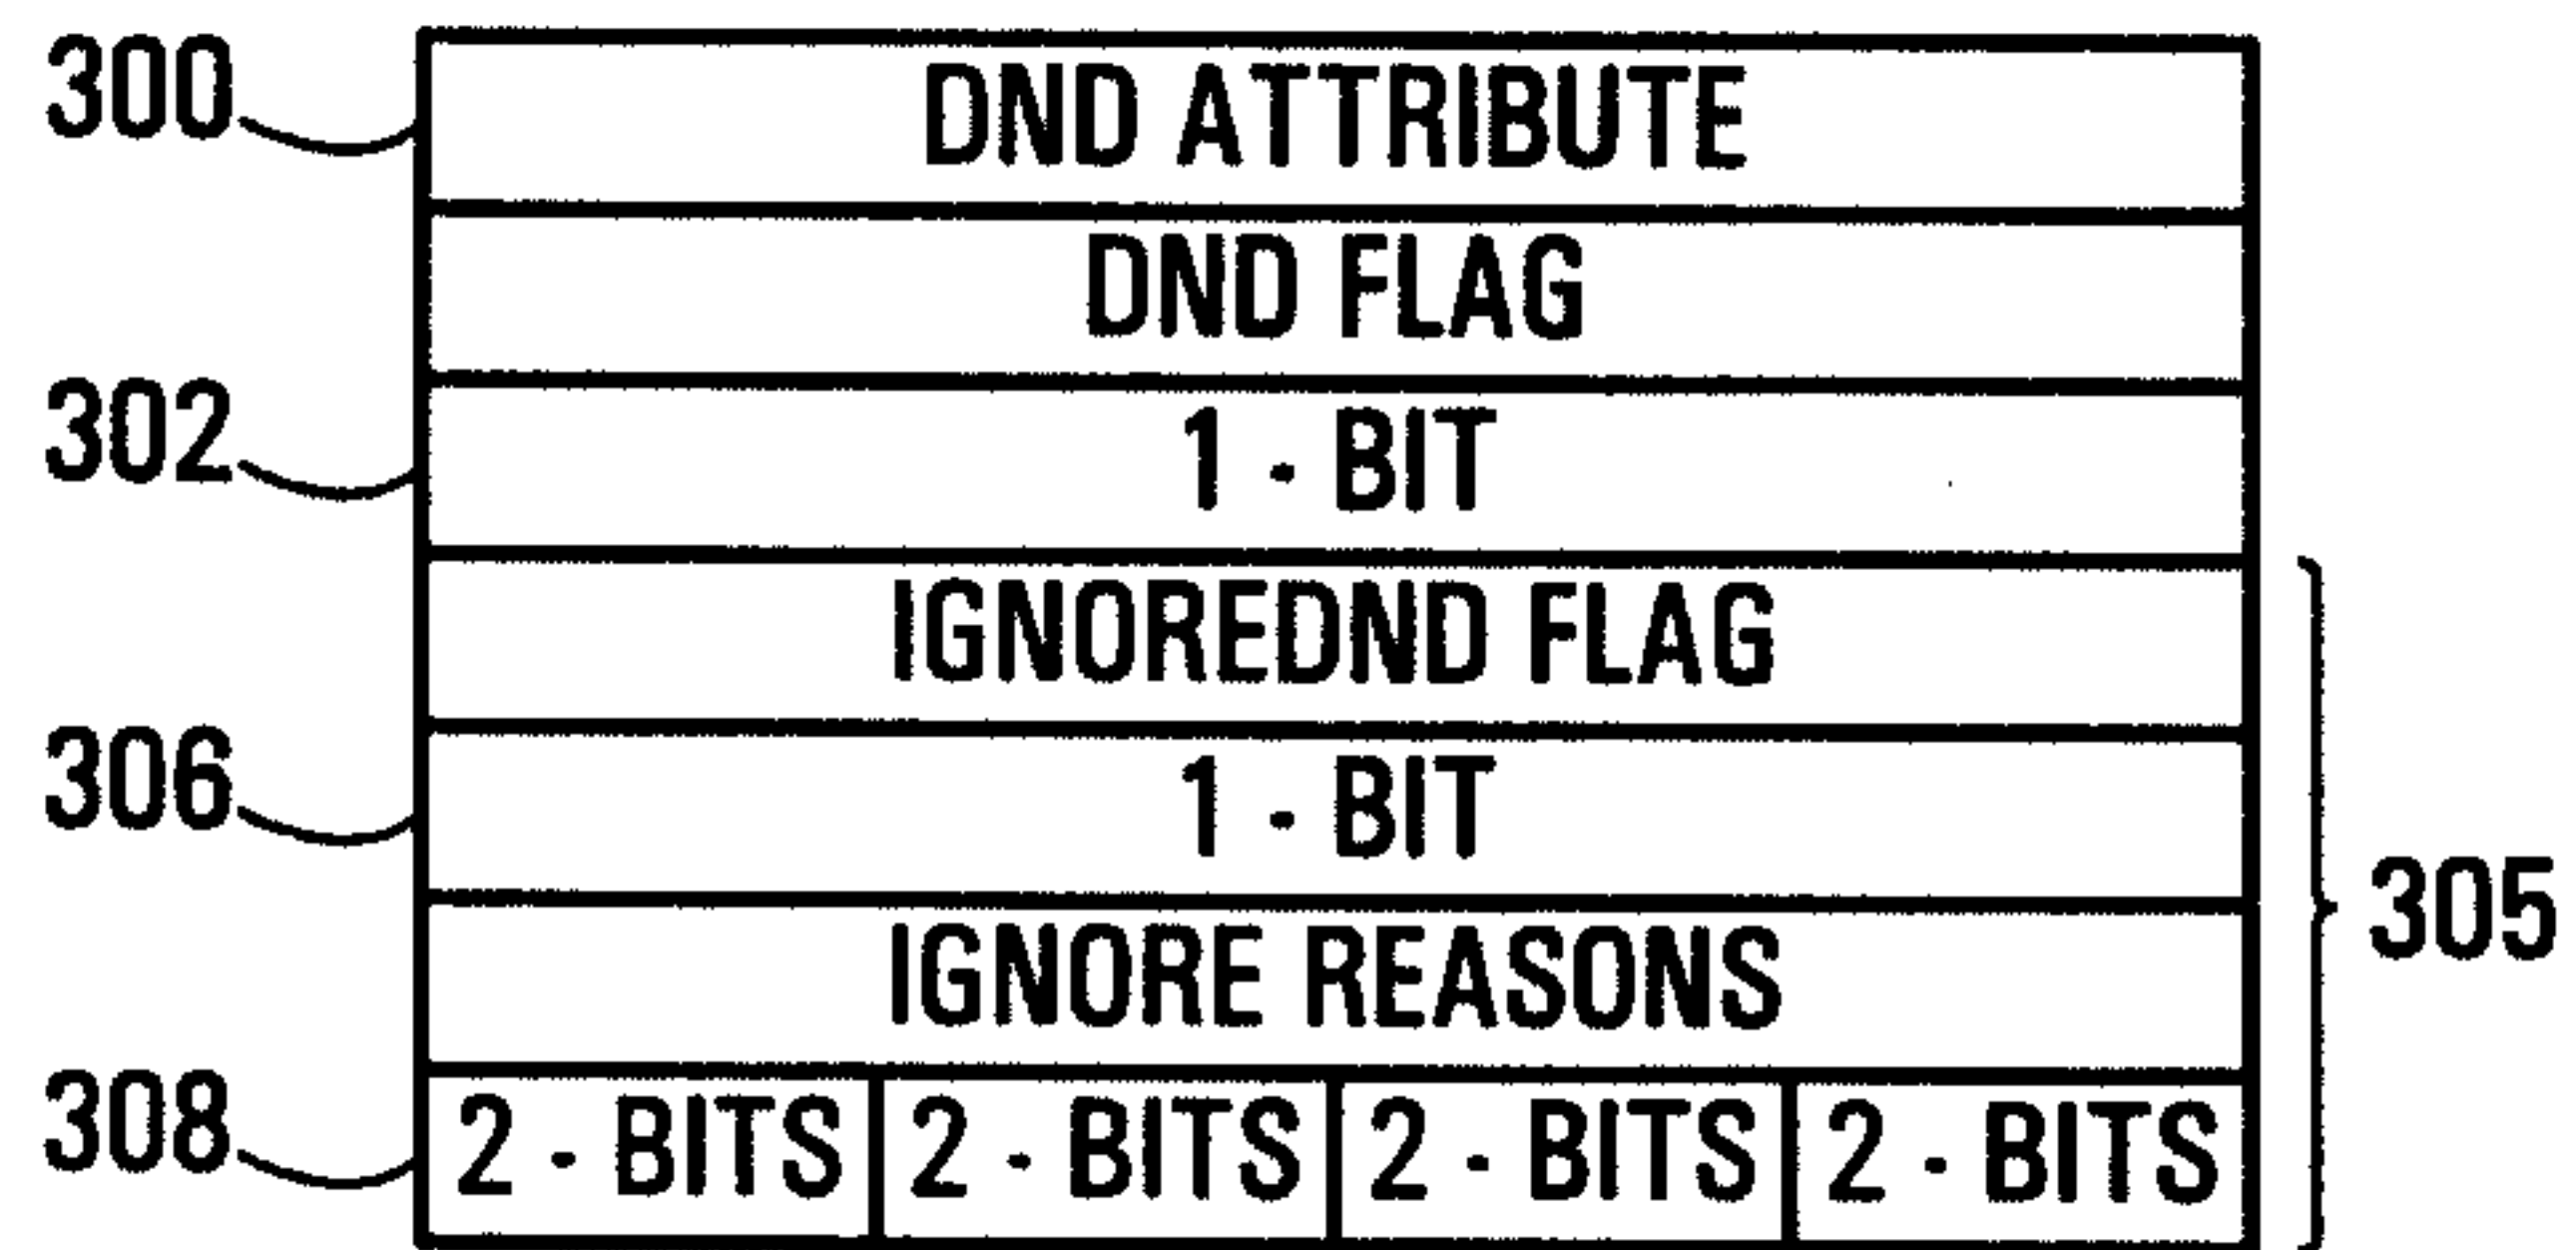


FIG. 5A

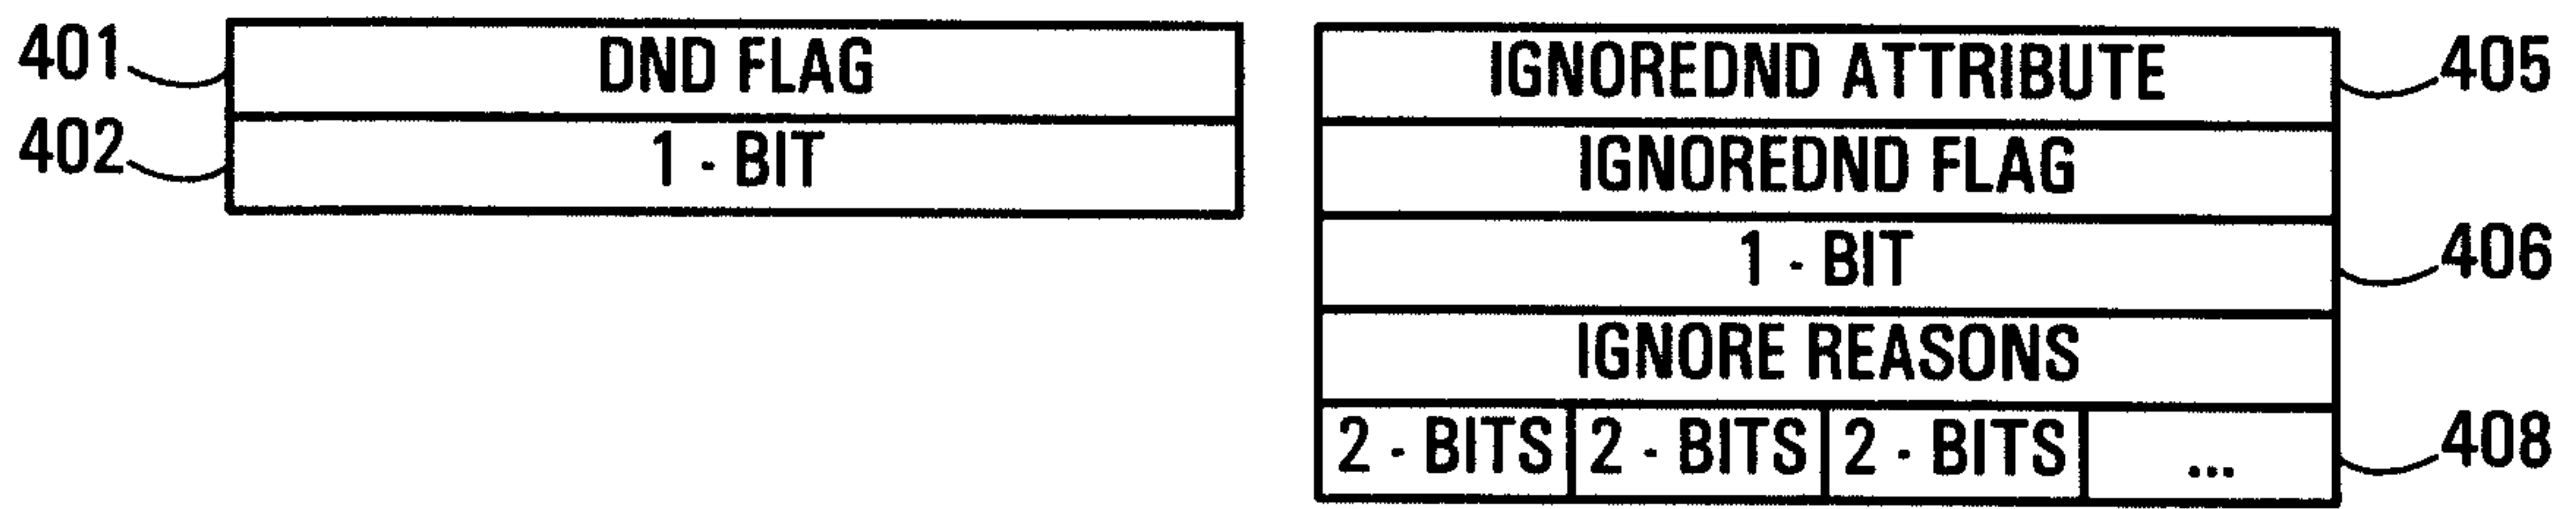


FIG. 5B

6/6

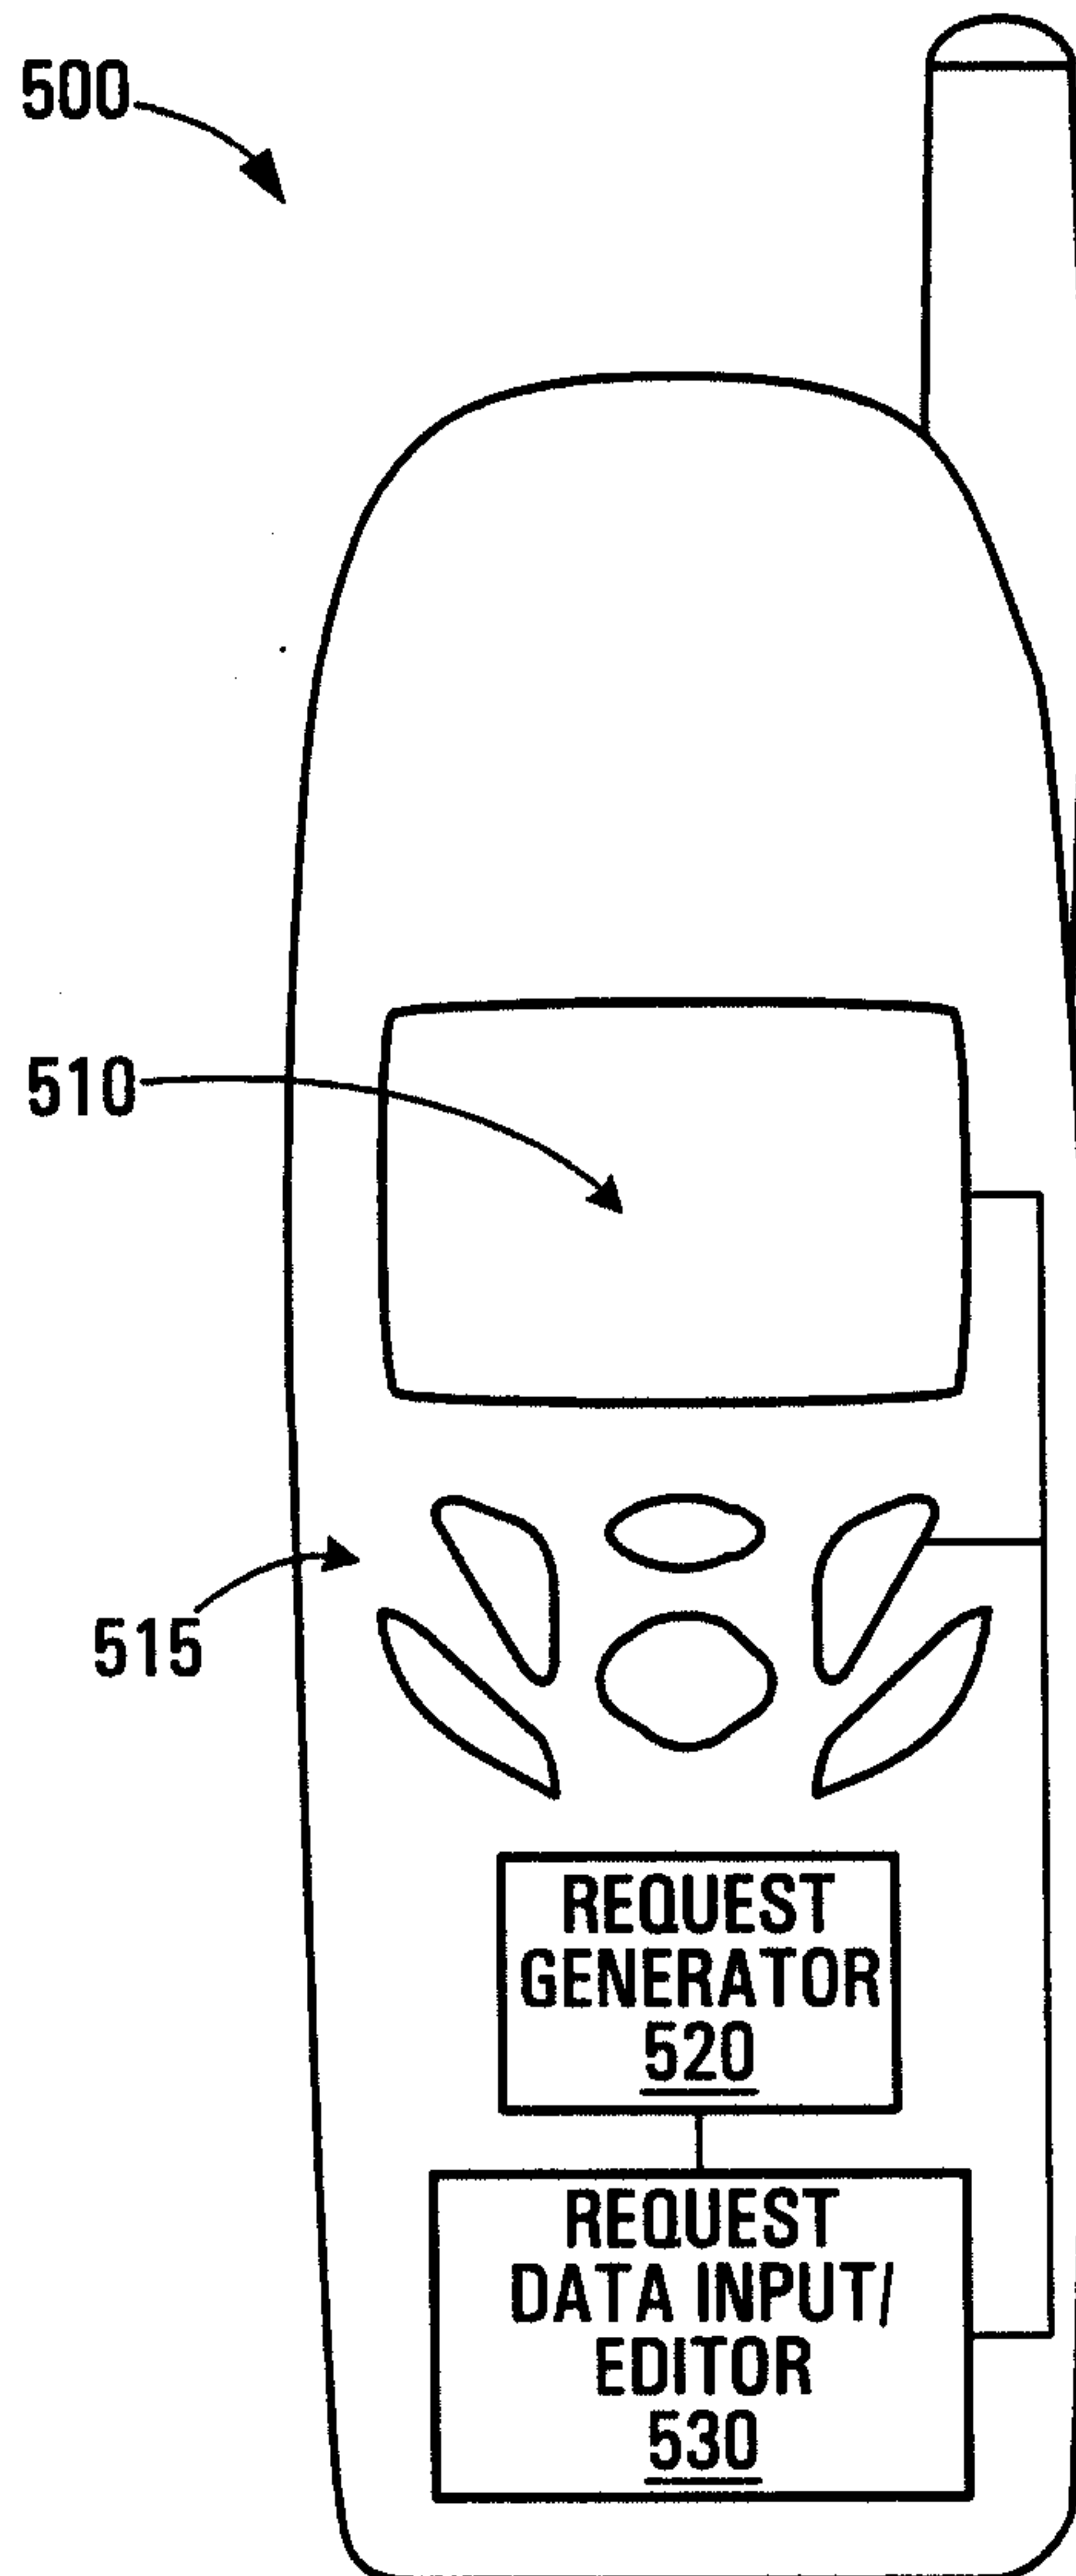


FIG. 6

200

