

(19)



(11)

EP 2 545 953 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
30.08.2017 Bulletin 2017/35

(51) Int Cl.:
A61M 25/00 ^(2006.01) **A61M 25/10** ^(2013.01)
A61M 25/01 ^(2006.01)

(21) Application number: **12175662.1**

(22) Date of filing: **10.07.2012**

(54) **Catheter**

Katheter

Cathéter

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **13.07.2011 JP 2011154444**

(43) Date of publication of application:
16.01.2013 Bulletin 2013/03

(73) Proprietor: **ASAHI INTECC CO., LTD.**
Nagoya-shi,
Aichi 463-0024 (JP)

(72) Inventors:
• **Watanabe, Nobuyoshi**
Nagoya-shi, Aichi 463-0024 (JP)
• **Ishikawa, Masatomo**
Nagoya-shi, Aichi 463-0024 (JP)

(74) Representative: **Winter, Brandl, Fürniss, Hübner, Röss, Kaiser, Polte - Partnerschaft mbB**
Patent- und Rechtsanwaltskanzlei
Alois-Steinecker-Strasse 22
85354 Freising (DE)

(56) References cited:
WO-A1-01/70323 JP-A- 2003 164 528
US-A- 5 772 641

EP 2 545 953 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates to a catheter.

2. Description of the Related Art

[0002] A catheter is a medical device that is inserted into a body cavity such as an abdominal cavity or into a lumen such as a ureter or a blood vessel to inject a medicine into a lesion or to drain a bodily fluid.

[0003] A balloon catheter is a type of catheter used for percutaneous transluminal coronary angioplasty. Guided by a guidewire that has been inserted into a blood vessel, a balloon catheter can reach a stenosed or obstructed lesion and can restore normal blood flow by dilating the lesion with a balloon.

[0004] In general, a balloon catheter includes a proximal shaft that is positioned near an operator, a distal shaft that is joined to the proximal shaft and positioned near a lesion, an inflatable and deflatable balloon that is formed in a distal end portion of the distal shaft, and an inner shaft that is disposed in the inner cavity of the distal shaft and extends through the inner cavity of the balloon (see, for example, Japanese Unexamined Patent Application Publication No. 2003-164528).

[0005] A space is formed between the distal shaft and the inner shaft, which is disposed in the inner cavity of the distal shaft. The inner cavity of the proximal shaft, the inner cavity of distal shaft, and the inner cavity of the balloon are connected to with each other. Therefore, a liquid, such as a contrast medium or a physiological saline, can be supplied to the inner cavity of the balloon through the inner cavities of the proximal shaft and the distal shaft, and thereby the balloon can be inflated and deflated at will.

[0006] The inner shaft has another inner cavity that is isolated from the inner cavities of the proximal shaft, the distal shaft, and the balloon. The catheter can be guided to a lesion by inserting a guidewire through the inner cavity of the inner shaft.

[0007] Referring to Figs. 4A to 4C, the structure of an existing balloon catheter described in Japanese Unexamined Patent Application Publication No. 2003-164528 will be described below.

[0008] Fig. 4A is a partially enlarged plan view of the existing balloon catheter, illustrating a joint portion between a core wire and a proximal shaft, Fig. 4B is a partially enlarged side view of the joint portion of Fig. 4A, and Fig. 4C is a partially enlarged side view of the joint portion of Fig. 4B when a bending force is applied to the joint portion. In Figs. 4A to 4C, the left side is the distal side, and the right side is the proximal side.

[0009] As illustrated in Figs. 4A and 4B, a distal end portion 421 of a proximal shaft 420 is fitted into the inner

cavity of a proximal end portion of a distal shaft 430. A core wire 440 extends through the inner cavities of the distal shaft 430 and the distal end portion 421 of the proximal shaft 420. The proximal end of the core wire 440 is joined to the inner surface of the distal end portion 421 of the proximal shaft 420 through joining means 450 such as a weld.

[0010] It is described in Japanese Unexamined Patent Application Publication No. 2003-164528 that, in the existing balloon catheter 400, the distal end portion 421 of the proximal shaft 420, which is fitted into the inner cavity of the proximal end portion of the distal shaft 430, is inclined toward the distal end, and thereby change in the rigidity of the balloon catheter at the boundary between the proximal shaft 420 and the distal shaft 430 can be reduced.

[0011] However, the balloon catheter 400 described in Japanese Unexamined Patent Application Publication No. 2003-164528 has a problem in that, when the balloon catheter is bent and a bending force is applied to the joint portion as illustrated in Fig. 4C, the force is concentrated at a part of the core wire 440 that is in contact with an end 421a of the distal end portion 421 of the proximal shaft 420, and thereby the core wire 440 is likely to become plastically deformed.

SUMMARY OF THE INVENTION

[0012] Therefore, the object of the present invention is to provide a catheter having improved bending characteristics.

[0013] This object can be achieved by a catheter according to claim 1. Preferred embodiments thereof are subject matter of dependent claims.

[0014] A catheter according to the present invention may include a proximal shaft, a distal shaft including a proximal end portion having an inner cavity into which a distal end portion of the proximal shaft is fitted, and a core wire extending through the inner cavity of the distal shaft. The core wire has a proximal end portion that is joined to a cutout portion formed in the distal end portion of the proximal shaft. Joining means is formed along a joint surface between the proximal end portion of the core wire and the cutout portion. The joining means is divided into first joining means and second joining means along a longitudinal axis of the catheter, a length of one of the first joining means and the second joining means is larger than a length of the other of the first joining means and the second joining means. The joining means forms a joint portion with which the proximal shaft is joined to the core wire. The different lengths of the first and second joining means form an asymmetrical joint portion about a longitudinal axis of the proximal shaft, with which the proximal shaft is joined to the core wire, and a non-joint portion with which the proximal shaft is not joined to the core wire. Owing to the asymmetrical joint portion or the different lengths of the first and the second joining means a bending force applied to the joining means when the

catheter is bent can be effectively dispersed in order to avoid plastic deformation of the core wire.

[0015] In the catheter according to the present invention, it is preferable that the joint surface with which the cutout portion is joined to the proximal end portion of the core wire includes first to third linear portions that are arranged in an angular U-shape in plan view, the first and second linear portions extending parallel to the longitudinal axis so as to face each other, the third linear portion extending perpendicular to the longitudinal axis and connecting the first and second linear portions to each other; that the first joining means join the first linear portion to the core wire; that the second joining means join the second linear portion to the core wire; and that a length of the first joining means and a length of the second joining means be different from each other. In the present specification, in the case where third joining means that joins the third linear portion to the core wire is provided, the third joining means is divided into two portions along the longitudinal axis of the catheter and these portions are respectively incorporated into the first joining means and the second joining means. In this case, the joining means forms first, second and third joint portions.

[0016] In the catheter according to the present invention, it is preferable that an end of the first joining means reach an end of the distal end portion of the proximal shaft and an end of the second joining means be separated from the end of the distal end portion of the proximal shaft.

[0017] Alternatively, in the catheter according to the present invention, an end of the first joining means and an end of the second joining means may be separated from an end of the distal end portion of the proximal shaft.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0018]

Fig. 1 is an overall schematic view of a catheter according to a first embodiment the present invention. Fig. 2A is a partially enlarged plan view of the catheter of Fig. 1, illustrating a joint portion between a core wire and a proximal shaft; Fig. 2B is a partially enlarged side view of the joint portion of Fig. 2A; Fig. 2C is a partially enlarged side view of the joint portion, seen from a direction opposite to that of Fig. 2B; Fig. 2D is a sectional view of the catheter of Fig. 1, taken along line IID-IID of Fig. 2A; and Fig. 2E is a sectional view of the catheter of Fig. 1, taken along line IIE-IIE of Fig. 2A.

Fig. 3A is partially enlarged plan view of a catheter according to a second embodiment, illustrating a joint portion between a core wire and a proximal shaft; and Figs. 3B and 3C are partially enlarged plan views of catheters according to other embodiments of the present invention, each illustrating a joint portion between a core wire and a proximal shaft.

Fig. 4A is a partially enlarged plan view of an existing

balloon catheter, illustrating a joint portion between a core wire and a proximal shaft, Fig. 4B is a partially enlarged side view of the joint portion of Fig. 4A, and Fig. 4C is a partially enlarged side view of the joint portion of Fig. 4B when a bending force is applied to the joint portion.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

10 First Embodiment

[0019] Referring to Figs. 1 to 2E, a catheter according to a first embodiment of the present invention will be described.

[0020] Fig. 1 is an overall schematic view of a catheter according to the first embodiment. Fig. 2A is a partially enlarged plan view of the catheter of Fig. 1, illustrating a joint portion (denoted by X in Fig. 1) between a core wire and a proximal shaft; Fig. 2B is a partially enlarged side view of the joint portion of Fig. 2A; and Fig. 2C is a partially enlarged side view of the joint portion, seen from a direction opposite to that of Fig. 2B. Fig. 2D is a sectional view of the catheter of Fig. 1, taken along line IID-IID of Fig. 2A; and Fig. 2E is a sectional view of the catheter of Fig. 1, taken along line IIE-IIE of Fig. 2A. In Figs. 1, 2A to 2C, and 3, the left side is the distal side (tip side) from which the catheter is inserted into a body, and the right side is the proximal side (rear end side, base end side) on which an operator such as a doctor operates the catheter. For ease of understanding, a distal shaft is not illustrated Figs. 2A to 2E and 3.

[0021] Referring to Fig. 1, a catheter 10 according to the first embodiment includes a proximal shaft 20, a distal shaft 30, and a core wire 40. A distal end portion 21 of the proximal shaft 20 is fitted into the inner cavity of a proximal end portion 32 of the distal shaft 30. The core wire 40 is disposed in the inner cavity of the distal shaft 30. A proximal end portion 42 of the core wire 40 is joined to a cutout portion 23, which is formed in the distal end portion 21 of the proximal shaft 20.

[0022] Referring to Figs. 2A to 2E, a joint surface 51 with which the cutout portion 23 is joined to the proximal end portion 42 of the core wire 40 includes a first linear portion 61, a second linear portion 62, and a third linear portion 63, which are arranged in an angular U-shape in plan view. The first and second linear portions 61 and 62 extend along the longitudinal axis L of the catheter 10 so as to face each other. The third linear portion 63 extends perpendicular to the longitudinal axis L and connects the first and second linear portions 61 and 62 to each other.

[0023] The first linear portion 61 and the second linear portion 62 have the same length. It is preferable that the length (the entire length l_2) of the first linear portion 61 or the length of the second linear portion 62 be in the range of, for example, 1 to 10 mm from the viewpoint of joint strength, and it is more preferable that the length be in the range of 2 to 5 mm. It is preferable that the length of the third linear portion 63 be smaller than that of the

first linear portion 61 or the second linear portion 62 from the viewpoint of joint strength, and it is more preferable that the length be in the range of, for example, 0.2 to 1 mm.

[0024] Joining means 50, including first to third joining means 52 to 54, are formed along the joint surface 51. To be specific, the first joining means 52 and second joining means 53 respectively join the first linear portion 61 and the second linear portion 62 to the core wire 40, thereby forming a joint portion. The length of the first joining means 52 is larger than that of the second joining means 53. The third joining means 54 joins the entirety of the third linear portion 63 to the core wire 40. The third joining means 54 need not be formed or only a part of the third linear portion 63 may be joined to the core wire 40.

[0025] An end 52a of the first joining means 52 reaches an end 21a of the distal end portion 21 of the proximal shaft 20. An end 53a of the second joining means 53 is separated from the end 21a of the distal end portion 21 of the proximal shaft 20. That is, when the joining means 50 is divided into the first joining means 52 and the second joining means 53 along the longitudinal axis L of the catheter 10, the length of the first joining means 52 is larger than that of the second joining means 53, such that a joint portion is formed which is disposed to be asymmetrical about the longitudinal axis L of the proximal shaft 20.

[0026] Since the length of the first joining means 52 is larger than that of the second joining means 53 in the catheter 10 according to the first embodiment, the joint strength of the joining means 50, which joins the proximal shaft 20 and the core wire 40 to each other, differs between parts of the joining means 50 on the right and left sides of the longitudinal axis L of the catheter 10. Therefore, a bending force applied to the joining means 50 when the catheter 10 is bent can be effectively dispersed, so that the core wire 40 is unlikely to be plastically deformed.

[0027] In particular, the joint surface 51 includes the first to third linear portions 61 to 63, which are arranged in an angular U-shape. Moreover, the length of the first joining means 52, which joins the first linear portion 61 to the core wire 40, is different from that of the second joining means 53, which joins the second linear portion 62 to the core wire 40. As a result, a bending force applied to the joining means 50 when the catheter 10 is bent can be effectively dispersed along the longitudinal axis L of the catheter 10, so that the core wire 40 is more unlikely to be plastically deformed.

[0028] The positions at which a bending force is most likely to be concentrated are presumably in the vicinity of the end 53a of the second joining means 53 and in the vicinity of the end 21a of the distal end portion 21 of the proximal shaft 20. Since the end 53a of the second joining means 53 is separated from the end 21a of the distal end portion 21 of the proximal shaft 20, the positions at which the bending force is particularly likely to be concentrated are displaced from each other along the longitudinal axis

L. As a result, the core wire 40 is more unlikely to be plastically deformed.

[0029] It is preferable that the smallest distance l_1 between the end 53a of the second joining means 53 and the end 21a of the distal end portion 21 of the proximal shaft 20 be in the range of 1/5 to 4/5 of the entire length l_2 of the second linear portion 62. If the smallest distance l_1 is in the range of 1/5 to 4/5 of the entire length l_2 , the amount of displacement between the end 53a of the second joining means 53 and the end 21a of the distal end portion 21 of the proximal shaft 20 is optimized along the longitudinal axis L, so that the core wire 40 is more unlikely to be plastically deformed. On the other hand, if the smallest distance l_1 is smaller than 1/5 of the entire length l_2 , the amount of displacement between the end 53a of the second joining means 53 and the end of the distal end portion 21 of the proximal shaft 20 is too small, so that a bending force may be unlikely to be dispersed. If the smallest distance l_1 is larger than 4/5 of the entire length l_2 , the length of the second joining means 53 is too small, so that the joint strength may be low. In the case where the smallest distance l_1 between the end 53a of the second joining means 53 and the end 21a of the distal end portion 21 of the proximal shaft 20 is in the range of 1/5 to 4/5 of the entire length l_2 of the second linear portion 62, it is preferable that the smallest distance l_1 between the end 53a of the second joining means 53 and the end 21a of the distal end portion 21 of the proximal shaft 20 be in the range of 0.2 to 8 mm, and it is more preferable that the smallest distance l_1 be in the range of 0.4 to 3 mm.

[0030] The joining means 50 may be, for example, a weld or an adhesive. Between these, it is preferable that the joining means be a weld, and it is more preferable that that joining means be a weld formed by laser welding using a YAG laser or the like. In the case where the joining means is a weld, it is more preferable that the joining means be formed such that adjacent portions of the weld overlap each other.

[0031] Referring back to Fig. 1, the structure of other parts of the catheter 10 according to the first embodiment will be described below in detail.

[0032] The proximal shaft 20 is a tubular member made of a metal such as a stainless steel or a Ni-Ti alloy. A connector 70 is attached to a proximal end portion 22 of the proximal shaft 20.

[0033] The distal shaft 30 is a tubular member made of a resin such as a polyamide, a polyamide elastomer, a polyolefin, a polyester, or a polyester elastomer.

[0034] An inner shaft 90, which is a tubular member that is made of a resin similar to the material of the distal shaft 30, extends through the inner cavity of the distal shaft 30 with a predetermined space therebetween. A proximal end portion 91 of the inner shaft 90 has an opening 93 formed in an intermediate portion of the distal shaft 30. The inner cavity of the inner shaft 90 is connected to the outside through the opening 93. A distal end portion 92 of the inner shaft 90 protrudes forward from a distal

end portion 31 of the distal shaft 30.

[0035] A pair of ring-shaped markers 100 are attached to the distal end portion 92 of the inner shaft 90 so as to be separated from each other by a predetermined distance.

[0036] A proximal attachment portion 81 of a balloon 80 is fixed to the distal end portion 31 of the distal shaft 30. A distal attachment portion 82 of the balloon 80 is fixed to the distal end portion 92 of the inner shaft 90, which protrudes forward from the distal end portion 31 of the distal shaft 30. Both ends of the balloon 80 are tightly fixed to the shafts, and thereby the balloon 80 is formed at the distal end of the catheter 10.

[0037] The material of the balloon 80 is, for example, a resin such as a low-density polyethylene (LDPE), a high-density polyethylene (HDPE), a linear low density polyethylene (LLDPE), a polyolefin such as an ethylene-vinyl acetate copolymer (EVA), a polyethylene terephthalate (PET), or a polyamide.

[0038] The diameter of the core wire 40 decreases from the proximal end portion 42 toward a distal end portion 41 so that the flexibility of the catheter 10 increases toward the distal end. The material of the core wire 40 is, for example, a stainless steel (SUS), a superelastic alloy such as Ni-Ti alloy, or a piano wire.

[0039] In the catheter 10 composed of such members, the inner cavity of the proximal shaft 20, the inner cavity of the distal shaft 30, and the inner cavity of the balloon 80 are connected to each other. When a liquid, such as a contrast medium or a physiological saline, is supplied from an inflator (not shown), which is attached to the connector 70, to inflate the balloon 80, the liquid passes through the aforementioned inner cavities and inflates or deflates the balloon 80.

[0040] A guidewire that has been inserted into a lesion may be passed through the inner cavity of the inner shaft 90 so as to extend to the outside through the opening 93. Thus, the catheter 10 can be inserted into the lesion along the guidewire.

[0041] The catheter according to the first embodiment can be made, for example, by using a method including, in addition to the steps of making a known catheter, the steps of forming a cutout portion having the aforementioned shape in a cylindrical proximal shaft by cutting out a part of a distal end portion of the proximal shaft, fitting a proximal end portion of a core wire into the cutout portion, and welding the cutout portion and the proximal end portion to each other such that the length of first joining means is larger than that of second joining means, such that a joint portion is formed which is asymmetrical about a longitudinal axis of the proximal shaft and the core wire.

Second Embodiment

[0042] A catheter according to a second embodiment has a structure the same as that of the catheter according to the first embodiment except that an end of first joining means and an end of second joining means are both

separated from an end of a distal end portion of a proximal shaft. The description of portions of the second embodiment that are the same as those of the first embodiment will be omitted.

5 **[0043]** Fig. 3A is partially enlarged plan view of a catheter according to a second embodiment, illustrating a joint portion between a core wire and a proximal shaft.

[0044] Referring to Fig. 3A, an end 152a of first joining means 152 is separated from an end 121a of a distal end portion 121 of a proximal shaft 120, and an end 153a of second joining means 153 is separated from an end 121a of a distal end portion 121 of a proximal shaft 120.

[0045] Also in the catheter according to the second embodiment, when joining means 150 is divided into the first joining means 152 and the second joining means 153 along the longitudinal axis L of the catheter, the length of the first joining means 152 is larger than that of the second joining means 153. Therefore, the catheter according to the second embodiment has an advantageous effect the same as that of the first embodiment.

[0046] Moreover, the second embodiment has the following effect, which is specific to the second embodiment. In the catheter according to the second embodiment, the end 152a of the first joining means 152 is separated from the end 121a of the distal end portion 121 of the proximal shaft 120, and the end 153a of the second joining means 153 is separated from the end 121a of the distal end portion 121 of the proximal shaft 120. The positions at which a bending force is most likely to be concentrated are presumably in the vicinity of the end 152a of the first joining means 152, in the vicinity of the end 153a of the second joining means 153, and in the vicinity of the end 121a of the distal end portion 121 of the proximal shaft 120. Since the end 152a of the first joining means 152 and the end 153a of the second joining means 153 are separated from the end 121a of the distal end portion 121 of the proximal shaft 120, the positions at which a bending force is most likely to be concentrated are displaced from each other along the longitudinal axis L. As a result, a core wire 140 is less likely to be plastically deformed.

[0047] It is preferable that the smallest distance l_1 between the end 153a of the second joining means 153 and the end 121a of the distal end portion 121 of the proximal shaft 120 be in the range of 2/5 to 4/5 of the entire length l_2 of a second linear portion 162. If the smallest distance l_1 is in the range of 2/5 to 4/5 of the entire length l_2 , the amount of displacement between the end 153a of the second joining means 153 and the end 121a of the distal end portion 121 of the proximal shaft 120 is optimized along the longitudinal axis L, so that the core wire 140 is more unlikely to be plastically deformed. In this case, it is preferable that the smallest distance l_1 be in the range of 0.4 to 8 mm, and it is more preferable that the smallest distance l_1 be in the range of 0.6 to 3 mm. On the other hand, if the smallest distance l_1 is smaller than 2/5 of the entire length l_2 , the amount of displacement between the end of the second joining means and the end of the distal

end portion of the proximal shaft is too small, so that a bending force may be unlikely to be dispersed. If the smallest distance l_1 is larger than $4/5$ of the entire length l_2 , the length of the second joining means is too small, so that the joint strength may be low.

[0048] It is preferable that the smallest distance l_3 between the end 152a of the first joining means 152 and the end 121a of the distal end portion 121 of the proximal shaft 120 be smaller than the distance l_1 and be in the range of $1/5$ to $3/5$ of the entire length l_4 of a first linear portion 161. If the smallest distance l_3 is in the range of $1/5$ to $3/5$ of the entire length l_4 , the amount of displacement between the end 152a of the first joining means 152 and the end 121a of the distal end portion 121 of the proximal shaft 120 is optimized along the longitudinal axis L, so that the core wire 140 is more unlikely to be plastically deformed. In this case, it is preferable that the smallest distance l_3 be in the range of 0.2 to 6 mm, and it is more preferable that the smallest distance l_3 be in the range of 0.4 to 2 mm. On the other hand, if the smallest distance l_3 is smaller than $1/5$ of the entire length l_4 , the amount of displacement between the end 152a of the first joining means 152 and the end 121a of the distal end portion 121 of the proximal shaft is too small, so that a bending force may be unlikely to be dispersed. If the smallest distance l_3 is larger than $3/5$ of the entire length l_4 , the length of the first joining means is too small, so that the joint strength may be low.

[0049] It is preferable that the smallest distance l_1 be in the range of $2/5$ to $4/5$ of the entire length l_2 and that the distance l_3 be smaller than the smallest distance l_1 and be in the range of $1/5$ to $3/5$ of the entire length l_4 , because when such conditions are satisfied, the core wire 140 is more unlikely to be plastically deformed. In this case, it is more preferable that the length (the entire length l_4) of the first linear portion 161 and the length (the entire length l_2) of the second linear portion 162 be in the range of 1 to 10 mm, that the smallest distance l_1 be in the range of 0.4 to 8 mm, and that the smallest distance l_3 be in the range of 0.2 to 6 mm. It is further preferable that the length (the entire length l_4) of the first linear portion 161 and the length (the entire length l_2) of the second linear portion 162 be in the range of 2 to 5 mm, that the smallest distance l_1 be in the range of 0.8 to 1.5 mm, and that the smallest distance l_3 be in the range of 0.4 to 1.0 mm.

[0050] The catheter according to the second embodiment can be made by using a method the same as that of the first embodiment except that the joining means is formed in such a way that an end of the first joining means and an end of second joining means are both separated from an end of the distal end portion of the proximal shaft.

Other Embodiments

[0051] In a catheter according to the present invention, it is sufficient that, when joining means is divided into first joining means and second joining means along the lon-

gitudinal axis of the catheter, the length of the first joining means be larger than that of the second joining means. For example, catheters according to other embodiments that are illustrated Figs. 3B and 3C are also within the technical scope of the present invention.

[0052] Figs. 3B and 3C are partially enlarged plan views of catheters according to other embodiments of the present invention, each illustrating a joint portion between a core wire and a proximal shaft.

[0053] In the embodiment illustrated in Fig. 3B, first joining means 252 joins the entirety of a first linear portion 261 to a core wire 240, and third joining means 254 joins the entirety of a third linear portion 263 to the core wire 240. On the other hand, second joining means 253 joins part of a second linear portion 262 to the core wire 240. An end 253a of the second joining means 253 reaches an end 221a of a distal end portion 221 of a proximal shaft 220, but an end 253b of the second joining means 253 does not reach the third joining means 254.

[0054] In the embodiment illustrated in Fig. 3C, first joining means 352 joins the entirety of a first linear portion 361 to a core wire 340, and second joining means 353 joins the entirety of a second linear portion 362 to the core wire 340. The length of the first joining means 352 is the same as that of the second joining means 353.

[0055] On the other hand, third joining means 354 joins only a part of a third linear portion 363 that is positioned between the longitudinal axis L of the catheter and the first joining means 352 to the core wire 340. The third joining means 354 does not join a part of the third linear portion 363 that is positioned between the longitudinal axis L of the catheter and the second joining means 353 to the core wire 340.

[0056] In the embodiment illustrated in Fig. 3C, the third joining means 354, which joins only a part of the third linear portion 363 that is positioned between the longitudinal axis L of the catheter and the first joining means 352 to the core wire 340, is incorporated in the first joining means 352. As a result, when the joining means is divided into the first joining means and the second joining means along the longitudinal axis of the catheter, the length of the first joining means is larger than that of the second joining means.

[0057] In the embodiments illustrated in Figs. 3B and 3C, when the joining means is divided into the first joining means and the second joining means along the longitudinal axis of the catheter, the length of the first joining means is larger than that of the second joining means. As a result, the advantageous effects of the catheter according to the present invention can be appropriately obtained.

[0058] In a catheter according to the present invention, a joint surface between a proximal end portion of a core wire and a cutout portion need not have an angular U-shape in plan view as described above. The joint surface may have an arc shape or the like. In the case where the joint surface between the proximal end portion of the core wire and the cutout portion has an angular U-shape in

plan view, the length of the first linear portion and the length of the second linear portion may be different from each other. In the case where the joint surface between the proximal end portion of the core wire and the cutout portion has an angular U-shape in plan view, the length of the third linear portion may be larger than that of the first linear portion or the second linear portion.

[0059] In the embodiments described above, when the joining means is divided into the first joining means and the second joining means along the longitudinal axis of the catheter, the length of the first joining means is larger than that of the second joining means. However, the structure of a catheter according to the present invention is not limited to such a structure, and the length of the second joining means may be larger than that of the second joining means.

[0060] In the embodiments described above, a rapid exchange balloon catheter is used as an example of a catheter according to the present invention. However, the structure according to the present invention can be appropriately used for an over-the-wire balloon catheter to appropriately obtain the advantageous effects described above. Here, an over-the-wire balloon catheter is a catheter in which an inner tube extends to a proximal end portion (proximal portion) of the balloon catheter. The structure according to the present invention can be appropriately used for a catheter other than a balloon catheter, such as a penetration catheter for penetrating a stenosed lesion and an injection catheter for injecting a medicine.

[0061] A balloon catheter, which is an example of a catheter according to the present invention, is usually used for treating a coronary blood vessel. However, a balloon catheter may be used in other manipulations such as a manipulation for dilating a blood vessel in a leg or a dialysis shunt.

Claims

1. A catheter (10) comprising:

a proximal shaft (20) including a cutout portion (23) formed in a distal end portion (21) thereof; and
 a core wire (40) joined to the cutout portion (23) through joining means (50) which is formed along a joint surface (51) between a proximal end portion (42) of the core wire (40) and the cutout portion (23),

characterized in that

when the joining means (50) is divided into first joining means (52) and second joining means (53) along a longitudinal axis (L) of the catheter (10), a length of one of the first joining means (52) and the second joining means (53) is larger

than a length of the other of the first joining means (52) and the second joining means (53), and

the different length of the first joining means (52) and the second joining means (53) form an asymmetrical joint portion about a longitudinal axis (L) of the proximal shaft (20), with which the proximal shaft (20) is joined to the core wire (40), and a non-joint portion with which the proximal shaft (20) is not joined to the core wire (40).

2. The catheter (10) according to Claim 1, wherein the cutout portion (23) includes first to third linear portions (61, 62, 63) that are arranged in an angular U-shape in plan view, the first and second linear portions (61, 62) extending parallel to the longitudinal axis (L) so as to face each other, the third linear portion (63) extending perpendicular to the longitudinal axis (L) and connecting the first and second linear portions (61, 62) to each other, and wherein the first joint portion joins the first linear portion (61) to the core wire (40) and the second joint portion joins the second linear portion (62) to the core wire (40).
3. The catheter (10) according to Claim 2, wherein an end of the first joint portion reaches an end (21a) of the distal end portion (21) of the proximal shaft (20), and wherein an end of the second joint portion is separated from the end (21a) of the distal end portion (21) of the proximal shaft (20).
4. The catheter (10) according to Claim 2, wherein an end of the first joint portion and an end of the second joint portion are both separated from an end (21a) of the distal end portion (21) of the proximal shaft (20).

Patentansprüche

1. Katheter (10) mit:

einem proximalen Schaft (20), der an seinem distalen Endabschnitt (21) einen ausgesparten Abschnitt (23) aufweist; und
 einem Kerndraht (40), der durch ein Fügemitel (50), das entlang einer Fügefläche (51) zwischen dem proximalen Endabschnitt (42) des Kerndrahts (40) und dem ausgesparten Abschnitt (23) ausgebildet ist, an den ausgesparten Abschnitt (23) angefügt ist, **dadurch gekennzeichnet, dass**

wenn das Fügemitel (50) in ein erstes Fügemitel (52) und ein zweites Fügemitel (53) geteilt wird, die sich in Richtung der Längsachse (L) des Katheters (10) erstrecken, die Länge eines

des ersten Fügmittels (52) und zweiten Fügmittels (53) größer ist als die Länge des anderen des ersten Fügmittels (52) und zweiten Fügmittels (53), und

die ungleichen Längen des ersten Fügmittels (52) und zweiten Fügmittels (53) eine bezüglich der Längsachse (L) des proximalen Schafts (20) asymmetrische Fügestelle, an der der proximale Schaft (20) am Kerndraht (40) angefügt ist, und eine fügefreie Stelle, an der der proximale Schaft (20) nicht am Kerndraht (40) angefügt ist, bilden.

2. Katheter (10) nach Anspruch 1, wobei der ausgesparte Abschnitt (23) ein erstes bis drittes lineares Teilstück (61, 62, 63) aufweist, die in einer Draufsicht U-förmig angeordnet sind, das erste und zweite lineare Teilstück (61, 62) einander gegenüberliegen und sich parallel zur Längsachse (L) erstrecken, das dritte lineare Teilstück (63) sich quer zur Längsachse (L) erstreckt und das erste und zweite lineare Teilstück (61, 62) miteinander verbindet, und wobei die erste Fügestelle das erste lineare Teilstück (61) und die zweite Fügestelle das zweite lineare Teilstück (62) an den Kerndraht (40) anfügt.
3. Katheter (10) nach Anspruch 2, wobei ein Ende der ersten Fügestelle ein Ende (21a) des distalen Endabschnitts (21) des proximalen Schafts (20) erreicht, und wobei ein Ende der zweiten Fügestelle in einem Abstand zu dem Ende (21a) des distalen Endabschnitts (21) des proximalen Schafts (20) liegt.
4. Katheter (10) nach Anspruch 2, wobei sowohl ein Ende der ersten Fügestelle als auch ein Ende der zweiten Fügestelle in einem Abstand zu einem Ende (21a) des distalen Endabschnitts (21) des proximalen Schafts (20) liegen.

Revendications


1. Cathéter (10) comprenant :
 - une tige proximale (20) incluant une partie de découpe (23) formée dans une partie d'extrémité distale (21) de celle-ci ; et
 - un fil central (40) joint à la partie de découpe (23) par le biais d'un moyen de jonction (50) qui est formé le long d'une surface de jonction (51) entre une partie d'extrémité proximale (42) du fil central (40) et la partie de découpe (23),
 - caractérisé en ce que**
 - lorsque le moyen de jonction (50) est divisé en un premier moyen de jonction (52) et un deuxième moyen de jonction (53) le long d'un axe lon-

gitudinal (L) du cathéter (10), une longueur de l'un parmi le premier moyen de jonction (52) et le deuxième moyen de jonction (53) est plus grande qu'une longueur de l'autre parmi le premier moyen de jonction (52) et le second moyen de jonction (53), et

la longueur différente du premier moyen de jonction (52) et du second moyen de jonction (53) forme une partie de jonction asymétrique autour d'un axe longitudinal (L) de la tige proximale (20), avec laquelle la tige proximale (20) est jointe au fil central (40), et une partie non jointe avec laquelle la tige proximale (20) n'est pas jointe au fil central (40).

2. Cathéter (10) selon la revendication 1, dans lequel la partie de découpe (23) inclut des première à troisième parties linéaires (61, 62, 63) qui sont agencées selon une forme angulaire en U dans une vue en plan, les première et deuxième parties linéaires (61, 62) s'étendant parallèlement à l'axe longitudinal (L) de manière à se faire face, la troisième partie linéaire (63) s'étendant perpendiculairement à l'axe longitudinal (L) et reliant les première et deuxième parties linéaires (61, 62) l'une à l'autre, et dans lequel la première partie de jonction joint la première partie linéaire (61) au fil central (40) et la deuxième partie de jonction joint la deuxième partie linéaire (62) au fil central (40).
3. Cathéter (10) selon la revendication 2, dans lequel une extrémité de la première partie de jonction atteint une extrémité (21a) de la partie d'extrémité distale (21) de la tige proximale (20), et dans lequel une extrémité de la deuxième partie de jonction est séparée de l'extrémité (21a) de la partie d'extrémité distale (21) de la tige proximale (20).
4. Cathéter (10) selon la revendication 2, dans lequel une extrémité de la première partie de jonction et une extrémité de la deuxième partie de jonction sont toutes deux séparées d'une extrémité (21a) de la partie d'extrémité distale (21) de la tige proximale (20).

FIG. 1

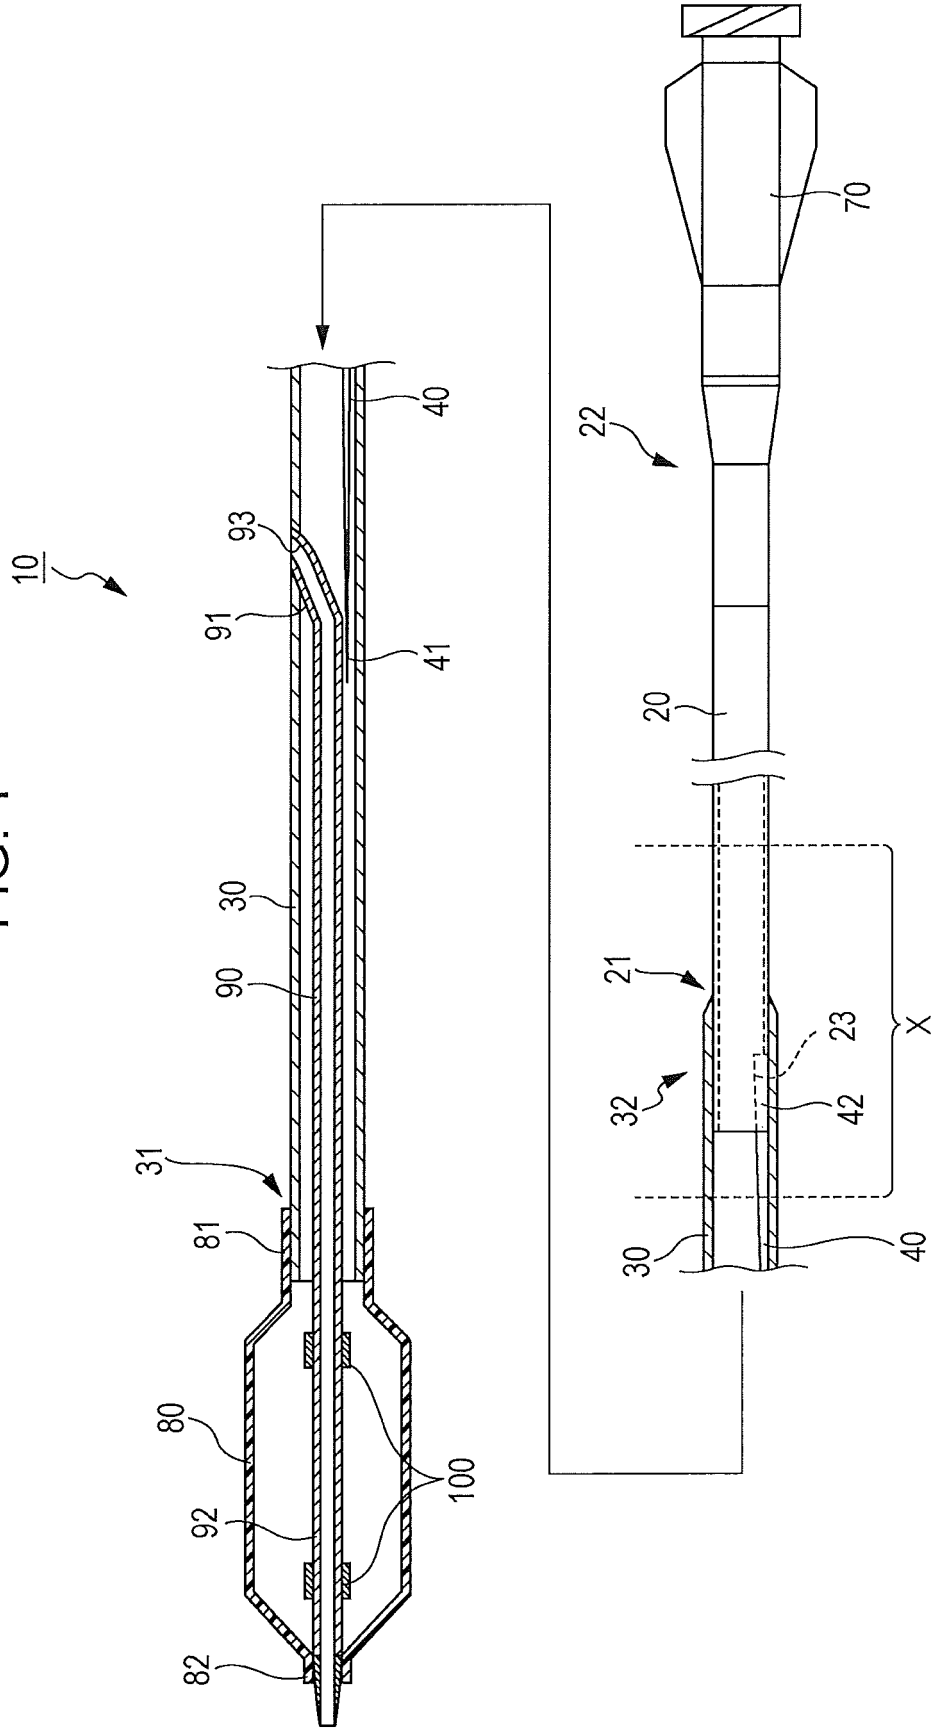

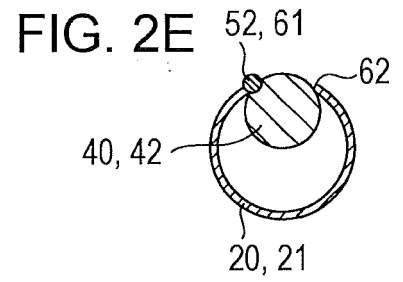
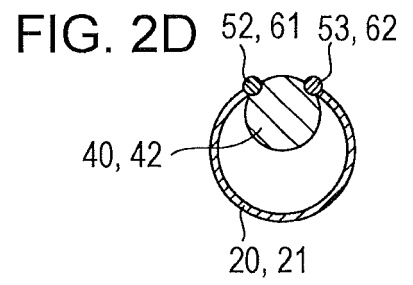
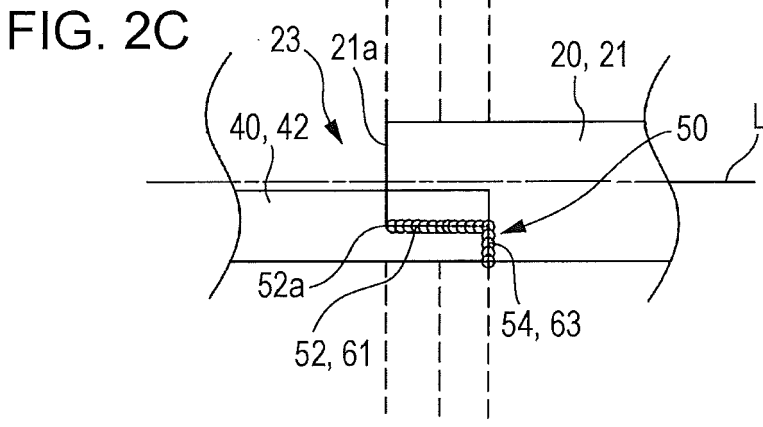
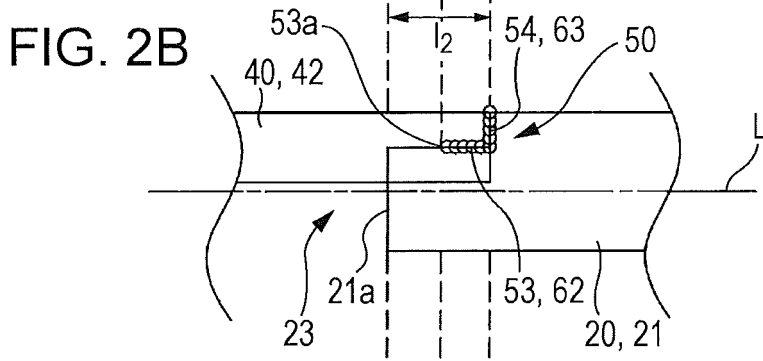
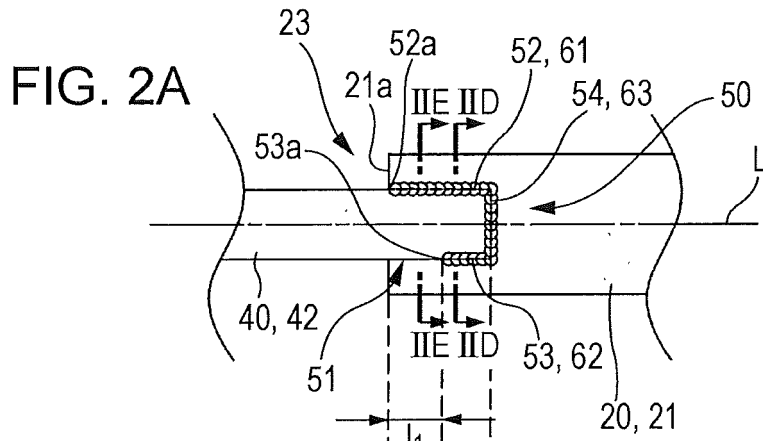


FIG. 3A

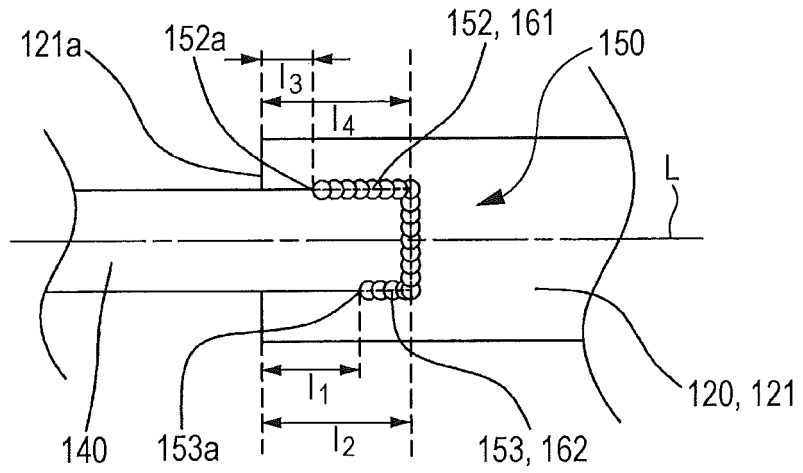


FIG. 3B

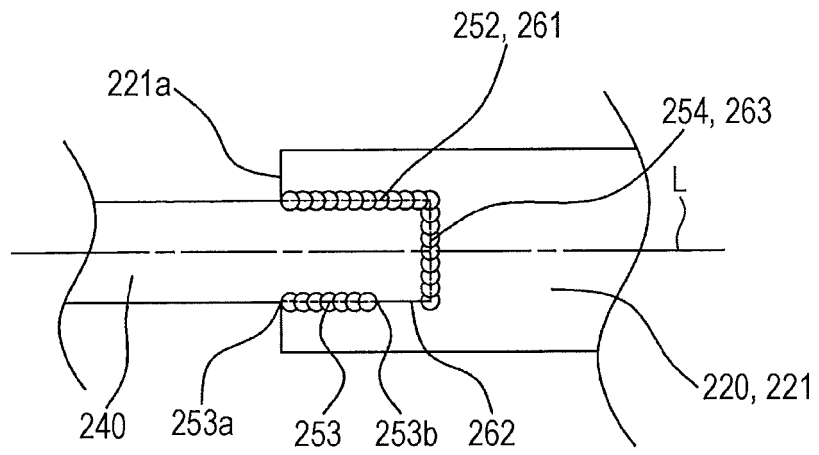


FIG. 3C

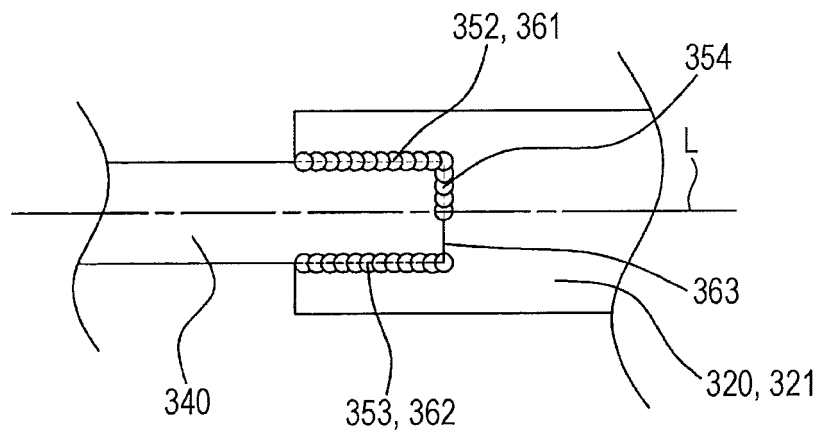


FIG. 4A

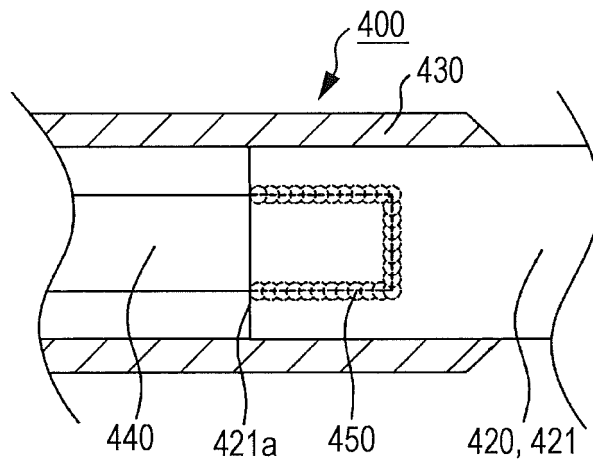


FIG. 4B


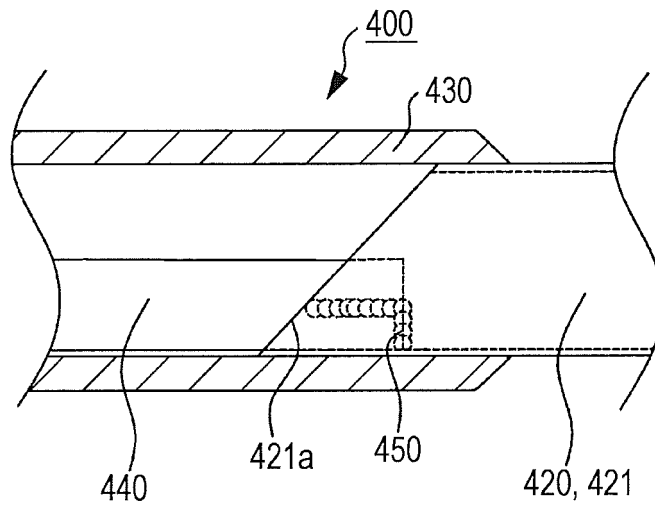


FIG. 4C

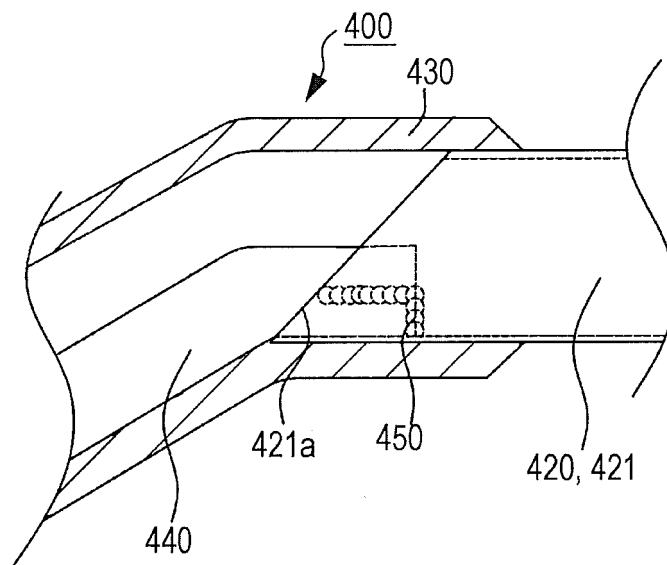

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2003164528 A [0004] [0007] [0010] [0011]