



(51) International Patent Classification:

G03B 21/20 (2006.01) *G02B* 27/22 (2006.01)
G03B 35/16 (2006.01) *H04N* 13/00 (2006.01)
G03B 35/26 (2006.01)

(21) International Application Number:

PCT/US2009/046562

(22) International Filing Date:

8 June 2009 (08.06.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12/141,351 18 June 2008 (18.06.2008) US

(71) Applicant (for all designated States except US): **DOLBY LABORATORIES LICENSING CORPORATION** [US/US]; 100 Potrero Avenue, San Francisco, CA 94103-4813 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **RICHARDS, Martin, J.** [US/US]; 437 Hillcrest Way, Redwood City, CA 94062 (US).

(74) Agents: **CARPENTER, John, W.** et al.; Dolby Laboratories, Inc., Intellectual Property Group, 999 Brannan Street, San Francisco, CA 94103-4938 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR LIGHT RECAPTURE AND SEQUENTIAL CHANNEL ILLUMINATION

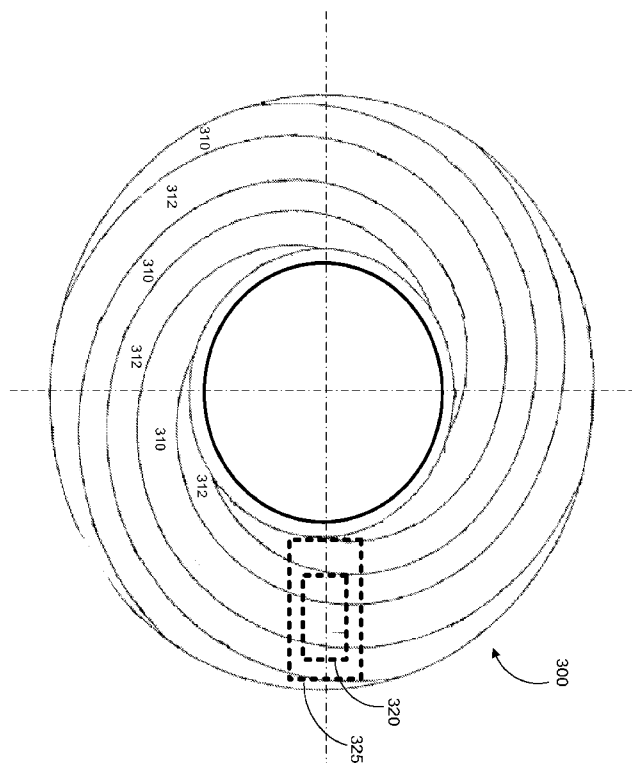


FIG. 3A

(57) Abstract: A filter wheel having spirally shaped left and right channel 3D filters. The 3D filters are, for example, spectral separation filters. The filter is mounted, for example, close to an integrating rod output of a projector. The left and right channel filtered light scrolls across a modulation device which is energized with correspondingly scrolling left and right image data. In one embodiment, the integrating rod comprises mirrored surfaces to facilitate recycling of light reflected off the filter wheel. The filter wheel may be placed in a single or dual projector configuration. In one embodiment, the filters are fixed at the end of an integrating rod using "re-cycled" light to illuminate different channels of a projection system.



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to the identity of the inventor (Rule 4.17(i))

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

**METHOD AND APPARATUS FOR LIGHT RECAPTUE AND SEQUENTIAL CHANNEL
ILLUMINATION**

Cross-Reference to Related Applications

[0001] This application claims priority to United States
Patent Non Provisional Application No. 12/141,351, filed 18
5 June, 2008, which is hereby incorporated by reference in its
entirety.

10 BACKGROUND OF THE INVENTION

Field of Invention

[0002] The present invention relates to light recapture
systems and particularly to light recapture in projection
systems.

15

Description of the Related Art

[0003] Various methods are in place for 3D stereoscopic
projection, including Anaglyph, Linear Polarization, Circular
Polarization, Shutter Glasses, and Spectral Separation.
20 Anaglyph is the oldest technology, and provides left/right eye
separation by filtering the light through a two color filter,
commonly red for one eye, and cyan for the other eye. At the
projector, the left eye image is (commonly) filtered through a
red filter, and the right image filtered through a cyan filter.
25 The eyewear consists of a red filter for the left eye, and a
cyan filter for the right eye. This method works best for black
and white original images, and is not well suited for color
images.

[0004] Linear Polarization 3D provides separation at the projector by filtering the left eye through a linear polarizer (commonly) oriented vertically and filtering the right eye image through a linear polarizer oriented horizontally. The eyewear
5 consists of a vertically oriented linear polarizer for the left eye and a horizontally oriented polarizer for the right eye. The projection screen must be of the polarization preserving type, commonly referred to as a "silver screen" because of its distinctive color. Linear Polarization allows a full color
10 image to be displayed with little color distortion. It has several problems, these include the need for a silver screen which is expensive, fragile, and not uniform. Another problem is that the viewer must keep his head oriented vertically to avoid crosstalk from one eye to another.

15 [0005] Circular Polarization 3D was invented to address the problem of requiring the viewer to keep his head oriented vertically. Circular Polarization provides separation at the projector by filtering the left eye image through a (commonly) left handed circular polarizer, and filtering the right eye
20 image through a right handed circular polarizer. The eyewear consists of a left handed circular polarizer for the left eye and a right handed circular polarizer for the right eye. A silver screen is also needed for this approach.

[0006] Shutter Glasses provides separation by multiplexing
25 the left and right images in time. A filter for separation at the projector is not required. The eyewear consists of active

glasses that electronically shutter the lens in synchrony with the projector frame rate. The left eye image is first displayed, followed by the right eye image etc. Since having a direct wired connection to the Glasses in a theatre is impractical, a wireless or infrared signaling method is used to provide a timing reference for the left/right eye shuttering.

[0007] Spectral Separation provides separation at the projector by filtering the left and right eye spectrally. The system differs from anaglyph in that the filters for the left and right eye each pass a portion of the red, green, and blue spectrum, providing for a full color image. The band pass spectrum of the left eye filter is complementary to the band pass spectrum of the right eye filter. The eyewear consists of filters with the same general spectral characteristics as are used in the projector. While this method provides a full color image, it requires color compensation to make the colors in the left and right eye match the colors that were present in the original image, and there is a small reduction in the color gamut compared to the gamut of the projector.

[0008] The projectors themselves take on various forms, including LCD (liquid crystal display) projectors which usually contain three separate LCD glass panels, one each primary color component of a image to be projected. The LCD panels modulate the light and produces the image that is projected onto the screen.

[0009] DLP ("Digital Light Processing") is a proprietary technology developed by Texas Instruments. The DLP chip is a reflective surface made up of thousands of tiny mirrors. In expensive DLP projectors, there are three separate DLP chips, one for each for the red, green, and blue channels. Typically, a prism separates light from a projection lamp into red, green, and blue colored light which then separately illuminate "red," "green," and "blue" DLP chips which modulate the primary colored lights according to the corresponding primary color components of an image signal. After modulation, the now modulated primary colored lights are recombined and projected onto a viewing screen.

[0010] Other, and less expensive, applications of DLP include projectors with a single DLP chip used in conjunction with a color wheel that consists of red, green, blue, and sometimes white (clear) filters. The color wheel spins between a projection lamp and the DLP chip - alternating the color of the light illuminating the chip. The alternating colors of the light illuminating the DLP chip are modulated and projected on a viewing screen in sequence. The sequentially modulated and projected lights then form a full color image when viewed.

[0011] The single chip DLP projector described has a lack of efficiency which has been partially addressed through light recapture and the use of "scrolling color" across the DLP chip.

Such techniques are described, for example, in D. Scott Dewald, "Sequential Color Recapture and Dynamic Filtering: A Method of

Scrolling Color," SID 00 DIGEST, and Dewald, US patent application serial number 10/028,023.

SUMMARY OF THE INVENTION

5 [0012] The present inventor has realized the need to increase brightness efficiency in high quality multi-chip projectors, such as D-Cinema projectors, particularly when projecting multi-channel images such as 3D cinema or displays (e.g., rear projection televisions, front projectors, medical diagnostic
10 display devices, etc).

[0013] In one embodiment, the present invention provides a filter (e.g., a filter wheel) comprising spirally shaped filters configured for use in left and right channels of a 3D projection system. The spirally shaped filters are, for example, rotated
15 so that the portions of filtered light from each spiral "scroll" across modulators (e.g., DLP modulators).

[0014] In one embodiment, the filters comprise, for example, spectral separation filters. The filters may also comprise a set of first channel passbands configured to pass light, a set
20 of second channel passbands configured to pass light, and a set of guard bands configured to block light between adjacent passbands of different channels. The filters may comprise at least one notch band between adjacent colors of a same channel configured to block light between the adjacent colors.

25 [0015] In one embodiment, at least one of the spectral separation filters comprises three passbands of visible light, a

first passband configured to pass only a first color of light, a second passband configured to pass two spectrum adjacent colors of light comprising the first color of light and a second color of light, and a third passband configured to pass two spectrum adjacent colors of light comprising the second color of light and a third color of light. In one embodiment, at least one of the passbands passing spectrum adjacent colors of light includes a notch band that separates the spectrum adjacent colors and is not passed by the passband.

10 [0016] In one embodiment, the spectral separation filters comprise at least one filter having passbands of wavelengths of approximately 400 to 440 nm, 484 to 498 nm, 514 to 528 nm, 567 to 581 nm, and 610 to 623 nm. In one embodiment, the spectral separation filters comprise at least one filter having passbands
15 of wavelengths of approximately 455 to 471 nm, 539 to 556 nm, and 634 to 700 nm.

[0017] The present invention includes a method, comprising the steps of, illuminating a first portion of a light modulator with light having characteristics of a first channel of a 3D
20 image, and illuminating a second portion of the light modulator with light having characteristics of a second channel of a 3D image, wherein the step of illuminating the first portion of the light modulator and the step of illuminating the second portion of the light modulator are performed simultaneously. The step
25 of illuminating may comprise, for example, spinning spirally shaped filters in a light path of a projector. The spirally

shaped filters may comprise, for example, spectral separation filters each including at least one set of primary passbands. The method may also comprise, for example, a step of re-cycling reflections from the spirally shaped filters.

5 **[0018]** The present invention includes various embodiments of projectors, including, for example, a projector comprising a filter wheel comprising at least one set of spectrally separated spirally shaped filters. The projector may further comprise, for example, an integrating rod positioned between the filter
10 wheel and a light source, wherein the integrating rod comprises a mirror configured to reflect portions of light not passed by a first of the spectrally separated filters and portions of light not passed by the second set of spectrally separated filters back toward the filters. The projector may further comprise,
15 for example, light modulators positioned to simultaneously intercept light filtered by both of at least one set of the spectrally separated spirally shaped filters. The projector may yet further comprise, for example, light modulators positioned to simultaneously intercept light filtered by more than at least
20 one set of the spectrally separated spirally shaped filters.

[0019] The projector (e.g., first projector) may, for example, be part of a system including at least one pair of spectrally separated eye filters. The system may include, for example, a second projector that operates in synchronicity
25 (e.g., inverse synchronicity) with the first projector.

[0020] Portions of both the devices and methods of the invention may be conveniently implemented in programming on a general purpose computer, or networked computers, and the results may be displayed on an output device connected to any of the general purpose, networked computers, or transmitted to a remote device for output or display. In addition, any components of the present invention represented in a computer program, data sequences, and/or control signals may be embodied as an electronic signal broadcast (or transmitted) at any frequency in any medium including, but not limited to, wireless broadcasts, and transmissions over copper wire(s), fiber optic cable(s), and co-ax cable(s), etc.

15 BRIEF DESCRIPTION OF THE DRAWINGS

[0021] A more complete appreciation of the invention and many of the attendant advantages thereof will be readily obtained as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings, wherein:

[0022] Fig. 1 is an optical schematic according to an embodiment of the present invention;

[0023] Fig. 2 is a set of exemplary band passes utilized to filter left and right channels according to an embodiment of the present invention;

[0024] Fig. 3A is a drawing of a multi-segmented spiral spectral separation filter wheel according to an embodiment of the present invention;

[0025] Fig. 3B illustrates variable diameter dimensions of a filter according to an embodiment of the present invention;

[0026] Fig. 3C illustrates a radially designed filter wheel according to an embodiment of the present invention;

[0027] Fig. 4 is a drawing of an input end of an integrating rod according to an embodiment of the present invention;

10 [0028] Fig. 5 is an illustration of left and right channel filtering according to an embodiment of the present invention;

[0029] Fig. 6 is a drawing of an alternate integrating rod according to an embodiment of the present invention;

[0030] Fig. 7 is a drawing of a dual projector system according to an embodiment of the present invention; and

[0031] Fig. 8 is a drawing of non-rotating light re-cycling system according to an embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

20 [0032] Referring now to the drawings, wherein like reference numerals designate identical or corresponding parts, and more particularly to Fig. 1 thereof, there is illustrated an optical schematic 100 according to an embodiment of the present invention. The schematic shows a light path from a lamphouse
25 110 to modulation chips 160 (e.g., 3 Spatial Light Modulator (SLM) Chips), which are, for example, TI DLP's, LCoS, or other

modulators. An integrating rod 120 homogenizes light received from the lamphouse 110. A filter 130 (e.g., filter wheel) filters light exiting the integrating rod 120 into a light bundle with separate channels which are, for example, left and right channels of a 3D projection system. Optics 150 direct the filtered light so as to illuminate modulation surfaces of the modulation chips 160.

[0033] The filter 130 is located very close to the output of the integrating rod such that light reflected from the wheel re-enters the rod, and such that the wheel is located at an image point for the modulation chips (e.g., DMD/DLP, LCoS, LCD, etc). The integrating rod includes, for example, a reflective surface 122 (e.g., a mirrored surface), which acts to redirect light that either fails to exit the integrating rod or is reflected into the rod from either the filter 130, the modulation chips 160, or any other portion of the light path.

[0034] The filter 130, is, for example, a spinning wheel filter that includes filters that pass the left and right channels of a 3D projection system. Light exiting the filter 130 includes, for example, a partial light bundle including beam 135 destined for modulation as part of the right channel and partial light bundle including beam 140 destined for modulation as part of the left channel. As shown, each of the light beams 135 and 140 illuminate different sections of the modulators corresponding to portions of the right and left images, respectively (e.g., $\frac{1}{2}$ left image and $\frac{1}{2}$ right image).

[0035] Fig. 2 is a set of exemplary band passes utilized to filter left and right channels according to an embodiment of the present invention. As shown in Fig. 2, a right channel projection filter has passband wavelengths of blue at 400 to 440 (210-B1) and 484 to 498 nm (210-B2), green at 514 to 528 (210-G1) and 567 to 581 nm (210-G2), and red at 610 to 623 nm (210-R). A left channel projection filter has passband wavelengths of blue at 455 to 471 nm (212-B), green at 539 to 556 nm (212-G), and red at 634 to 700 nm (212-R). Of course other permutations exist, such as, for example, switching the left and right channel wavelengths, or switching the green and blue wavelengths etc. In addition, the passband wavelengths are approximate and each band may vary by, for example +/- 5 nm or more. Such variations may occur by shifting the entire passband and/or by selecting one or more different endpoints for the passbands. An important consideration is that such variances should not reduce the guard band between passbands to a level where a system using the filters incurs unacceptable levels of crosstalk between the channels. In sum, the filters include, for example, at least one band in each of red, green, and blue lights for each of the channels. The filters may include more than one band in a same color and same channel. The filters may also include guard bands between adjacent portions of spectrum in different channels. The filters may also include a notch band between adjacent colors in the same channel. A full discussion of similar channel filters in the context of 3D

projection systems is provided by Richards et al., U.S. Patent Application Serial No. 11/804,602, and Richards et al., U.S. Provisional Patent Application Serial No. 60/931,320, the contents of each of which are incorporated herein by reference
5 in their entirety.

[0036] In designs such as those represented in the above noted patent applications [patents] using a 3D spectral separation filter wheel, the filter wheel is, for example, divided into 2 halves, each half comprising a channel filter.

10 In embodiments of the present invention utilizing a filter wheel, the filter wheel is instead divided into spiral sections (filter 130 is, for example, a multi-segment spiral spectral separation wheel), or sections of other geometric properties (e.g., radial filter sections). The filter 130 is, for example,
15 located at the output of the integrating rod of the projector.

[0037] Fig. 3A is a drawing of a multi-segmented spiral spectral separation filter wheel 300 according to an embodiment of the present invention. The wheel 300 includes sections 310 (e.g., a right channel filter) having a spectral separation
20 filter (e.g., passbands consistent with, for example, Right Channel Projection Filter Passbands 210-B1, 210-B2, 210-G1, 210-G2, and 210R), and section 312 (e.g., a left channel filter) having a second spectral separation filter (e.g., passbands consistent with, for example, Left Channel Projection Filter
25 Passbands 212-B, 212-G, and 212-R).

[0038] Fig. 3A also illustrates an outline of possible sizes and a location of a 16x9 integrating rod output (320 and 325) on the filter wheel 300. Light output from the integrating rod passes through multiple segments of the filter 300 and then
5 illuminates the modulation chips (e.g., the modulation surfaces of the modulation chips) with the multiple segment filtered light. The modulation chip then modulates, in sections, the left and right channel images simultaneously. The sections corresponding to the left and right channel segments of filtered
10 light illuminating the modulation chips.

[0039] Because of a rotational speed of the filter, the illuminated sections "scroll" across the modulation chips, and modulation data energizing each pixel of the modulation chip is provided based on the frame rate of the video image being
15 projected and whether the pixel is in a section illuminated by a left or right channel segment of filtered light (taking into account the scroll rate and filtered light bundle shape/dimensions, and hence the changing locations of left and right filtered sections scrolling across the modulating chips).

[0040] Fig. 3B illustrates variable diameter dimensions of a filter according to an embodiment of the present invention. A more efficiently produced filter utilizes less of the comparatively more expensive filter materials. A smaller dimension d_1 means a smaller filter overall and generally less
25 filter material. Dimension d_2 - d_3 provides a non-filter filler material that accounts for space between a perimeter of an

attachment point of a rotating mechanism of a projector and an approximate beginning of the integrating rod output. The integrating rod output and filter material encompassing an area of approximately $d_1 - d_2$. The diameter d_3 matching the rotating attachment point (and, depending on the projector design, matches the shape and characteristics of the attachment point for the projector). A filter wheel according to the present invention may be retro-fitted to existing projector designs by matching the attachment point and varying the amount of filter material (diameters d_1 and d_2) to cover the integrating rod output (or other light bundle within the optical path at the rotating mechanism).

[0041] Fig. 3C illustrates a radially designed filter wheel according to an embodiment of the present invention. As shown in Fig. 3C, the alternating filter sections 310 and 312 (corresponding to filters for right and left channels respectively) extend radially from a center of the filter wheel. The integrating rod output 320 is shown as being covered by approximately 2 filter sections (one full section, and one scrolling in section and one scrolling out section). However, the filter sections may be variable size with any number of sections (2 or more) being over the output at any given time. Other shapes for the filter sections may also be utilized along with corresponding changes in modulation data matching the channel of the filtered light that "scrolls" across the modulation surfaces.

[0042] Fig. 4 is a drawing of an input end of an integrating rod 400 according to an embodiment of the present invention. The integrating rod 400 includes a mirrored section 440 which reflects light. An illumination beam 430 is input light from, for example, lamphouse 110. In one embodiment, the mirrored section is a mirror at the input end of the light rod that re-reflects light that has been reflected upstream toward the input end of the integrating rod. The re-reflection directs the reflected light back towards the output end of the integrating rod (and further downstream toward the filter and modulator(s)). In another embodiment, the mirrored section also intercepts light from a light source (e.g., lamphouse 110) incident on the upstream side of the mirrored section which may then be reflected back into the lamphouse. Such reflections are intended to increase the efficiency of the light path.

[0043] Fig. 5 is an illustration of left and right channel filtering according to an embodiment of the present invention. A filter wheel 500 is illustrated as rotating in a counter-clockwise direction. Alternating sections of right channel filter (e.g., filter sections 510a, 510b, etc) and left channel filter (e.g., 512a, 512b, etc.) scroll across an integrating rod output 520, resulting in a light bundle whose cross-section includes segments of light which scroll over time (and include both left channel filtered light and right channel filtered light). The segmented light bundle then illuminates one or more modulation chips which modulate the segmented light bundle.

[0044] In the illustrated embodiment, both the left channel filter and right channel filter are present in the light path simultaneously, and the wheel rotates during the frame period. And, approximately $\frac{1}{2}$ of the image of the wheel is left and $\frac{1}{2}$ is right. The modulating chip formatting is modified such that a portion of the left image being modulated "scrolls" across the pixels of modulating surface. Modulation data for the left image corresponding to pixels of the modulating surface being illuminated with left channel filtered light energize the illuminated pixels. A similar process occurs for the right image and the right channel filtered light.

[0045] At least some of the light that is reflected from the left section of the color wheel that re-enters the integrating rod is reflected from the mirrors at the input of the integrating rod, and some of this reflected light passes through the right portion of the filter wheel, thus increasing the light that passes through the right channel over a non-reflecting configuration. At least some of the light that is reflected from the right section of the color wheel that re-enters the integrating rod is also reflected from the mirrors at the input of the integrating rod, and some of this reflected light passes through the left portion of the filter wheel, increasing the light that passes through the left channel over the non-reflecting configuration. Overall, these reflections ("light recycling") increases the light efficiency of the projection system.

[0046] Although Fig. 5 illustrates as having 3 active sections, a scrolling in section (e.g., 512b), a scrolling section (e.g., 510b), and a scrolling out section (e.g., 512a).

In fact, any number of sections may be utilized by varying the width of the spirals (e.g., separate embodiments having 2, 3, 4, 5, 6, 7, or more sections of alternating or changing filter material specifications). Further, the spirals may be sized such that the integrating rod output is covered by 2 or more scrolling sections plus scrolling in and scrolling out sections.

In one embodiment, the spiral widths are the same or approximately the same. In another embodiment, the spiral widths vary, and if implemented with varying widths, corresponding varying modulation data would also be provided to the illuminated light modulators.

[0047] In one embodiment, differences in illumination intensity between channels is compensated for by adjusting filter sizes. For example, if the intensity of light available for the left channel is lower than the intensity of light available for the right channel, the filter size of the left filter is increased until a better match is reached. Corresponding changes in programming for energizing the modulation chips is also provided (e.g., scrolling a larger portion of the left channel across the modulation surface in synchronization with the larger filter section passing through the light path).

[0048] As shown in Fig. 3A, the filter may accommodate various sizes of integrating rod outputs. The integrating rod output (e.g., 320/325) may, for example, be the entire end of the integrating rod or an output aperture. For better
5 efficiency, the integrating rod output is, for example, shaped proportional to a size of the modulation surface of the modulation chips and a final image projected from the projection system.

[0049] In the illustrated embodiments, both left and right
10 channel portions contain at least all three primary colors, and, using the exemplary filters, at least one channel includes more than one wavelength band in a same color (e.g., the right channel includes more than one band of blue light). However, other arrangements can be made based on the principles of the
15 present invention including sequential red, green, and blue (or other primary and/or mixed color) images each containing both left and right channel wavebands simultaneously.

[0050] Fig. 6 is a drawing of an alternate integrating rod
600 according to an embodiment of the present invention.
20 Mirrors are located at the portions of the input to the integrating rod that are not illuminated by the lamphouse. An input end of the integrating rod 600 includes a reflecting surface 610 (e.g., 100% reflecting surface) and an input aperture 625. The input end reflecting surface 610 may be
25 configured as described above with reference to Fig. 4.

[0051] The integrating rod 600 also includes an output end reflecting surface 620 (e.g., 100% reflecting) and an output aperture 630. The output aperture is constructed by, for example, not coating the aperture with any reflecting material.

5 The integrating rod body may be coated, for example, with a silverized or other material assuring near or equal to 100% internal reflection and little or no loss within the integrating rod.

[0052] The input aperture 625 allows light to enter the
10 integrating rod. Two potential light paths are illustrated, a first path 602 reflecting off an interior of the integrating rod body and exiting the output aperture 630. The second path 604 reflects off the output end reflecting surface 620 and then internally reflects off the integrating rod body and the input
15 end reflecting surface 610 and then on to a path that exits the output aperture. Any number or combination of reflections off the integrating rod body and/or the output end reflecting surface and/or the input end reflecting surface can occur prior to a light beam exiting the output aperture.

20 [0053] Fig. 7 is a drawing of a dual projector system 700 according to an embodiment of the present invention. Left and right channel images are derived, decoded, retrieved, or reconstructed from data stored on disk drive 740 (or received from an appropriate network or transmission reception) by server
25 780. Color correction as described in the above noted patent applications may also be applied. The color correction, if

utilized, is performed, for example, on a channel-by-channel basis and applied to the energizing data of the modulation chip in accordance with which pixels are illuminated by filtered light of the corresponding channel (e.g., pixels illuminated by left channel light have left channel color correction data applied).

[0054] The decoded, color corrected (if applicable), left and right channel images are then projected simultaneously and in part from a first projector 705A and a second projector 705B onto screen 710 for viewing through glasses 715. A projection filter 720 in the first projector has at least two passbands as described in any of the above embodiments. A projection filter 725 in the second projector has at least two passbands as described in any of the above embodiments. The light source of each projector is filtered by its projection filter and then illuminates modulators within the projector.

[0055] The illumination onto each modulator in both projectors comprises light with wavelengths from both a left and a right channel. The light filters (and modulators) of both projectors may be synchronized such that both projectors project identical images. However, in one embodiment, both the modulation chip energizing data and the filtered light illuminating pixels at a same corresponding locations in the separate projectors are inversely synchronized.

[0056] In a 3D left and right channel system, once the images from both projectors are combined, such inverse synchronization

results in the production of full left and right images at any particular instance in time. Conversely, when the projected images are combined without inverse synchronization at a particular instance of time, only part of the image is present
5 for each eye.

[0057] By way of further example, in inverse synchronization, half of the modulation surface of each modulator in one projector may be illuminated with left channel filtered light and pixels illuminated by the left channel filtered light are
10 energized with modulation data for a left channel image. The other half of the modulation surface of each modulator is illuminated with right channel filtered light and the pixels so illuminated are energized with right channel image data. The modulators of the other projector are then inversely illuminated
15 and energized. In result, if the 50% of the modulator being used for the left channel in one projector is the "top" half of the modulation surfaces, then the other projector utilizes the "bottom" half of its modulation surfaces for the left channel. The same relationship exists between channels when the
20 modulation surfaces are broken down into more parts, where, for example, 2 or more sections of "scrolling" left channel filtered light illuminate 2 or more "scrolling" sections of a modulation surface and are side-by-side to 1 or more sections of "scrolling" right channel filtered light (sections of the
25 modulators in one projector being illuminated and energized

according to a left channel are illuminated and energized according to a right channel in the other projector).

[0058] Regardless of the percentage of modulation surface being used by a particular channel, in an inverse
5 synchronization arrangement, it is the sum of the images from both projectors that creates the full images for each channel (a workable system results when, for example, 25% of the modulation surfaces of one projector are used by the left channel - the other projector utilizes 75% of its modulation surfaces modulate
10 the remainder of the left channel image). The inverse synchronization may be accomplished, for example, by different relative positions of the filters in each projector and providing appropriate modulation data to each modulator.

[0059] Such a system is a dual projector active system,
15 wherein the active portion is the inversely synchronized left and right channel "scrolling." Typically, without inverse synchronization a scrolling rate 2 or more scrolls per frame is needed to reduce flicker to acceptable levels. However, inverse synchronization reduces flicker, allowing the use of a slower
20 left/right channel scrolling rate (e.g., a single scroll per frame may be utilized) and the slower scrolling rate also requires less switching in the modulators.

[0060] Glasses 715 include left and right channel viewing filters respectively disposed on left and right lenses of the
25 glasses. The viewing filters are, for example, passbands that

encompass each passband of a corresponding channel in the projection filters.

[0061] Fig. 8 is a drawing of non-rotating light re-cycling system 800 according to an embodiment of the present invention.

5 An integrating rod 801 is illuminated by a light source (e.g., lamphouse) 805. An input aperture is surrounded by mirror 810. A first channel filter 815 and a second channel filter 820 are positioned at an output (e.g., an output aperture) of the integrating rod. Reflections from either the first channel
10 filter 815 or the second channel filter 820 are "recycled" by further reflection off mirror 810 and/or the sides of the integrating rod.

[0062] The reflected light has the opportunity to pass through the channel filter opposite the channel filter that
15 reflected it back towards mirror 810 (e.g., light beam 830 was initially reflected toward mirror 810 by the first channel filter 815 and was reflected multiple times within the integrating rod, including off mirror 810, and then exited the integrating rod through the second channel filter 820). Light
20 that fails to strike a passable channel filter is reflected again providing yet another opportunity to pass the/an appropriate channel filter.

[0063] Light passed by the first channel filter 815 then follows a path (e.g., reflection via mirrors 835 through 2nd
25 integrating rod 855) to modulators for the first channel. Light passed by the second channel filter 820 follows a path (e.g.,

reflection via mirrors 840, through 3rd integrating rod 860) to modulators for the second channel. The modulators are for example, 3 chip DLPs. The modulators, for example, respectively modulate left and right images of a 3D image.

5 [0064] In a single projector system utilizing the non-rotating light re-cycling system, the left and right modulated images are recombined and then projected through a projection lens onto a screen for viewing. For example, $\frac{1}{2}$ of the modulation chip is used for modulating the left channel image
10 and the other $\frac{1}{2}$ of the modulator is used to modulate the right channel image. Optics similar to those used in "dual strip" film projectors are then utilized to combine the left and right channel light paths into a single 3-D light path.

[0065] As with other embodiments described herein, the
15 projection onto the screen is, for example, either a rear or front projection configuration. Alternatively, separate projection lenses may be configured for the left and right channels individually. A dual projection system utilizing the non-rotating light re-cycling system would utilize two
20 projectors respectively projecting left and right channel images simultaneously onto the same screen for increased brightness.

[0066] Although the present invention has been described herein with reference to projectors using DLP modulators, other modulator types, including LCoS may be utilized. In describing
25 preferred embodiments of the present invention, specific terminology is employed for the sake of clarity. However, the

present invention is not intended to be limited to the specific terminology so selected, and it is to be understood that each specific element includes all technical equivalents which operate in a similar manner. Furthermore, the inventor
5 recognizes that newly developed technologies not now known may also be substituted for the described parts and still not depart from the scope of the present invention. All other described items, including, but not limited to integrating rods, mirrors, filters, etc should also be considered in light of any and all
10 available equivalents.

[0067] Portions of the present invention may be conveniently implemented using a conventional general purpose or a specialized digital computer or microprocessor programmed according to the teachings of the present disclosure, as will be
15 apparent to those skilled in the computer art.

[0068] Appropriate software coding can readily be prepared by skilled programmers based on the teachings of the present disclosure, as will be apparent to those skilled in the software art. The invention may also be implemented by the preparation
20 of application specific integrated circuits or by interconnecting an appropriate network of conventional component circuits, as will be readily apparent to those skilled in the art based on the present disclosure.

[0069] The present invention includes a computer program
25 product which is a storage medium (media) having instructions stored thereon/in which can be used to control, or cause, a

computer to perform any of the processes of the present invention. The storage medium can include, but is not limited to, any type of disk including floppy disks, mini disks (MD's), optical discs, DVD, HD-DVD, Blue-ray, CD-ROMS, CD or DVD RW+/-, micro-drive, and magneto-optical disks, ROMs, RAMs, EPROMs, EEPROMs, DRAMs, VRAMs, flash memory devices (including flash cards, memory sticks), magnetic or optical cards, SIM cards, MEMS, nanosystems (including molecular memory ICs), RAID devices, remote data storage/archive/warehousing, or any type of media or device suitable for storing instructions and/or data.

[0070] Stored on any one of the computer readable medium (media), the present invention includes software for controlling both the hardware of the general purpose/specialized computer or microprocessor, and for enabling the computer or microprocessor to interact with a human user or other mechanism utilizing the results of the present invention. Such software may include, but is not limited to, device drivers, operating systems, and user applications. Ultimately, such computer readable media further includes software for performing the present invention, as described above.

[0071] Included in the programming (software) of the general/specialized computer or microprocessor are software modules for implementing the teachings described herein, including, but not limited to, decoding video and preparing frame data for modulation, color processing, synchronizing filters, simultaneously energizing modulation chips with

“scrolling” left and right channel image data, timing and synchronization of images projected in dual projection systems, matching scrolling modulation data to variable filter sizes, and the display, storage, or communication of results according to
5 the processes of the present invention.

[0072] The present invention may suitably comprise, consist of, or consist essentially of, any element (the various parts or features of the invention) and their equivalents. Further, the present invention illustratively disclosed herein may be
10 practiced in the absence of any element, whether or not specifically disclosed herein. Obviously, numerous modifications and variations of the present invention are possible in light of the above teachings. It is therefore to be understood that within the scope of the appended claims, the
15 invention may be practiced otherwise than as specifically described herein.

ENUMERATED EXAMPLE EMBODIMENTS

[0073] Thus, embodiments of the present invention may relate to one or more of the enumerated example embodiments below, each
20 of which are examples, and, as with any other related discussion provided above, should not be construed as limiting any claim or claims provided yet further below as they stand now or as later amended, replaced, or added. Likewise, these examples should not be considered as limiting with respect to any claim or
25 claims of any related patents and/or patent applications

(including any foreign or international counterpart applications and/or patents, divisionals, continuations, re-issues, etc.).

1. A filter, comprising spirally shaped filters configured for
5 use in left and right channels of a 3D projection system.

2. The filter according to Claim 1, wherein the spirally shaped filters comprise spectral separation filters.

10 3. The filter according to Claim 2, wherein the spectral separation filters comprise a set of first channel passbands configured to pass light, a set of second channel passbands configured to pass light, and a set of guard bands configured to block light between adjacent passbands of different channels.

15 4. The filter according to Claim 3, wherein the spectral separation filters further comprise at least one notch band between adjacent colors of a same channel configured to block light between the adjacent colors.

20 5. The filter according to Claim 2, wherein at least one of the spectral separation filters comprises three passbands of visible light, a first passband configured to pass only a first color of light, a second passband configured to pass two
25 spectrum adjacent colors of light comprising the first color of light and a second color of light, and a third passband

configured to pass two spectrum adjacent colors of light comprising the second color of light and a third color of light.

6. The filter according to Claim 3, wherein at least one of
5 the passbands passing spectrum adjacent colors of light includes a notch that separates the spectrum adjacent colors and is not passed by the passband.

7. The filter according to Claim 2, wherein a first of the
10 spectral separation filters comprises passbands of wavelengths of approximately 400 to 440 nm, 484 to 498 nm, 514 to 528 nm, 567 to 581 nm, and 610 to 623 nm.

8. The filter according to Claim 2, wherein one of the
15 spectral separation filters comprises wavelengths of approximately 455 to 471 nm, 539 to 556 nm, and 634 to 700 nm.

9. A method, comprising the steps of:
illuminating a first portion of a light modulator with light
20 having characteristics of a first channel of a 3D image; and
illuminating a second portion of the light modulator with light having characteristics of a second channel of a 3D image;
wherein the step of illuminating the first portion of the light modulator and the step of illuminating the second portion of the
25 light modulator are performed simultaneously.

10. The method according to Claim 9, wherein the step of illuminating comprises spinning spirally shaped filters in a light path of a projector.

5 11. The method according to Claim 10, wherein the spirally shaped filters comprise spectral separation filters each including at least one set of primary passbands.

12. The method according to Claim 10, wherein the spirally
10 shaped filters comprise spectral separation filters

13. The method according to Claim 12, further comprising the step of re-cycling reflections from the spirally shaped filters.

15 14. A projector, comprising a filter wheel comprising at least one set of spectrally separated spirally shaped filters.

15. The projector according to Claim 14, further comprising an integrating rod positioned between the filter wheel and a light
20 source, wherein the integrating rod comprises a mirror configured to reflect portions of light not passed by a first of the spectrally separated filters and portions of light not passed by the second set of spectrally separated filters back toward the filters.

16. The projector according to Claim 14, further comprising light modulators positioned to simultaneously intercept light filtered by both of at least one set of the spectrally separated spirally shaped filters.

5

17. The projector according to Claim 14, further comprising light modulators positioned to simultaneously intercept light filtered by more than at least one set of the spectrally separated spirally shaped filters.

10

18. The projector according to Claim 14, wherein the projector is part of a system including at least one pair of spectrally separated eye filters.

15 19. A filter, comprising filter segments each comprising spectral separation filters respectively configured for use in left and right channels of a 3D projection system.

20 20. The filter according to Claim 19, wherein the filter comprises a wheel filter and the segments comprise spectral separation filters that extend out radially on the wheel.

21. The filter according to Claim 20, wherein the filter is installed in a projection system comprising an integrating rod
25 having a reflective aperture configured to re-cycle light reflected from the filter.

22. The filter according to Claim 19, wherein the filter comprises a wheel and the segments are spirally shaped and intermeshed on the wheel, and the filter is installed in a
5 projection system comprising an integrating rod having a reflective aperture configured to re-cycle light reflected from the filter.

23. A projection system, comprising a first projector
10 configured to project at least a portion of first and second channel images and re-cycle portions of spectrum not used by a channel by re-directing the unused portions of spectrum to the other channel.

15 24. The projection system according to Claim 23, wherein the projector is configured to modulate light to be projected in a "dual-strip" manner.

25. The projection system according to Claim 23, further
20 comprising a second projector configured to project at least a portion of the first and the second channel images and re-cycle portions of spectrum not used by a channel by re-directing the unused portions of spectrum to the other channel.

26. The projection system according to Claim 25, wherein images projected by the first projector are inversely synchronized with images projected by the second projector.

5 27. A dual projection system, comprising a first projector and a second projector each configured to simultaneously project full color portions of first and second channel images and re-cycle portions of spectrum not used by a channel by re-directing the unused portions of spectrum to the other channel.

10

28. The dual projection system according to Claim 27, wherein the projectors are configured to modulate and project the images in a "dual-strip" manner.

15 29. The dual projection system according to Claim 27, wherein the unused portions of spectrum are re-directed to the other channel in the same projector.

30. The dual projection system according to Claim 27, wherein
20 the re-directed portions of spectrum are re-directed by reflection from a filter having characteristics of the channel from which the spectrum is being re-directed.

31. The dual projection system according to Claim 30, wherein
25 the filter is a filter wheel having filter sections wherein at least one filter section comprises characteristics of the first

channel and at least one filter section comprises characteristics of the second channel.

32. The dual projection system according to Claim 31, wherein
5 the filter sections comprise spirally shaped filter sections.

33. The dual projection system according to Claim 31, wherein the filter sections comprise radially extending filter sections.

10 34. The dual projection system according to Claim 31, wherein the filter sections are sized according to an amount of light available for each channel.

35. The dual projection system according to Claim 27, wherein
15 the portions of the first and second channel images projected by the first projector are inversely synchronized with the portions projected by the second projector.

36. The dual projector system according to Claim 35, wherein
20 the portions of the first and second channel images comprise scrolling portions.

37. The dual projector system according to Claim 36, wherein the scrolling portions scroll at a rate of approximately 1
25 scroll per frame.

CLAIMS

1. A filter, comprising spirally shaped filters configured for use in left and right channels of a 3D projection system.

5

2. The filter according to Claim 1, wherein the spirally shaped filters comprise spectral separation filters.

3. The filter according to Claim 2, wherein the spectral
10 separation filters comprise a set of first channel passbands configured to pass light, a set of second channel passbands configured to pass light, and a set of guard bands configured to block light between adjacent passbands of different channels.

15 4. The filter according to Claim 3, wherein the spectral separation filters further comprise at least one notch band between adjacent colors of a same channel configured to block light between the adjacent colors.

20 5. The filter according to Claim 2, wherein at least one of the spectral separation filters comprises three passbands of visible light, a first passband configured to pass only a first color of light, a second passband configured to pass two spectrum adjacent colors of light comprising the first color of
25 light and a second color of light, and a third passband

configured to pass two spectrum adjacent colors of light comprising the second color of light and a third color of light.

6. The filter according to Claim 3, wherein at least one of
5 the passbands passing spectrum adjacent colors of light includes a notch that separates the spectrum adjacent colors and is not passed by the passband.

7. A method, comprising the steps of:
10 illuminating a first portion of a light modulator with light having characteristics of a first channel of a 3D image; and illuminating a second portion of the light modulator with light having characteristics of a second channel of a 3D image; wherein the step of illuminating the first portion of the light
15 modulator and the step of illuminating the second portion of the light modulator are performed simultaneously.

8. The method according to Claim 7, wherein the step of
illuminating comprises spinning spirally shaped filters in a
20 light path of a projector.

9. A projection system comprising a filter wheel comprising at least one set of spectrally separated spirally shaped filters.

25 10. The projection system according to Claim 9, further comprising an integrating rod positioned between the filter

wheel and a light source, wherein the integrating rod comprises a mirror configured to reflect portions of light not passed by a first of the spectrally separated filters and portions of light not passed by the second set of spectrally separated filters
5 back toward the filters.

11. The projection system according to Claim 14, further comprising light modulators positioned to simultaneously intercept light filtered by both of at least one set of the
10 spectrally separated spirally shaped filters.

12. The projection system according to Claim 9, further comprising at least one pair of spectrally separated eye filters.

15

13. The projection system according to Claim 9, wherein the filter wheel is installed in a first projector configured to project at least a portion of first and second channel images and re-cycle portions of spectrum not used by a channel by re-
20 directing the unused portions of spectrum to the other channel.

14. The projection system according to Claim 13, further comprising a second projector configured to project at least a portion of the first and the second channel images and re-cycle
25 portions of spectrum not used by a channel by re-directing the unused portions of spectrum to the other channel.

15. The projection system according to Claim 14, wherein images projected by the first projector are inversely synchronized with images projected by the second projector.

5

16. The projector system according to Claim 9, wherein the spirally shaped filters comprise spectrally separated scrolling portions that scroll at a rate of approximately 1 scroll per frame.

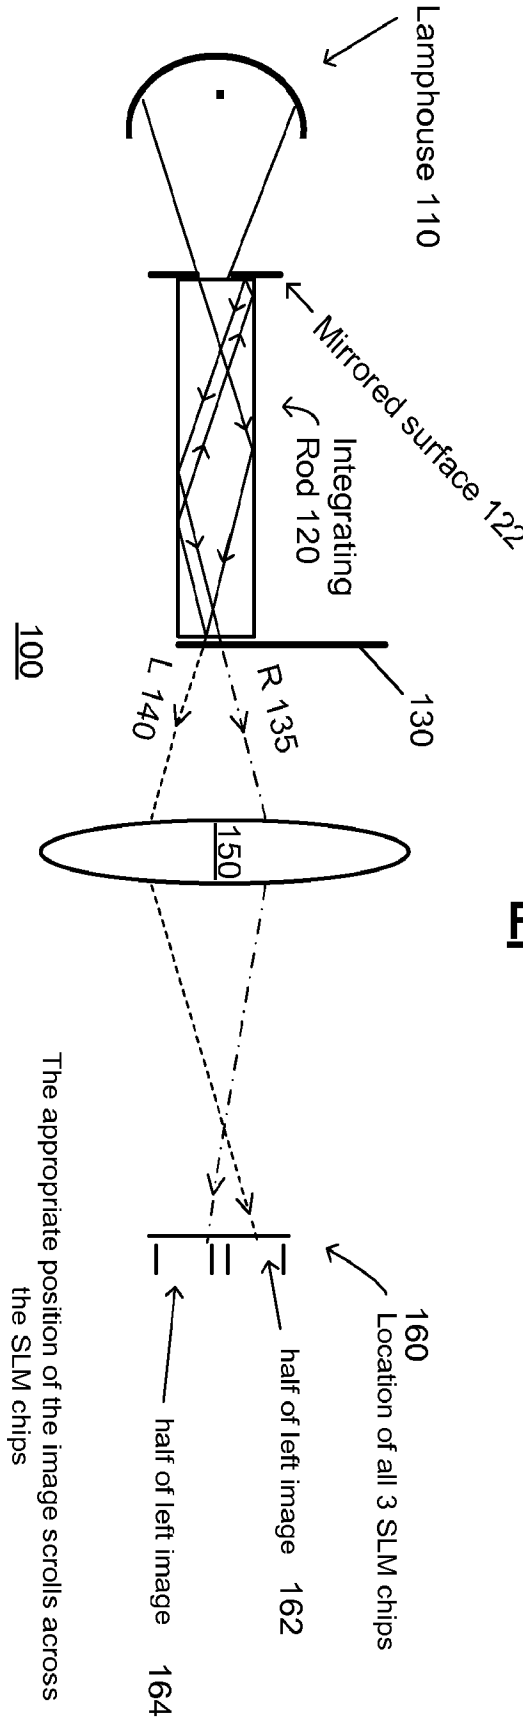
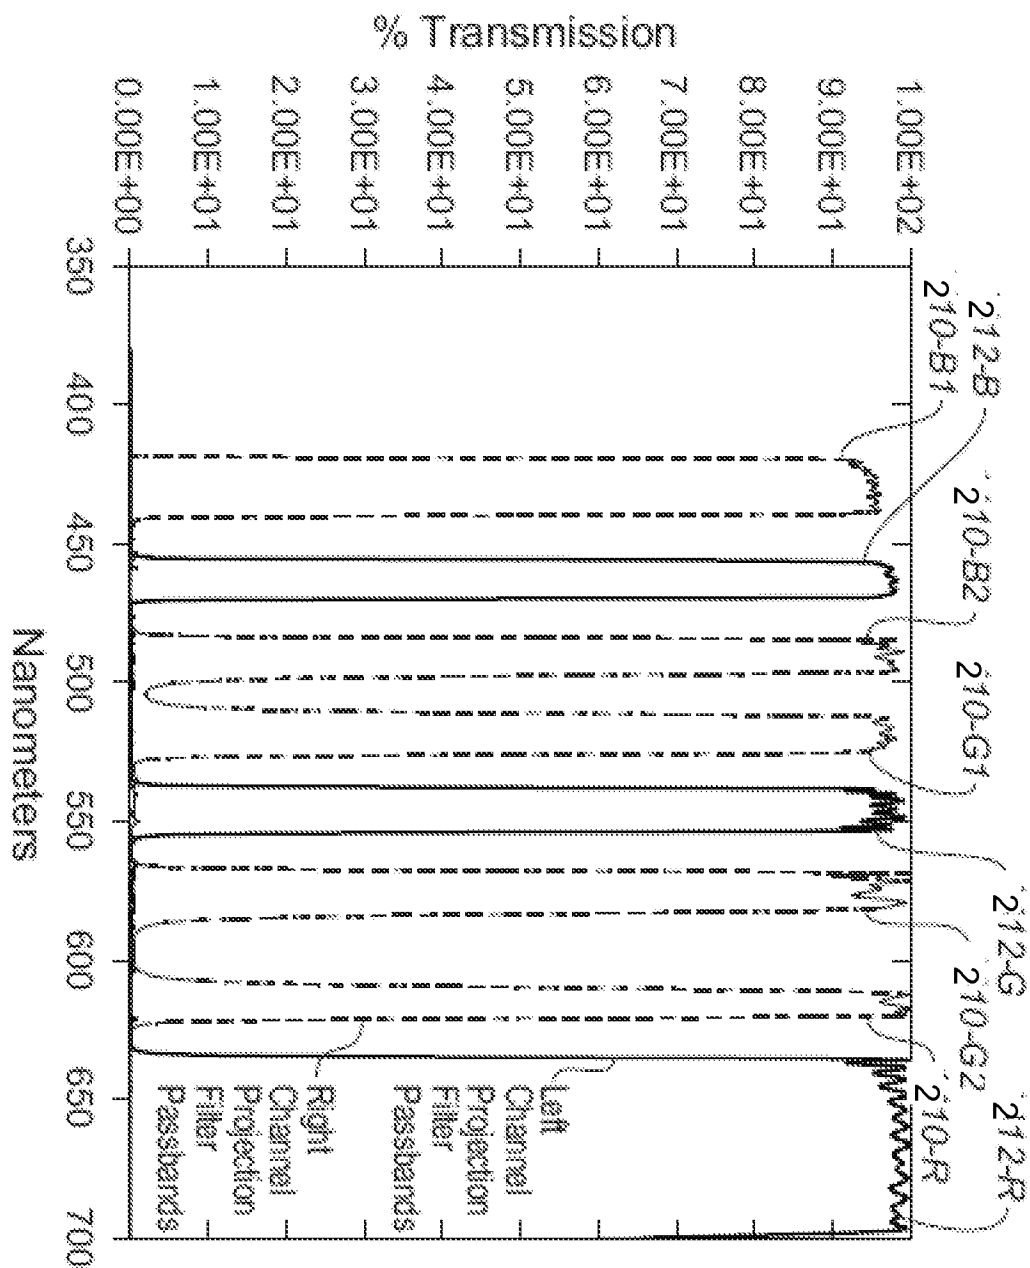


FIG. 1

**FIG. 2**

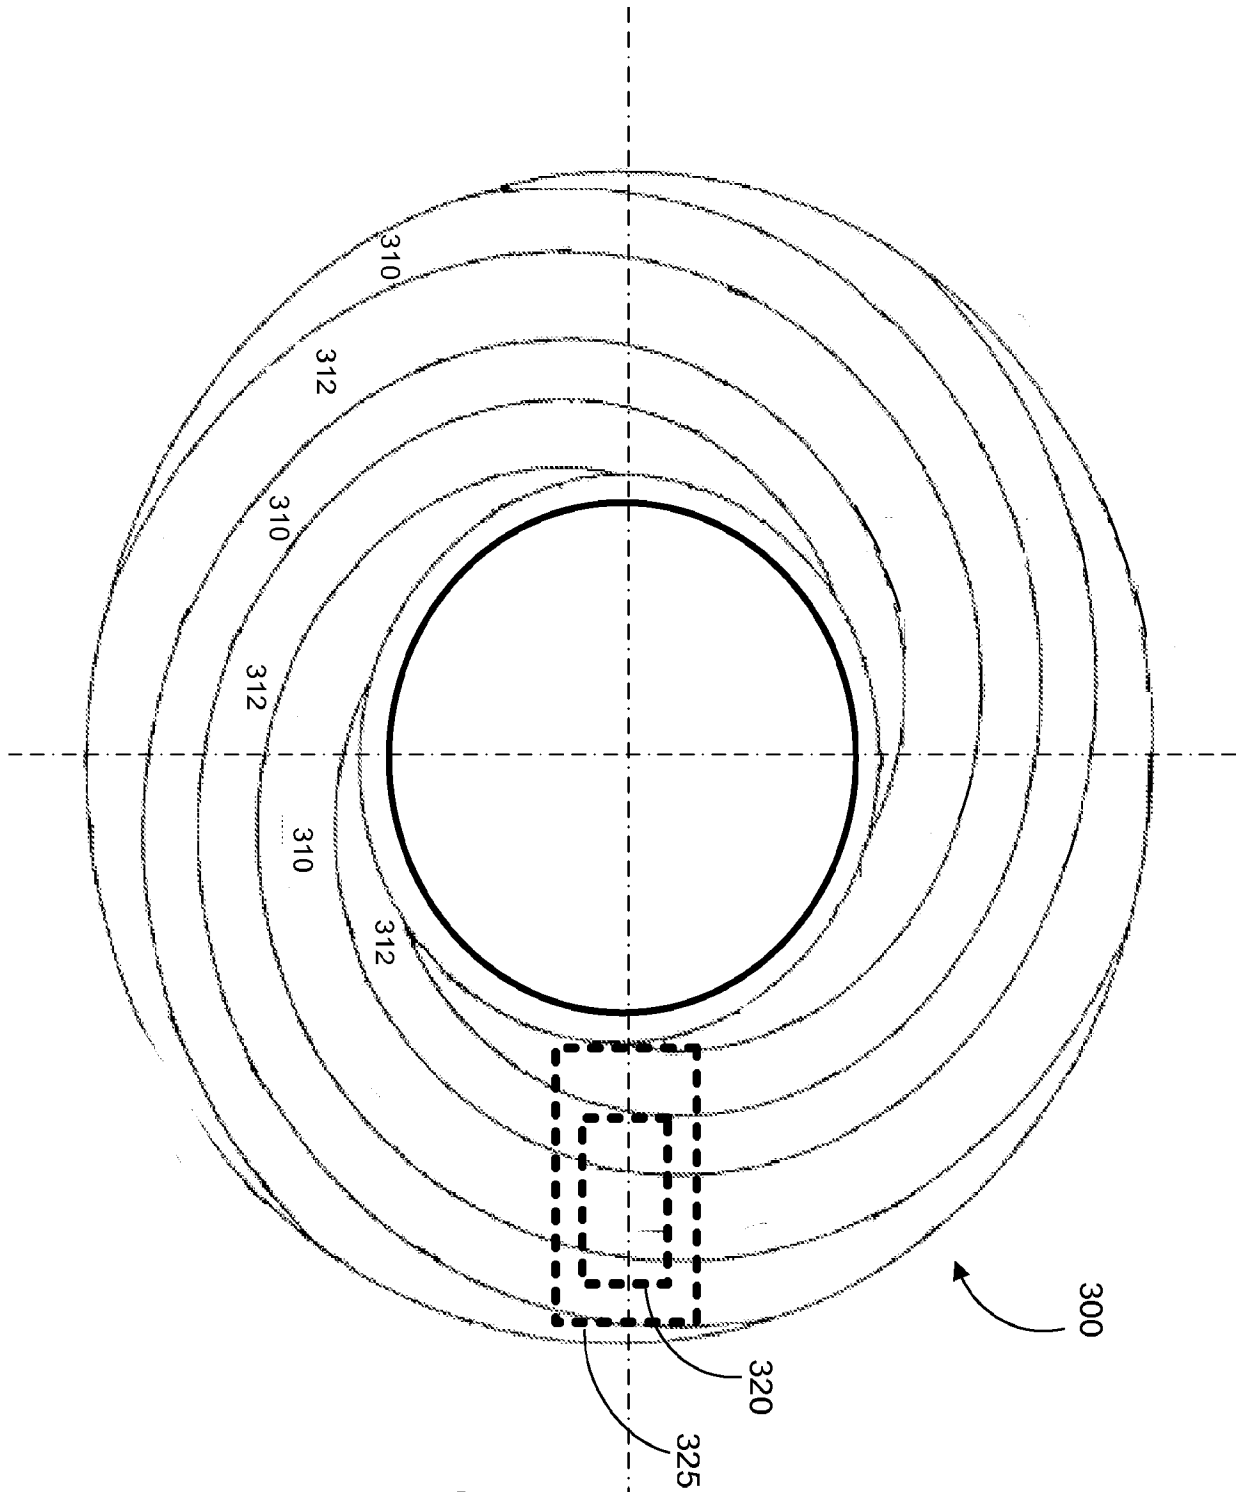


FIG. 3A

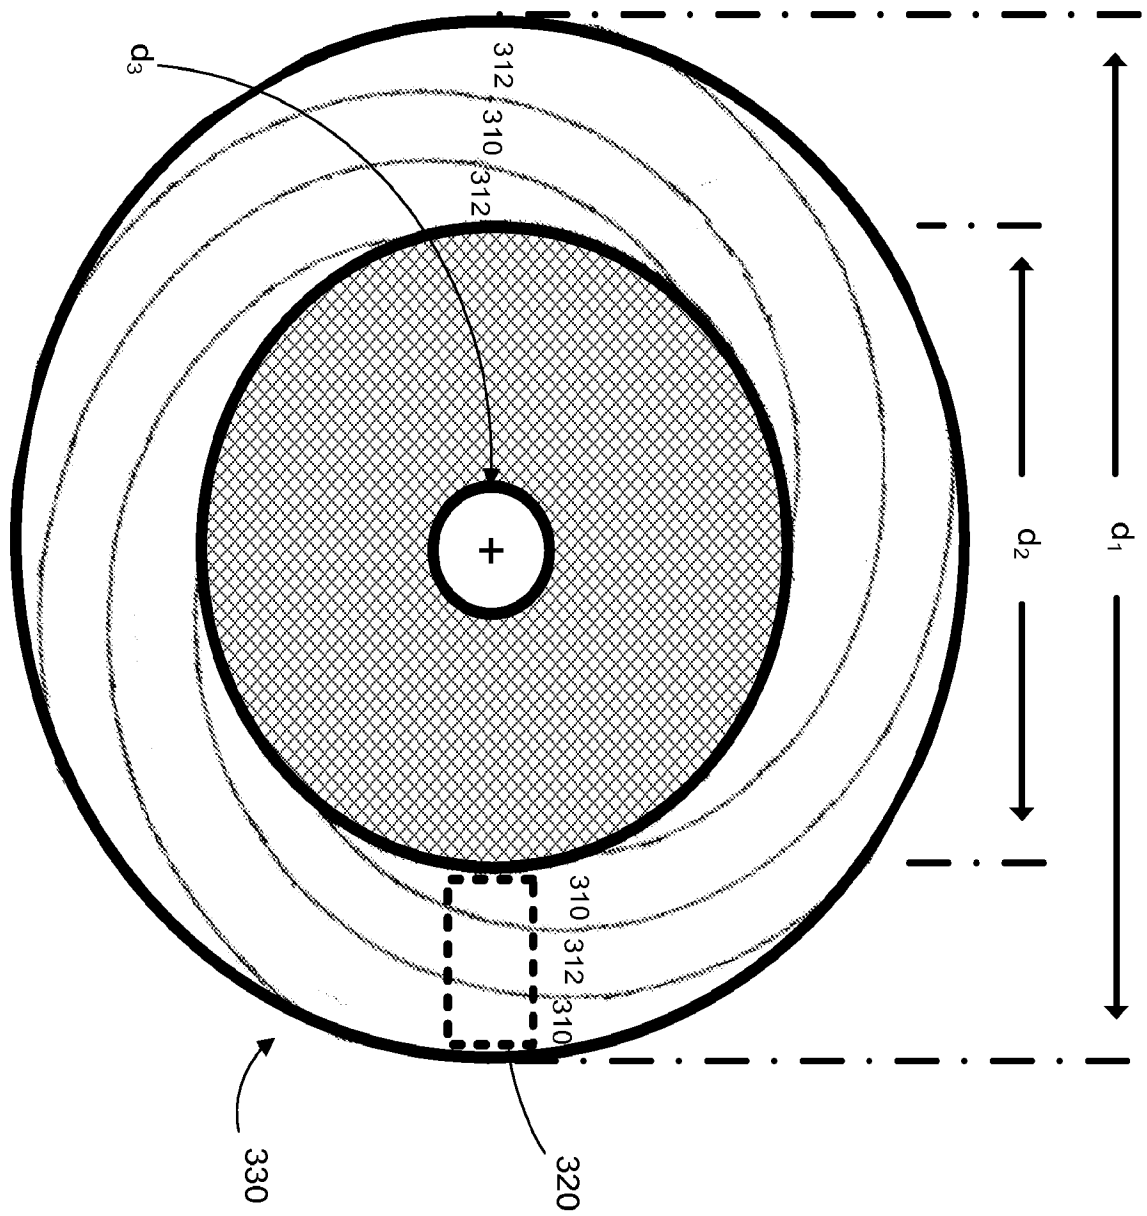


FIG. 3B

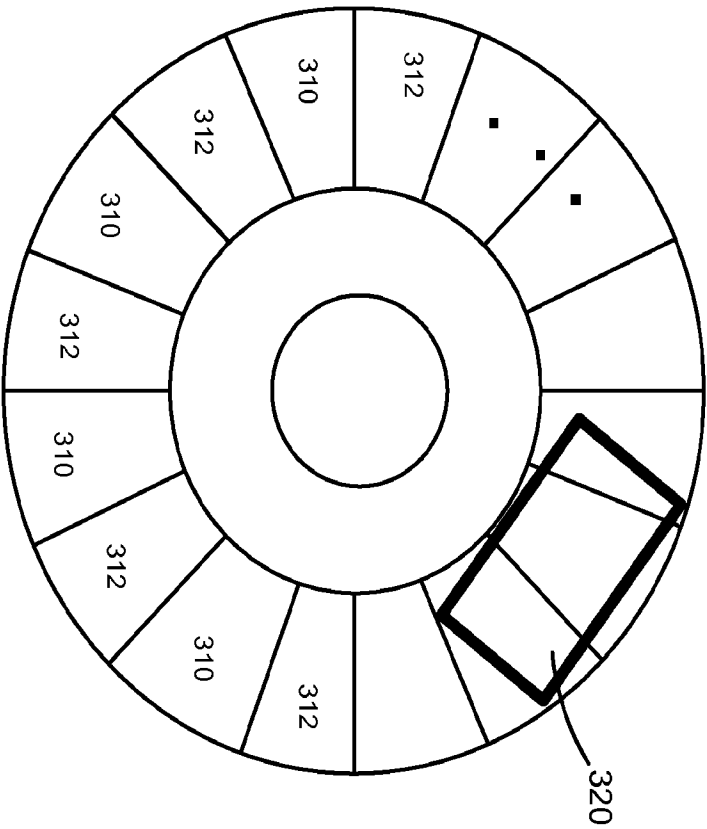


FIG. 3C


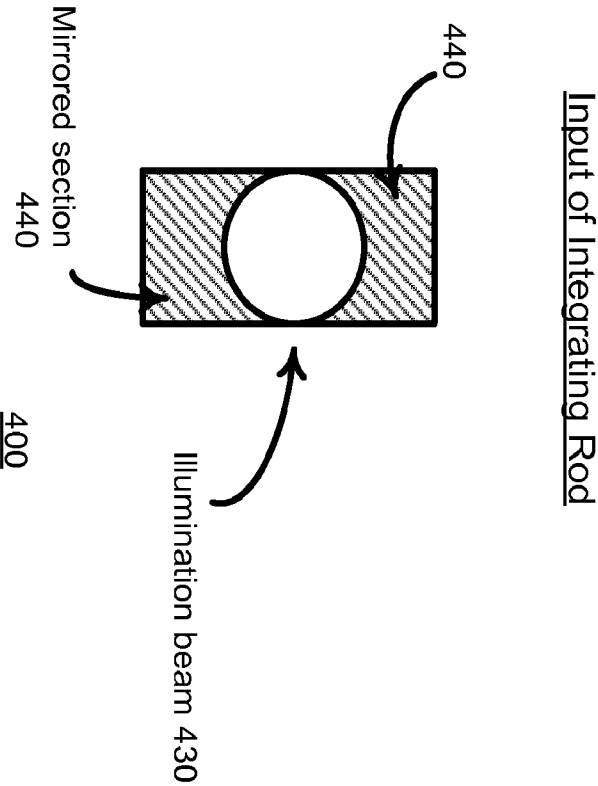


FIG. 4

Filter Wheel at the Output of Integrating Rod

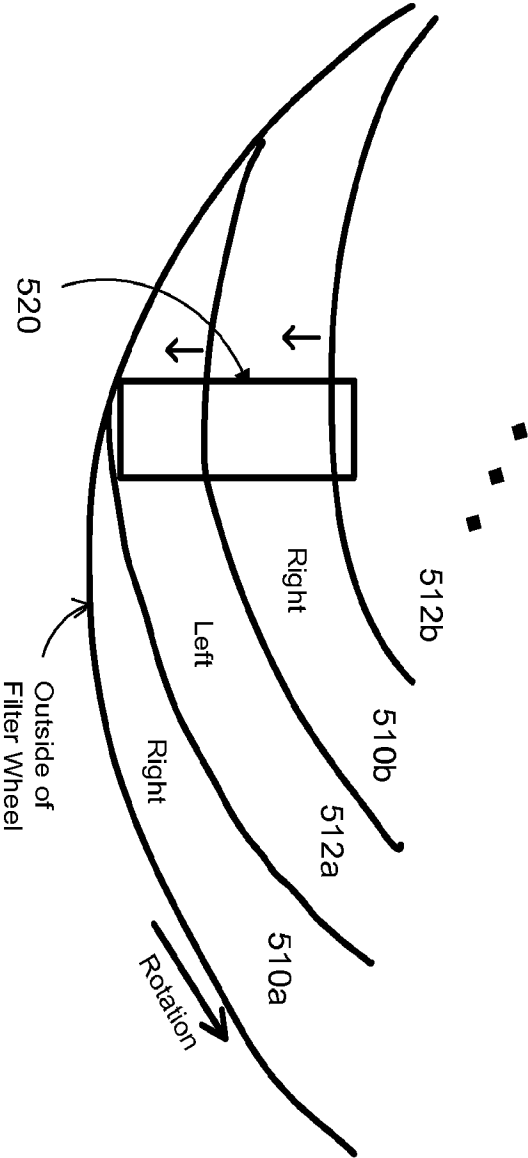

The filters scroll down across the output of the integrating rod

FIG. 5

Alternate Integrating Rod

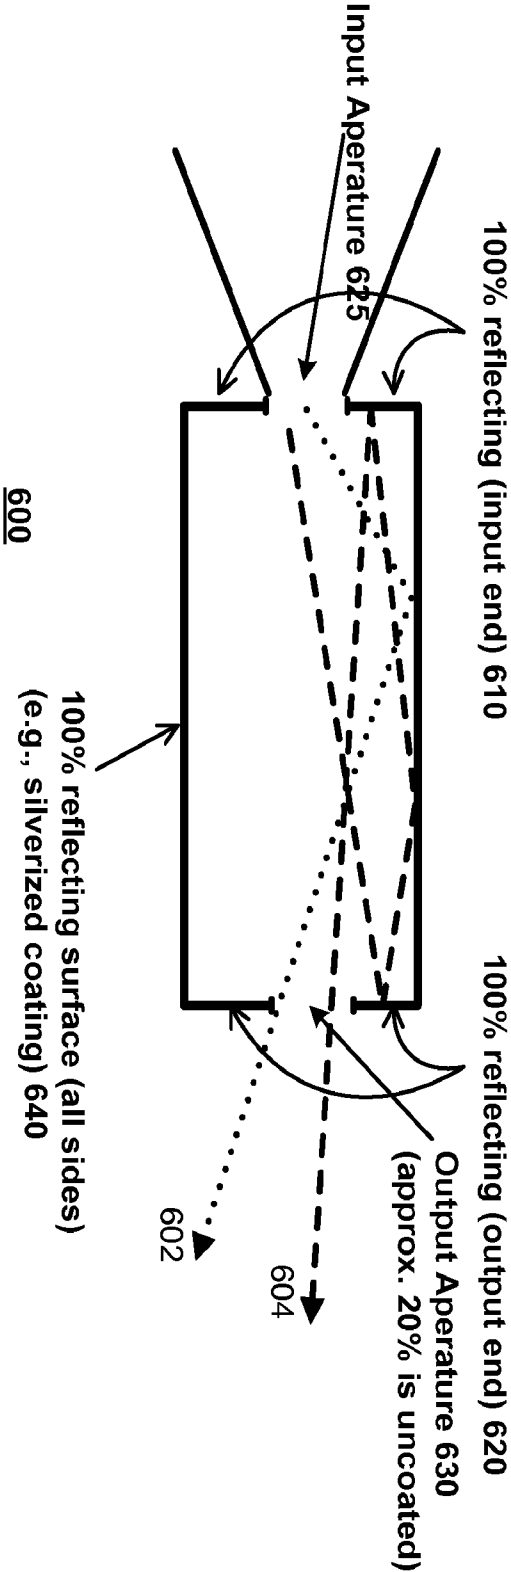


FIG. 6


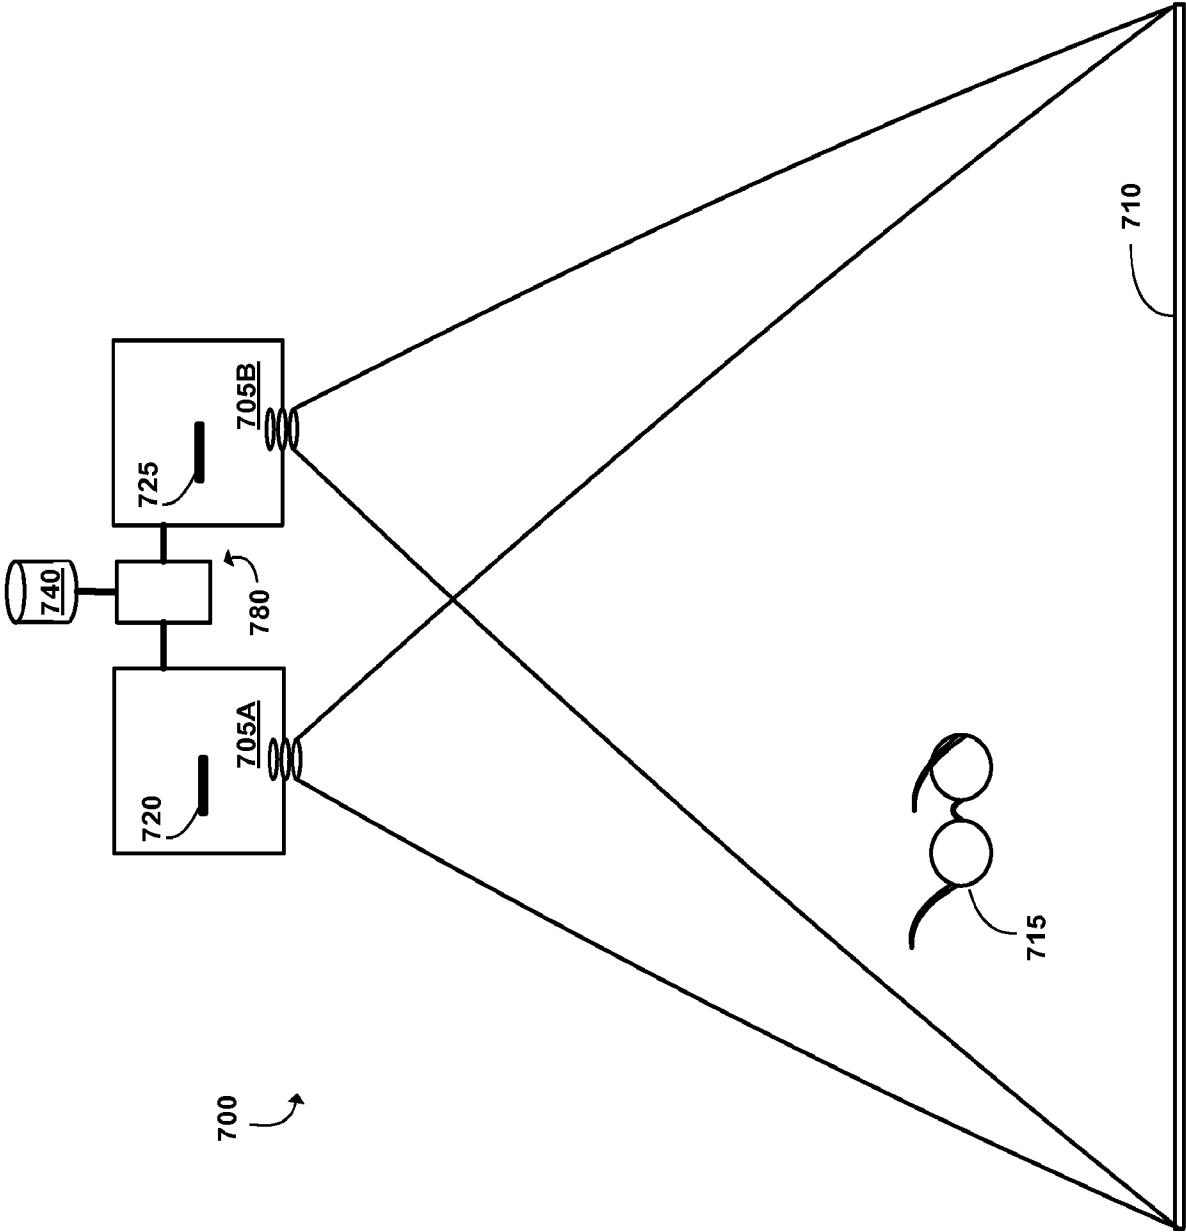


FIG. 7

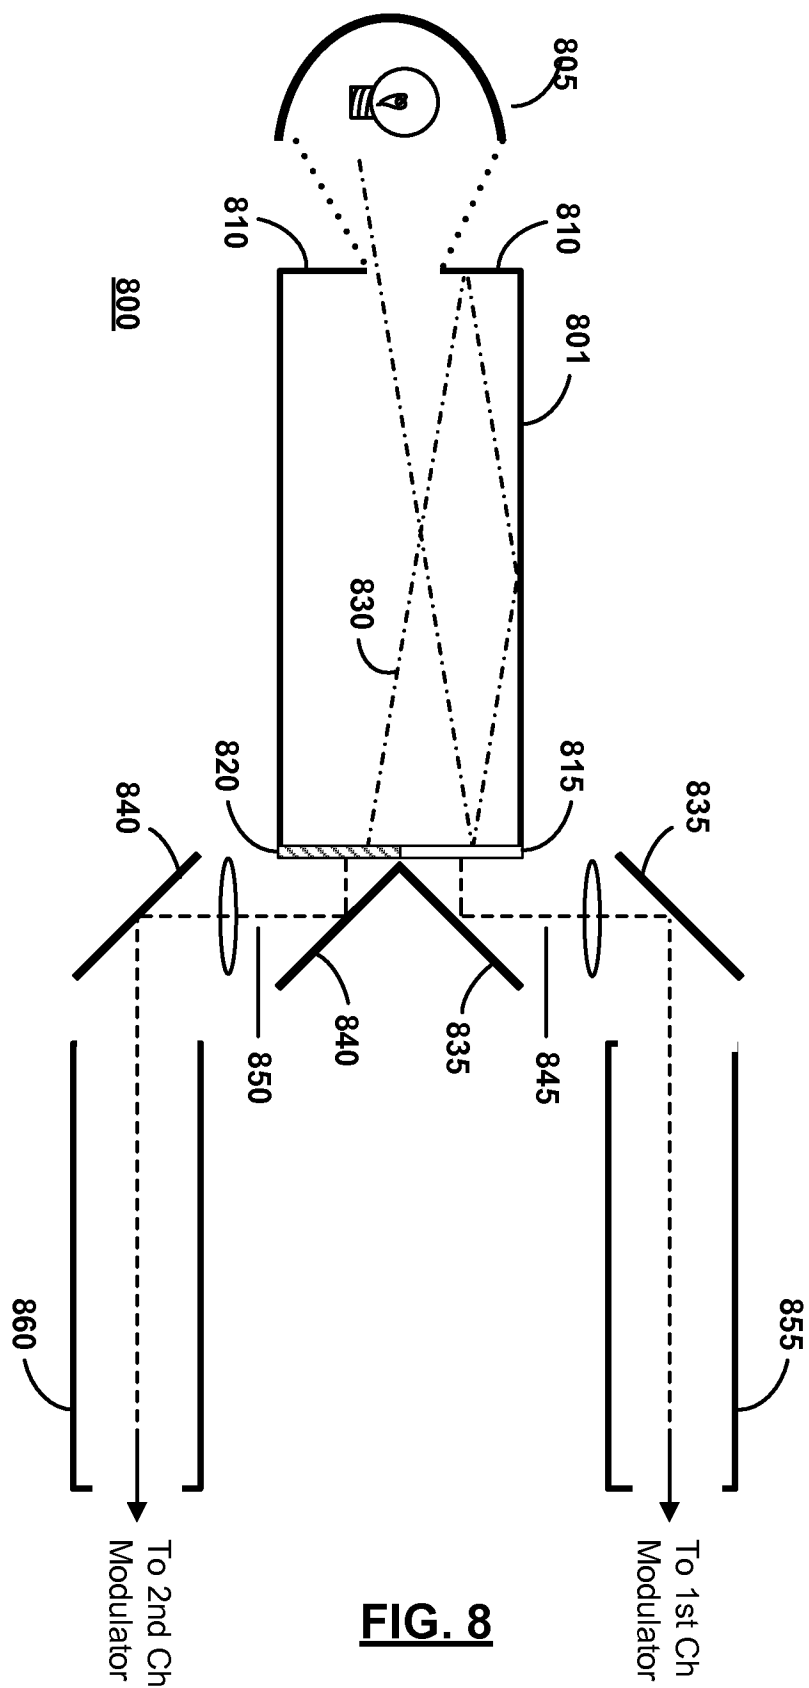

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2009/046562

A. CLASSIFICATION OF SUBJECT MATTER

INV. G03B21/20 G03B35/16 G03B35/26 G02B27/22 H04N13/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G03B G02B H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2005/007305 A1 (JOHANSEN IB-RUNE [NO] ET AL) 13 January 2005 (2005-01-13)	1,2,7,8
Y	paragraphs [0037] - [0039]; figures 1,2,6	3-6
X	US 2002/057402 A1 (UM KEE TAE [KR]) 16 May 2002 (2002-05-16)	1,2
Y	abstract; figures 14,15	3-6
Y	DE 103 59 788 A1 (DAIMLER CHRYSLER AG [DE]) 28 April 2005 (2005-04-28)	3-6
	paragraphs [0017] - [0020]; figures 2,5	
Y	EP 1 830 584 A (BARCO NV [BE]) 5 September 2007 (2007-09-05)	3-6
	abstract; figures 2,13	

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* & * document member of the same patent family

Date of the actual completion of the international search

31 July 2009

Date of mailing of the international search report

18/11/2009

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040.
Fax: (+31-70) 340-3016

Authorized officer

Rückerl, Ralph

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2009/046562

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-8

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-8

directed to the display of 3D images.

1.1. claims: 1-6

directed to a spirally shaped spectral filter defining a first set of passbands and a second set of passbands used in a 3D projection system.

1.2. claims: 7-8

directed to a method of displaying a portion of a first channel and a portion of a second channel of a 3D image on a single light modulator simultaneously.

2. claims: 9-16

directed to a projection system comprising an integrating rod and a filter wheel, wherein the integrating rod is configured to recycle light reflected from the filter wheel.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/US2009/046562

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005007305 A1	13-01-2005	CN 1823533 A	23-08-2006
		EP 1645137 A1	12-04-2006
		JP 2007529019 T	18-10-2007
		KR 20060103820 A	04-10-2006
		WO 2005006771 A1	20-01-2005
US 2002057402 A1	16-05-2002	KR 20020037797 A	23-05-2002
DE 10359788 A1	28-04-2005	NONE	
EP 1830584 A	05-09-2007	EP 1830585 A2	05-09-2007