



(51) International Patent Classification:

A01G 25/00 (2006.01) F16K 31/00 (2006.01)
A01G 25/16 (2006.01) G01N 19/10 (2006.01)

(21) International Application Number:

PCT/IL2018/051011

(22) International Filing Date:

06 September 2018 (06.09.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/554,610 06 September 2017 (06.09.2017) US

(71) Applicant: **SOLIDRIP LTD.** [IL/IL]; 7 Ha'Barzel Street,
6971011 Tel Aviv (IL).


(72) Inventor: **SOL, David**; 7682900 Kibbutz Naan (IL).

(74) Agent: **GASSNER, Dvir** et al.; Geyra Gassner Kesten, 55
Yigal Alon Street, 6789115 Tel Aviv (IL).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH,

(54) Title: AUTONOMOUS IRRIGATION SYSTEM

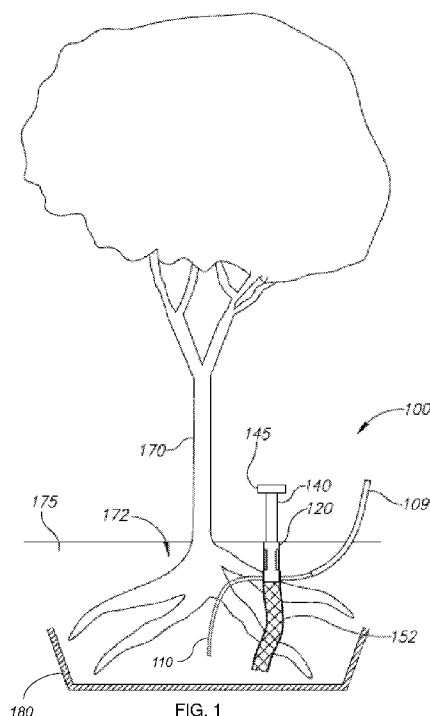

(57) Abstract: A system, comprising: a housing comprising an elongated hollow body configured to be at least partially embedded in a soil environment adjacent a plant at a desired depth; a swellable element dimensioned to be disposed within the housing, the swellable element being configured to swell when absorbing moisture; a resiliently-compressible flexible tube configured to provide water to the soil environment, the flexible tube is laced transversely through tube openings of the housing, the flexible tube is disposed adjacent to the swellable element inside the housing such that a swelling or displacement of the swellable element compresses the flexible tube, thereby limiting or preventing water flow therethrough; and a moisture transfer adapter configured to communicate moisture along its length from a desired location within the soil environment to the swellable element, as well as methods of using the system are provided.

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

AUTONOMOUS IRRIGATION SYSTEM

CROSS REFERENCE TO RELATED APPLICATIONS

[001] This application is an International Patent Application which claims the benefit of priority of U.S. Provisional Patent Application No. 62/554,610, filed September 6, 2017, the contents of which are all incorporated herein by reference in their entirety.

FIELD OF THE INVENTION

[002] The invention relates to the field of autonomous plant irrigation.

BACKGROUND OF THE INVENTION

[003] Various types of plants have different irrigation requirements depending on numerous factors, such as type of plant, rate of growth, relative humidity, and rate of air flow around the leaves. Additionally, environmental factors such as temperature, humidity, terrain or soil type, gravitational seepage, etc., may also affect the irrigation requirements of the various plants. Insufficient watering may result in a plant drying up and withering away. Conversely, excessive watering may also be detrimental to the plant and its root system.

[004] The cultivation of healthy plants requires individual attention to the specific needs of different plants. This chore may be onerous and may lead to excessive or insufficient watering to the detriment of the plants. The use of a “one-size-fits-all” irrigation systems, where plants arranged along the same irrigation line receive the same quantity of water at the same time, poses a similar threat of excessive or insufficient watering. However, customized irrigation systems may be expensive, time consuming, require electricity and be intricate to operate. Further, due to the increased evaporation of water near the surface of soil, irrigation systems that sense moisture near where they are implanted and not at the base of the plants roots, may inadvertently overwater the plant. An automated, non-electronic, irrigation system that releases water based on the water content at the base of a plants roots is thus greatly needed.

[005] The foregoing examples of the related art and limitations related therewith are intended to be illustrative and not exclusive. Other limitations of the related art will

become apparent to those of skill in the art upon a reading of the specification and a study of the figures.

SUMMARY OF THE INVENTION

[006] The following embodiments and aspects thereof are described and illustrated in conjunction with systems, tools and methods which are meant to be exemplary and illustrative, not limiting in scope.

[007] According to a first aspect, there is disclosed a system, comprising: a housing comprising an elongated hollow body configured to be at least partially embedded in a soil environment adjacent to a plant at a desired depth; a swellable element dimensioned to be disposed within the housing, the swellable element being configured to swell when absorbing moisture; a resiliently-compressible flexible tube configured to provide water to the soil environment, the flexible tube is laced transversely through tube openings of the housing, the flexible tube is disposed adjacent to the swellable element inside the housing such that a swelling or displacement of the swellable element compresses the flexible tube, thereby limiting or preventing water flow therethrough; and a moisture transfer adapter configured to communicate moisture along its length from a desired location within the soil environment to the swellable element

[008] According to another aspect, there is disclosed a method comprising: providing a system of the invention; at least partially embedding the housing in a soil environment at a predetermined depth adjacent to a plant; configuring the flexible tube to deliver water to a region of the soil environment below the plant; configuring a location of the moisture transfer adapter so as to provide moisture communication from the region of the soil environment below the plant to the swellable element; and flowing water through the flexible tube.

[009] In some embodiments, the system of the invention further comprises an irrigation plate disposed underneath the roots of a plant within the soil environment, the irrigation plate being configured to receive and retain water from the flexible tube and irrigate the soil environment. In some embodiments, the desired location is the irrigation plate. In some embodiments, the irrigation plate comprises a connector for stably attaching the transfer adapter thereto. In some embodiments, the irrigation plate is a bottom portion of a container configured to contain a plant to be irrigated.

[010] In some embodiments, the housing comprises exposure windows configured to provide air and water communication between the swellable element and the ambient environment outside the housing. In some embodiments, the windows provide communication between the swellable element and the air above ground. In some embodiments, the housing is configured to be imbedded in the soil and partially above ground. In some embodiments, the swellable element is at least partially above ground. In some embodiments, the swellable element is completely above ground.

[011] In some embodiments, exposure to ambient air causes water to evaporate from the swellable element. In some embodiments, egression of moisture from the swellable element reduces a constricting force applied on the flexible tube by the swellable element, the reduction of the constricting force enabling water to flow through the flexible tube.

[012] In some embodiments, the housing further comprises a regulating element comprising a screw configured to rotatably engage with interior screw threads at an open end of the housing, the regulating element being disposed within the housing such that by rotating the regulating element, the water-swellable element is displaced towards the flexible tube such that it applies a compressive force on the flexible tube.

[013] In some embodiments, the flexible tube comprises a catch valve configured to prevent debris in the soil environment from penetrating the flexible tube.

[014] In some embodiments, the moisture transfer adapter is made of a fibrous or a porous material. In some embodiments, the moisture transfer adapter comprises a sleeve configured to wrap around a portion of the exterior of the housing comprising at least a portion of the exposure windows. In some embodiment, the moisture transfer adapter is configured to communicate moisture from the irrigation plate to the swellable element at substantially a same rate that moisture is transferred through the soil environment.

[015] In some embodiments, the system of the invention further comprises a filter defining a perforated elongated tubular body configured for receiving the moisture transfer adapter therein.

[016] In some embodiments, the system of the invention further comprises a rigid element coupled to the swellable element and configured to communicate compressive

pressure from the swellable element to the flexible tube upon swelling or displacement of the swellable element.

[017] In some embodiments, the system of the invention further comprises a non-water permeable adapter cover positioned to block transfer of moisture to at least a portion of the adapter.

[018] In some embodiments, the system of the invention does not comprise an electronic component.

[019] In some embodiments, the method of the invention further comprises placing an irrigation plate in the region of the soil environment below the plant such that the flexible tube delivers water to the irrigation plate and the adapter provides moisture communication from the irrigation plate to the swellable element.

[020] In some embodiments, the egression of moisture from the swellable element reduces a constricting force applied on the flexible tube by the swellable element, the reduction of the constricting force enabling water flow through the flexible tube.

[021] In some embodiments, the moisture transfer adapter is configured to communicate moisture from the region of the soil environment below the plant to the swellable element at substantially the same or a greater rate than moisture is transferred through the soil environment.

[022] In some embodiments, the method of the invention is for automatically and non-electronically controlling irrigating of the plant.

[023] In some embodiments, the region of the soil environment below the plant is at least 10 cm from the swellable element.

[024] In addition to the exemplary aspects and embodiments described above, further aspects and embodiments will become apparent by reference to the figures and by study of the following detailed description.

BRIEF DESCRIPTION OF THE FIGURES

[025] Exemplary embodiments are illustrated in referenced figures. Dimensions of components and features shown in the figures are generally chosen for convenience and clarity of presentation and are not necessarily shown to scale. The figures are listed below.

[026] Fig. 1 shows an autonomous irrigation system used in plant irrigation, according to certain embodiments;

[027] Fig. 2 shows a housing of an autonomous irrigation system, according to certain embodiments;

[028] Figs. 3A-3C show an autonomous irrigation system, according to certain embodiments;

[029] Figs. 4A-4B show an irrigation plate, according to certain embodiments;

[030] Fig. 5 shows a moisture transfer adapter filter, according to certain embodiments;

[031] Fig. 6 shows a flexible irrigation tube comprising a check valve, according to certain embodiments;

[032] Fig. 7 shows an autonomous irrigation system configured to irrigate a field plant, according to certain embodiments;

[033] Fig. 8 shows a plurality of autonomous irrigation system configured to irrigate a plurality of plants, according to certain embodiments.

[034] Fig. 9 shows an autonomous irrigation system configured to irrigate a plant in a pot, according to certain embodiments, a blown-up view is inset; and

[035] Fig. 10 shows a water profile of moisture at the roots of three plants grown using autonomous irrigation systems and one plant watered by a computer every 3 days.

DETAILED DESCRIPTION OF THE INVENTION

[036] Disclosed herein is an autonomous, non-electronic, irrigation system for regulating the irrigation of a plant embedded in a soil environment. In some embodiments, the irrigation system is self-controlled. In an exemplary embodiment, the autonomous irrigation system comprises a housing; a flexible tube passing through the housing and configured to provide irrigation to the plant; a swellable element disposed within the housing adjacent the irrigation tube and configured to swell from moisture absorption and to shrink on egression of moisture; and a moisture transfer adapter for communicating moisture levels in a desired location to the swellable

element. The autonomous irrigation system is designed to be at least partially embedded in the soil adjacent to the roots of the plant. The housing may be partially or fully embedded in the soil environment, so as to enable the swellable element to be exposed to a moisture level that reflects the moisture level in the soil environment. The housing may also be embedded such that the swellable element is partially exposed to atmospheric air, to enable the swellable element to egress moisture into the air in a similar manner to the soil environment.

[037] Upon absorption of moisture from the surrounding soil environment, the swellable element swells and applies a compressive force onto the flexible tube, thereby restricting or completely stopping the flow of water through the flexible tube. When the water in the swellable element egresses, for example, through evaporation or absorption by the soil environment, the swellable element shrinks, thus reducing the compressive force applied to the flexible tube and enabling water to flow through the flexible tube at an increased rate. The autonomous irrigation system may be configured such that the normal flow rate through the flexible tube is sufficient to prevent clogging of the flexible tube. In certain embodiments, the flexible tube may comprise a check valve, which may be configured to prevent insects, soil, or debris from entering the flexible tube and potentially clogging or damaging the flexible tube. In certain embodiments, an opening of the flexible tube through which water pours out of the flexible tube may be located at a predetermined distance from the swellable element, to provide sufficient moisture levels in the soil environment prior to the swellable element swelling and compressing the flexible tube.

[038] Optionally, the autonomous irrigation system comprises a bias screw, which is configured to control an initial maximum rate of water flow through the flexible tube. Tightening the bias screw applies an initial compressive force to the swellable element, which in turn compresses the flexible tube, thereby limiting the maximum flow rate through the flexible tube. Conversely, loosening the bias screw reduces the constant force applied to the flexible tube through the swellable element, thus increasing the maximum flow rate up to the full flow rate of the flexible tube.

[039] In certain embodiments, the flexible tube may irrigate the soil environment from a surface of the soil environment, such that the water seeps through the soil environment. In other embodiments, the system may comprise an irrigation plate or mat disposed underneath a plant pot or forming an integral part thereof; or embedded

in the soil underneath the roots of the plant. The irrigation plate is configured to receive and retain a desired amount of irrigation, which is then absorbed and controllably disperses upwards through the soil environment. Moisture may be absorbed into the soil environment from the irrigation plate through, e.g., osmotic transference. The moisture dispersed through the soil environment and reaches the roots, thus providing the necessary water for the plant. The irrigation plate may disperse the water over a larger surface area thereby ensuring consistent optimal moisture levels throughout the soil environment. Irrigation using the irrigation plate may also reduce the mineral content or salinity of the water that reaches the roots, as only the water is absorbed by the soil environment, while any mineral content remains as residue in the irrigation plate.

[040] In some embodiments, the autonomous irrigation system is non-electronic. In some embodiments, the irrigation system operates entirely mechanically. In some embodiments, the autonomous irrigation system is configured to be completely embedded in soil. In some embodiments, the autonomous irrigation system is configured to be partially embedded in soil. In some embodiments, the autonomous irrigation system is configured to be partially embedded in soil such that the swellable element contacts the air.

[041] In certain embodiments, the autonomous irrigation system further comprises a moisture transfer adapter configured to communicate moisture levels to the swellable element from a predetermined location that is not in the immediate vicinity of the autonomous irrigation system, e.g., from the irrigation plate. Communication of moisture levels through the moisture transfer adapter may be performed through osmotic transference towards the swellable element. The moisture transfer adapter may define a predetermined distance between the swellable element and a location at which the flexible tube provides water for irrigation, e.g., at the irrigation plate. The swellable element may be arranged at a predetermined height above the irrigation plate, such that when a predetermined volume of water fills the irrigation plate, the swellable element communicates such moisture level to the swellable element. Alternatively, the moisture transfer adapter may be coupled to the irrigation plate. Thus, once a desired volume of water is provided to the irrigation plate, the moisture level is communicated to the swellable element via the moisture transfer adapter. This enables the autonomous

irrigation system to respond more effectively by restricting or stopping further irrigation once the irrigation plate has received a sufficient supply of water.

[042] Herein throughout, the term "swellable", or any grammatical inflection thereof, as used herein, intends the property of the material to absorb a fluid medium, typically, but not exclusively, aqueous, with an accompanying increase in the volume of such material. In some embodiments, swellable is also shrinkable. In some embodiments, swellable is able to change volume in response to the absorbance or loss of moisture.

[043] In some embodiments, under conditions known in the art, the swellable material has the ability to swell by a volume of at least 0.1, 0.2, 0.25, 0.3, 0.4, 0.5, 0.6, 0.7, 0.75, 0.8, 0.9, 1, 1.25, 1.5, 1.75, 2, 2.5, 3, 3.5, 4, 4.5 or 5 ml, upon immersing thereof in 100 grams of water. Each possibility represents a separate embodiment of the invention. In some embodiments, under conditions known in the art, the swellable material has the ability to swell by a volume of between 0.1-5.0, 0.1-3, 0.1- 1, 0.1-0.75, 0.1-0.5, 0.25-5, 0.2-3, 0.25-1, 0.25-0.5, 0.5-5, 0.5-3, 0.5-1, 1-5, or 1-3 ml, upon immersing thereof in 100 grams of water. Each possibility represents a separate embodiment of the invention. In some embodiments, the swellable material has the ability to swell by at least 10, 15, 20, 25, 30, 35, 40, 45, 50, 55, 60, 65, 70, 75, 80, 85, 90, 95, 100% of its volume upon immersion in water. Each possibility represents a separate embodiment of the invention.

[044] In some embodiments, the swelling is at least 70%, at least 75%, at least 80%, at least 85%, at least 90%, at least 95%, or in some embodiments, even completely reversible, upon the release of the fluid medium from the swellable material. In some embodiments, the swelling is 100% reversible. In some embodiments, the swellable element is a reversibly swellable element, configured to swell when absorbing moisture and to shrink when losing moisture. In some embodiments, loss of moisture is due to evaporation, drying and/or diffusion. In some embodiments, the tube is disposed adjacent to the swellable element inside the housing such that a shrinking of a swelled swellable element releases the flexible tube, thereby unrestricting water flow therethrough. Optionally, the fluid medium may be released from the swellable material by evaporation or drying.

[045] The swellable element may be made of any material that changes volume due to intake or egress of moisture from the element. Such swellable materials are well known in the art and any such element may be used, including but not limited to,

hydrogels, clays, slurries, rubber and the like. In some embodiments, the swellable material comprises rubber. In some embodiment, the rubber is natural rubber. In some embodiments, the rubber is vulcanized rubber. In some embodiments, the rubber is artificial rubber. In some embodiments, the artificial rubber is chemically combined with a hydrophilic material or compound. In some embodiments, the swellable element comprises a hydrophilic material. In some embodiments, the swellable element comprises a material capable of changing volume and a hydrophilic material. In some embodiments, the swellable element is capable of changing volume in response to moisture intake or egress. In certain embodiments, the swellable element may be made of various forms of silicate minerals such as, and without being limited thereto, bentonite clay. The swellable element may have varying levels of hydrophilic and solvating properties. Without being bound by any particular theory, the swelling of bentonite may occur due to water absorption at a platelet surface level and/or by osmotic repulsive forces, forcing platelets to detach and spread out. In some types of bentonite, such as sodium bentonite with sodium cation prevalence (Na^+), water may penetrate through platelets, forcing platelets apart, thus leading to swelling. Conversely, calcium bentonite with calcium cation prevalence (Ca^{2+}) may have low absorption properties due to a strong positive charge preventing water from penetrating through the platelets. Thus, in calcium bentonite with calcium cation prevalence platelets are more likely to flake off rather than swell.

[046] When bentonite is dispersed in water, highly stable colloidal suspensions may be formed with high viscosity and thixotropy. At high enough concentrations of bentonite, such suspensions may take on gel characteristics. Suspensions may form when water molecules penetrate platelet interlayers. Hydrogen bridge bonds may be formed by the hydrogen atoms contained in water molecules. Platelets become isolated from each other, while bonded through interposition of water. When left still, the bentonite may form a mesh by incorporating water, causing the bentonite to jelly. Conversely, under mechanical stress, these bonds may partially break, thus allowing platelets to move more freely. Viscosity under these conditions is lower than at rest. Bentonite may consist of a varying density when dry, e.g. within a range of 2.2 grams/centimeter cubed (g/cm^3) to 2.8 g/cm^3 . Milled bentonite may have an apparent density that may vary depending on mill fineness, ranging from 0.7 g/cm^3 to 0.9 g/cm^3 .

[047] Fig. 1 illustrates a plant irrigation arrangement utilizing an autonomous irrigation system **100**, according to certain embodiments. Plant **170** comprises roots **172**, which may be embedded in a soil environment **175**. An irrigation plate **180** is disposed substantially beneath the roots **172** and is supplied with water for irrigating tree **170**. As moisture is absorbed by soil environment **175** from irrigation plate **180**, water saturation of the soil increases and disperses upwards through the soil environment **175**, until it reaches the autonomous irrigation system **100**. In certain embodiments, irrigation plate **180** may enable osmotic transference of moisture through soil environment **175** to roots **172** to provide plant **170** with the necessary water intake, without salts or minerals present in the water, which may be harmful to a plant's longevity. In certain embodiments, the surface area of irrigation plate **180** may be dimensioned according to the size of roots **172** to ensure moisturizing of soil environment **175** adjacent to roots **172**.

[048] Irrigation plate **180** need not be inserted into the ground, but rather may be the bottom of a pot such as is used for potting plants. Indeed, irrigation plate **180** can be any water storing material or mechanism that stops water runoff. Irrigation plate **180** may be any water storage container that keeps the water deposited by system **100** from continuing down due to gravity, and rather allows for upward flow of the water through soil environment **175**. Thus, irrigation plate **180** may be any container, tray, pot, nylon sheet, garden bed box, planter, or vessel that is below roots **172**. Irrigation plate **180** may even be a non-dirt layer that is below soil environment **175**. Many gardens, and parks are built over a layer of non-dirt construction material such as concrete or asphalt. In such cases this layer acts as the irrigation plate as it keeps water from continuing down and away from the roots via gravity.

[049] Autonomous irrigation system **100** comprises a housing **120**, bias screw **140** and bias screw handle **145**. Bias screw **140** and handle **145** may be optional. Autonomous irrigation system **100** may be embedded in soil environment **175** adjacent to roots **172** at a predetermined depth. For example, autonomous irrigation system **100** may be embedded adjacent to plant **170** within a range of 1-5 centimeters (cm) of depth. In certain embodiments, housing **120** may be embedded in a predetermined depth into soil environment **175**, such that the swellable element is exposed to a moisture level which reflects the moisture level of soil environment **175**. In some embodiments, housing **120** is partially embedded at a predetermined depth in soil

environment **175**, such that the swellable element is at least partially above ground. In some embodiments, housing **120** is partially embedded at a predetermined depth in soil environment **175**, such that the swellable element is in contact with the air. The predetermined depth may also provide the swelling element with sufficient exposure to ambient air to facilitate the necessary rate of water egression to simulate the rate of moisture egression from soil environment **175**. The predetermined depth may vary according to soil hydraulic properties of soil environment **175** and and/or a plant water intake rate. For example, where plant **170** is a tropical plant that requires frequent irrigation, housing **120** may be embedded such that the swellable element has a reduced exposure to soil environment **170** and greater exposure to atmospheric air. Where plant **170** may be of a desert or water-retaining variety, e.g., cacti or succulents, housing **120** may be embedded deeper, to provide a reduced exposure to atmospheric air, thus simulating a slower rate of egression of water from the swellable element. Thus, housing **120** and the swellable element may be placed in a position best able to mimic the water dynamics of the plant **170** it is irrigating.

[050] Autonomous irrigation system **100** further comprises a flexible tube **110** passing through housing **120** and configured to flow water from a main irrigation tube **109** to soil environment **175**, or directly to irrigation plate **180**. In certain embodiments, flexible tube **110** may be composed of silicone, e.g. silicone rubber, to withstand the water pressure and to prevent the walls of flexible tube **110** from adhering together when a compressive force is applied to flexible tube **110**. In certain embodiments, flexible tube **110** may comprise an external diameter within a range of 3-5 millimeter (mm) and an internal diameter within a range of 1-3 mm.

[051] In some embodiments, flexible tube **110** is configured to deposit water directly into plate **180**. In some embodiments, flexible tube **110** is configured to deposit water proximal to plate **180**. In some embodiments, proximal comprises within a distance of not more than 1, 2, 3, 5, 7, 10, 15 or 20 cm from a location. Each possibility represents a separate embodiment of the invention. In some embodiments, flexible tube **110** is configured to deposit water proximal to roots **172**. In some embodiments, flexible tube **110** is configured to deposit water proximal to an end of roots **172**. In some embodiments, flexible tube **110** is configured to deposit water proximal to the deepest end of roots **172**. As water will begin to diffuse up from irrigation plate **180**, and from the end of flexible tube **110**, a skilled artisan will appreciate that both of these

components can be ideally places at the bottom of the root structure of plant **170**. In some embodiments, plate **180** is proximal to roots **172**. In some embodiments, plate **180** is proximal to an end of roots **172**. In some embodiments, plate **180** is proximal to the deepest end of roots **172**. In some embodiments, the end of the tube is not proximal to the housing element and/or the swellable element. In some embodiments, the end of the tube is at least 2, 3, 4, 5, 7, 10, 15, 20, 25 or 30 cm distance from the housing element or swellable element. Each possibility represents a separate embodiment of the invention.

[052] In some embodiments, system **100** senses moisture at plate **180**, at the outlet of flexible tube **110** or at the deepest end of roots **172**. In some embodiments, system **100** responds to moisture at plate **180**, at the outlet of flexible tube **110** or at the deepest end of roots **172**. In some embodiments, system **100** irrigates in response to lack of moisture at plate **180**, at the outlet of flexible tube **110** and/or at the deepest end of roots **172**. In some embodiments, system **100** irrigates and/or stops irrigation in response to moisture at plate **180**, at the outlet of flexible tube **110** and/or at the deepest end of roots **172**. As system **100** is non-electronic the term “senses” refers to systems responding to moisture levels by releasing more water and/or slowing/stopping the release of water.

[053] Autonomous irrigation system **100** further comprises a swellable element (not shown) housed within housing **120**. The swellable element is exposed directly or indirectly to the moisture carried by the soil environment **175**. In some embodiments, the swellable element is exposed to the moisture in soil **175** surrounding the autonomous irrigation system **100**. In some embodiments, the swellable element is exposed to the moisture in soil **175** that is not proximal to the autonomous irrigation system **100**. In some embodiments, the swellable element is exposed to the moisture in soil **175** that is at or proximal to plate **180**, the outlet of flexible tube **110**, or at the deepest end of roots **172**. Autonomous irrigation system **100** further comprises a moisture transfer adapter **152**. Transfer adapter **152** transfers moisture from a more distance location in soil **175** to the swellable element. This more distance location may optionally be at or proximal to plate **180**, the outlet of flexible tube **110**, and/or at the deepest end of roots **172**. Transfer adapter **152** may be configured to communicate to the swellable element moisture levels from a location other than the immediate soil environment vicinity of the autonomous irrigation system **100**. Thus, moisture transfer

adapter **152** may provide the swellable element, e.g., with an indication of the moisture level at a different level of soil **175** or at the irrigation plate **180**. By employing moisture transfer element **152**, the autonomous irrigation system **100** may be embedded near surface level but configured to react to changes in moisture levels at a desired depth within the soil environment **175** or the irrigation plate **180**, to provide a more efficient control over irrigation of the plant **170**. In some embodiments, transfer adapter **152** allows for sensing at a distal location.

[054] Fig. 2 illustrates housing **120** with moisture transfer adapter **152**. Housing **120** comprises an elongate body having an optional opening **123** on one end and defining a hollow cavity therein. Optionally, housing **120** defines a cylinder having an internal diameter of between 8 mm and 12 mm and an external diameter of between 12 mm and 16 mm. Optionally, housing **120** has a length of between 30 mm and 40 mm. Optionally, housing **120** may be composed of an acrylic polymer, e.g. methacrylate, poly(methyl methacrylate), methyl acrylate, ethyl acrylate, or the like. Housing **120** may comprise exposure windows **135**, **136** which may be configured to expose internal components disposed within the hollow cavity of housing **120** to an environment, e.g., soil environment **175** or atmospheric air. Optionally, exposure windows **135**, **136** may have a height within a range of 17 mm to 21 mm, and a width within a range of 0.5 mm to 3.5 mm. Housing **120** may comprise tube openings **121**, **122**. Tube openings **121**, **122** may be arranged on opposite sides to enable passing of flexible tube **110** transversely through housing **120**. Tube openings **121**, **122** may have a diameter within a range of 3 mm to 6 mm, to permit the passage of flexible tube **110** therethrough. Optionally, housing **120** comprises exposure apertures (not shown) configured to provide additional exposure of the internal components stored within the cavity of housing **120** to the environment. Optionally, the exposure apertures are smaller than the exposure windows **135**, **136**.

[055] In certain embodiments, moisture transfer adapter **152** may be configured as a sleeve that fits around housing **120** such that it fully or partially covers exposure windows **135**, **136** and any exposure apertures. Moisture transfer adapter **152** may be made of a woven element, such as a sleeve or a rope made of fibers having desired wicking properties, such as manila hemp, hemp, cotton, polypropylene, polyester, aramid, or the like. In some embodiments, moisture transfer adapter **152** may be composed of a porous material, e.g. a sponge composed of polypropylene, polyether,

polyester, cellulose, or the like. In certain embodiments, the moisture transfer adapter **152** is configured to mimic the moisture transfer characteristics of soil environment **175**, such that moisture transfer adapter **152** transfers moisture at the same rate as moisture is being dispersed within soil environment **175**. Thus, moisture transfer adapter ensures that moisture levels by the swellable element reflect moisture levels at a desired location within the soil environment **175** or at the irrigation plate **180**. Optionally, moisture transfer adapter **152** has a width or diameter within a range of 10 mm to 25 mm and a length of within a range of 3 cm and 10 cm.

[056] In some embodiments, the moisture transfer adapter transfers water by capillary action. In some embodiments, the moisture transfer adapter comprises an absorbent material of a resilience that can hold absorbed water. In some embodiments, the moisture transfer adapter is a wick, cord, rope or the like, comprising strands of absorbent material. In some embodiments, the moisture transfer adapter is an artificial root. In some embodiments, the adapter mimics the capillary water transfer of a root. In some embodiments, the adapter comprises a rate of capillary action that is equal to or great than that of soil. In some embodiments, the adapter comprises a rate of capillary action that is great than that of soil. Non-limiting examples of material that can transfer moisture through soil and function as the adapter include, plastics and synthetics such as polymers (polypropylene, polyether, polyester and the like), nylon and polyester and natural materials such as cellulose, cotton and other fabrics. In some embodiments, the adapter is made of a polymer. In some embodiments, the adapter is made of plastic. In some embodiments, the adapter is a mesh of fibers.

[057] Fig. 3A-3C show autonomous irrigation system **100** in a side view and a cross-sectional lengthwise view, according to certain embodiments. Autonomous irrigation system **100** comprises flexible tube **110** passing through opposite walls of housing **120**. Housing **120** further comprises a bias screw **140**, which may be configured to adjust the desired maximum water flow rate in flexible tube **110** by applying a continuous compressive force onto swellable element **130** shown in Figs. 3B and 3C, which in turn applies a compressive force on flexible tube **110**, thereby constricting the flow of water therethrough. Bias screw **140** may comprise a knob or handle **145** to ease manipulation of bias screw **140**. Bias screw **140** may be engaged within housing **120** through internal screw threads in opening **123** shown in Fig. 2.

[058] Referring to Fig. 3B, autonomous irrigation system may comprise a swellable element **130** configured to swell when absorbing moisture. In certain embodiments, swellable element **130** may be composed of bentonite or another like material having desired hydrophilic and solvating properties. Optionally, swellable element **130** is cylindrically-shaped and has a diameter enabling swellable element **130** to fit within housing **120**, e.g., a diameter within a range of 8 mm to 10 mm. Swellable element **130** may be inserted into the hollow space defined by housing **120** through opening **123** and enclosed within housing **120** by bias screw **140**, or another form of lid or seal. Such a closure may be fastened by screwing, snaps, magnets or any like method of sealing in the swellable element such that it can only expand in the direction of flexible tube **110**. Swellable element **130** may be arranged adjacent to flexible tube **110**, such that when swellable element **130** swells it applies a compressive force onto flexible tube **110**.

[059] Swellable element **130** may be coupled to a rigid element **132**, which may be configured to communicate the compressive force applied by swellable element **130** to the flexible tube **110**. It will be appreciated that swellable element **130** may lack sufficient rigidity for effectively applying a compressive force to the flexible tube **110** without causing some deformation of swellable element **130** itself. Rigid element **132** may be coupled to swellable element **130** between swellable element **130** and flexible tube **110**, such that when swellable element **130** swells, swellable element **130** pushes rigid element **132** against flexible tube **110**, thus applying the full compressive force to flexible tube **110**. Rigid element **132** may define, e.g., a cylinder or a hemisphere having a diameter equal to the diameter of the swellable element **130** on the side adjacent to the swellable element, such that any deformation of the swellable element **130** is minimized. In some embodiments, rigid element **132** comprises two hemispheres pushing with their curved surfaces against the flexible tube **110** from opposite sides. The first of said hemispheres is coupled at its flat surface to the swellable element **130**, and the second of said hemispheres is disposed between the closed end of housing **120** and the flexible tube **110**. Rigid element **132** may be made of an acrylic polymer, e.g. methacrylate, poly (methyl methacrylate), methyl acrylate, ethyl acrylate, or the like. Rigid element **132** may be of any shape such that it applies the force of the expansion of swellable element **130** to flexible tube **110**. Rigid element **132** may have a flat surface that engages or contacts swellable element **130**. The flat surface may completely cover or partially cover swellable element **130**. Rigid element

132 may be curved or come to a point (like a triangle) where it contacts and applied force to flexible tube **110**.

[060] Referring now to Fig. 3C, showing swellable element **130** in a swollen state and compressing flexible tube **110**. Housing **120** and bias screw **140** are configured to cause the swellable element **130** to direct its compressive force toward the flexible tube **110**. When swellable element **130** absorbs moisture and becomes fully saturated, swellable element **130** applies a compressive force to flexible tube **110** which restricts or completely stops water flow through flexible tube **110**, by pinching it partially or fully shut. Constriction of flexible tube **110** by swellable element **130** decreases the amount of water supplied to soil environment **175** or the irrigation plate **180** by the autonomous irrigation system **100**. Over time, the moisture in soil environment **175** decreases due to water absorption by the plant via roots **172** or evaporation into the atmosphere. Swellable element **130** may be exposed to air via exposure windows **135**, **136** which may cause water to egress from swellable element **130**, e.g., due to dehydration. Without additional moisture in the soil environment, the rate of moisture egression from swellable element **130** may be higher than moisture absorption, which may cause swellable element **130** to shrink. As swellable element **130** shrinks, the compressive force on flexible tube **110** reduces, thereby enabling water flow through flexible tube **110** once again.

[061] Fig. 4A-4B show irrigation plate **180**, according to certain embodiments. Optionally, irrigation plate **180** is in a cube shape, a rectangular cuboid shape, a cylindrical shape, a hemispheric shape, or the like. In certain embodiments, where irrigation plate **180** is a cylinder, irrigation plate **180** may have a diameter within a range of 50-200 cm, which may provide an optimal surface area for water absorption by soil environment **175**. Irrigation plate **180** may comprise a depth within a range of 10-500 mm for storing water and to prevent water spillage when water is received from flexible tube **110**. Irrigation plate **180** may comprise a connector **181**, configured to couple to moisture transfer adapter **152**. In some embodiments, the irrigation plate is part of a plant potter, or a pot containing a plant. In some embodiments, the irrigation plate is the bottom of the pot. In some embodiments, the bottom of the pot does not comprise a hole for releasing water, or if there is a hole the hole has been stoppered.

[062] Referring to Figs. 4B and 5, showing filter **400** configured to be coupled to moisture transfer adapter **152**. Filter **400** may be composed of polyethylene that is used

to receive moisture transfer adapter **152** and prevent deviation of moisture transfer adapter **152** from connecting between irrigation plate **180** and swellable element **130**. In certain embodiments, moisture transfer adapter **152** may be connected as a screw on attachment to connector **181**. In certain embodiments, moisture transfer adapter **152** may be connected to connector **181** by insertion into connector **181**. Filter **400** may be comprised of polymers or plastics or any material that ensure proper connection between the adapter and the plate.

[063] Referring to Fig. 6, showing a portion of flexible tube **110** comprising a check valve **600**, according to certain embodiments. Check valve **600** may be coupled to an irrigation end of flexible tube **110**, e.g., the end which provides the water to soil environment **175** and/or irrigation plate **180**. Check valve **600** may be configured to enable water to flow out of flexible tube **110** while preventing soil and debris from entering flexible tube **110** resulting in clogs and malfunctioning of autonomous irrigation system **100**. In certain embodiments, check valve **600** may be made of silicone or the like. In certain embodiments, check valve **600** may comprise an opening **605**. In certain embodiments, opening **605** comprises flexible lips to enable egression of water and prevent entrance of animals and debris into check valve **600**. Optionally, check valve **600** may be a diaphragm check valve, a swing check valve, a duckbill valve, or the like.

[064] Fig. 7 shows autonomous irrigation system **100** configured to irrigate a field plant **700**, according to certain embodiments. In certain embodiments, autonomous irrigation system **100** may be configured to irrigate a field plant **705** in a field. In certain embodiments, irrigation plate **180** may be located beneath field plant **705**. As a result of osmotic transference, water from irrigation plate **180** may be absorbed by field soil environment **700** vertically above irrigation plate **180**. As additional moisture is absorbed by field soil environment **700**, the water saturation of the soil increases, forcing moisture to rise vertically through the field soil environment **700** towards a surface of field soil environment **700**. Moisture transfer adapter **152** may be disposed such that it communicates moisture from the vicinity of irrigation plate **180** to the autonomous irrigation system **100**. Housing **120** may be embedded in field soil environment **700** sufficiently close to field plant **705**, such that the swellable element housed within housing **120** swells in reaction to moisture levels at irrigation plate **180** communicated through moisture transfer adapter **152**, as well as moisture levels at the

field soil environment **700** near roots **710**. Optionally, only adapter 152 may contact the swellable element such that the swellable element swells only in response to moisture from the adapter.

[065] Parts of the adapter may be covered in a non-absorbent or non-permeable material such that moisture cannot enter the adapter in these covered regions. In some embodiments, the entire adapter except its distal end (relative to the swellable element) is covered. In some embodiments, at least 10, 20, 30, 40, 50, 60, 70, 80, 90 or 95% of the adapter is covered. Each possibility represents a separate embodiment of the invention. In some embodiments, at most 10, 20, 30, 40, 50, 60, 70, 80, 90 or 95% of the adapter is covered. Each possibility represents a separate embodiment of the invention. In some embodiments, between 10-90, 20-90, 30-90, 40-90, 50-90, 60-90, 70-90, 10-80, 20-80, 30-80, 40-80, 50-80, 60-80, 70-80, 10-70, 20-70, 30-70, 40-70, 50-70, 60-70, 10-50, 20-50, 30-50, 40-50, 10-40, 20-40, 30-40, 10-30, 20-30, or 10-20% of the adapter is covered. Each possibility represents a separate embodiment of the invention. In some embodiments, at least 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 15, 20, or 25 cm of the adapter is covered. Each possibility represents a separate embodiment of the invention. In some embodiments, at most 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 15, 20, or 25 cm of the adapter is covered. Each possibility represents a separate embodiment of the invention. In some embodiments, between 1-20, 1-15, 1-10, 1-7, 1-5, 1-3, 3-20, 3-15, 3-10, 3-7, 3-5, 5-20, 5-15, 5-10, 5-7, 7-20, 7-15, 7-10, 10-20 or 10-15 cm of the adapter are covered. Each possibility represents a separate embodiment of the invention. A skilled artisan will appreciate that the adapter can transfer water from anywhere, or everywhere along its length, and that by covering certain regions the source of the moisture swelling the swellable element can be controlled. In some embodiments, only the most distal region and the region at the swellable element are uncovered. In some embodiments, only the most distal end is uncovered. In some embodiments, only the region at the irrigation plate of the end of the plant's roots are uncovered.

[066] Fig. 8 shows a plurality of autonomous irrigation systems **807** configured to irrigate a plurality of plants **801**, according to certain embodiments. For irrigation of multiple plants, each of plants **801** is planted above a respective irrigation plate **180**. Plants **801** are each provided an autonomous irrigation system **807** connected to a lead tube **850**. Lead tube **850** may be configured as a main water source for the multiple plants. In certain embodiments, the multiple plants may be distinct types of plants,

where each plant requires a different volume of water for survival and growth. autonomous irrigation systems **807** each comprise a swellable element (not shown), which regulates water rations for the respective plant **801**. Since each of plants **801** may require a different amount of water due to factors such as type of plant, rate of growth, relative humidity, rate of air flow, type of soil in which plant is embedded, and/or the like, water rations for each of plants **801** may be different.

[067] As shown in Fig. 9, the plant to be irrigated need not be in a field, but rather may be growing anywhere, including but not limited to, a pot, a garden, a house, a planting bed, and a green house. Any growing plant may be irrigated with the systems and methods of the invention. In some embodiments, the plant to be irrigated is in a pot. In some embodiments, the plant to be irrigated is in a garden. In some embodiments, the plant to be irrigated is in a house. In some embodiments, the plant to be irrigated is not a tree. In some embodiments, the plant to be irrigated is a flower. In some embodiments, the plant to be irrigated is a bush.

[068] Fig. 9 shows that device **100** may be partially inserted into a growth medium (soil), such that swellable element **130**, and optionally windows or other access points to the swellable element are above ground. The lower portion of housing **120** is within the growth medium and anchors device **100** in position so it does not move away from plant **901**. Flexible tube **110** passes from housing **120** into the growth medium where it can release water. Moisture transfer adapter **152** extends further into the growth medium and down to irrigation plate **180**. Plant **901** and device **100** are shown within pot **960** which comprises drainage holes **961** in bottom **962**. Optionally, if bottom **962** does not comprise a hole, then bottom **962** may itself be the irrigation plate and no separate irrigation plate may be necessary. Alternatively, as many plant pots have holes, if drainage holes **961** become filled, either by plant roots or a stopper, then bottom **962** may itself be the irrigation plate and no separate irrigation plate may be necessary. A stopper may be made of any material that closes the whole. Possible materials include rubber, wood, ceramic, plastic, paper or metal. The stopper need not be completely water tight, as so long as water cannot easily drain from the hole the bottom of the vessel holding the plant may suffice as an irrigation plate.

[069] Fig. 10 shows a watering profile of moisture levels at the roots of 4 separately grown plants. 3 of the plants (A, B and C) where irrigated using 3 devices of the invention all attached to the same water source, while a fourth plant was irrigated by a

computer that watered every third day. Plants A, B and C all had different watering requirements. As can be seen in Figure 10, though they each required different amounts of water, use of the device of the invention kept the moisture level at the plants roots at a constant level. This insured that the plants were never too dry and never too wet. By contrast, the computer automated watering resulted in very high moisture levels on the day of watering, that rapidly reduced to nothing by the day before watering. A plant so watered would be too dry on some days but drowned on others. Further, much of the water from the computerized watering is wasted as the plant cannot absorb all of it. These problems would be exasperated during rain or periods of extreme heat when the overwatering and underwatering, respectively, would be even worse. This exemplifies the extreme advantage of the present invention, as a gardener or farmer can use the device of the invention with little to no oversight and be ensured that diverse plants are all being watered appropriately.

[070] In some embodiments, a first plant to be irrigated and a second plant to be irrigated require different amounts of moisture, or uptake moisture at different rates and are irrigated by a first and second system of the invention respectively, wherein the first and second systems receive water from the same source. In some embodiments, more than two plants are irrigated by more than two systems of the invention respectively, wherein all systems receive water from the same source. In some embodiments, the system of the invention produces an essentially constant moisture level at the roots of a plant. In some embodiments, the essentially constant moisture level comprises a variance of not more than 5, 10, 15, 20, 25, 30, 35, 40, 45 or 50%. Each possibility represents a separate embodiment of the invention.

[071] In some embodiments, there is provided a method comprising providing a system of the invention, at least partially embedding the housing of the system in a soil environment at a predetermined depth adjacent to a plant, configuring the flexible tube to deliver water to a region of the soil environment below the plant, configuring a location of the moisture transfer adapter so as to provide moisture communication from the region of soil environment below the to the swellable element, and flowing water through the flexible tube.

[072] In some embodiments, the housing is completely embedded in the soil environment. In some embodiments, the housing is partially embedded in the soil environment. In some embodiments, partial embedding comprises at least, 1, 2, 3, 4,

5, 6, 7, 8, 9, or 10 cm of the housing embedded in the soil environment. Each possibility represents a separate embodiment of the invention. In some embodiments, the housing is partially embedded such that the swellable element contacts the air. In some embodiments, the housing is partially embedded such that moisture can be removed from the swellable element by evaporation. In some embodiments, partial embedding comprises contact between the swellable element and the air.

[073] In some embodiments, the region of soil environment below the plant is at least 3, 5, 7, 9, 10, 12, 15, 17, or 20 cm from the swellable element. Each possibility represents a separate embodiment of the invention. In some embodiments, the region of soil environment below the plant is not proximal to the swellable element. In some embodiments, the outlet end of the tube is not proximal to the swellable element. In some embodiments, the irrigation plate is not proximal to the swellable element.

[074] In some embodiments, the method further comprises placing an irrigation plate in the region of the soil environment below the plant. In some embodiments, the irrigation plate is embedded in the soil environment. In some embodiments, the irrigation plate is the bottom of a container holding the plant. In some embodiments, irrigation plate is placed such that the flexible tube can deliver water to the irrigation plate. In some embodiments, the system is connected to a water source, such as a faucet. In some embodiments, the flexible tube is connected at one end to the water source and the other end is positioned to deliver water to the region of soil environment under the plant. In some embodiments, the adapter provides moisture communication from the irrigation plate to the swellable element.

[075] In some embodiments, egression of moisture from the swellable element reduces a constricting force applied on the flexible tube by the swellable element. In some embodiments, the reduction of the constricting force enables water flow through the flexible tube. In some embodiments, the water flow persists until sufficient water is delivered to the region of soil environment under the plant to cause moisture transfer via the adapter to the swellable element to again swell and close the flexible tube. In this way the system automatically regulates watering of the plant without any sensors or electronics and ensures the roots of the plant are never too wet and never too dry.

[076] A skilled artisan will appreciate that a plant can be killed by both too little watering and too much watering. Too little watering and the plant dies of thirst; too much watering and the plant dies of strangulation as mud does not allow entry of air to

the roots. Systems that only detect/measure/respond to moisture near the soils surface will often underestimate the amount of water available to roots. Due to proximity to the soil surface, heat from the sun, and evaporation by the air can produce soil with low moisture levels even when deeper soil is still wet. Further, water absorption by the plant can lower moisture levels at higher soil levels, while the roots are still well watered. This can lead to over watering if the irrigation system is not responding to moisture levels at the bottom of the roots. The system and method of the invention employs the transfer adapter to make sure that the plant is not killed by over watering, and provides an advantage over other irrigation systems known in the art. Further, because no electronics are used the system can be employed without outlets or the need for batteries or solar panels. Additionally, because the system responds to moisture directly at the plants roots, many systems can be inserted near many different plants with diverse water needs, and still irrigate each plant properly.

[077] Throughout this application, various embodiments of this invention may be presented in a range format. It should be understood that the description in range format is merely for convenience and brevity and should not be construed as an inflexible limitation on the scope of the invention. Accordingly, the description of a range should be considered to have specifically disclosed all the possible subranges as well as individual numerical values within that range. For example, description of a range such as from 1 to 6 should be considered to have specifically disclosed subranges such as from 1 to 3, from 1 to 4, from 1 to 5, from 2 to 4, from 2 to 6, from 3 to 6 etc., as well as individual numbers within that range, for example, 1, 2, 3, 4, 5, and 6. This applies regardless of the breadth of the range.

[078] Whenever a numerical range is indicated herein, it is meant to include any cited numeral (fractional or integral) within the indicated range. The phrases “ranging/ranges between” a first indicate number and a second indicate number and “ranging/ranges from” a first indicate number “to” a second indicate number are used herein interchangeably and are meant to include the first and second indicated numbers and all the fractional and integral numerals therebetween.

[079] In the description and claims of the application, each of the words “comprise” “include” and “have”, and forms thereof, are not necessarily limited to members in a list with which the words may be associated. In addition, where there are

inconsistencies between this application and any document incorporated by reference, it is hereby intended that the present application controls.

[080] As used herein, the term "about" when combined with a value refers to plus and minus 10% of the reference value. For example, a length of about 1000 nanometers (nm) refers to a length of 1000 nm $\pm$ 100 nm.

[081] It is noted that as used herein and in the appended claims, the singular forms "a," "an," and "the" include plural referents unless the context clearly dictates otherwise. Thus, for example, reference to "a polynucleotide" includes a plurality of such polynucleotides and reference to "the polypeptide" includes reference to one or more polypeptides and equivalents thereof known to those skilled in the art, and so forth. It is further noted that the claims may be drafted to exclude any optional element. As such, this statement is intended to serve as antecedent basis for use of such exclusive terminology as "solely," "only" and the like in connection with the recitation of claim elements or use of a "negative" limitation.

[082] In those instances where a convention analogous to "at least one of A, B, and C, etc." is used, in general such a construction is intended in the sense one having skill in the art would understand the convention (e.g., "a system having at least one of A, B, and C" would include but not be limited to systems that have A alone, B alone, C alone, A and B together, A and C together, B and C together, and/or A, B, and C together, etc.). It will be further understood by those within the art that virtually any disjunctive word and/or phrase presenting two or more alternative terms, whether in the description, claims, or drawings, should be understood to contemplate the possibilities of including one of the terms, either of the terms, or both terms. For example, the phrase "A or B" will be understood to include the possibilities of "A" or "B" or "A and B."

[083] It is appreciated that certain features of the invention, which are, for clarity, described in the context of separate embodiments, may also be provided in combination in a single embodiment. Conversely, various features of the invention, which are, for brevity, described in the context of a single embodiment, may also be provided separately or in any suitable sub-combination. All combinations of the embodiments pertaining to the invention are specifically embraced by the present invention and are disclosed herein just as if each and every combination was individually and explicitly disclosed. In addition, all sub-combinations of the various embodiments and elements thereof are also specifically embraced by the present invention and are disclosed herein

just as if each and every such sub-combination was individually and explicitly disclosed herein.

[084] Additional objects, advantages, and novel features of the present invention will become apparent to one ordinarily skilled in the art upon examination of the following examples, which are not intended to be limiting. Additionally, each of the various embodiments and aspects of the present invention as delineated hereinabove and as claimed in the claims section below finds experimental support in the following examples, and these examples found hereinbelow should be considered as embodiments of the present invention.

[085] Various embodiments and aspects of the present invention as delineated hereinabove and as claimed in the claims section below find experimental support in the following examples.

EXAMPLES

[086] The following examples are meant to illustrate, but in no way to limit, the claimed invention. The following examples represent embodiments of the claimed invention.

Example 1: A static model of humidity transfer from the soil to the capillary pipeline (moisture transfer adapter) and progress through the pipeline.

[087] The irrigation system operates essentially by the following process:

- a. Humidity transferring from the soil to the capillary pipeline (moisture transfer adapter);
- b. Capillary progress of the humidity in the pipeline (adapter);
- c. Spreading of the blocking unit (swellable element);
- d. Pressure of the blocking unit on the water tube (flexible tube);
- e. Water tube's opening and closing as a result of the pressure from swelling.

[088] We can use Fick's law for estimation of the diffusion of the water from the soil to our capillary pipeline:

$$\frac{dC}{dt} = D \cdot \frac{d^2C}{dx^2} - \alpha \quad (\text{Eq. \#1})$$

when C is the concentration of water vapors, D is the diffusion coefficient and α is the absorption rate per volume unit.

[089] In steady state, we can say:

$$\frac{d^2C}{dx^2} = \frac{\alpha}{D} \quad (\text{Eq. \#2}).$$

We can use this equation to characterize a) the humidity of the soil (and its changes as a function of the depth), b) the humidity transfer between the soil and the pipeline and c) the humidity inside the pipeline (if it's a material and not a tube).

[090] Capillary motion in a thin tube is given by Jurin's law:

$$h = \frac{2 \cdot \gamma \cdot \cos(\theta)}{r \cdot \rho \cdot g} \quad (\text{Eq. \#3})$$

when h is the liquid height in the tube, γ is the surface tension, θ is the contact angle of the liquid on the tube's wall, r is the tube radius, ρ is the liquid density and g is the gravity acceleration. Both the surface tension and the contact angle depend on the liquid and the tube's materials.

[091] In a further expansion of Jurin's law, the dominant forces in capillary motion are the interfacial tension and gravity, when Jurin's law describes equilibrium between both for a hollow pipe. The capillary pressure equations are given by the interfacial tension pressure:

$$p_c = \frac{2 \cdot \gamma \cdot \cos(\theta)}{r} \quad (\text{Eq. \#4})$$

and the gravity pressure:

$$p_c = h \cdot (\rho_{wet} - \rho_{dry}) \quad (\text{Eq. \#5}).$$

Example 2: Spreading of the blocking unit and its pressure on the water tube.

[092] While dealing with hydrothermal properties of composite materials the following equation is employed:

$$\varepsilon_z = \frac{\sigma_z}{E_{zz}} - \frac{\sigma_x}{n_{xz}} - \frac{\sigma_y}{n_{yz}} + \alpha \cdot \Delta T + \beta \cdot \Delta C \quad (\text{Eq. \#6})$$

when ε is the strain (normalized elongation $\Delta L/L$), σ is the stress, E is Young's modulus (modulus of elasticity), n is Poisson's ratio, α is the thermal coefficient and β is the humidity strain coefficient.

[093] The blocking unit is closed inside the tube so $\varepsilon_x = \varepsilon_y = 0$ (no elongation because it's bounded). From this boundary condition we can assume:

$$\varepsilon_x = \frac{\sigma_x}{E_{xx}} - \frac{\sigma_z}{n_{xz}} - \frac{\sigma_y}{n_{xy}} + \alpha \cdot \Delta T + \beta \cdot \Delta C = 0 \text{ (Eq. \#7).}$$

If there are no outer stresses, we get:

$$\sigma_x = -E_{xx}(\alpha \cdot \Delta T + \beta \cdot \Delta C) \text{ (Eq. \#8),}$$

and similarly:

$$\sigma_y = -E_{yy}(\alpha \cdot \Delta T + \beta \cdot \Delta C) \text{ (Eq. \#9),}$$

and for the Z axis, when the material is isotropic ($E_{xx}=E_{yy}=E_{zz}$):

$$\varepsilon_z = (1 + 2 \cdot n) \cdot (\alpha \cdot \Delta T + \beta \cdot \Delta C) \text{ (Eq. \#10).}$$

[094] The water pipe will press the blocking unit such that:

$$\varepsilon_z = (1 + 2 \cdot n) \cdot (\alpha \cdot \Delta T + \beta \cdot \Delta C) - \frac{P}{E} \text{ (Eq. \#11)}$$

when P is the pipe's pressure on the blocking unit. The block elongation is

$$\Delta Z = \varepsilon_z \cdot Z_0 \text{ (Eq. \#12)}$$

when Z_0 is the initial blocking height.

[095] Thus, the deformation of the pipeline is given by:

$$\Delta Z = \frac{P \cdot length}{\frac{10 \cdot E \cdot I}{r^3}} \text{ (Eq. \#13)}$$

when P is the outer pressure per unit of length and EI/r^3 is the stiffness of the pipe.

[096] The vector of the pressure is on a length of the block's diameter therefore:

$$\Delta Z = \frac{P \cdot D_{block}}{\frac{10 \cdot E \cdot I}{r^3}} \text{ (Eq. \#14)}$$

An expression for the stiffness can be given as:

$$\frac{E \cdot I}{r^3} = \frac{2E}{3(DR-1)^3} \quad (\text{Eq. \#12})$$

when DR is the dimension ratio and is given as D/t when D is the pipe diameter and t is its wall thickness. We can see that this stiffness is not a function of the pipe's size (just its proportions). The same pressure will cause the same vertical displacement, but its effect on blocking the water depends on the pipe's size.

[097] For equilibrium between the blocking unit elongation and the pipe deformation we will have to fulfill:

$$\Delta Z = \frac{P \cdot D_{block}}{20 \cdot E_{pipe}} = L_0 \cdot ((1 + 2 \cdot n_{block}) \cdot (\alpha \cdot \Delta T + \beta \cdot \Delta C)_{block}) - \frac{P}{E_{block}} \quad (\text{Eq. \#13})$$

when P is the pressure which resists the block elongation. This equation includes the elasticity of the water pipe and the water pressure inside it:

$$P = P_{water} + P_{pipe} \quad (\text{Eq. \#14}).$$

From this we can get the expression for the pressure:

$$P_{pipe} = \frac{L_0 \cdot ((1 + 2 \cdot n_{block}) \cdot (\alpha \cdot \Delta T + \beta \cdot \Delta C)_{block})}{\frac{L_0}{E_{block}} + \frac{3(DR_{pipe} - 1)^3 \cdot D_{block}}{20 \cdot E_{pipe}}} \quad (\text{Eq. \#15}),$$

and we can get ΔZ . For a full closure of the pipe it is required that $\Delta Z > D_{pipe}$. For smaller value, we get a non-linear valve, however, for initial approximation we will assume linearity:

$$Q = Q_{max} \cdot (1 - \frac{\Delta Z}{D}) \quad (\text{Eq. \#16}).$$

Example 3: Numeric example of blocking unit closing the water tube.

[098] In the following example the minimum soil humidity at the end of the adapter pipeline necessary to close the water tube is calculated. Based on a given length of the capillary pipeline, and given properties of the pipeline, tube and blocking unit it was determined that a soil humidity of at least 62% in the lower edge of the capillary pipeline will enable capillary motion to the height of the blocking unit which will in turn absorb the water and close the water pipe.

[0099] Assuming a pipe with an outer diameter of 3 mm and width of 1 mm, and Young's modulus of 10 MPa, then: $DR_{\text{pipe}}=3$ and $E_{\text{pipe}}=10 \cdot 10^6$ Pa.

[0100] Assuming a blocking unit with a length of 20 mm, diameter of 5.5 mm, humidity strain coefficient of 0.4 (while 100% humidity of the block's strain is 40% on all axes, so its final volume is 270% of its initial one), Young's modulus of 20 MPa, and Poisson's ratio of 0.5, then: $D_{\text{block}}=0.0055$ m, $L_0=0.02$ m, $E_{\text{block}}=20 \cdot 10^6$ Pa, and $n_{\text{block}}=0.5$. For a humidity of 0.35 in the blocking unit and water pressure of $2 \cdot 10^5$ Pa (2 atmospheres) we get elastic pressure of about 3.4 MPa and displacement of 2 mm which ensures closing the pipe (the required displacement is between 1-2 mm).

[0101] The capillary tube covers the blocking unit, so if water gets to the unit's height, the blocking unit will absorb the required water and block the water pipe. The capillary motion is in a porous absorbent structure. The pressure caused by the interfacial tension is thus given by:

$$p_c = \frac{2 \cdot \gamma \cdot \cos(\theta)}{r} \quad (\text{Eq. \#17})$$

when: γ is the surface tension of the water: $70 \cdot 10^{-3}$ N/m (typical, with little change due to temperature), r is limited by the tube's radius: 0.003 m, and θ is the contact angle between the water and the pipe's walls.

[0102] The gravity pressure is given by:

$$p_c = h \cdot (\rho_{\text{wet}} - \rho_{\text{dry}}) \quad (\text{Eq. \#18})$$

when: h is the capillary tube's height: 0.2 m, ρ_{dry} is the density of the capillary tube when it's dry: 538 kg/m^3 , and ρ_{wet} is the density of the capillary tube when it's fully absorbed: 1216 kg/m^3 . We can see that the pressure which is caused by the interfacial pressure will reach this value if the effective radius is about 1 mm. This example assumes that the tube is vertical. When the tube is configured on a diagonal, the pressure caused by gravity is reduced which enables longer distances to be traversed (although horizontal motion is also required).

[0103] In this example we can see that these dimensions and properties enable capillary motion, but we are interested in the humidity that causes opening and closing of the water pipe. The capillary pressure equations provide the humidity gradient in the

capillary tube. If for this example and say that the effective tube radius is 0.5 mm and the contact angle is 40° , we get that the pressure caused by the interfacial tension is

$$p_c = \frac{2 \cdot \gamma \cdot \cos(\theta)}{r} = \frac{2 \cdot 70 \cdot 10^{-3} \cdot \cos(40^\circ)}{0.5 \cdot 10^{-3}} = 214.5 \text{ Pa}$$

This pressure enables capillary motion to a height of:

$$h = \frac{p_c}{(\rho_{wet} - \rho_{dry})} = \frac{214.5}{(1216 - 538)} = 0.32 \text{ m}$$

That means that the humidity gradient in the capillary tube is $100\%/0.32 \text{ m}$. The capillary pipeline length, as stated, is 0.2 m; so, for humidity of at least 62% at the bottom of the pipeline capillary motion will reach the blocking unit and keep it wet. We refer to effective tube radius because, in this example, we use a porous structure and not a hollow tube. Capillary motion is much more effective while using porous structures because the motion is through narrow spaces, and the interface pressure becomes bigger.

[0104] Now, we have to check the humidity transfer between the soil and the capillary tube:

$$\frac{d^2C}{dx^2} = \frac{\alpha}{D} \quad (\text{Eq. \#19})$$

when C is the concentration of water vapors, D is the diffusion coefficient and α is the absorption rate per volume unit. The gradient in the tube intersection can be neglected because of the geometrical proportions. That means, that in steady state, the condition for closing is a humidity of at least 62% in the bottom of the capillary pipeline.

[0105] Although the invention has been described in conjunction with specific embodiments thereof, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art. Accordingly, it is intended to embrace all such alternatives, modifications and variations that fall within the spirit and broad scope of the appended claims.

CLAIMS

What is claimed is:

1. A system, comprising:
 - a housing comprising an elongated hollow body configured to be at least partially embedded in a soil environment adjacent to a plant at a desired depth;
 - a swellable element dimensioned to be disposed within said housing, said swellable element being configured to swell when absorbing moisture;
 - a resiliently-compressible flexible tube configured to provide water to the soil environment, said flexible tube is laced transversely through tube openings of the housing, said flexible tube is disposed adjacent to the swellable element inside the housing such that a swelling or displacement of said swellable element compresses the flexible tube, thereby limiting or preventing water flow therethrough; and
 - a moisture transfer adapter configured to communicate moisture along its length from a desired location within the soil environment to the swellable element.
2. The system of claim 1, further comprising an irrigation plate disposed underneath the roots of a plant within the soil environment, said irrigation plate being configured to receive and retain water from the flexible tube and irrigate the soil environment.
3. The system of claim 2, wherein said desired location is said irrigation plate.
4. The system of any one of claims 1 to 3, wherein the housing comprises exposure windows configured to provide air and water communication between the swellable element and the ambient environment outside the housing, and wherein exposure to ambient air causes water to evaporate from said swellable element.
5. The system of any one of claims 2 to 4, wherein said irrigation plate comprises a connector for stably attaching said transfer adapter thereto.
6. The system of any one of claims 1 to 5, further comprising a regulating element comprising a screw configured to rotatably engage with interior screw threads at an open end of the housing, said regulating element being disposed within the housing such that by rotating the regulating element, the water-swellable element is displaced towards the flexible tube such that it applies a compressive force on the flexible tube.

7. The system of any one of claims 1 to 6, wherein the flexible tube comprises a catch valve configured to prevent debris in the soil environment from penetrating the flexible tube.

8. The system of any one of claims 1 to 7, wherein the moisture transfer adapter is made of a fibrous or a porous material.

9. The system of any one of claims 1 to 8, wherein the moisture transfer adapter comprises a sleeve configured to wrap around a portion of the exterior of the housing comprising at least a portion of said exposure windows.

10. The system of any one of claims 2 to 9, further comprising a filter defining a perforated elongated tubular body configured for receiving the moisture transfer adapter therein and connecting to said irrigation plate.

11. The system of any one of claims 1 to 10, further comprising a rigid element coupled to the swellable element and configured to communicate compressive pressure from the swellable element to the flexible tube upon swelling or displacement of the swellable element.

12. The system of any one of claims 2 to 11, wherein said irrigation plate is a bottom portion of a container configured to contain a plant to be irrigated.

13. The system of any one of claims 1 to 12, further comprising a non-water permeable adapter cover positioned to block transfer of moisture to at least a portion of said adapter.

14. The system of any one of claims 1 to 13, wherein said system does not comprise an electronic component.

15. A method comprising:

providing a system of any one of claims 1 to 14;

at least partially embedding said housing in a soil environment at a predetermined depth adjacent to a plant;

configuring said flexible tube to deliver water to a region of said soil environment below said plant;

configuring a location of said moisture transfer adapter so as to provide moisture communication from said region of said soil environment below said plant to said swellable element; and

flowing water through said flexible tube.


16. The method of claim 15, further comprising placing an irrigation plate in said region of said soil environment below said plant such that said flexible tube delivers water to said irrigation plate and said adapter provides moisture communication from said irrigation plate to said swellable element.

17. The method of claim 15 or 16, wherein egression of moisture from the swellable element reduces a constricting force applied on the flexible tube by the swellable element, said reduction of the constricting force enabling water flow through the flexible tube.

18. The method of any one of claims 15 to 17 wherein said moisture transfer adapter is configured to communicate moisture from said region of said soil environment below said plant to said swellable element at substantially the same or a greater rate than moisture is transferred through the soil environment.

19. The method of any one of claims 15 to 18, for automatically and non-electronically controlling irrigating of said plant.

20. The method of any one of claims 15 to 19, wherein said region of said soil environment below said plant is at least 10 cm from said swellable element.

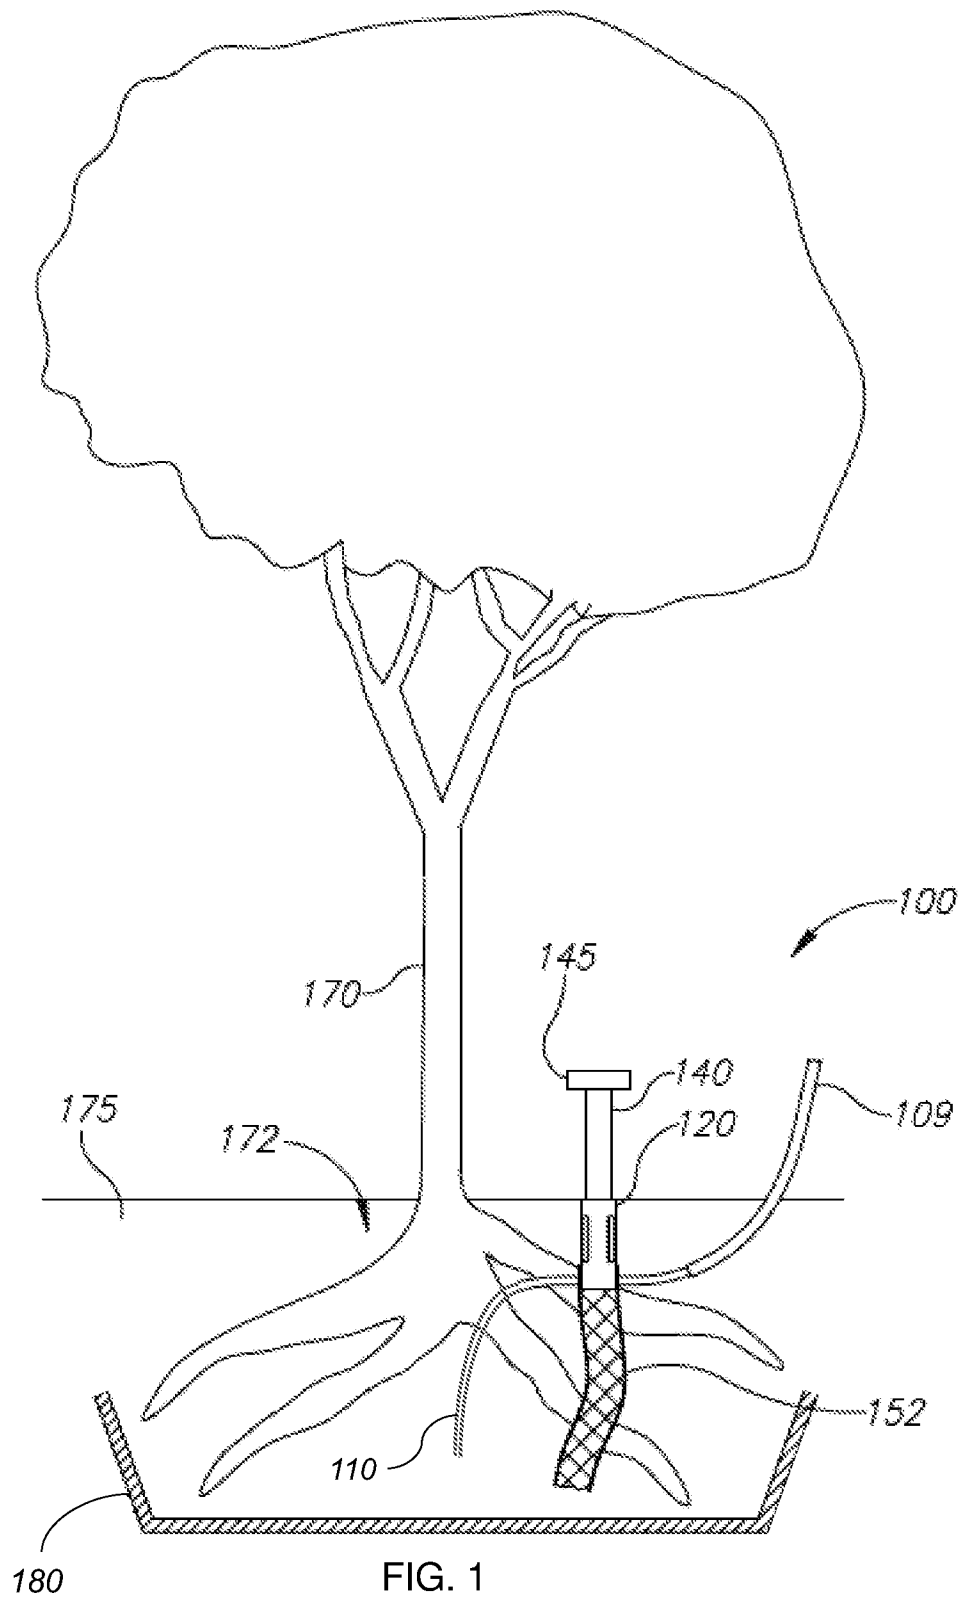

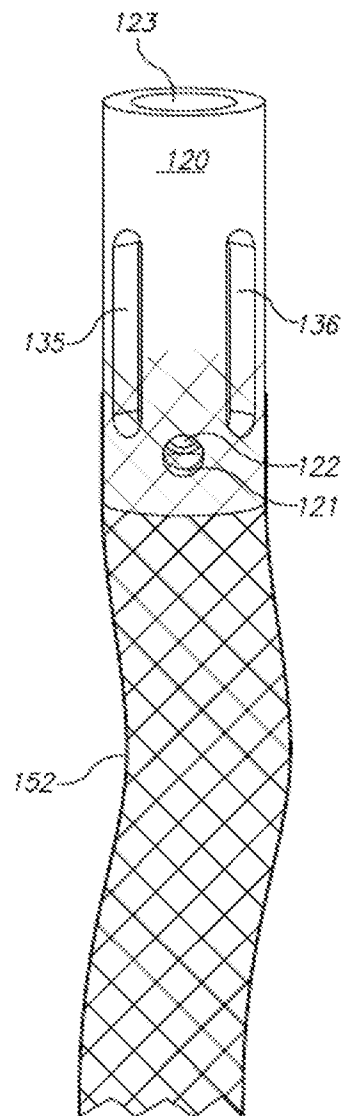


FIG.2

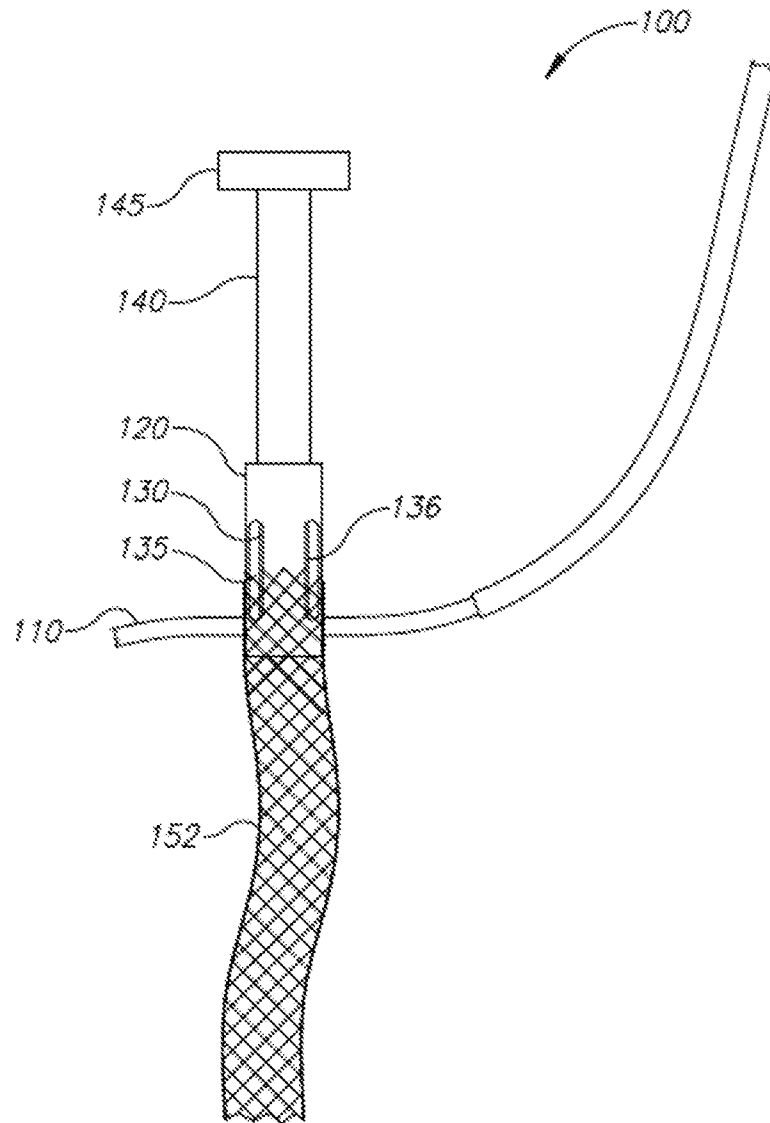


FIG. 3A

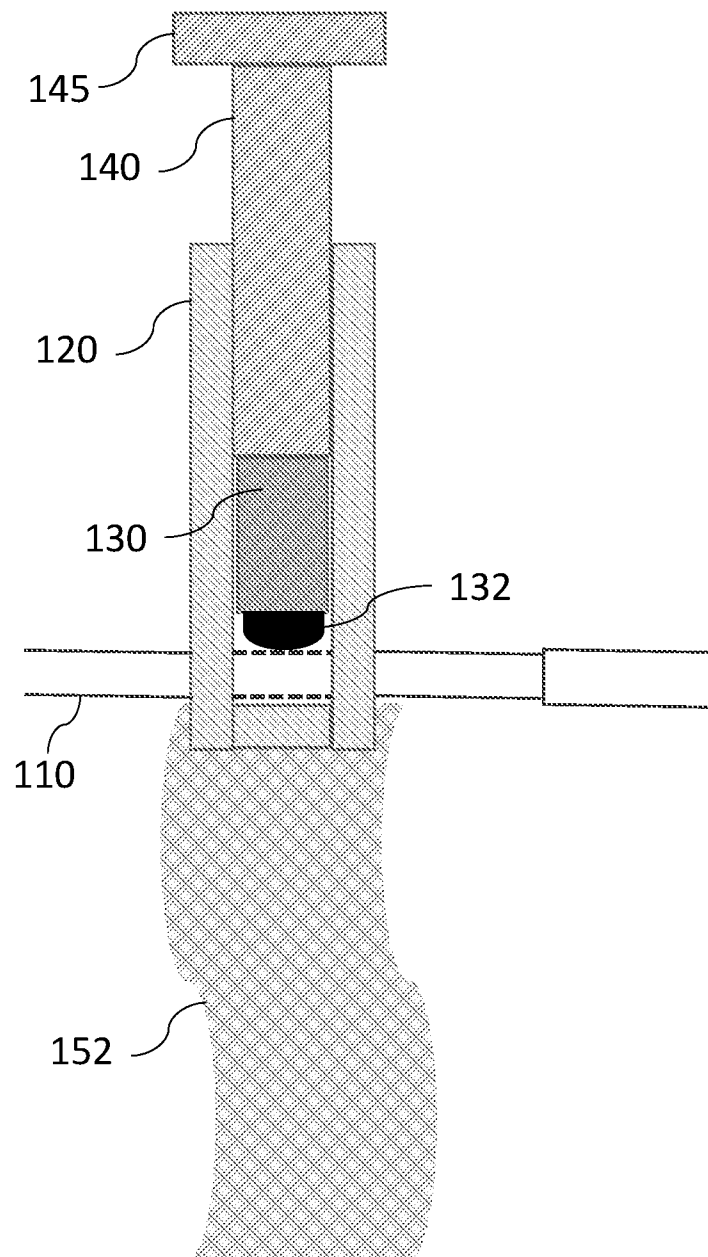


FIG. 3B

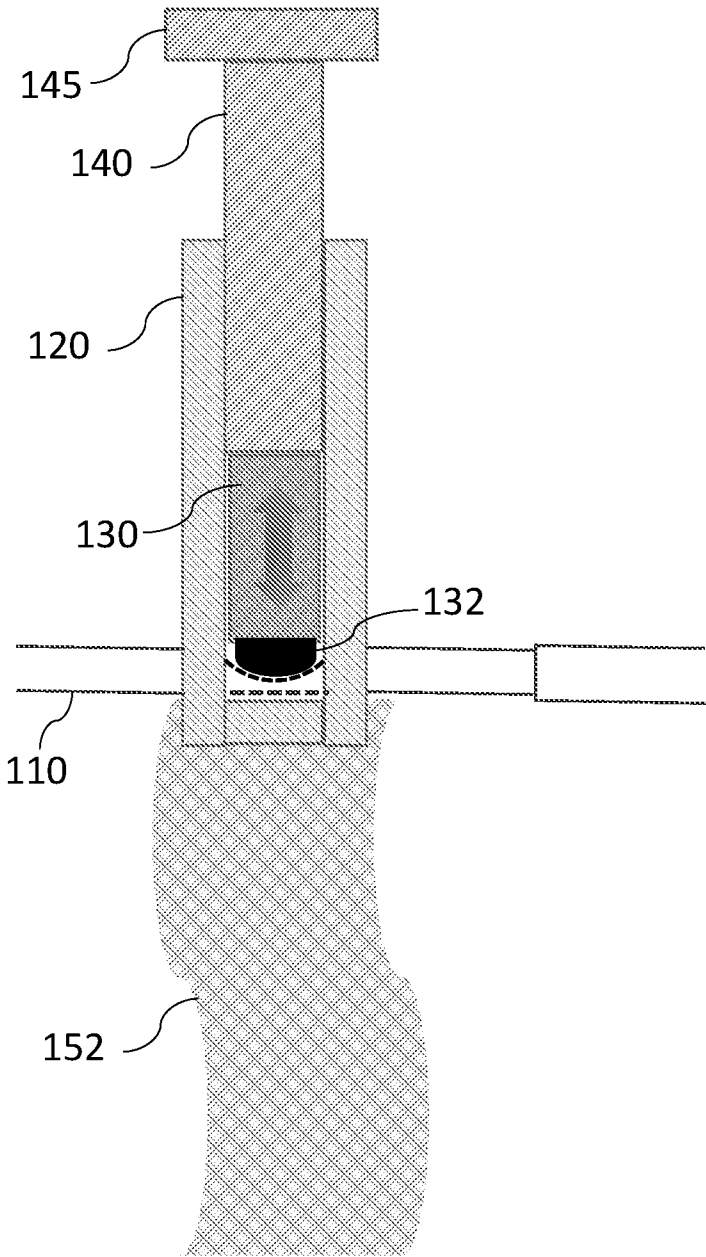


FIG. 3C

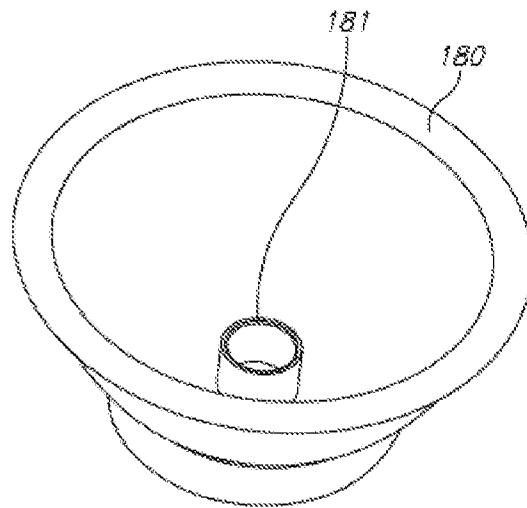


FIG. 4A

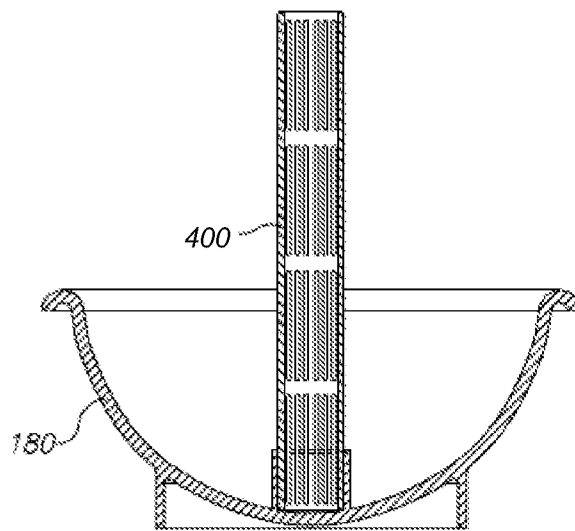


FIG. 4B

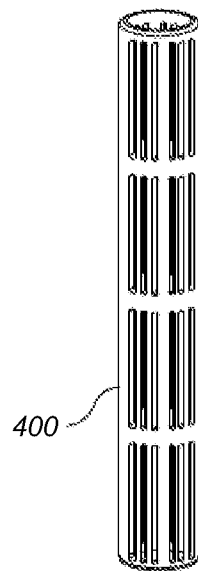


FIG. 5

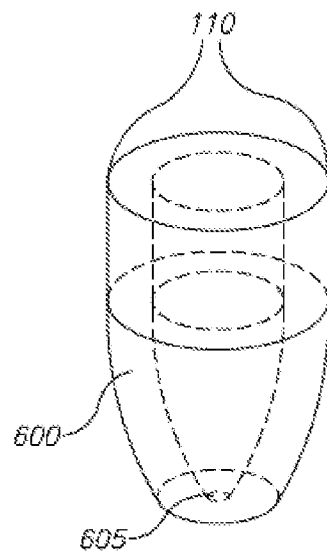


FIG. 6

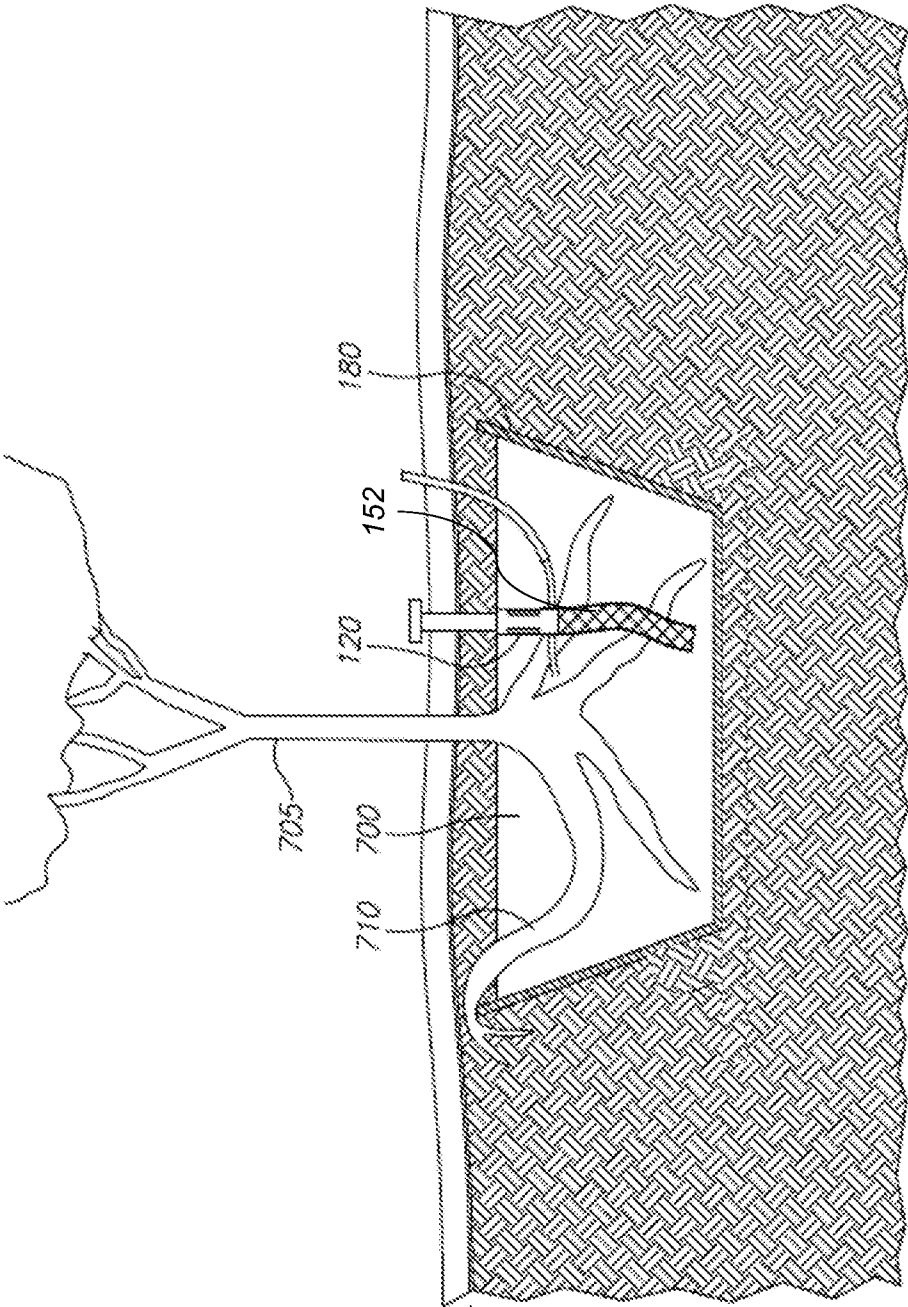


FIG. 7

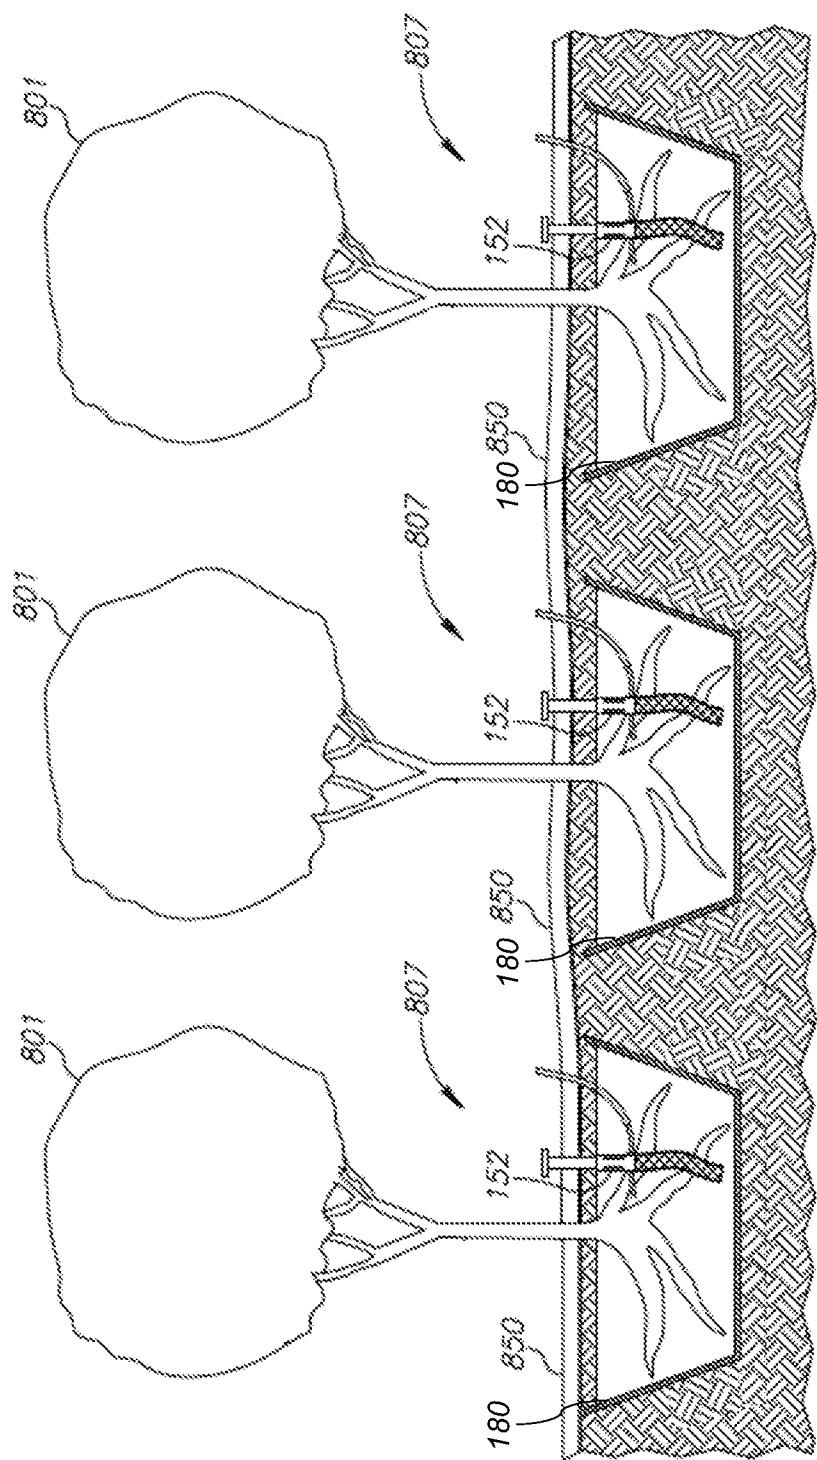


FIG. 8


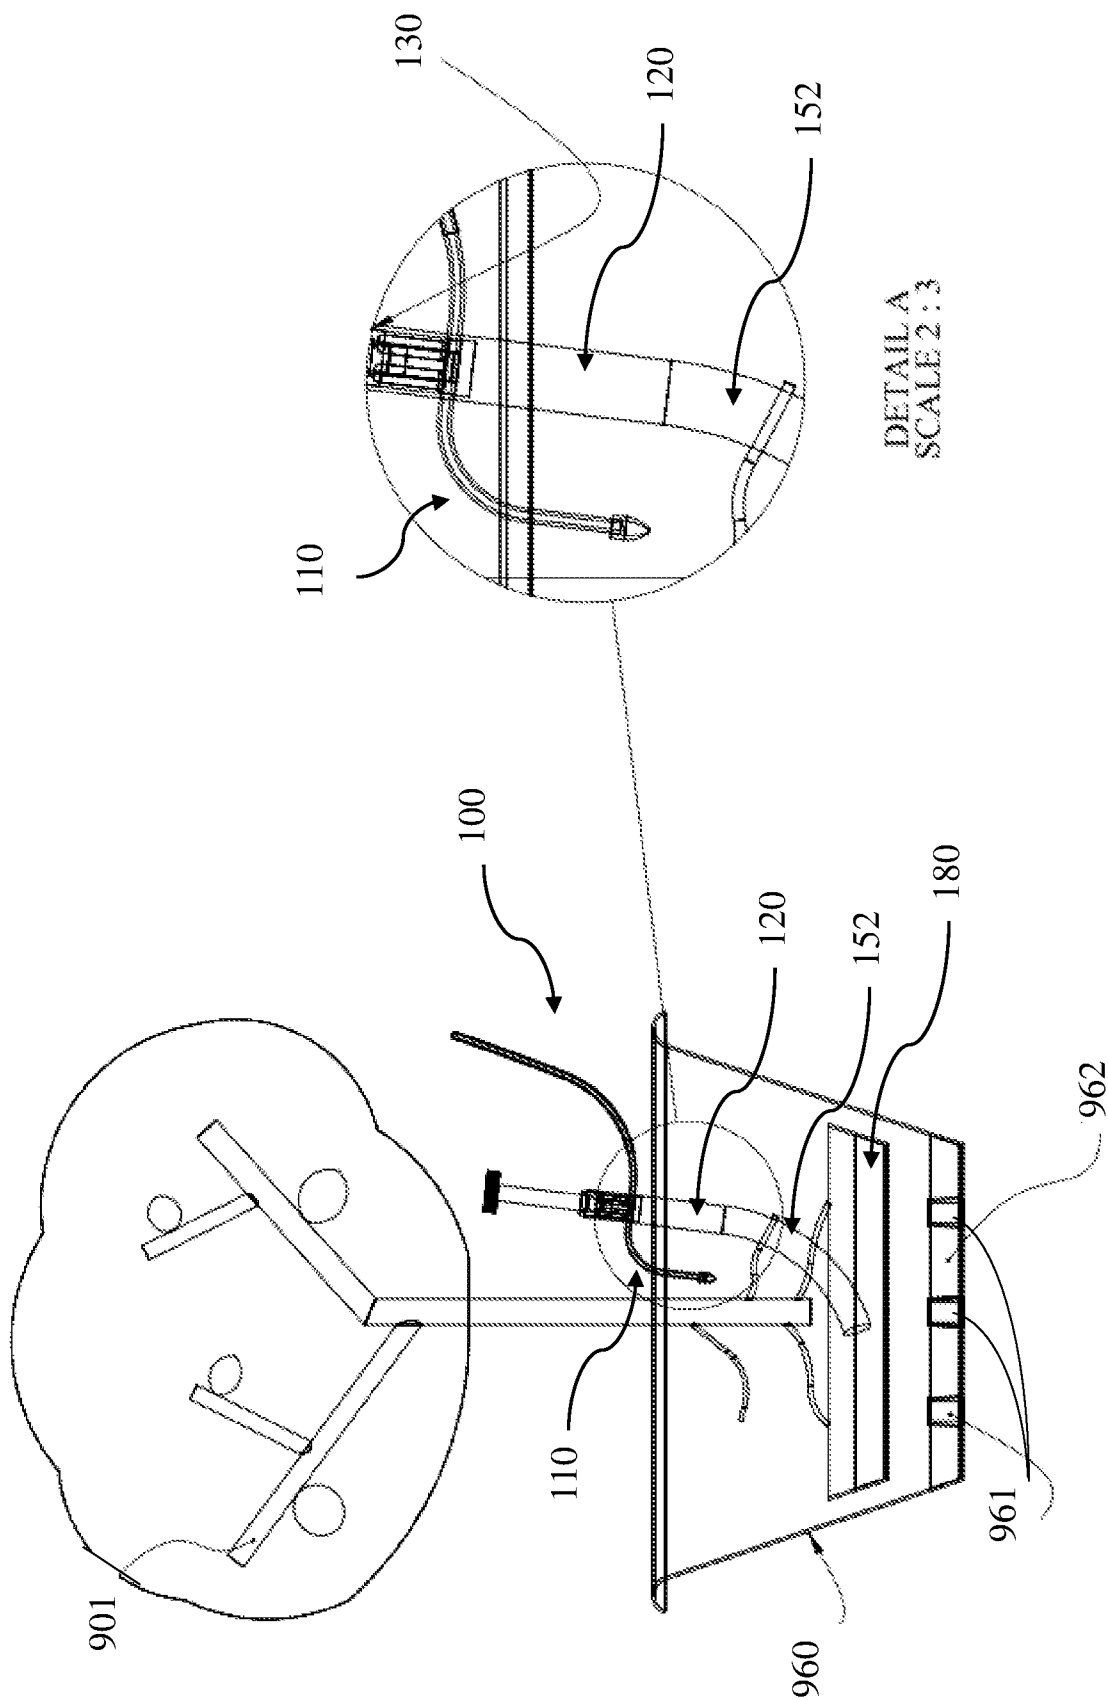


Figure 9

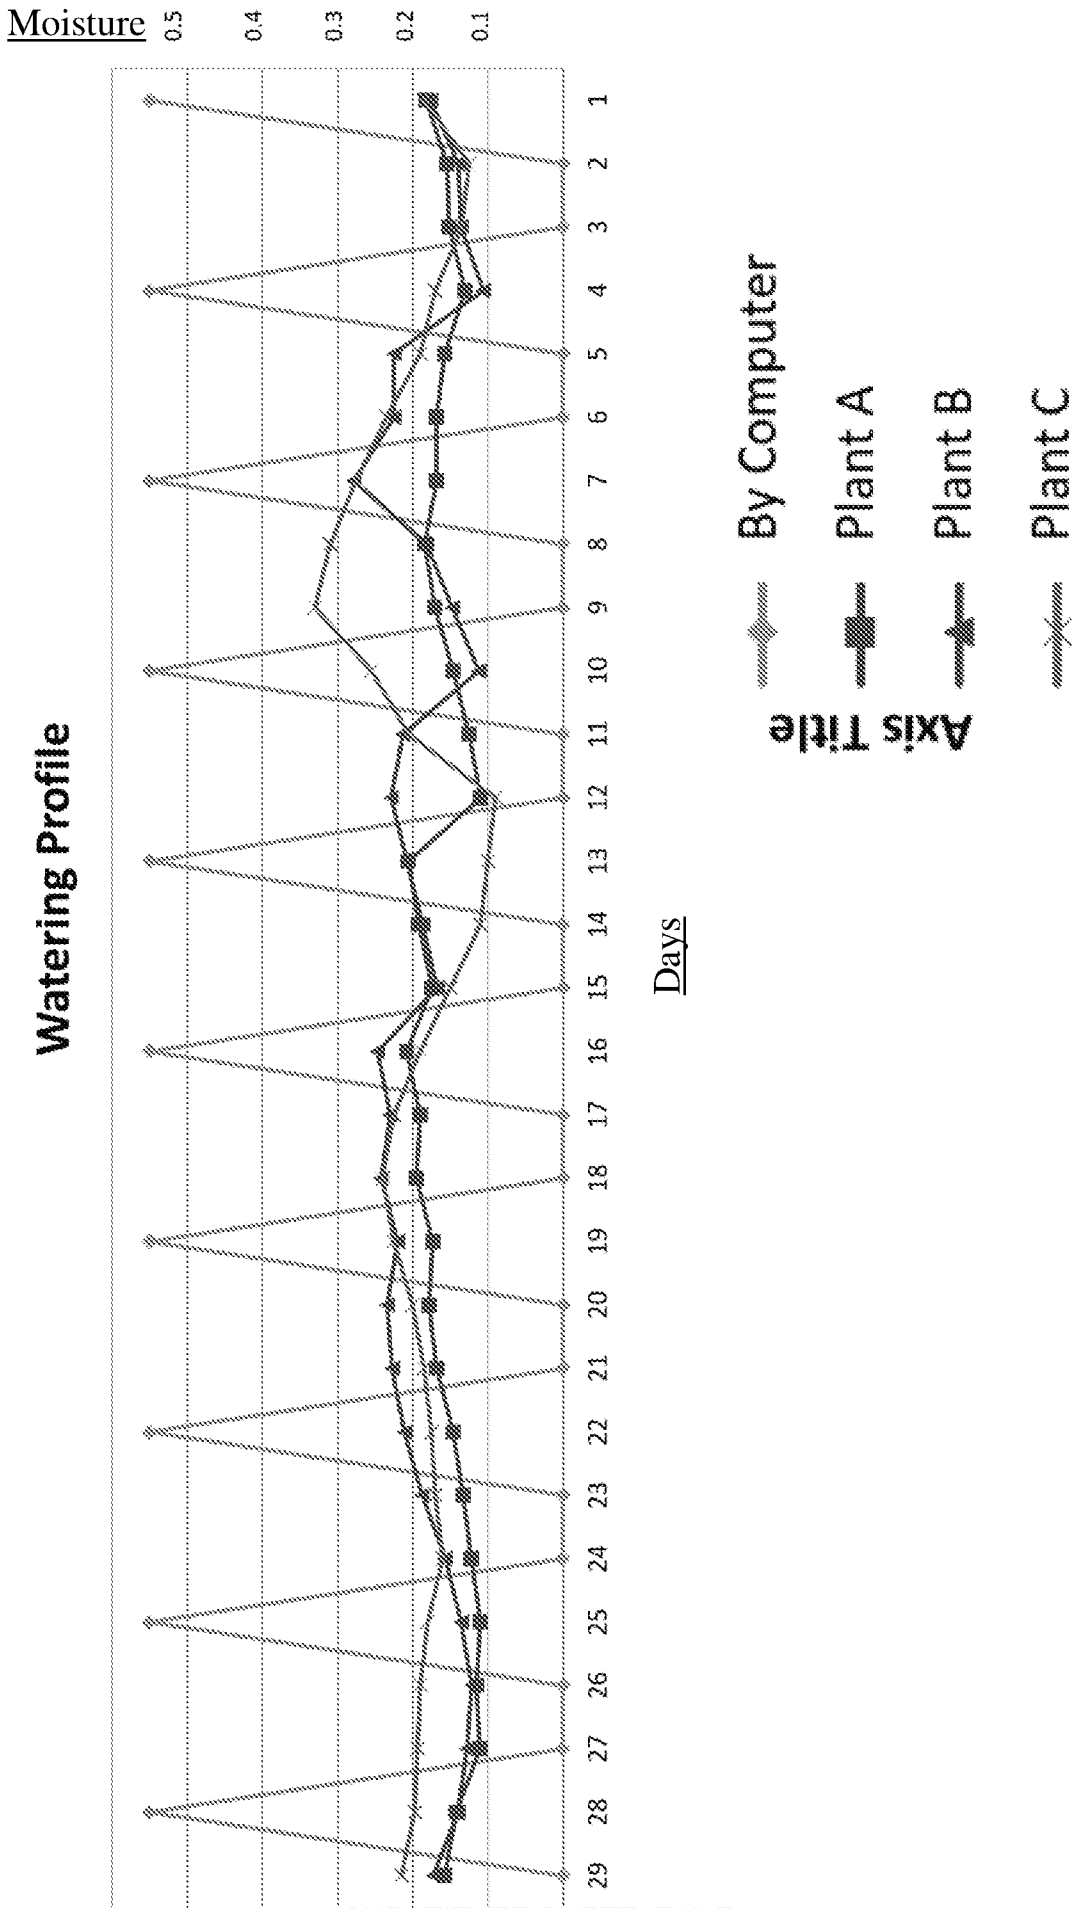

SUBSTITUTE SHEET (RULE 26)

Figure 10

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL2018/051011

A. CLASSIFICATION OF SUBJECT MATTER IPC (2018.01) A01G 25/00, A01G 25/16, F16K 31/00, G01N 19/10 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC (2018.01) A01G 25/00, A01G 25/16, F16K 31/00, G01N 19/10 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Databases consulted: Esp@cenet, Google Patents, Orbit Search terms used: swellable, irrigate, flexible tube, moisture, valve, filter		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4095458 A ELEKTROWATT AG 20 Jun 1978 (1978/06/20) Whole document	1-20
X	US 4214701 A G. BECKMANN 29 Jul 1980 (1980/07/29) Whole document	1-20
X	FR 2694157 A1 HUTCHINSON 04 Feb 1994 (1994/02/04) See abstract and figs 3, 4 with particular reference to the use in pot plants (planted en pots) and swellable element (14) and compressible tube (12)	1-20
A	FR 2657139 A1 HUCHINSON 19 Jul 1991 (1991/07/19) See abstract and fig. 1 with particular reference to swelling element 12 and pipe 18	1
A	US 3874590 A W. GIBSON 01 Apr 1975 (1975/04/01) See abstract and figure 1 with particular reference to valve operated by expandable element	1
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 30 Dec 2018		Date of mailing of the international search report 31 Dec 2018
Name and mailing address of the ISA: Israel Patent Office Technology Park, Bldg.5, Malcha, Jerusalem, 9695101, Israel Facsimile No. 972-2-5651616		Authorized officer VASL Robert Telephone No. 972-2-5651637

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL2018/051011

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6220268 B1 BOLTON 24 Apr 2001 (2001/04/24) See fig. 1 with reference to moisture indicator bar (16) attached to a hygrometer coil (20)	1

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IL2018/051011

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
US 4095458 A	20 Jun 1978	US 4095458 A	20 Jun 1978
		CH 607128 A5	30 Nov 1978
		ES 227393 U	01 May 1977
		ES 227393 Y	01 Oct 1977
		FR 2345894 A7	21 Oct 1977
		SU 659079 A3	25 Apr 1979
US 4214701 A	29 Jul 1980	US 4214701 A	29 Jul 1980
		AU 3943878 A	06 Mar 1980
		AU 523482 B2	29 Jul 1982
		CH 632393 A5	15 Oct 1982
		DE 2739650 A1	08 Mar 1979
FR 2694157 A1	04 Feb 1994	FR 2694157 A1	04 Feb 1994
		FR 2694157 B1	28 Oct 1994
		DE 581628 T1	28 Jul 1994
		EP 0581628 A1	02 Feb 1994
		ES 2049685 T1	01 May 1994
FR 2657139 A1	19 Jul 1991	FR 2657139 A1	19 Jul 1991
		FR 2657139 B1	03 Jul 1992
US 3874590 A	01 Apr 1975	US 3874590 A	01 Apr 1975
US 6220268 B1	24 Apr 2001	US 6220268 B1	24 Apr 2001