

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
02.11.2000 Bulletin 2000/44

(51) Int. Cl.⁷: **E21B 21/08**, E21B 21/06,
E21B 21/14, E21B 44/00

(21) Application number: **00112899.0**

(22) Date of filing: **05.05.1997**

(84) Designated Contracting States:
BE DE FR GB IT NL

(30) Priority: **03.05.1996 US 642828**
29.10.1996 US 30752 P

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
97922650.3 / 0 897 454

(71) Applicant:
BAKER HUGHES INCORPORATED
Houston Texas 77027 (US)

(72) Inventor:
**The designation of the inventor has not yet been
filed**

(74) Representative:
Finck, Dieter, Dr.Ing. et al
v. Fünér Ebbinghaus Finck Hano
Mariahilfplatz 2 - 3
81541 München (DE)

Remarks:

This application was filed on 19 - 06 - 2000 as a
divisional application to the application mentioned
under INID code 62.

(54) **Closed loop fluid-handling system for use during drilling of wellbores**

(57) This invention provides a fluid-handling system for use in underbalanced drilling operations. The system includes a first vessel which acts as a four phase separator. The first vessel includes a first stage for separating solids. Oil and gas are separated at a second stage. A pressure sensor provides signals to a pressure controller, which modulates a gas flow valve coupled to the vessel for discharging gas from the first vessel. The pressure controller maintains the pressure in the first vessel at a predetermined value. An oil level sensor placed in the first vessel provides a signal to an oil level

controller. The oil level controller modulates an oil flow valve coupled to the vessel to discharge oil from the first vessel into a second vessel. Water is discharged into a third vessel. Water from the third vessel is discharged via a water flow control valve, which is modulated by a level controller as a function of the water level in the third vessel. Any gas in the third vessel is discharged by modulating a gas control valve as a function of the pressure in the third vessel.

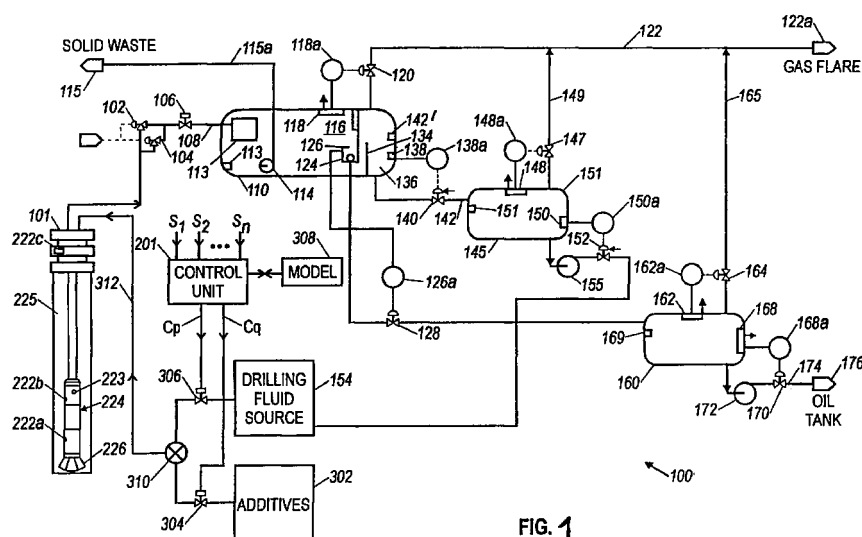


FIG. 1

Description

[0001] This invention relates to a fluid-handling system for use in drilling of wellbores.

[0002] In conventional drilling of wellbores for the production of hydrocarbons from subsurface formations, wellbores are drilled utilizing a rig. A fluid comprising water and suitable additive, usually referred to in the art as "mud," is injected under pressure through a tubing having a drill bit which is rotated to drill the wellbores. The pressure in the wellbore is maintained above the formation pressure to prevent blowouts. The mud is circulated from the bottom of the drill bit to the surface. The circulating fluid reaching the surface comprises the fluid pumped downhole and drill cuttings. Since the fluid pressure in the wellbore is greater than the formation pressure, it causes the mud to penetrate into or invade the formations surrounding the wellbore. Such mud invasion reduces permeability around the wellbore and reduces accuracy of measurements-while-drilling devices commonly used during drilling of the wellbores. Such wellbore damage (also known as the skin damage or effect) may extend from a few centimeters to several meters from the wellbore. The skin damage results in a decrease in hydrocarbon productivity.

[0003] To address the above-noted problems, some wells are now drilled wherein the pressure of the circulating fluid in the wellbore is maintained below the formation pressure. This is achieved by maintaining a back pressure at the wellhead. Since the wellbore pressure is less than the formation pressure, fluids from the formation (oil, gas and water) co-mingles with the circulating mud. Thus, the fluid reaching the surface contains four phases: cuttings (solids), water, oil and gas. Such drilling systems require more complex fluid-handling systems at the surface. The prior art systems typically discharge the returning fluids ("wellstream") into a pressure vessel or separator at the surface to separate sludge (solids), water, oil and gas. The pressure in the vessel typically exceeds 70 bar (1000 psi). A number of manually controlled valves are utilized to maintain the desired pressure in the separator and to discharge the fluids from the pressure vessel. These prior art systems also utilize manually controlled emergency shut down valves to shut down the drilling operations. Additionally, these systems rely upon pressure measured at the wellhead to control the mud pressure downhole. In many cases this represents a great margin of error. These prior art fluid-handling systems require the use of high pressure vessels, which are (a) relatively expensive and less safe than low pressure vessels, (b) relatively inefficient, and (c) require several operators to control the fluid-handling system.

[0004] US-A-5 249 635 refers to a method of maintaining a constant predetermined hydrostatic pressure in a wellbore being drilled by a rotary drilling process utilizing aerated drilling fluid. The aerating gas, such as compressed air, is maintained at a constant pressure

while its flow is changed in response to changes in the flow of the drilling fluid. This maintains a constant ratio of compressed air to drilling fluid, resulting in the hydrostatic pressure remaining constant. The flow of aerating gas is controlled by a flow control valve. The flow of the drilling fluid is carried out by a liquid flow transmitter. The pressure of the aerating gas is maintained substantially constant by means of a back pressure control valve. The aerating gas is injected into the drilling fluid prior to the drilling fluid being introduced into the drill pipe.

[0005] The present invention addresses the above-noted deficiencies of the prior art fluid-handling systems and provides a relatively low pressure fluid-handling system which improves the drilling operation by monitoring the quality of the drilling fluid.

[0006] This invention provides a fluid-handling system according to claim 1.

[0007] The system of the present invention also determines the downhole pressures, including the formation pressure and controls the drilling fluid flow into the wellbore to maintain a desired pressure at the wellhead. The system also automatically controls the drilling fluid mix as a function of one or more desired operating parameters to control the density of the circulating fluid.

[0008] For detailed understanding of the present invention, references should be made to the following detailed description of the preferred embodiment, taken in conjunction with the accompanying drawings, in which like elements have been given like numerals, wherein:

FIG. 1 shows a schematic of a fluid handling system in conjunction with a schematic representation of a wellbore with a drilling assembly conveyed therein for automatically controlling the wellhead pressure, downhole circulating fluid pressure and the drilling fluid mix.

FIG. 1A shows a functional block diagram of a control system for use with the system of **FIG. 1** for controlling the operation of the fluid handling system.

[0009] During underbalanced drilling of a wellbore, a drilling fluid (also referred to as the "mud") is circulated through the wellbore to facilitate drilling of the wellbore. The fluid returning from the wellbore annulus (referred herein as the "wellstream") typically contains the drilling fluid originally injected into the wellbore, oil, water and gas from the formations, and drilled cuttings produced by the drilling of the wellbore.

[0010] In the system **100**, the wellstream passes from a wellhead equipment **101** through a choke valve **102** which is duty-cycled at a predetermined rate. A second choke valve **104** remains on one hundred percent (100%) standby. The duty-cycled valve **102** is electrically controlled so as to maintain a predetermined back

pressure. The wellstream then passes through an emergency shut-down valve ("ESD") **106** via a suitable line **108** into a four phase separator (primary separator) **110**. The choke valve **102** creates a predetermined pressure drop between the wellhead equipment **110** and the primary separator **100** and discharges the wellstream into the primary vessel at a relatively low pressure, typically less than 7 bar (100 psi). In some applications, it may be desirable to utilize more than one choke valve in series to obtain a sufficient pressure drop. Such choke valves are then preferably independently and remotely controlled as explained in more detail later.

[0011] The primary separator **110** preferably is a four phase separator. The wellstream entering into the separator **110** passes to a first stage of the separator **110**. Solids (sludge), such as drilled cuttings, present in the wellstream are removed in the first stage by gravity forces that are aided by centrifugal action of an involute entry device **112** placed in the separator **110**. Such separation devices **112** are known in the art and, thus, are not described in detail. Any other suitable device also may be utilized to separate the solids from the wellstream. The solids being heavier than the remaining fluids collect at the bottom of the primary separator **100** and are removed by a semi-submersible sludge pump **114**. A sensor **113** detects the level of solids build-up in the separator **110** and energizes the pump **114** to discharge the solids from the separator **110** into a solids waste place **115** via a line **115a**. The operation of the sludge pump **114** is preferably controlled by a control system placed at a remote location. **FIG. 1A** shows a control system **200** having a control unit or control circuit **201**, which receives signals from a variety of sensors associated with the fluid-handling system **100**, determines a number of operating parameters and controls the operation of the fluid-handling system **100** according to programmed instruction and models provided to the control unit **201**. The operation of the control system **200** is described in more detail later.

[0012] The fluid that is substantially free of solids passes to a second stage, which is generally denoted herein by numeral **116**. The second stage **116** essentially acts as a three phase separator to separate gas, oil and water present in the fluids entering the second stage. The gas leaves the separator **110** via a control valve **120** and line **122**. The gas may be flared or utilized in any other manner. A pressure sensor **118** placed in the separator **110** and coupled to the control unit **201** is used to continually monitor the pressure in the separator **110**. The control unit **201** adjusts the control valve **120** so as to maintain the pressure in the vessel **110** at a predetermined value or within a predetermined range. Alternatively, a signal from the pressure sensor **118** may be provided to a pressure controller **118a**, which in turn modulates the control valve **120** to maintain the pressure in the separator at a predetermined value. Both a high and a low pressure alarm signals are also gener-

ated from the pressure sensor **118** signal. Alternatively, two pressure switches may be utilized, wherein one switch is set to provide a high pressure signal and the other to provide a low pressure signal. The control unit **201** activates an alarm **210** (**FIG. 1a**) when the pressure in the separator is either above the high level or when it falls below the low level.

[0013] The control unit **201** may also be programmed to shut down the system **100** when the pressure in the separator is above a predetermined maximum level ("high-high") or below a predetermined minimum level ("low-low"). Alternatively, the system **100** may be shut down upon the activation of pressure switches placed in the separator, wherein one such switch is activated at the high-high pressure and another switch is activated at the low-low pressure. The high-high pressure trip protects against failure of the upstream choke valves **102** and **104**, while the low-low trip protects the system against loss of containment within the vessel **110**.

[0014] The oil contained in the fluid at the second stage **116** collects in a bucket **124** placed in the second stage **116** of the separator **110**. A level sensor **126** associated with the bucket **124** is coupled to the control unit **201**, which determines the level of the oil in the bucket **124**. The control unit **201** controls a valve **128** to discharge the oil from the separator **110** into an oil surge tank **160**. Alternatively, the level sensor **126** may provide a signal to a level controller **126a**, which modulates the control valve **128** to control the oil flow from the bucket **124** into the oil surge tank **160**. The oil level sensor signals also may be used to activate alarms **210** when the oil level is above a maximum level or below a minimum level.

[0015] In the second stage **116**, fluid that is substantially free of oil (referred to herein as the "water" for convenience) flows under the oil bucket **124** in the area **116** and then over a weir **134** and collects into a water chamber or reservoir **136**. A level sensor **138** is placed in the water reservoir **136** and is coupled to the control unit **201**, which continually determines the water level in the reservoir **136**. The control unit **201** is programmed to control a valve **140** to discharge the water from the separator **110** into a water tank **145** via a line **142**. Alternatively, the level sensor **138** may provide a signal to a level controller **138a** which modulates the control valve **140** to discharge the water from the separator **110** into the water tank **145**. Additionally, the liquid level in the main body of the separator is monitored by a level switch **142** which provides a signal when the liquid level in the main body of the separator **110** is above a maximum level, which signal initiates the emergency shut down. This emergency shut down prevents any liquid passing into the gas vent **11** or into any flare system used.

[0016] Any gas present in the water discharged into the water tank separates within the water tank **145**. Such gas is discharged via a control valve **147** to flare.

A pressure sensor **148** associated with the water tank **145** is utilized to control the control valve **147** to maintain a desired pressure in the water tank **145**. The control valve **147** may be modulated by a pressure controller **148a** in response to signals from the pressure sensor **148**. Alternatively, the control valve **147** may be controlled by the control unit **201** in response to the signals from the pressure sensor **148**. Alarms are activated when the pressure in the water tank **145** is above or below predetermined limits. Water level in the water tank **145** is monitored by a level sensor **150**. A level controller **150a** modulates a control valve **152** in response to the level sensor signals to maintain a desired liquid level in the water tank **145**. Alternatively, control unit **201** may be utilized to control the valve **152** in response to the level sensor signals. The fluid level in the water tank **145** also is monitored by a level switch **151**, which initiates an emergency shutdown of the system if the level inadvertently reaches a predetermined maximum level. A pump **155** passes the fluids from the water tank **145** to the control valve **152**. The fluid leaving the valve **152** discharges via a line **153** into a drilling fluid tank **154**.

[0017] Any gas present in the oil surge tank **160** separates within the oil surge tank **160**. The separated gas is discharged via a control valve **164** and a line **165** to the gas line **122** to flare. A pressure sensor **162** associated with the oil surge tank **160** is utilized to control the control valve **164** in order to maintain a desired pressure in the oil surge tank **160**. The control valve **164** may be modulated by a pressure controller **162a** in response to signals from the pressure sensor **162**. Alternatively, the operation of the control valve **164** may be controlled by the control unit **201** in response to the signals from the pressure sensor **162**. Alarms **210** are activated when the pressure in the oil surge tank **160** is either above or below their respective predetermined limits. Oil level in the oil surge tank **160** is monitored by a level sensor **168**. A level controller **168a** modulates a control valve **170** in response to the level sensor signals to maintain a desired liquid level in the oil surge tank **160**. Alternatively, the control unit **201** may be utilized to control the valve **170** in response to the signals from the level sensor **168**. The liquid level in the oil surge tank **160** also is monitored by a level switch **169**, which initiates an emergency shutdown of the system if the level inadvertently reaches a predetermined maximum level. A pump **172** passes the fluids from the oil surge tank **160** to the control valve **170**. The fluid leaving the valve **170** discharges via a line **174** into an oil tank or oil reservoir **176**.

[0018] Still referring to **FIGS. 1** and **1A**, the control unit **201** may be placed at a suitable place in the field or in a control cabin having other control equipment for controlling the overall operation of the drilling rig used for drilling the wellbore. The control unit **201** is coupled to one or more monitors or display screens **212** for displaying various parameters relating to the fluid-handling system **100**. Suitable data entry devices, such as touch-

screens or keyboards are utilized to enter information and instructions into the control unit **201**. The control unit **201** contains one or more data processing units, such as a computer, programs and models for operating the fluid-handling system **100**.

[0019] In general, the control unit **201** receives signals from the various sensors described above and any other sensors associated with the fluid-handling system **100** or the drilling system. The control unit **201** determines or computes the values of a number of operating parameters of the fluid-handling system and controls the operation of the various devices based on such parameters according to the programs and models provided to the control unit **201**. The ingoing or input lines **S₁-S_n** connected to the control unit **201** indicate that the control unit **201** receives signals and inputs from various sources, including the sensors of the system **100**. The outgoing or output lines **C₁-C_m** are shown to indicate that the control unit **201** is coupled to the various devices in the system **201** for controlling the operations of such devices, including the control valves **102**, **104**, **120**, **128**, **147**, **152**, **64**, **168** and **170**, and pumps **124**, **155** and **170**.

[0020] Referring to **FIGS. 1** and **1A**, prior to the operation of the system **100**, an operator stationed at the control unit **201**, which is preferably placed at a safe distance from the fluid-handling system **100**, enters desired control parameters, including the desired levels or ranges of the various parameters, such as the fluid levels and pressure levels. As the drilling starts, the control unit **201** starts to control the flow of the wellstream from the wellbore **225** by controlling the valves **102** and **104** so as to maintain a desired back pressure. The control unit **201** also controls the pressure in the separator **110**, the fluid levels in the separator **110** and each of the tanks **145** and **160**, the discharge of solids from the separator **110** and the discharge of the gases and fluids from the tanks **145** and **170**.

[0021] As noted earlier, prior art systems control the wellbore pressure by maintaining the pressure at the surface at a desired value. Based on the depth of the wellbore and the types of fluids utilized during drilling of the wellbore, the actual downhole pressure can vary from the desired pressure by several hundred pounds. In order to accurately control the pressure in the wellbore, the present system includes a pressure sensor **222c** for measuring the pressure at the wellhead **101**, a pressure sensor **222b** in the drill string **224** for measuring the pressure of the drilling fluid in the drill string **224** and a pressure sensor **222a** in the drill string **224** for measuring the pressure in the annulus between the drill string **224** and the wellbore **225**. Other types of sensors, such as differential pressure sensors, may also be utilized for determining the differential pressures downhole. During the drilling operations, the control unit **201** periodically or continually monitors the pressures from the sensors **222a**, **222b** and **222c** and controls the fluid flow rate into the wellbore **225** by controlling so as

to maintain the wellbore pressure at a predetermined value or within a predetermined range. The drill string **224** may also include other sensors, such as a temperature sensor **223**, for measuring the temperature in the wellbore **225**.

[0022] During underbalanced drilling, the drilling fluid is mixed with other materials, such as nitrogen, air, carbon dioxide, air-filled balls and other additives to control the drilling fluid density or the equivalent circulating density and to create foam in the drilling fluid to provide gas lift downhole. **FIG. 2** shows an embodiment **100a** of the fluid handling system of the present invention which can automatically control the drilling fluid mix as a function of downhole measured operating parameters, such as the formation pressure, or any other selected parameters. As shown in **FIG. 1**, the system **100a** includes one or more sources **302** of materials (additives) to be mixed with the drilling mud from the mud tank **154**. The drilling fluid from the mud tank **154** passes to a mixer **310** via an electrically-controlled flow valve **304**. The additives from the source **302** pass to the mixer **310** via an electrically-controlled flow valve **306**. The controller **201** receives information about the downhole parameters from the various sensors **S₁-S_n**, including the pressure sensors **222a**, **222b**, and **222c**, and temperature sensor **223** and determines the selected parameters to be controlled, such as the formation pressure. The system **100a** is provided with a model **308** for use by the control unit **201** to determine the drilling fluid mix. The control unit **201** periodically or continually determines the required fluid mix as a function of one or more of the selected operating parameters and operates the control valve **304** via control line **C_q** to discharge the correct amount of the additive materials to obtain the desired mix. The control unit **201** also controls the fluid control valve **306** via line **C_p** to control the drilling fluid flow into the mixer **310**. The mixed fluid is discharged into the wellbore **225** from the mixer **310** via line **312** to maintain the desired pressure in the wellbore. The mud from the mud tank **154** and the additives from the source **302** are preferably mixed at a juncture or mixer **310** and discharged into the wellbore via line **312**. The additives and the drilling fluid, however, may be injected separately into the wellbore **225**. In some applications it may be more desirable to inject the additives at or near the bottom of the drill string **224** via a separate line (not shown) so that the mixing occurs near the drill bit **226**.

[0023] Thus, the fluid handling system of the present invention provides a closed loop fluid handling system which automatically separates the wellstream into its constituent parts, discharges the separated constituent parts into their desired storage facilities. The system also automatically controls the pressure in the wellbore and drilling fluid mixture as a function of selected operating parameters.

[0024] The above-described system requires substantially less manpower to operate in contrast to known

fluid-handling systems utilized during underbalanced drilling of wellbores. The pressure in the main separator **110** is relatively low compared to known prior art systems, which typically operate at a pressure of more than 70 bar (1000 psi). Low pressure operations reduce the costs associated with manufacture of separators. More importantly, the low pressure operations of the present system are inherently safer than the relatively high pressure operations of the prior art systems. The control of the wellhead pressure and the drilling fluid mix based on the downhole measurements during the drilling operations provide more accurate control of the pressure in the wellbore.

Claims

1. A fluid-handling system for use during drilling of a wellbore, comprising:
 - (a) a source of drilling fluid for supplying the drilling fluid to the wellbore during drilling of the wellbore;
 - (b) a source of an additive for supplying a selected additive to the wellbore during drilling of the wellbore;
 - (c) sensors for taking measurements downhole relating to at least one selected downhole parameter during drilling of the wellbore; and
 - (d) a control unit, said control unit controlling the supply of the additive from the source thereof in response to the measurements of the selected downhole parameter.
2. The fluid-handling system as specified in claim 1, wherein the additive is selected from a group comprising air, nitrogen, carbon dioxide, air-filled pellets, and air-filled glass beads.
3. The fluid-handling system as specified in claim 1 or 2, wherein the additive is injected into the drilling fluid prior to injecting the drilling fluid into the wellbore.
4. The fluid-handling system as specified in claim 1 or 2, wherein the additive is mixed with the drilling fluid after the drilling fluid has been injected into the wellbore.

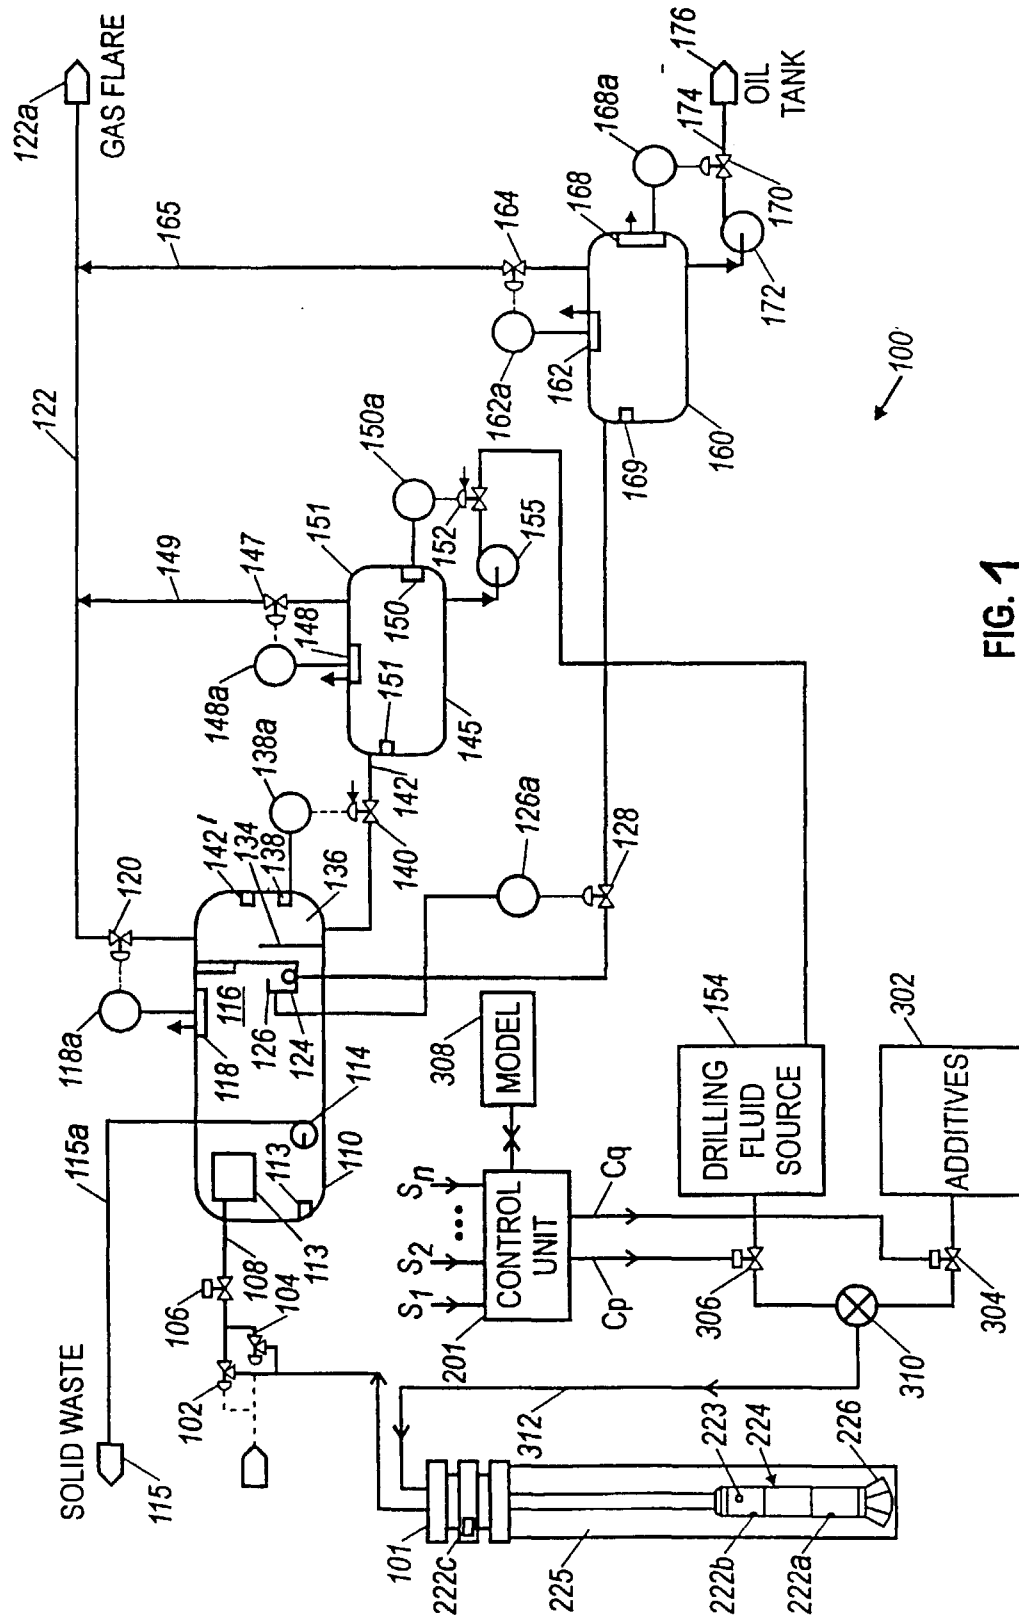


FIG. 1

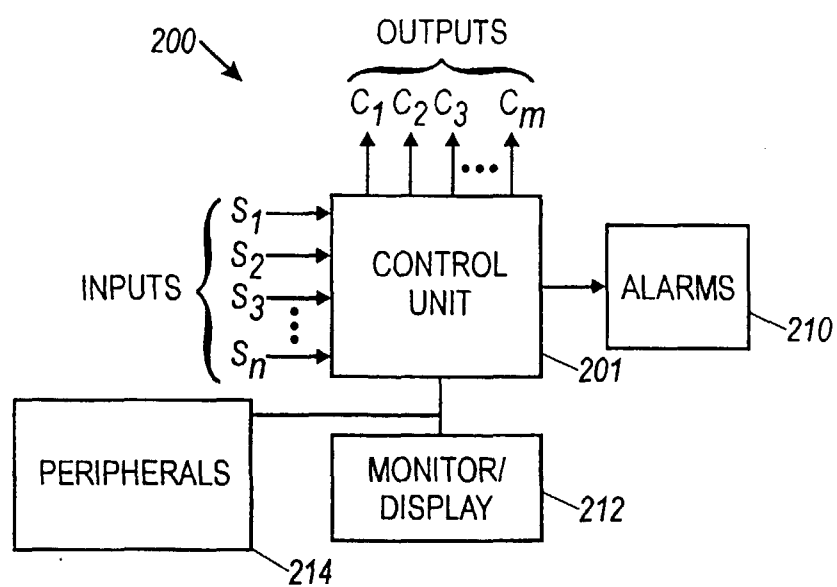


FIG. 1A



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 11 2899

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 411 105 A (GRAY BENJAMIN) 2 May 1995 (1995-05-02)	1, 2, 4	E21B21/08 E21B21/06 E21B21/14 E21B44/00
Y	* column 5, line 23 - line 29; claims 3, 5 *	3	
D, Y	US 5 249 635 A (KING CHARLES W ET AL) 5 October 1993 (1993-10-05)	3	
A	* claims 1-9 *	1, 2, 4	
X	US 4 924 949 A (CURLETT HARRY B) 15 May 1990 (1990-05-15) * the whole document *	1	
A	US 4 449 594 A (SPARKS RONALD L) 22 May 1984 (1984-05-22)		
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			E21B
Place of search	Date of completion of the search	Examiner	
THE HAGUE	23 August 2000	Fonseca Fernandez, H	
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 11 2899

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-08-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5411105 A	02-05-1995	CA 2140694 A	15-12-1995
US 5249635 A	05-10-1993	NONE	
US 4924949 A	15-05-1990	CA 1319361 A	22-06-1993
		US 4683944 A	04-08-1987
		AU 591558 B	07-12-1989
		AU 7260087 A	10-11-1988
		CA 1335811 A	06-06-1995
		EP 0289673 A	09-11-1988
		US 4799544 A	24-01-1989
		US 4836305 A	06-06-1989
US 4449594 A	22-05-1984	NONE	