



(11) **EP 1 502 938 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
16.06.2010 Bulletin 2010/24

(51) Int Cl.:
C10L 1/14 (2006.01) **C10L 1/24** (2006.01)
C10L 1/196 (2006.01) **C10L 1/236** (2006.01)

(21) Application number: **04076708.9**

(22) Date of filing: **10.06.2004**

(54) **Fuel oil composition**

Kraftstoffzusammensetzung

Composition de carburants

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**

(30) Priority: **03.07.2003 EP 03254230**

(43) Date of publication of application:
02.02.2005 Bulletin 2005/05

(73) Proprietor: **Infineum International Limited
Abingdon,
Oxfordshire OX13 6BB (GB)**

(72) Inventor: **Gormley, Fiona
Malahide
Co. Dublin (IE)**

(74) Representative: **Capaldi, Michael Joseph et al
Infineum UK Limited
Law Department
P.O. Box 1
Milton Hill
Abingdon, Oxfordshire OX13 6BB (GB)**

(56) References cited:
**EP-A- 0 521 628 WO-A-95/23836
US-A- 3 126 260 US-A- 4 356 002
US-A- 5 071 445**

Remarks:

The file contains technical information submitted after
the application was filed and not included in this
specification

EP 1 502 938 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention relates to fuel oils which exhibit improved conductivity properties and an additive system for providing such properties

[0002] The use of acrylate and methacrylate polymers in fuel oils is disclosed, for example, in U.S. Patent 4,985,160 issued January 15, 1991 to Henry et al. and U.S. Patent 5,035,719 issued July 30, 1991 to Sung et al., both of which disclose the use of such polymers for storage stability and U.S. Patent 4,153,424 issued May 8, 1979 to Wisotsky, which discloses the use of such polymers in fuels as cold flow additives. U.S. Patent 5,621,154 issued April 15, 1997 to Wright et al. discloses the use of an ester of polyalkenylthiophosphonic acid as an additive for jet fuels in order to inhibit deposit formation.

[0003] U.S. Patent 6,391,070, issued May 21, 2002 to Schield discloses a composition having increased electrical conductivity, which includes a) a liquid hydrocarbon; b) an anti-static amount of at least one hydrocarbon soluble copolymer of an alkylvinyl monomer and a cationic vinyl monomer, wherein the copolymer has an alkylvinyl monomer unit to cationic vinyl monomer unit ratio of from about 1:1 to about 10:1, the copolymer having an average molecular weight of from about 800 to about 1,000,000; and c) an anti-static amount of at least one hydrocarbon soluble polysulfone copolymer of at least one olefin and sulfur dioxide. These polymers are described by Schield in U. S. Patent 5,672,183 as containing a cationic quaternary ammonium monomer.

[0004] WO95/2383 concerns fuel compositions and means to improve their combustion with the aims of increasing thermal efficiency and reducing hazardous emissions. Conductivity enhancing additives such as Stadis® 450 may be included in the fuels.

[0005] EP 0 521 628 A2 discloses organic phosphate esters useful as wear inhibitors for fuels, lubricants and functional fluids. Additional additives may be included, such as conductivity additives and various types of ashless dispersant. The document does not discuss the effect that combinations of additives may have on the electrical conductivity of fuels.

[0006] US 5,071,445 describes reaction products of aminoalkylene polycarboxylic acids with secondary amines and their use as additives for middle distillate fuels. These species may be combined with conventional flow improvers and conductivity improvers.

[0007] US 4,356,002 relates to the use of surfactants as antistatic agents in organic fluids.

[0008] The present invention is based upon the discovery that the use in combination of an acrylate, methacrylate or fumarate polymer, not prepared from a cationic quaternary ammonium monomer, with certain commercial conductivity improvers results in a synergistic effect upon the conductivity properties of a fuel oil having little or no inherent conductivity.

[0009] The invention is particularly useful for the formulation of turbine combustion fuel oils which are generally those hydrocarbon fuels having boiling ranges within the limits of about 66° to 316 °C (150° to 600°F) and are designated by such terms as JP-4, JP-5, JP-7, JP-8, Jet A, Jet A-1. JP-4 and JP-5 are fuels defined by U.S. military specification MILT-5624-N and JP-8 is defined by U.S. Military Specification MIL-T83133-D. Jet A, Jet A-1 and Jet B are defined by ASTM specification D1655.

[0010] In accordance with the present invention there is provided a fuel oil composition which comprises a fuel oil having an inherent conductivity of less than 10 pS/m and an additive comprising:

(a) a polymethacrylate, polyacrylate or polyfumarate polymer not prepared from a quaternary ammonium monomer and having a number average molecular weight of 1,000 to 10,000,000 wherein the polyacrylate, polymethacrylate or polyfumarate polymer contains an amino or amido group from a copolymerized monomer or is obtained through a transesterification or amidation reaction of the polymer with an aminoalcohol or amine, respectively; and either

(b) a conductivity improver comprising (i) an olefin polysulfone and (ii) a polymeric polyamine reaction product of epichlorohydrin and an aliphatic primary monoamine or an N-aliphatic hydrocarbyl alkylene diamine, or the sulfonic acid salt of the polymeric polyamine reaction product, or

(c) a conductivity improver comprising a hydrocarbon soluble copolymer of an alkylvinyl monomer and a cationic vinyl monomer, wherein the copolymer has an alkylvinyl monomer unit to cationic vinyl monomer unit ratio of from 1:1 to 10:1, the copolymer having a number average molecular weight of from 800 to 1,000,000.

[0011] Suitable polyacrylate, polymethacrylate or polyfumarate polymers are those polymers of ethylenically unsaturated monomers such as methacrylic, acrylic or fumaric acid esters of alcohols having about 1 to 40 carbon atoms, such as methylacrylate, ethylacrylate, n-propylacrylate, lauryl acrylate, stearyl acrylate, methylmethacrylate, ethylmethacrylate, n-propylmethacrylate, lauryl methacrylate, stearyl methacrylate and the like. These polymers may have number average molecular weights (Mn) of 1,000 to 10,000,000 and preferably the molecular weight range is from about 10,000 to 1,000,000, most preferably 10,000 to 100,000. These polymers do not include copolymers with quaternary ammonium acrylate monomers such as disclosed in U.S. Patent 5, 672, 183.

[0012] The acrylate, methacrylate or fumarate monomer is copolymerized with an amine-containing or amide-containing monomer (excluding quaternary ammonium monomers), or the acrylate or methacrylate main chain polymer is

provided so as to contain sites suitable for grafting, and then amine-containing or amide-containing branches, either monomers or macromonomers, (but excluding quaternary ammonium monomers or macromonomers), are grafted onto the main chain. Transesterification reactions or amidation reactions may also be employed to produce the same products. Preferably, the polymer will contain 0.4 to 4.0 wt. % nitrogen.


[0013] Examples of amine-containing monomers include: the basic amino substituted olefins such as p-(2-diethylaminoethyl) styrene; basic nitrogen-containing heterocycles having a polymerizable ethylenically unsaturated substituent, such as the vinyl pyridines or the vinyl pyrrolidones; esters of amino alcohols with unsaturated carboxylic acids such as dimethylaminoethyl methacrylate or dimethylaminopropyl methacrylate; amides of diamines with unsaturated carboxylic acids, such as dimethylaminopropyl methacrylamide; amides of polyamines with unsaturated carboxylic acids, examples of such polyamines being ethylene diamine (EDA), diethylene triamine (DETA), triethylene tetramine (TETA), tetraethylene pentamine (TEPA), pentaethylene hexamine (PEHA), and higher polyamines, PAM (N = 7,8) and Heavy Polyamine (N>8); morpholine derivatives of unsaturated carboxylic acids, such as N-(aminopropyl)morpholine derivatives; and polymerizable unsaturated basic amines such as allyl amine.

[0014] Particularly preferred is a polymer of methacrylate of C₈-C₁₄ alcohols copolymerized with a methacrylamide of an (N,N-dialkylamino)alkylamine, such as dimethylaminopropylamine.

[0015] The weight average molecular weight of the polysulfone will be in the range of 10,000 to 1,500,000 with the preferred range being 50,000 to 900,000 and the most preferred molecular weight range being in the range of about 100,000 to 500,000. The olefins useful for the preparation of the polysulfones may have about 6 to 20 carbon atoms, preferably about 6 to 18 carbon atoms, with 1-decene polysulfone being particularly preferred. The preparation of these materials is known in the art as described for example in U.S. Patent 3,917,466. The polymeric polyamine component is prepared by heating an amine with epichlorohydrin in the molar proportions of 1:1 to 1:1.5 in the range of 50°C to 100°C. Suitable aliphatic primary amines will have about 8 to 24 carbon atoms, preferably about 8 to 12 carbon atoms, with the aliphatic group being preferably an alkyl group. If the amine used is an N-aliphatic hydrocarbyl alkylene diamine, the aliphatic hydrocarbyl group will have 8 to 24 carbon atoms and will preferably be alkyl and the alkylene group will have 2 to 6 carbon atoms. The preferred N-aliphatic hydrocarbyl alkylene diamine is N-aliphatic hydrocarbyl 1,3-propylenediamine which are commercially available. A preferred commercially available polymeric polyamine is believed to be the polymeric reaction product of N-tallow-1,3-propylenediamine with epichlorohydrin sold as "Polyflo 130" sold by Universal Oil Co. The polymeric polyamine reaction product will have a degree of polymerization of about 2 to 20. The description of these materials is also disclosed in U.S. Patent 3,917,466.

[0016] Preferably, the polymeric polyamine reaction product component will be used in the form of a sulfonic acid salt. Useful are oil soluble sulfonic acids such as alkane sulfonic acid or an aryl sulfonic acid, Particularly suitable is dodecyl benzene sulfonic acid.

[0017] The hydrocarbon soluble copolymer of an alkylvinyl monomer and a cationic vinyl monomer is described in and may be made by the procedures of U.S. Patent No. 5,672,183. In a preferred embodiment, the copolymer has an alkylvinyl monomer unit to cationic vinyl monomer unit ratio of from 1:1 to about 10:1, the copolymer having a number average molecular weight of from about 800 to about 1,000,000. In another embodiment, the cationic vinyl monomer is a cationic quaternary ammonium vinyl monomer, and in a preferred embodiment is a cationic quaternary ammonium acrylate monomer or a cationic quaternary ammonium methacrylate monomer. In another embodiment, the cationic vinyl monomer corresponds to the formula:

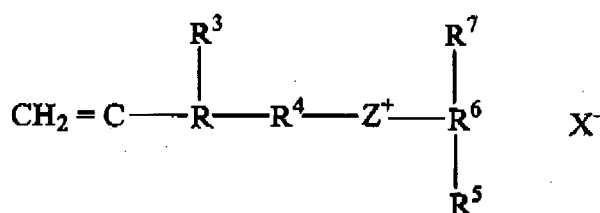

wherein Z is selected from the group consisting of nitrogen, phosphorus and sulfur, X is a nonhalogen atom, R is selected from the group consisting of -C(=O)O-, -C(=O)NH-, straight chain and branched alkylene groups, divalent aromatic groups and divalent alicyclic groups, R³ is selected from the group consisting of hydrogen and methyl, R⁴ is a straight chain or branched alkylene of up to about twenty carbon atoms (C₁-C₂₀), and R⁵, R⁶ and R⁷ are independently each a straight chain or branched alkyl of up to about twenty carbon atoms, provided however that if Z is sulfur R⁷ is absent. Optionally, a copolymer of an alkyl vinyl monomer and a nitrile-containing monomer may be used in conjunction with the copolymer of alkylvinyl monomer and cationic vinyl monomer.

[0018] The components of the conductivity-improving additive according to the invention are present in the fuel oil

composition in an amount effective to improve conductivity.

[0019] The polyacrylate, polymethacrylate or polyfumarate materials are preferably used in the compositions of the present invention in amounts ranging from 5 - 400 ppm, more preferably about 10 - 160 ppm (by weight).

[0020] The polysulfonic-polyamine mixture conductivity improver or the alkylvinyl monomer-cationic vinyl monomer copolymer conductivity improver may each be used in amounts from 0.25-2 ppm, preferably about 0.35-1 ppm.

[0021] The compositions of this invention may also contain an antioxidant compound. The amount of antioxidant compound incorporated may vary over a range of about 1 - 100 ppm, preferably about 10 - 50 ppm, such as about 25 ppm by weight.

[0022] Preferably, the antioxidant compound is a phenolic antioxidant compound.

[0023] The preferred phenolic antioxidant compounds are the hindered phenolics which are those which contain a sterically hindered hydroxyl group. These include those derivatives of dihydroxy aryl compounds in which the hydroxyl groups are in the ortho- or para- position to each other. Typical phenolic antioxidants include the hindered phenols substituted with alkyl groups of a total of 6 or more carbon atoms and the alkylene coupled derivatives of these hindered phenols. Examples of phenolic materials of this type are 2,6-di-*t*-butyl-4-methyl phenol (BHT, butylated hydroxy toluene); 2-*t*-butyl-4-heptyl phenol; 2-*t*-butyl-4-octyl phenol; 2-*t*-butyl-4-dodecyl phenol; 2,6-di-*t*-butyl-4-heptyl phenol; 2,6-di-*t*-butyl-4-dodecyl phenol; 2-methyl-6-di-*t*-butyl-4-heptyl phenol; and 2-methyl-6-di-*t*-butyl-4-dodecyl phenol. Examples of ortho coupled phenols include 2,2'-bis(6-*t*-butyl-4-heptyl phenol); 2,2'-bis(6-*t*-butyl-4-octyl phenol); and 2,2'-bis(6-*t*-butyl-4-dodecyl phenol). Sulfur containing phenols can also be used. The sulfur can be present as either aromatic or aliphatic sulfur within the phenolic antioxidant molecule. BHT is especially preferred, as are 2,6- and 2,4-di-*t*-butylphenol and 2,4,5- and 2,4,6-triisopropylphenol, especially for use in jet fuels.

[0024] The compositions will preferably contain about 0.1 - 50 ppm of a metal deactivator, preferably 1 - 10 ppm by weight. Examples of suitable metal deactivators are:

(a) Benzotriazoles and derivatives thereof, for example, 4- or 5-alkylbenzotriazoles (e.g. tolutriazole) and derivatives thereof; 4,5,6,7-tetrahydrobenzotriazole and 5,5'-methylenebisbenzotriazole; Mannich bases of benzotriazole or tolutriazole, e.g. 1-[bis(2-ethylhexyl)aminomethyl]tolutriazole and 1-[bis(2-ethylhexyl)aminomethyl]benzotriazole; and alkoxyalkylbenzotriazoles such as 1-(nonyloxymethyl)-benzotriazole, 1-(1-butoxyethyl)benzotriazole and 1-(1-cyclohexyloxybutyl)-tolutriazole;

(b) 1,2,4-Triazoles and derivatives thereof, for example, 3-alkyl(or aryl)-1,2,4-triazoles, and Mannich bases of 1,2,4-triazoles, such as 1-[bis(2-ethylhexyl)aminomethyl]-1,2,4-triazole; alkoxyalkyl-1,2,4-triazoles such as 1-(1-butoxyethyl)-1,2,4-triazole; and acylated 3-amino-1,2,4-triazoles;

(c) Imidazole derivatives, for example 4,4'-methylenebis(2-undecyl-5-methylimidazole) and bis[(N-methyl)imidazol-2-yl]carbinol octyl ether;

(d) Sulfur-containing heterocyclic compounds, for example 2-mercaptobenzothiazole, 2,5-dimercapto-1,3,4-thiadiazole and derivatives thereof; and 3,5-bis[di(2-ethyl-hexyl)aminomethyl]-1,3,4-thiadiazolin-2-one; and

(e) Amino compounds and imino compounds, such as N,N'-disalicylidene propylene diamine, which is preferred, salicylaminoguanadine and salts thereof.

[0025] The fuel oil compositions of this invention may also contain one or more other additives commonly employed in fuels present in such amounts so as to provide their normal attendant functions. Examples are cold flow improvers such as ethylene-unsaturated ester copolymers, comb polymers containing hydrocarbyl groups pendant from a polymer backbone, polar nitrogen compounds, compounds having a cyclic ring system having at least two substituents of the formula -A-NR¹⁵R¹⁶ where A is linear or branched hydrocarbylene and R¹⁵ and R¹⁶ are C₉-C₄₀ hydrocarbyl, hydrocarbon polymers such as ethylene alpha-olefin copolymers, polyoxyethylene esters, ethers and ester/ether mixtures such as behenic diesters of polyethylene glycol. Other additives include lubricity additives such as fatty acids, dimers of fatty acids, esters of fatty acids or dimers of fatty acids, corrosion inhibitors, anti-icing additives such as ethylene glycol monomethyl ether or diethylene glycol monomethyl ether, biocides, thermal stability additives, anti-rust agents, anti-foam agents, demulsifiers, detergents, dispersants, cetane improvers, stabilisers, antioxidants, static dissipator additives and the like.

[0026] The fuel oil may be a hydrocarbon fuel such as a petroleum-based fuel oil for example gasoline, kerosene or distillate fuel oil. The fuel oil can comprise atmospheric distillate or vacuum distillate, or cracked gas oil or a blend in any proportion of straight run and thermally and/or catalytically cracked distillates. The most common petroleum distillate fuels are kerosene, jet fuels, diesel fuels, heating oils and heavy fuel oils. The heating oil or diesel fuel may be a straight atmospheric distillate, or it may contain minor amounts, e.g. up to 35 wt. %, of vacuum gas oil or cracked gas oils or of both.


[0027] Heating oils may be made of a blend of virgin distillate, e.g. gas oil, naphtha, etc and cracked distillates, e.g. catalytic cycle shock. A representative specification for a diesel fuel includes a minimum flash point of 38°C and a 90% distillation point between 282 and 380°C (see ASTM Designations D-396 and D-975).

[0028] The fuel oil may have a sulphur concentration of 0.2% by weight or less based on the weight of the fuel.

Preferably, the sulphur concentration is 0.05% by weight or less, such as 0.035% by weight or less or 0.01% by weight or less. The art describes methods for reducing the sulphur concentration of hydrocarbon middle distillate fuels, such methods including solvent extraction, sulfuric acid treatment, and hydrodesulphurisation. The additive of the invention is advantageous in the fuels having low sulphur contents, providing lubricity improvement and detergency.

[0029] Also, the fuel oil may be a biofuel, i.e. come from an animal or vegetable source, for example a vegetable or animal oil or both or derivatives thereof, or a mineral oil as described above in combination with biofuel.

[0030] Vegetable oils are mainly triglycerides of monocarboxylic acids, e.g. acids containing 10-25 carbon atoms and listed below



where R is an aliphatic radical of 10-25 carbon atoms which may be saturated or unsaturated.

[0031] Generally, such oils contain glycerides of a number of acids, the number and kind varying with the source vegetable of the oil.

[0032] Examples of oils are rapeseed oil, tall oil, coriander oil, soyabean oil, cottonseed oil, sunflower oil, castor oil, olive oil, peanut oil, maize oil, almond oil, palm kernel oil, coconut oil, mustard seed oil, beef tallow and fish oils. Rapeseed oil, which is a mixture of fatty acids esterified with glycerol, is preferred as it is available in large quantities and can be obtained in a simple way by pressing from rapeseed.

[0033] Examples of derivatives thereof are alkyl esters, such as methyl esters, of fatty acids of the vegetable or animal oils. Such esters can be made by transesterification. The preferred alkyl esters of fatty acids are the methyl esters of oleic acid, linoleic acid, linolenic acid and erucic acid.

[0034] Commercial mixtures of the stated kind are obtained for example by cleavage and esterification of natural fats and oils by their transesterification with lower aliphatic alcohols. For production of lower alkyl esters of fatty acids it is advantageous to start from fats and oils with high iodine number, such as, for example, sunflower oil, rapeseed oil, coriander oil, castor oil, soyabean oil, cottonseed oil, peanut oil or beef tallow. Lower alkyl esters of fatty acids based on a new variety of rapeseed oil, the fatty acid component of which is derived to more than 80 wt.% from unsaturated fatty acids with 18 carbon atoms, are preferred.

[0035] The invention is particularly useful for the formulation of turbine combustion fuel oils which are generally those hydrocarbon fuels having boiling ranges within the limits of about 66° to 316°C (150° to 600°C) and are designated by such terms as JP-4, JP-5, JP-7, JP-8, Jet A, Jet A-1. JP-4 and JP-5 are fuels defined by U.S. military specification MIL-T-5624-N and JP-8 is defined by U.S. Military Specification MIL-T83133-D. Jet A, Jet A-1 and Jet B are defined by ASTM specification D1655.

EXAMPLES

[0036] The fuels described below were tested.

Fuel	A	B	C
Type	Diesel	Diesel	Jet fuel
Density @ 15°C		0.835	0.81
Distillation °C			
I.B.Pt	188.8	216.6	
10% @		240.7	192
F.B.Pt	291.1	358.1	260
Acidity mg KOH/gm			0.007

EP 1 502 938 B1

(continued)

Fuel	A	B	C
Aromatics %v/v		28.2	17
Doctor test			Negative
Freeze Point °C			<-47
Viscosity cS @ -20°C			5.1
Viscosity cS @ 40°C	2.004	3.148	
Copper corrosion			1
Hydrogen content %w/w			13.9
Total Sulphur %w/w	<0.01	0.0036	<0.01
Naphthalenes %v/v			2.3
Existent gum mg/100 ml			1
W.I.S.M.			95
J.F.T.O.T @ 260°C			
Tube visual rating			1
Pressure drop mm Hg			0
Specific energy MJ/Kg			42.9
Smoke point mm			25
Abel Flash °C			64
Silver Corrosion			1
Cloud point	-36	-40	
Cetane number	56.2	53.8	

Product Key:

[0037]

Code	Description
PMA-1	Mn ~ 25,000 polymer (vs. polystyrene) of methacrylates of C8-C14 alcohols copolymerized with a methacrylamide of 3-(N,N-dimethylamino)propylamine. PMA is used in all examples as a 41.6% active ingredient solution in mineral oil, 200 ppm solution added.
Stadis 450	66% toluene, 13.3% 1-decene polysulfone, 13.3% polyamine (a reaction product of N-tallow-1,3-propylenediamine and epichlorohydrin) and 7.4% dodecylbenzene sulfonic acid.
T3514	a commercial hydrocarbon soluble copolymer of an alkylvinyl monomer and a cationic vinyl monomer sold as "T3514" by Baker Petrolite as a conductivity improver.

Fuel Conductivity

[0038] The effect of PMA on fuel conductivity of Fuel A in the presence and absence of the static dissipator additive "Stadis 450" was measured using an EMCEE 1152 conductivity meter.

Results:

[0039]

Test temperature, 22°C		
Additive	Treat Rate, ppm	Conductivity, pS/m
Base Fuel A	0	1
Stadis 450	0.5	43
PMA-1	83.2	14
Stadis 450 + PMA-1	0.5+83.2	280

The conductivity value of 280 greatly exceeds what would be predicted from the values observed when each additive was measured alone.

[0040] Fuels B and C were similarly tested with Stadis 450 and T3514. No synergistic effect was noted for Fuel B which has an inherent conductivity of 16 pS/m.

		Fuel B	Fuel C
Additive	Treat Rate ppm	Conductivity (pS/m)	Conductivity (pS/m)
Base Fuel	0	16	2.3
Stadis 450	0.25	31.7	65.7
T3514	0.25	57	61.7
PMA-1	50	60.3	20.3
PMA-1+Stadis 450	50+0.25	86	266
PMA-1+T3514	50+0.25	87	115.5

Claims

1. A fuel oil composition which comprises a fuel oil having an inherent conductivity of less than 10 pS/m and an additive comprising:

(a) a polymethacrylate, polyacrylate or polyfumarate polymer not prepared from a quaternary ammonium monomer and having a number average molecular weight of 1,000 to 10,000,000 wherein the polyacrylate, polymethacrylate or polyfumarate polymer contains an amino or amido group from a copolymerized monomer or is obtained through a transesterification or amidation reaction of the polymer with an aminoalcohol or amine, respectively; and either

(b) a conductivity improver comprising (i) an olefin polysulfone and (ii) a polymeric polyamine reaction product of epichlorohydrin and an aliphatic primary monoamine or an N-aliphatic hydrocarbyl alkylene diamine, or the sulfonic acid salt of the polymeric polyamine reaction product, or

(c) a conductivity improver comprising a hydrocarbon soluble copolymer of an alkylvinyl monomer and a cationic vinyl monomer, wherein the copolymer has an alkylvinyl monomer unit to cationic vinyl monomer unit ratio of from 1:1 to 10:1, the copolymer having a number average molecular weight of from 800 to 1,000,000.

2. The composition of claim 1 further comprising an antioxidant.

3. The composition of any preceding claim further comprising a metal deactivator.

4. The composition of any preceding claim wherein the polymer as defined in paragraph (a) of claim 1 has a molecular weight of 5,000 to 1,000,000.

5. The composition of any preceding claim wherein the fuel oil is a jet fuel.

6. The composition of any preceding claim wherein the fuel oil is a diesel fuel or a heating oil.

7. An additive comprising the combination of :

(a) a polymethacrylate, polyacrylate or polyfumarate polymer not prepared from a quaternary ammonium monomer and having a number average molecular weight of 1,000 to 10,000,000 wherein the polyacrylate, polymethacrylate or polyfumarate polymer contains an amino or amido group from a copolymerized monomer or is obtained through a transesterification or amidation reaction of the polymer with an aminoalcohol or amine, respectively; and either

(b) a conductivity improver comprising (i) an olefin polysulfone and (ii) a polymeric polyamine reaction product of epichlorohydrin and an aliphatic primary monoamine or an N-aliphatic hydrocarbyl alkylene diamine, or the sulfonic acid salt of the polymeric polyamine reaction product, or

(c) a conductivity improver comprising a hydrocarbon soluble copolymer of an alkylvinyl monomer and a cationic vinyl monomer, wherein the copolymer has an alkylvinyl monomer unit to cationic vinyl monomer unit ratio of from about 1:1 to about 10:1, the copolymer having a number average molecular weight of from about 800 to about 1,000,000.

8. Use of an additive according to claim 7 to improve the conductivity of a fuel composition.

9. A method of improving the conductivity of a fuel oil composition comprising a fuel oil having an inherent conductivity of less than 10 pS/m, which method comprises incorporating an additive as claimed in claim 7 into the fuel oil.

Patentansprüche

1. Brennstoffölzusammensetzung, die Brennstofföl mit einer inhärenten Leitfähigkeit von weniger als 10 pS/m und Additiv umfasst, das

(a) Polymethacrylat-, Polyacrylat- oder Polyfumarat-Polymer, das nicht aus quartäre Ammoniummonomer hergestellt ist und ein durchschnittliches Molekulargewicht (Zahlenmittel) von 1.000 bis 10.000.000 hat, wobei das Polyacrylat-, Polymethacrylat- oder Polyfumarat-Polymer eine Amino- oder Amidogruppe aus copolymerisiertem Monomer enthält oder durch Umesterungs- oder Amidierungsreaktion des Polymers mit Aminoalkohol oder Amin erhalten ist, und entweder

(b) Leitfähigkeitsverbesserer, der (i) Olefin-Polysulfon und (ii) polymeres Polyamin-Reaktionsprodukt von Epichlorhydrin und aliphatischem primären Monoamin oder Alkylendiamin mit N-aliphatischer Kohlenwasserstoffeinheit, oder das Sulfonsäuresalz des polymeren Polyamin-Reaktionsprodukts umfasst, oder

(c) Leitfähigkeitsverbesserer umfasst, der kohlenwasserstofflösliches Copolymer von Alkylvinylmonomer und kationischem Vinylmonomer umfasst, wobei das Copolymer ein Verhältnis von Alkylvinylmonomereinheiten zu kationischen Vinylmonomereinheiten von 1:1 bis 10:1 hat, wobei das Copolymer ein durchschnittliches Molekulargewicht (Zahlenmittel) von 800 bis 1.000.000 hat.

2. Zusammensetzung nach Anspruch 1, die ferner Antioxidans umfasst.

3. Zusammensetzung nach einem der vorhergehenden Ansprüche, die ferner Metalldesaktivator umfasst.

4. Zusammensetzung nach einer der vorhergehenden Ansprüche, wobei das in Absatz (a) von Anspruch 1 definierte Polymer ein Molekulargewicht von 5.000 bis 1.000.000 hat.

5. Zusammensetzung nach einem der vorhergehenden Ansprüche, wobei das Brennstofföl Düsenkraftstoff ist.

6. Verfahren nach einem der vorhergehenden Ansprüche, wobei das Brennstofföl Dieselkraftstoff oder Heizöl ist.

7. Additiv, das die Kombination von

(a) Polymethacrylat-, Polyacrylat- oder Polyfumarat-Polymer, das nicht aus quartärem Ammoniummonomer hergestellt ist und ein durchschnittliches Molekulargewicht (Zahlenmittel) von 1.000 bis 10.000.000 hat, wobei das Polyacrylat-, Polymethacrylat- oder Polyfumarat-Polymer eine Amino- oder Amidgruppe aus copolymerisiertem Monomer enthält oder durch Umesterungs- oder Amidierungsreaktion des Polymers mit Aminoalkohol oder Amin erhalten ist, und entweder

(b) Leitfähigkeitsverbesserer, der (i) Olefin-Polysulfon und (ii) polymeres Polyamin-Reaktionsprodukt von Epichlorhydrin und aliphatischem primären Monoamin oder Alkylendiamin mit N-aliphatischer Kohlenwasserstoffeinheit, oder das Sulfonsäuresalz des polymeren Polyamin-Reaktionsprodukts umfasst, oder

(c) Leitfähigkeitsverbesserer umfasst, der kohlenwasserstofflösliches Copolymer von Alkylvinylmonomer und kationischem Vinylmonomer umfasst, wobei das Copolymer ein Verhältnis von Alkylvinylmonomereinheiten zu kationischen Vinylmonomereinheiten von etwa 1:1 bis etwa 10:1 hat, wobei das Copolymer ein durchschnittliches Molekulargewicht (Zahlenmittel) von etwa 800 bis etwa 1.000.000 hat.

8. Verwendung eines Additivs gemäß Anspruch 7 zum Verbessern der Leitfähigkeit einer Brennstoffzusammensetzung.
9. Verfahren zur Verbesserung der Leitfähigkeit einer Brennstoffölzusammensetzung, die Brennstofföl mit einer inhärenten Leitfähigkeit von weniger als 10 pS/m umfasst, bei dem ein wie in Anspruch 7 beanspruchtes Additiv in das Brennstofföl eingearbeitet wird.

Revendications

1. Composition de fuel-oil, qui comprend un fuel-oil ayant une conductivité inhérente inférieure à 10 pS/m et un additif comprenant :

(a) un polymère du type polyméthacrylate, polyacrylate ou polyfumarate non préparé à partir d'un monomère ammonium quaternaire et ayant une moyenne en nombre du poids du poids moléculaire de 1000 à 10 000 000, ledit polymère du type polyacrylate, polyméthacrylate ou polyfumarate contenant un groupe amino ou amido provenant d'un monomère copolymérisé ou étant obtenu par une réaction de transestérification ou d'amidation du polymère avec un aminoalcool ou une amine, respectivement ; et soit

(b) un agent améliorant la conductivité comprenant (i) une polysulfone oléfinique et (ii) une polyamine polymère consistant en le produit de réaction d'épichlorhydrine et d'une monoamine primaire aliphatique ou d'une hydrocarbylealylènediamine N-aliphatique, ou bien le sel d'acide sulfonique de la polyamine polymère obtenue comme produit de réaction, soit

(c) un agent améliorant la conductivité comprenant un copolymère, soluble dans les hydrocarbures, d'un monomère alkylvinyle et d'un monomère vinylique cationique, ledit copolymère ayant un rapport des motifs monomères alkylvinyle aux motifs monomères vinyliques cationiques de 1:1 à 10:1, le copolymère ayant une moyenne en nombre du poids moléculaire de 800 à 1 000 000.

2. Composition suivant la revendication 1, comprenant en outre un antioxydant.

3. Composition suivant l'une quelconque des revendications précédentes, comprenant en outre un désactivateur de métaux.

4. Composition suivant l'une quelconque des revendications précédentes, dans laquelle le polymère tel que défini dans le paragraphe (a) de la revendication 1 a un poids moléculaire de 5000 à 1 000 000.

5. Composition suivant l'une quelconque des revendications précédentes, dans laquelle le fuel-oil est un carburéacteur.

6. Composition suivant l'une quelconque des revendications précédentes, dans laquelle le fuel-oil est un carburant diesel ou une huile de chauffe.

7. Additif comprenant l'association :

(a) d'un polymère du type polyméthacrylate, polyacrylate ou polyfumarate non préparé à partir d'un monomère ammonium quaternaire et ayant une moyenne en nombre du poids du poids moléculaire de 1000 à 10 000 000, ledit polymère du type polyacrylate, polyméthacrylate ou polyfumarate contenant un groupe amino ou amido provenant d'un monomère copolymérisé ou étant obtenu par une réaction de transestérification ou d'amidation du polymère avec un aminoalcool ou une amine, respectivement ; et soit

(b) d'un agent améliorant la conductivité comprenant (i) une polysulfone oléfinique et (ii) une polyamine polymère consistant en le produit de réaction d'épichlorhydrine et d'une monoamine primaire aliphatique ou d'une hydrocarbylealylènediamine N-aliphatique, ou bien le sel d'acide sulfonique de la polyamine polymère obtenue comme produit de réaction, soit

(c) d'un agent améliorant la conductivité comprenant un copolymère, soluble dans les hydrocarbures, d'un monomère alkylvinyle et d'un monomère vinylique cationique, ledit copolymère ayant un rapport des motifs

EP 1 502 938 B1

monomères alkylvinyle aux motifs monomères vinyliques cationiques d'environ 1:1 à 10:1, le copolymère ayant une moyenne en nombre du poids moléculaire d'environ 800 à environ 1 000 000.

8. Utilisation d'un additif suivant la revendication 7, pour améliorer la conductivité d'une composition de carburant.
9. Procédé pour améliorer la conductivité d'une composition de fuel-oil, comprenant un fuel-oil ayant une conductivité inhérente inférieure à 10 pS/m, procédé qui comprend l'incorporation d'un additif suivant la revendication 7 au fuel-oil.

5

10

15

20

25

30

35

40

45

50

55

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4985160 A, Henry **[0002]**
- US 5035719 A, Sung **[0002]**
- US 4153424 A, Wisotsky **[0002]**
- US 5621154 A, Wright **[0002]**
- US 6391070 B, Schield **[0003]**
- US 5672183 A **[0003]** **[0011]** **[0017]**
- WO 952383 A **[0004]**
- EP 0521628 A2 **[0005]**
- US 5071445 A **[0006]**
- US 4356002 A **[0007]**
- US 3917466 A **[0015]**