



(86) Date de dépôt PCT/PCT Filing Date: 1999/11/16

(87) Date publication PCT/PCT Publication Date: 2000/06/08

(45) Date de délivrance/Issue Date: 2006/07/11

(85) Entrée phase nationale/National Entry: 2000/09/27

(86) N° demande PCT/PCT Application No.: US 1999/027275

(87) N° publication PCT/PCT Publication No.: 2000/032388

(30) Priorités/Priorities: 1998/11/16 (US60/108,541);
1999/11/12 (US09/440,010)

(51) Cl.Int./Int.Cl. *B64C 1/40* (2006.01),
B32B 3/00 (2006.01), *B32B 27/00* (2006.01),
B32B 17/10 (2006.01), *B32B 5/26* (2006.01),
B32B 27/20 (2006.01), *B64C 1/12* (2006.01)


(72) Inventeurs/Inventors:
FAY, RALPH MICHAEL, US;
WULLIMAN, REBECCA SUE, US;
STACY, JAMES WALTER, US;
TOWNSEND, JEFFREY CANON, US;
VOLENEC, STEVEN N., US

(73) Propriétaire/Owner:
JOHNS MANVILLE INTERNATIONAL, INC., US

(74) Agent: MACRAE & CO.

(54) Titre : SYSTEMES RESISTANT AU PERCEMENT PAR LE FEU DESTINES AUX MOYENS DE TRANSPORT,
NOTAMMENT AUX AVIONS

(54) Title: BURN THROUGH RESISTANT SYSTEMS FOR TRANSPORTATION, ESPECIALLY AIRCRAFT

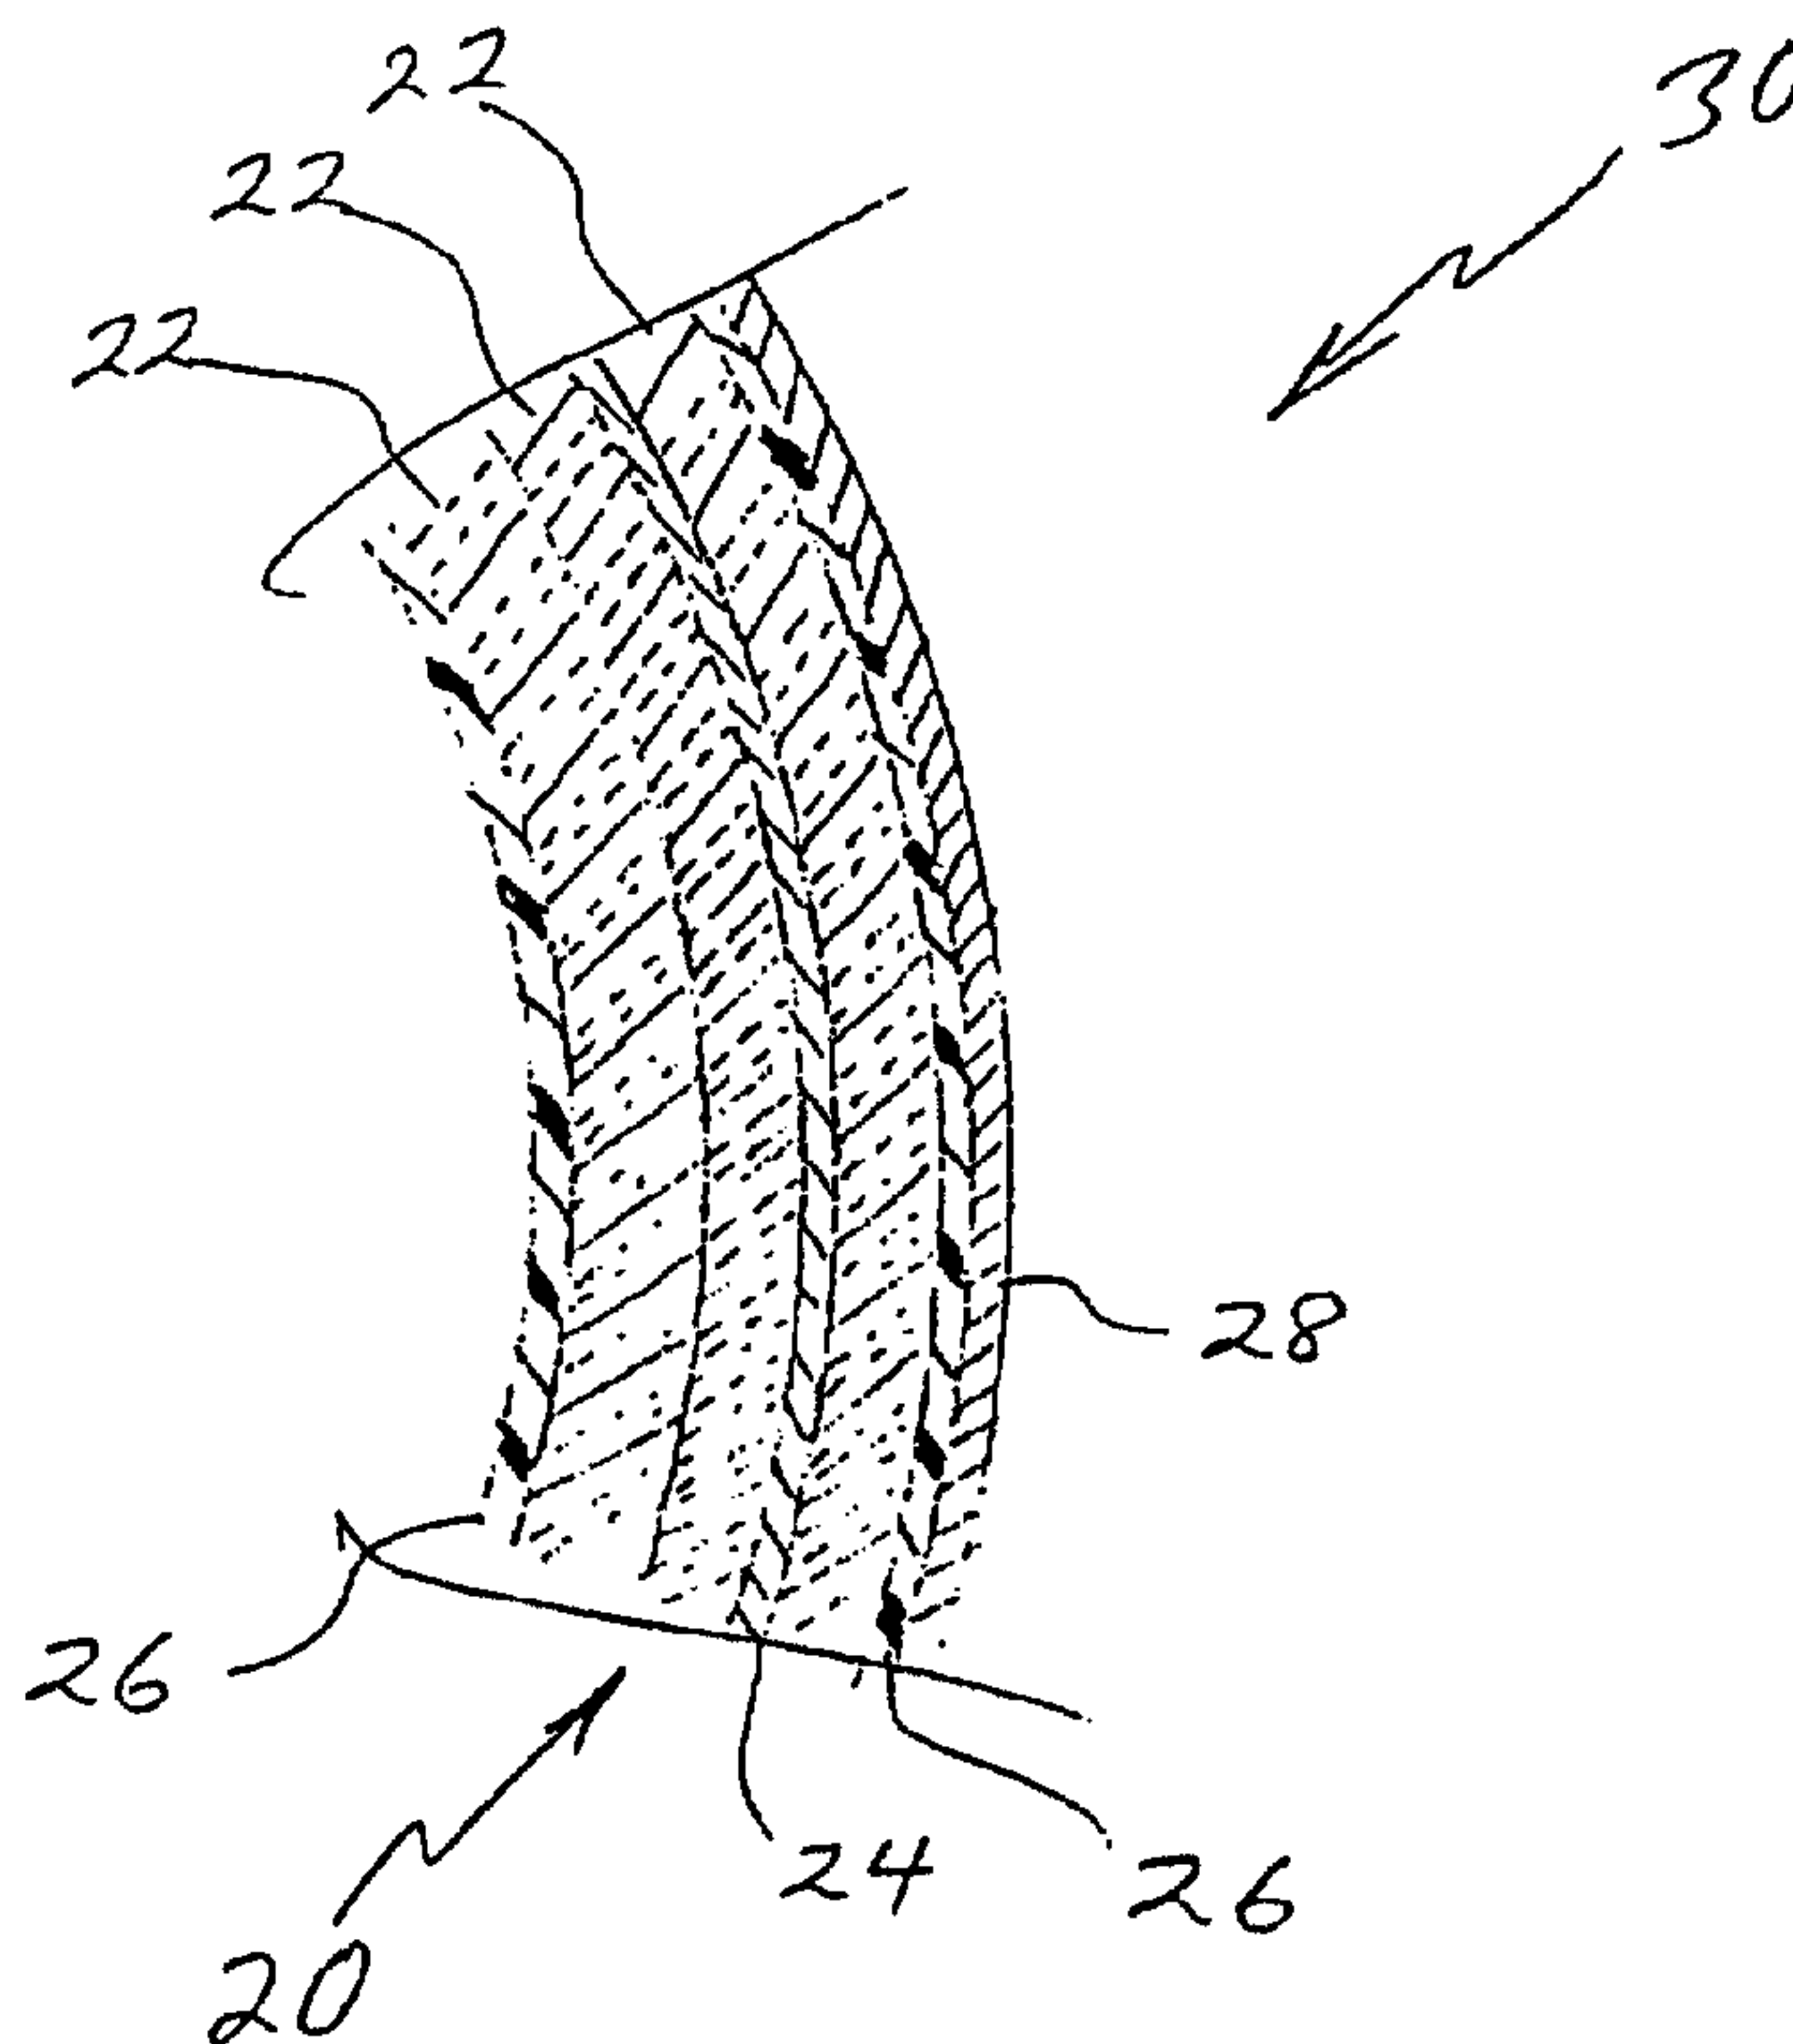

(57) Abrégé/Abstract:

An encapsulated insulation composite system for increasing the burn through resistance of an aircraft fuselage includes: an insulation layer of glass fiber or foam insulation and a coating or interleaf barrier layer of a high temperature resistant material and/or a coating or barrier layer of a high temperature resistant material on an outer major surface of the insulation layer of the composite and a film encapsulating the composite. Preferably, the barrier layer or layers include a reflective mineral, such as a reflective mineral containing coating carried on a sheet material. Preferably, the encapsulating film is a polymeric film such as a polyimide film.

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : B32B	A2	(11) International Publication Number: WO 00/32388
		(43) International Publication Date: 8 June 2000 (08.06.00)

(21) International Application Number: PCT/US99/27275

(22) International Filing Date: 16 November 1999 (16.11.99)

(30) Priority Data:

60/108,541	16 November 1998 (16.11.98)	US
Not furnished	12 November 1999 (12.11.99)	US

(71) Applicant (for all designated States except US): JOHNS MANVILLE INTERNATIONAL, INC. [-/US]; 717 Seventeenth Street, Denver, CO 80202 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): FAY, Ralph, Michael [-/US]; 2249 South Hoyt Court, Lakewood, CO 80227 (US). WULLIMAN, Rebecca, Sue [-/US]; 6589 East Lake Place, Englewood, CO (US). STACY, James, Walter [-/US]; 20770 Oasis Avenue, Peyton, CO 80831 (US). TOWNSEND, Jeffrey, Canon [-/US]; 8423 South Tanglewood Street, Highlands Ranch, CO 80126 (US). VOLENEC, Steven, N. [-/US]; 7553 South Willow Circle, Englewood, CO 80112 (US).

(74) Agent: TOUSLEE, Robert, D.; Johns Manville Corporation, 10100 West Ute Avenue, Littleton, CO 80127 (US).


(81) Designated States: AU, BR, CA, CN, DE, DK, ES, GB, JP, LU, RU, SE, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published*Without international search report and to be republished upon receipt of that report.*

(54) Title: BURN THROUGH RESISTANT SYSTEMS FOR TRANSPORTATION, ESPECIALLY AIRCRAFT

(57) Abstract

An encapsulated insulation composite system for increasing the burn through resistance of an aircraft fuselage includes: an insulation layer of glass fiber or foam insulation and a coating or interleaf barrier layer of a high temperature resistant material and/or a coating or barrier layer of a high temperature resistant material on an outer major surface of the insulation layer of the composite and a film encapsulating the composite. Preferably, the barrier layer or layers include a reflective mineral, such as a reflective mineral containing coating carried on a sheet material. Preferably, the encapsulating film is a polymeric film such as a polyimide film.

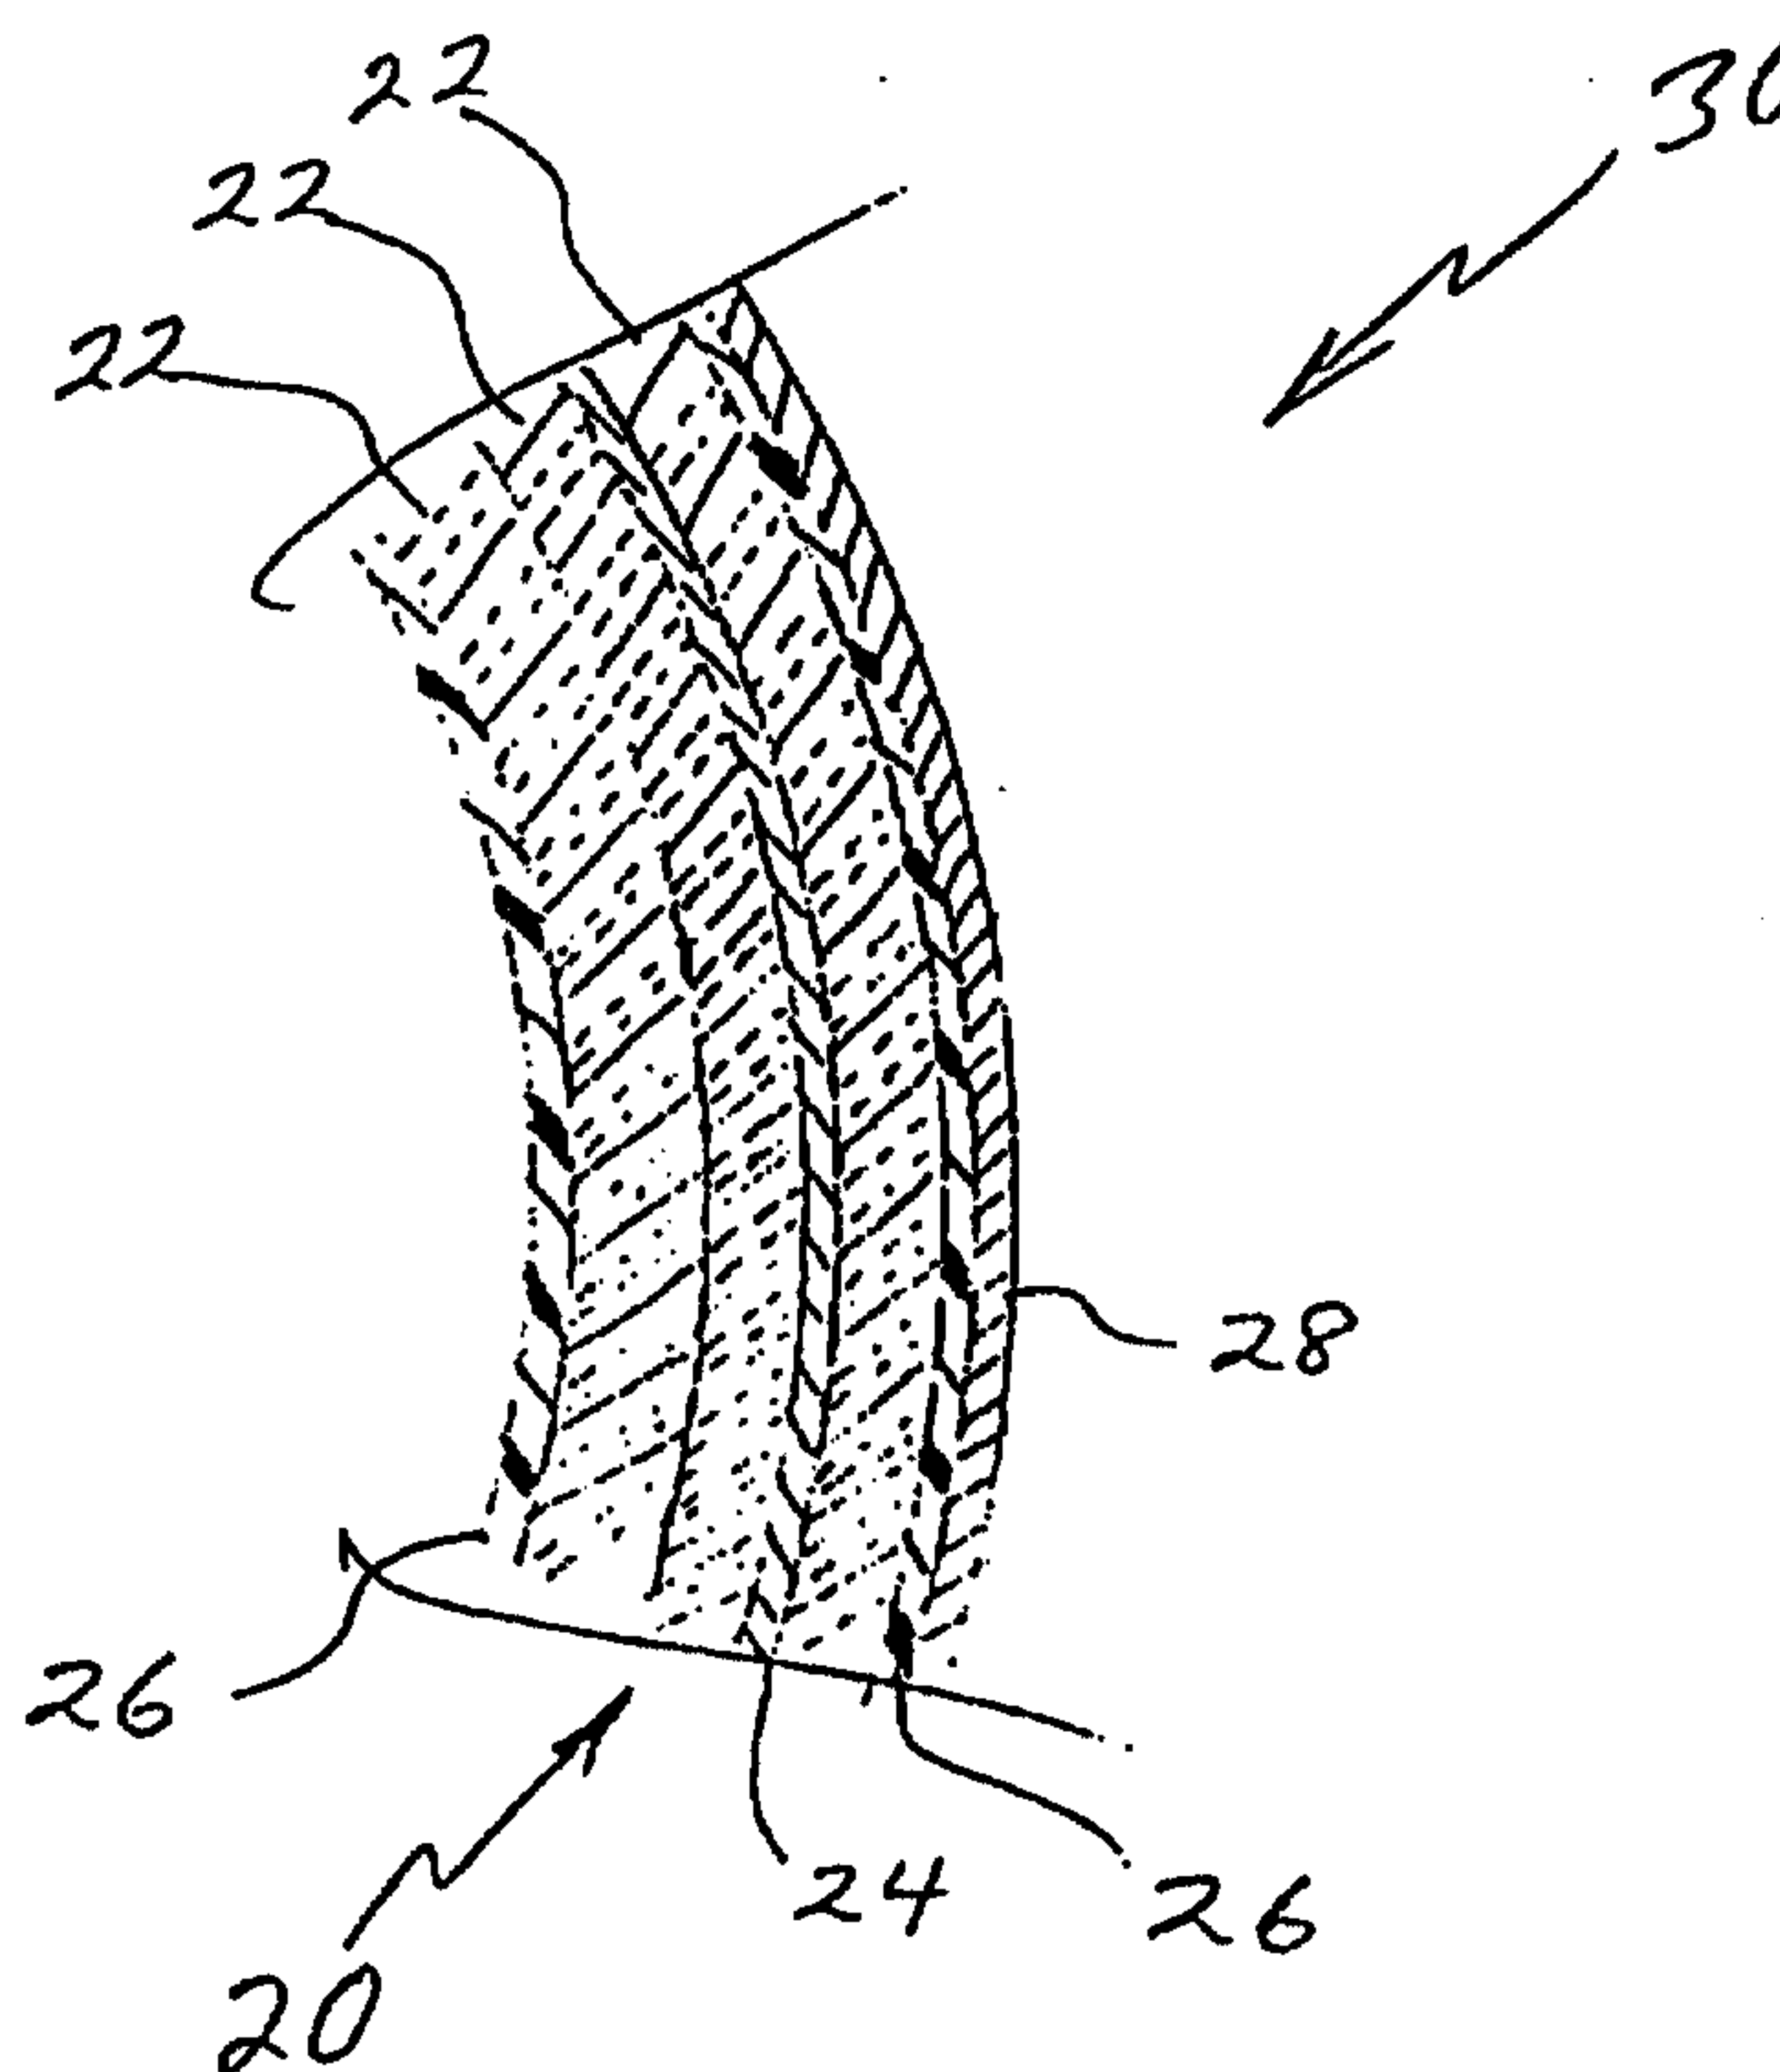

BURN THROUGH RESISTANT SYSTEMS FOR TRANSPORTATION,
ESPECIALLY AIRCRAFT

BACKGROUND OF THE INVENTION

5 The present invention relates to an insulation system for aircraft fuselages and, in particular, to an insulation system for increasing the burn through resistance of aircraft fuselages to provide passengers with additional time within which to evacuate an airplane in the event of an external fuel fire.

10 Currently the Federal Aviation Administration (the FAA) is testing various aircraft fuselage sidewall constructions to determine if they can demonstrate a significant increase in burn through resistance in a simulated exterior fire condition. For example, the test simulates a situation where the aircraft is on the ground and a jet fuel fire ignites next to the outside of the fuselage.

15 The baseline fuselage sidewall construction in current use combines an interior trim panel with one or more layers of "Microlite AA"™ fiberglass insulation blanket, encapsulated in a reinforced Mylar™ film, that is positioned in the framework of an aircraft with an exterior aluminum skin. The fiberglass blanket currently used in the baseline construction is 0.42 pound per cubic foot (pcf) X 1 inch (6.7Kg/m³ X 25.4mm) or 0.6 pcf X 1 inch (9.6Kg/m³ X 25.4mm) "Microlite AA". In some constructions used by aircraft manufacturers, one or all of the "Microlite AA" fiberglass blanket layers are replaced with a 0.3 pcf X 1 inch to a 0.6 pcf X 1 inch (4.8Kg/m³ X 25.4mm to 9.6 Kg/m³ X 25.4mm) polyimide foam.

20 In a real or simulated fire condition, all of the individual fuselage components melt away quickly and permit flame to penetrate into the passenger compartment. The baseline fuselage construction typically provides only a couple of minutes of burn through protection in these tests. There are many ways to improve burn through protection in an aircraft fuselage. However, the most obvious solutions require a significant addition of weight which is undesirable in aircraft construction.

PCT/US 99/27275
IPEAUS 22 JAN 2001

SUMMARY OF THE INVENTION

By replacing the current two to three layers of 0.42 pcf X 1 inch (6.7Kg/m^3 X 25.4mm) or 0.6 pcf X 1 inch (9.6Kg/m^3 X 25.4mm) Microlite AA blanket insulation system, described above, with the burn through resistant system of the present invention, the length
5 of time it takes to burn through the insulation portion of the system has been shown to increase from a couple of minutes to more than five minutes and preferably more than 7 minutes. The burn through resistant system of the present invention has one or more coating or interleaf barrier layers of high temperature resistant material included in the encapsulated multilayered construction of fiberglass blanket layers and/or foam insulation
10 layers.

To provide good results in the simulated fire condition of a full scale FAA simulated burn through test, the system must also be able to withstand moderate air pressure fluctuations attributed to the pulsing flame front or wind. The burn through resistant system of the present invention is able to withstand such moderate air pressure fluctuations.

15

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic cross section through a first embodiment of the burn through resistant system of the present invention installed in a fuselage with one coating or interleaf layer of high temperature resistant material intermediate insulation layers of the system.

20 FIG. 2 is a schematic cross section through a second embodiment of the burn through resistant system of the present invention installed in a fuselage with two coating or interleaf layers of high temperature resistant material intermediate insulation layers of the system.

25 FIG. 3 is a schematic cross section through a third embodiment of the burn through resistant system of the present invention installed in a fuselage with a coating or interleaf layer of high temperature resistant material intermediate an insulation layer and the encapsulating envelope of the system.

PCT/US 99/27275
IPEAUS 22 JAN 2001**DESCRIPTION OF THE PREFERRED EMBODIMENTS**

As shown in FIG. 1, a first embodiment of the burn through resistant system 20 includes a plurality of glass fiber insulation blanket layers and/or foam insulation sheet layers 22 and one high temperature resistant material coating or interleaf barrier layer 24 intermediate two of the insulation layers 22. The glass fiber insulation blanket layers and/or foam insulations sheet layers 22, along with the high temperature resistant material coating or interleaf barrier layer 24, are encapsulated or enclosed within an envelope 26 and placed against or adjacent the skin 28, e.g. aluminum skin, of the aircraft fuselage 30. As shown in FIG. 2, a second embodiment of the burn through resistant system 20 includes a plurality of glass fiber insulation blanket layers and/or foam insulation sheet layers 22 and two high temperature resistant material coating or interleaf barrier layers 24 which are each located intermediate two of the insulation layers 22. The glass fiber insulation blanket layers and/or foam insulations sheet layers 22, along with the high temperature resistant material coating or interleaf barrier layers 24, are encapsulated or enclosed within an envelope 26 and placed against or adjacent the skin 28, e.g. aluminum skin, of the aircraft fuselage 30. In both of the embodiments shown, the major surfaces of the insulation layers 22 and the coating or interleaf barrier layers 24 extend in planes parallel to or substantially parallel to each other and the major surfaces of the skin 28. The systems of FIGS 1 and 2 could include additional insulation layers 22 and high temperature resistant material coating or interleaf layers 24.

In the embodiment of the burn through resistant system 20 shown in FIG. 3, the system 20 includes a plurality of glass fiber insulation blanket layers and/or foam insulation sheet layers 22; a first high temperature resistant material coating or interleaf barrier layer 24 located intermediate one of the insulation layers 22 and the envelope 26 on the outer or fuselage skin facing side (the flame facing side) of the system; and a second high temperature resistant material coating or interleaf barrier layer

24 located intermediate two of the insulation layers 22. An envelope 26 encapsulates or encloses the insulation layers 22 and coating or interleaf barrier layers 24. The system 20 is placed against or adjacent the skin 28, e.g. aluminum skin, of the aircraft fuselage 30 with the portion of the envelope covering the first coating or interleaf barrier layer 24 of high temperature resistant material adjacent the skin 28 of the aircraft. As with the embodiments of FIGS. 1 and 2, the major surfaces of the insulation layers 22 and the coating or interleaf barrier layers 24 extend in planes parallel to or substantially parallel to each other and the major surfaces of the fuselage skin 28. While not shown in FIG. 3, additional coating or interleaf barrier layers 24 of high temperature resistant material can be included intermediate the insulation layers 22.

Preferably, the glass fiber blanket layers 22 are one inch (25.4 mm) thick Microlite AA glass fiber insulation blankets (manufactured and sold by Johns Manville International, Inc.) having densities of about 0.42 pcf (6.7 Kg/m³) or one inch (25.4 mm) thick Premium NR glass fiber insulation blankets (manufactured and sold by Johns Manville International, Inc.) having densities of about 0.34 pcf (5.4 Kg/m³). Preferably, the foam insulation layers 22 are one inch (25.4 mm) thick polyimide foam insulation layers having densities of about 0.3 pcf (4.8Kg/m³) to about 0.6 pcf (9.6 Kg/m³).

Preferably, the high temperature resistant coating or interleaf barrier layer or layers 24 include a reflective plate-like mineral, such as but not limited to vermiculite, applied in a coating to or incorporated into one or both major surfaces of a sheet, such as a paper sheet, an organic fiber mat, a glass fiber mat, or a fabric sheet. The high temperature resistant coating or interleaf layers 24 can also be applied as a coating directly to one or more of the major surfaces of the insulation layers 22. One example of an interleaf barrier layer 24 includes a paper like product, such as Manninglas™ 1208 paper (manufactured by Lydall Corporation) made from 6.5 micron DE glass (little or no binder is

used to produce the paper) and vermiculite which is applied as a coating on one or both sides or major surfaces of the paper sheet. An interleaf barrier layer 24 of Manninglas 1208 paper coated on both sides weighs 13.8 g/ft^2 (148g/m^2). An insulation system 20 using three layers 24 of 0.34 Premium NR fiber glass blanket to sandwich two layers of Manninglas 1208 paper weighs about 66 g/ft^2 (710g/m^2) (the weight of the aluminum fuselage skin is not included). Another example of an interleaf barrier layer 24 includes a spunlaced fabric, such as Freudenberg C1999VM aircraft seat cushion fire block fabric made from 70% CurlonTM partially oxidized PAN fiber and 30% KynarTM phenolic fiber and zig-zag stitched with a high temperature resistant organic fiber, and vermiculite which is applied as a coating to one or both sides or major surfaces of the fabric. A burn through resistant system 20 of the present invention using one interleaf barrier layer of Freudenberg C1999VM fabric coated with a vermiculite coating and sandwiched between two outboard fiber glass or polyimide foam layers 22 is considered tough enough to withstand the air pressure fluctuations attributed to a pulsing flame front or wind and provide greater than 7 minutes of burn through resistance. This embodiment of the system 20, using three layers 22 of 0.42 pcf (6.7Kg/m^3) Microlite AA glass-fiber blanket and one interleaf barrier layer 24 of vermiculite coated Freudenberg C1999VM fabric weighs about 62.5 g/ft^2 (672g/m^2) (the weight of the aluminum fuselage skin is not included). Due to necessity to keep aircraft fuselages as light as practical, the systems 20 of the present invention preferably weigh less than 70 g/ft^2 (753g/m^2) not including the weight of the fuselage skin.

Preferably, the encapsulating envelope 26 is a polymeric film envelope, such as but not limited to a Mylar film or a polyimide film envelope with a polyimide film envelope being preferred since the use of such an envelope extends the burn through time when compared to a Mylar film envelope. Two burn through resistant systems were tested using the same core materials, but with different film envelopes. A three layer system of 0.42 pcf

PCT/US 99/27275
IPEAUS 22 JAN 2001

(6.7Kg/m³) Microlite AA glass fiber blankets was tested with a Mylar film covering and also with a polyimide film covering (System configuration I). A three layer system of ANSC carbon fiber blanket and two layers of 0.42 pcf (6.7Kg/m³) Microlite AA glass fiber blankets was also tested with a Mylar film covering and also with a polyimide film covering (System configuration II). With System configuration I, the burn through time using the Mylar film covering was about 2.67 minutes and the burn through time using the polyimide film covering was about 3.25 minutes. With System configuration II, the burn through time using the Mylar film covering was about 4.25 minutes and the burn through time using the polyimide film covering was about 8.50 minutes. Thus, in both tests, the system covered with the polyimide film exhibited a longer burn through time.

The term "burn through time" as used in this specification and claims relates to a test method developed by Johns Manville International, Inc. and is based on an ASTM E-119 test rig. This ASTM test method is a standard one for fire tests of building construction and materials. The test sample is 73.7 cm X 73.7 cm square and is tested in a vertical configuration. The sample itself is made up of a "system" consisting of a 1.6 mm thick aluminum skin to the fire side and the insulation batting enclosed in covering films of various types. The sample does not include an interior trim panel as part of the fuselage construction. The system sample is subjected to a furnace with a heat flux of 12 to 15 W/cm² and a temperature of 1093⁰C. The test begins when a sliding door separating the furnace from the system test sample is removed. The time of failure back to the back or cold side covering film is recorded, and the "burn through time" is deemed to be when the flame reaches or penetrates to the cold side.

Initial test results from this method showed that aluminum skin on its own achieved an approximate failure time of one minute. The standard configuration of three layers of 0.42 pcf (6.7Kg/m³) Microlite AA glass fiber blanket encased in Mylar film (System configuration I) yielded a result of 2.67 minutes to burn through.

PCT/US 99/27275
IPEAUS 22 JAN 2001

What is claimed is:

1. An insulation system for increasing the burn through resistance of an aircraft fuselage having an outer skin, comprising:

an encapsulated multilayered insulation composite; the multilayered insulation composite including a first insulation layer, a second insulation layer, and a first interleaf barrier layer of a high temperature resistant reflective mineral material; the insulation layers each having a density between about 4.8 Kg/m^3 and about 9.6 Kg/m^3 ; the insulation layers and the interleaf layer each having major surfaces extending in planes substantially parallel to each other and being enclosed within a polyimide film; and the multilayered insulation composite having a burn through time of at least five minutes.

2. The insulation system for increasing the burn through resistance of an aircraft fuselage having an outer skin, according to claim 1, wherein:

the interleaf barrier layer comprises a reflective mineral coated sheet.

3. The insulation system for increasing the burn through resistance of an aircraft fuselage having an outer skin, according to claim 1, wherein:

the insulation layers are glass fiber blanket insulation layers which each have a thickness of about 5.54 cm and a density between about 5.4 Kg/m^3 and about 6.7 Kg/m^3 .

4. The insulation system for increasing the burn through resistance of an aircraft fuselage having an outer skin, according to claim 1, wherein:

the insulation layers are polyimide foam insulation layers which each have a thickness of about 2.54 cm.

5. The insulation system for increasing the burn through

PCT/US 99/27275
IPEAUS 22 JAN 2001

resistance of an aircraft fuselage having an outer skin, according to claim 1, wherein:

the first interleaf barrier layer is intermediate the major surfaces of the first and second insulation layers which are opposed to each other.

6. The insulation system for increasing the burn through resistance of an aircraft fuselage having an outer skin, according to claim 5, wherein:

the multilayered insulation composite includes a third insulation layer having a density between about 4.8 Kg/m^3 and about 9.6 Kg/m^3 and a second interleaf barrier layer of a high temperature resistant reflective mineral material; the third insulation layer and the second interleaf barrier layer each have major surfaces extending in planes substantially parallel to the major surfaces of the first and second insulation layers and the first interleaf barrier layer; and the second interleaf barrier layer is intermediate the major surfaces of the second and third insulation layers which are opposed to each other.

7. The insulation system for increasing the burn through resistance of an aircraft fuselage having an outer skin, according to claim 1, wherein:

the first interleaf barrier layer of a high temperature resistant reflective mineral material is intermediate an outer major surface of the first insulation layer and the polyimide film.

8. The insulation system for increasing the burn through resistance of an aircraft fuselage having an outer skin, according to claim 7, wherein:

a second interleaf barrier layer of high temperature resistant reflective mineral material is intermediate the major surfaces of the first and the second insulation layers which are opposed to each other.

PCT/US 99/27275
IPEAUS 22 JAN 2001

9. The insulation system for increasing the burn through resistance of an aircraft fuselage having an outer skin, according to claim 7, wherein:

there is a third insulation layer having a density between about 4.8 Kg/m^3 and about 9.6 Kg/m^3 and a second interleaf barrier layer of high temperature resistant reflective mineral material which is intermediate the opposed major surfaces of two of the insulation layers.

10. The insulation system for increasing the burn through resistance of an aircraft fuselage having an outer skin, according to claim 7, wherein:

the interleaf barrier layer comprises a reflective mineral coated sheet.

11. The insulation system for increasing the burn through resistance of an aircraft fuselage having an outer skin, according to claim 7, wherein:

the insulation layers are glass fiber insulation layers which each have a thickness of about 2.54 cm and a density between about 5.4 Kg/m^3 and about 6.7 Kg/m^3 .

12. The insulation system for increasing the burn through resistance of an aircraft fuselage having an outer skin, according to claim 7, wherein:

the insulation layers are polyimide foam insulation layers which each have a thickness of about 2.54 cm.

13. An aircraft fuselage having an outer skin and an insulation system for increasing the burn through resistance of the aircraft fuselage, comprising:

an encapsulated multilayered insulation composite adjacent an inner major surface of the outer fuselage skin; the multilayered insulation composite including a first insulation layer, a second insulation layer, and an interleaf barrier layer of a high

PCT/US 99/27275
IPEAUS 22 JAN 2001

temperature resistant reflective mineral material; the insulation layers each having a density between about 4.8 Kg/m^3 and about 9.6 Kg/m^3 ; the insulation layers and the interleaf barrier layer each having major surfaces extending in planes substantially parallel to each other and the inner major surface of the metallic skin and being enclosed within a polyimide film; and the multilayered insulation composite having a burn through time of at least five minutes.

14. The aircraft fuselage according to claim 13, wherein:
the interleaf barrier layer comprises a reflective mineral coated sheet.

15. The aircraft fuselage according to claim 13, wherein:
the insulation layers are glass fiber blanket insulation layers which each have a thickness of about 2.54 cm and a density between about 5.4 Kg/m^3 and about 6.7 Kg/m^3 .

16. The aircraft fuselage according to claim 13, wherein:
the insulation layers are polyimide foam insulation layers which each have a thickness of about 2.54 cm.

17. The aircraft fuselage according to claim 13, wherein:
the first interleaf barrier layer is intermediate the major surfaces of the first and second insulation layers which are opposed to each other.

18. The aircraft fuselage according to claim 17, wherein:
the multilayered insulation composite includes a third insulation layer having a density between about 4.8 Kg/m^3 and about 9.6 Kg/m^3 and a second interleaf barrier layer of a high temperature resistant reflective mineral material; the third insulation layer and the second interleaf barrier layer each have major surfaces extending in planes substantially parallel to the major surfaces of the first and second insulation layers and the

PCT/US 99/27275
IPEMUS 22 JAN 2001

first interleaf barrier layer; and the second interleaf barrier layer is intermediate the major surfaces of the second and third insulation layers which are opposed to each other.

19. The aircraft fuselage according to claim 13, wherein:

the first interleaf barrier layer of a high temperature resistant reflective mineral material is intermediate an outer major surface of the first insulation layer and the polyimide film.

20. The aircraft fuselage according to claim 19, wherein:

a second interleaf barrier layer of high temperature resistant reflective mineral material is intermediate the major surfaces of the first and the second insulation layers which are opposed to each other.

21. The aircraft fuselage according to claim 19, wherein:

there is a third insulation layer having a density between about 4.8 Kg/m^3 and about 9.6 Kg/m^3 and a second interleaf barrier layer of high temperature resistant reflective mineral material which is intermediate the opposed major surfaces of two of the insulation layers.

22. An insulation system for increasing the burn through resistance of an aircraft fuselage having an outer skin, comprising:

an encapsulated insulation composite system; the insulation composite system including at least one insulation layer having a density between about 4.8 Kg/m^3 and about 9.6 Kg/m^3 and a barrier layer of a high temperature resistant reflective mineral material; the at least one insulation layer and the barrier layer each having major surfaces extending in planes substantially parallel to each other and the composite system being enclosed within a polyimide film; and the composite system having a burn through time of at least five minutes.

PCT/US 99/27275
IPEAUS 22 JAN 2001

23. The insulation system for increasing the burn through resistance of an aircraft fuselage having an outer skin, according to claim 22, wherein:
the barrier layer comprises a reflective mineral coated sheet.

7050

FIG. 1


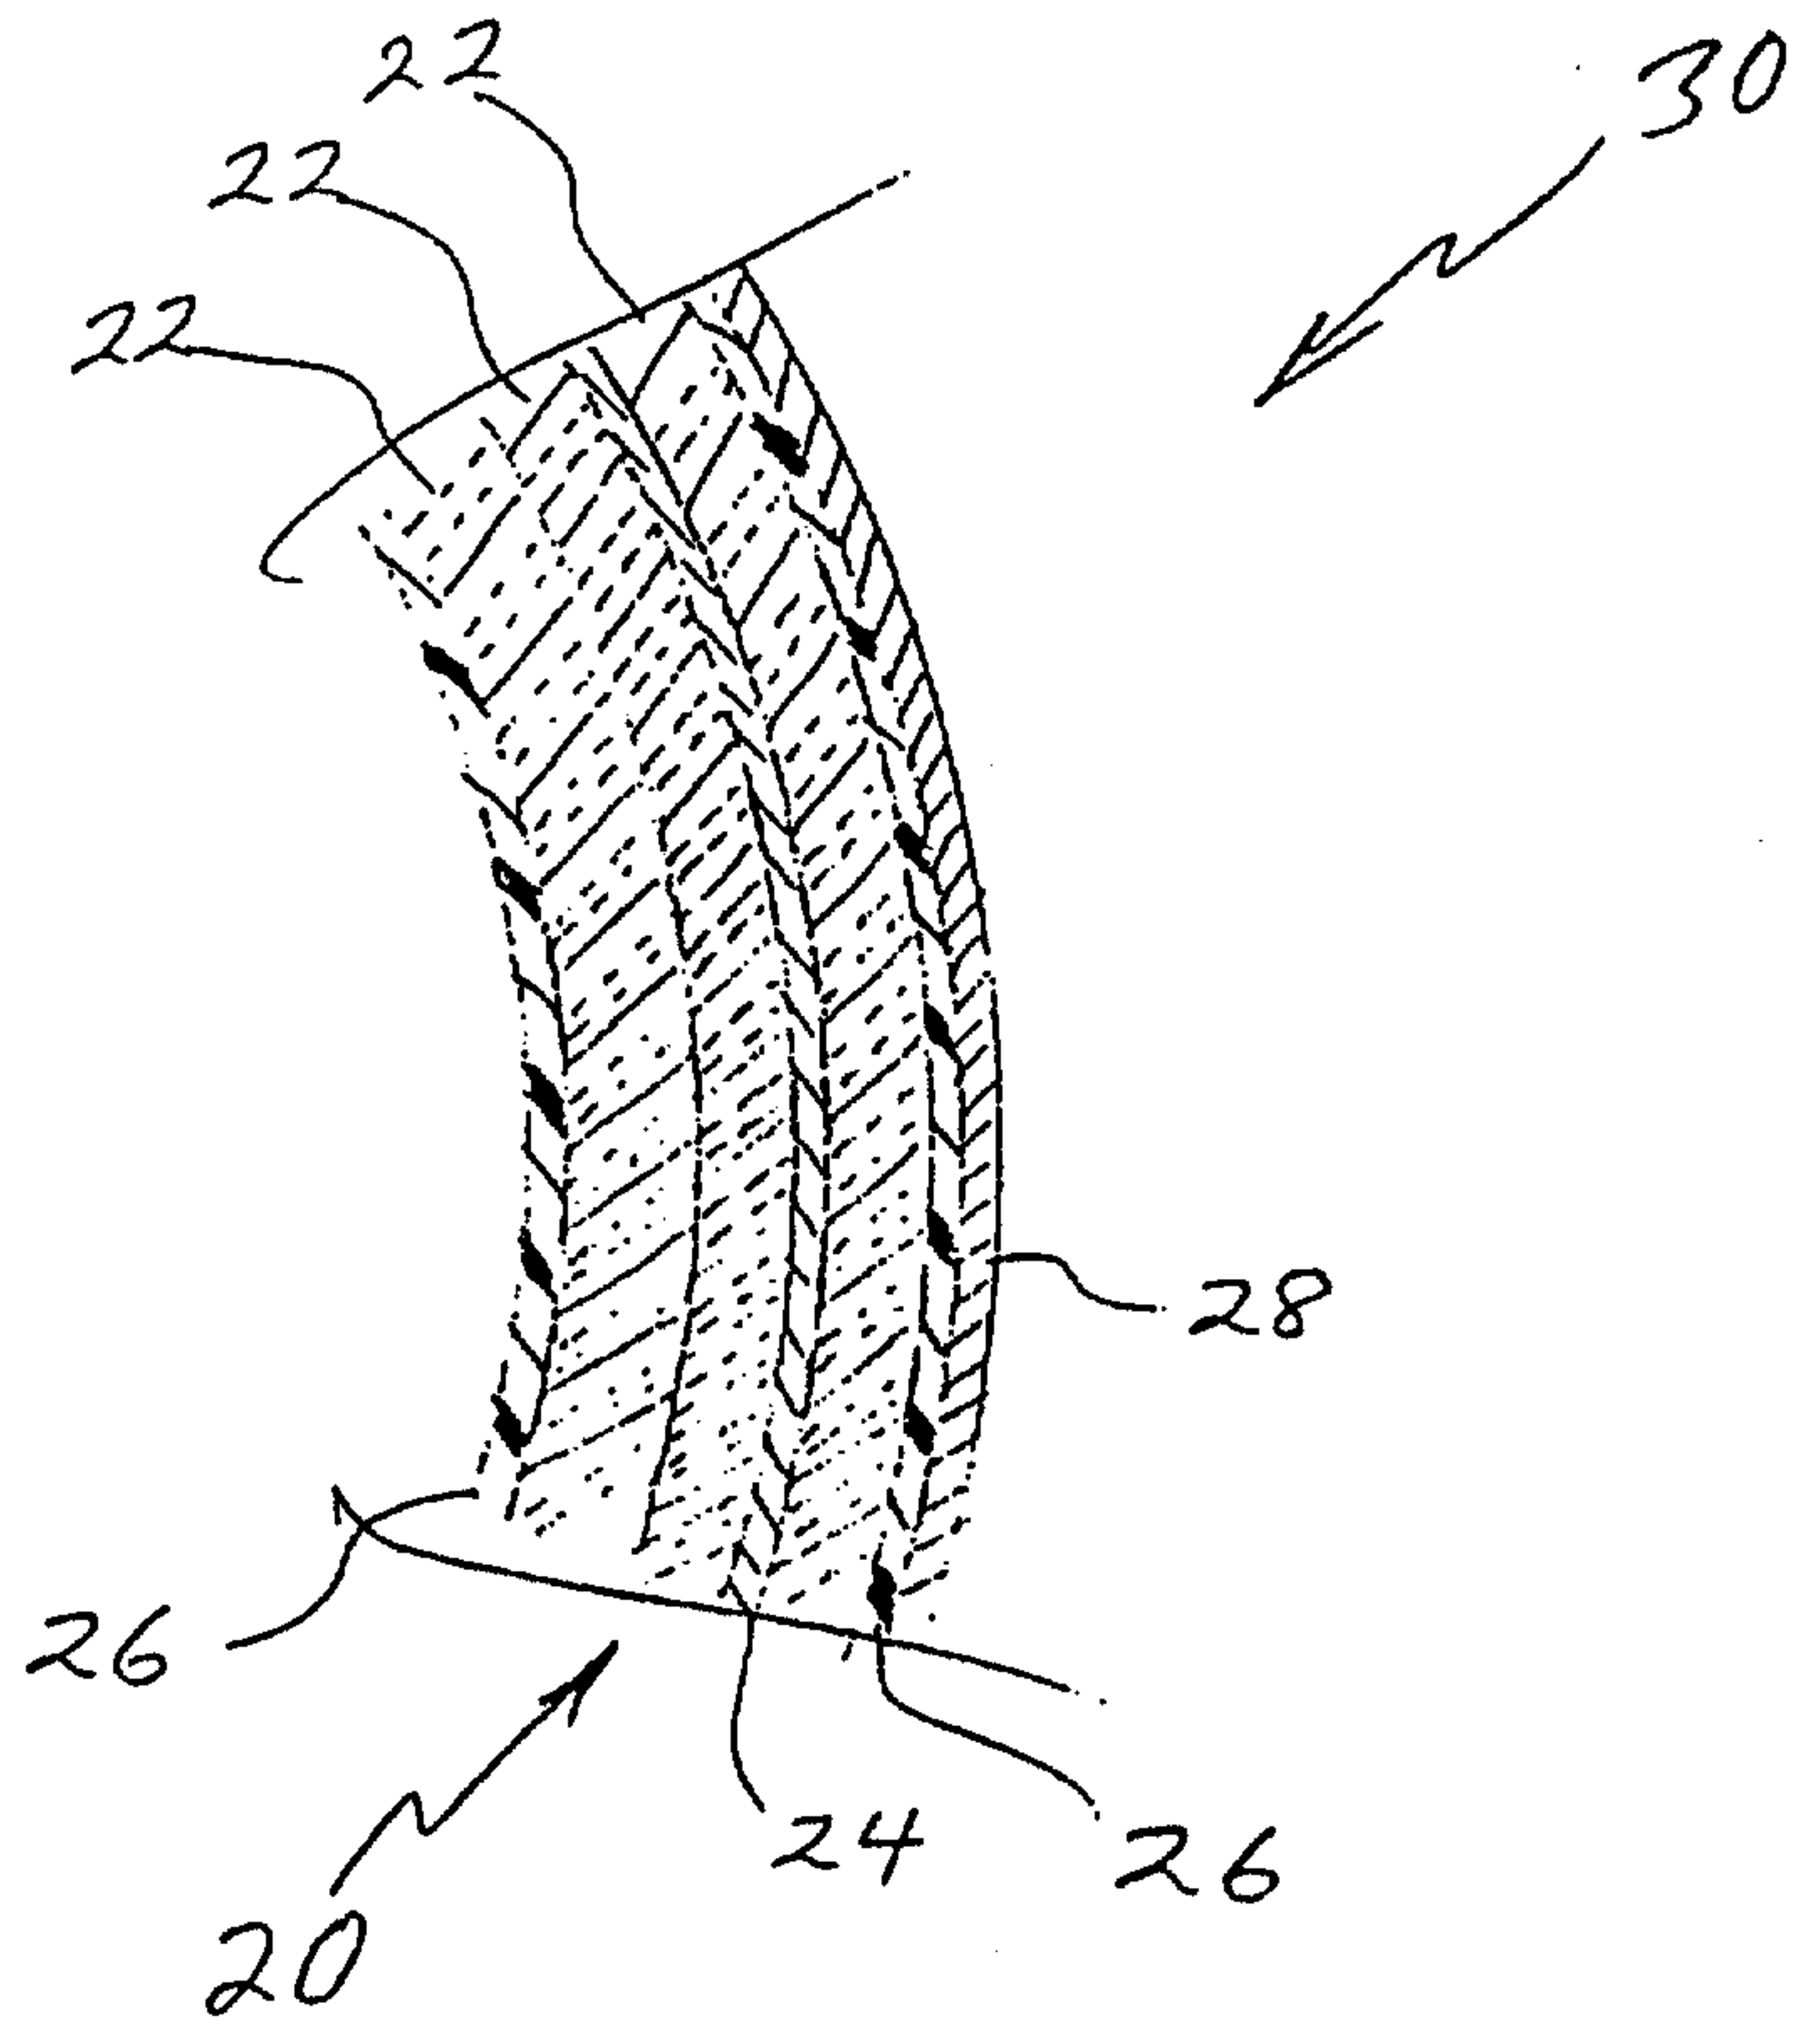


FIG. 2



7050.

FIG. 3

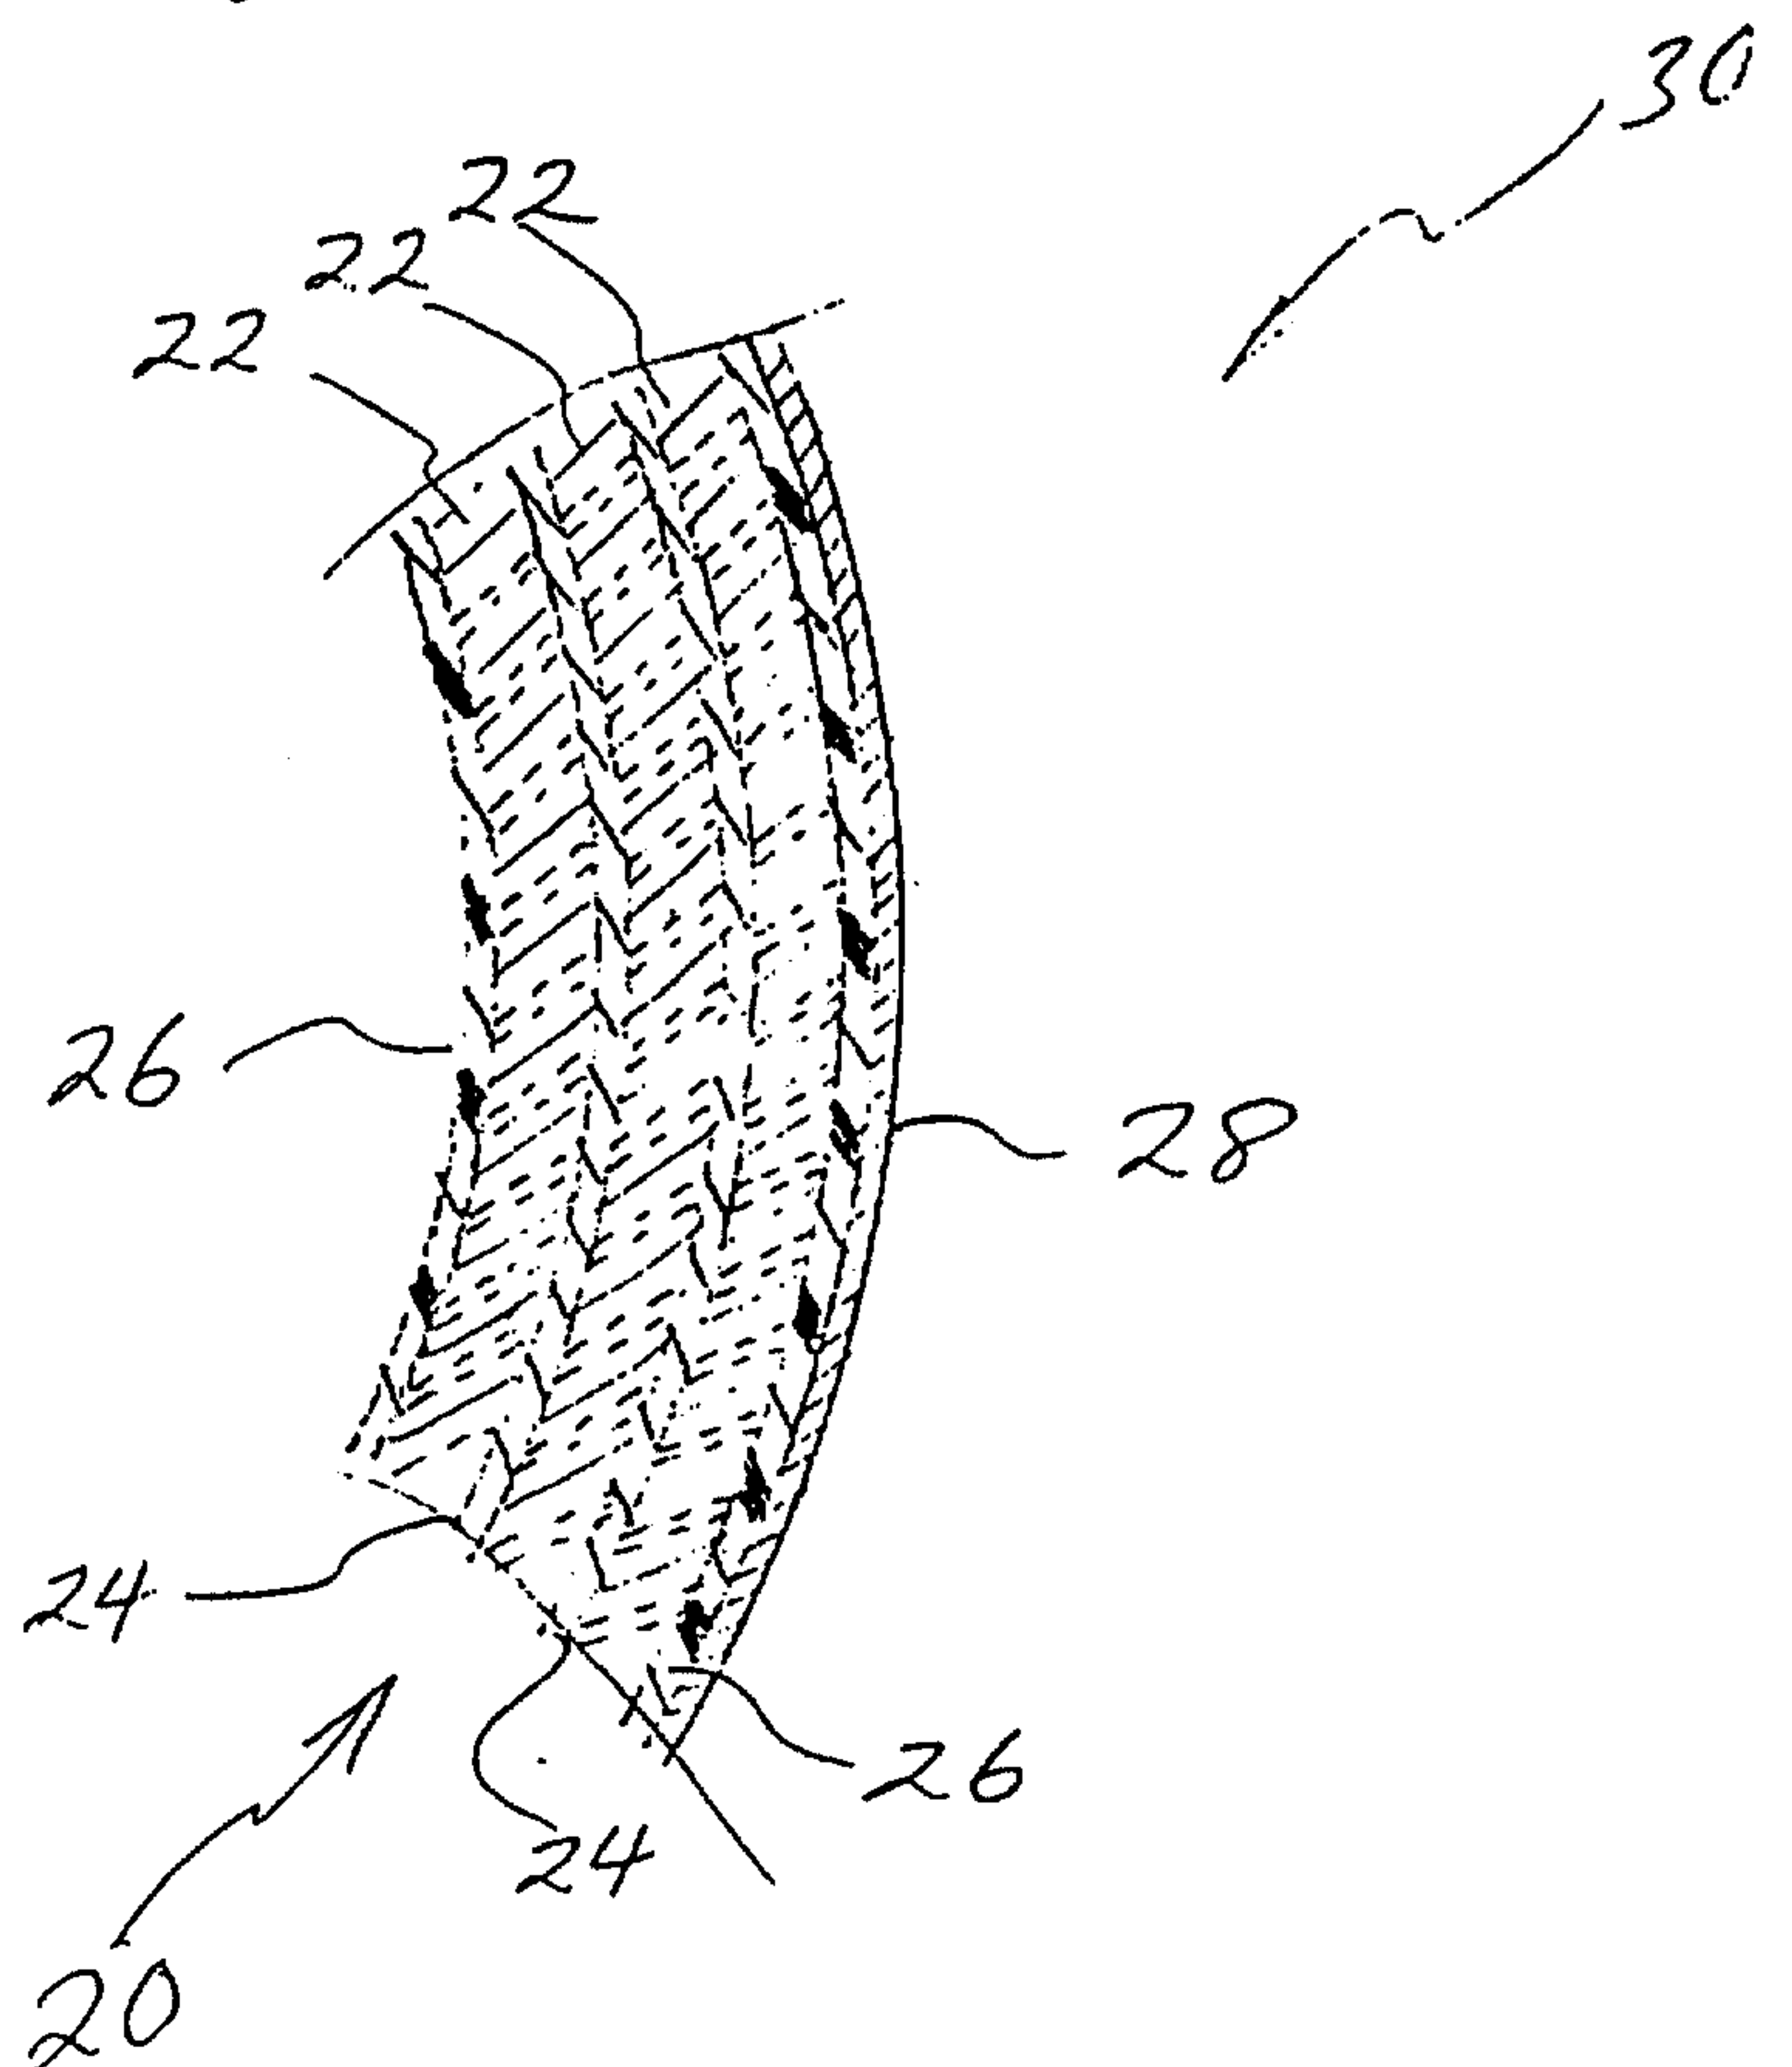