



(22) Date de dépôt/Filing Date: 2004/09/14

(41) Mise à la disp. pub./Open to Public Insp.: 2005/03/19

(45) Date de délivrance/Issue Date: 2012/03/06

(30) Priorité/Priority: 2003/09/19 (FR03 50578)

(51) Cl.Int./Int.Cl. *F01D 5/12* (2006.01),
B21D 53/78 (2006.01), *B23K 20/12* (2006.01),
B23P 6/00 (2006.01), *F01D 5/34* (2006.01)


(72) Inventeurs/Inventors:
ADDE, DANIELLE, FR;
BOURGEOIS, MARIE-FRANCE, FR;
LESTOILLE, PATRICK DIDIER MICHEL, FR;
FERTE, JEAN PIERRE, FR;
SONIAK, FRANCIS GILLES BASILE, FR;
MIRAUCOURT, GERARD, FR

(73) Propriétaire/Owner:
SNECMA, FR

(74) Agent: GOUDREAU GAGE DUBUC

(54) Titre : PROCEDE DE FABRICATION OU DE REPARATION D'UN DISQUE MONOBLOC A AILETTES

(54) Title: PROCESS FOR MANUFACTURING OR REPAIRING A MONOBLOC BLADED DISC

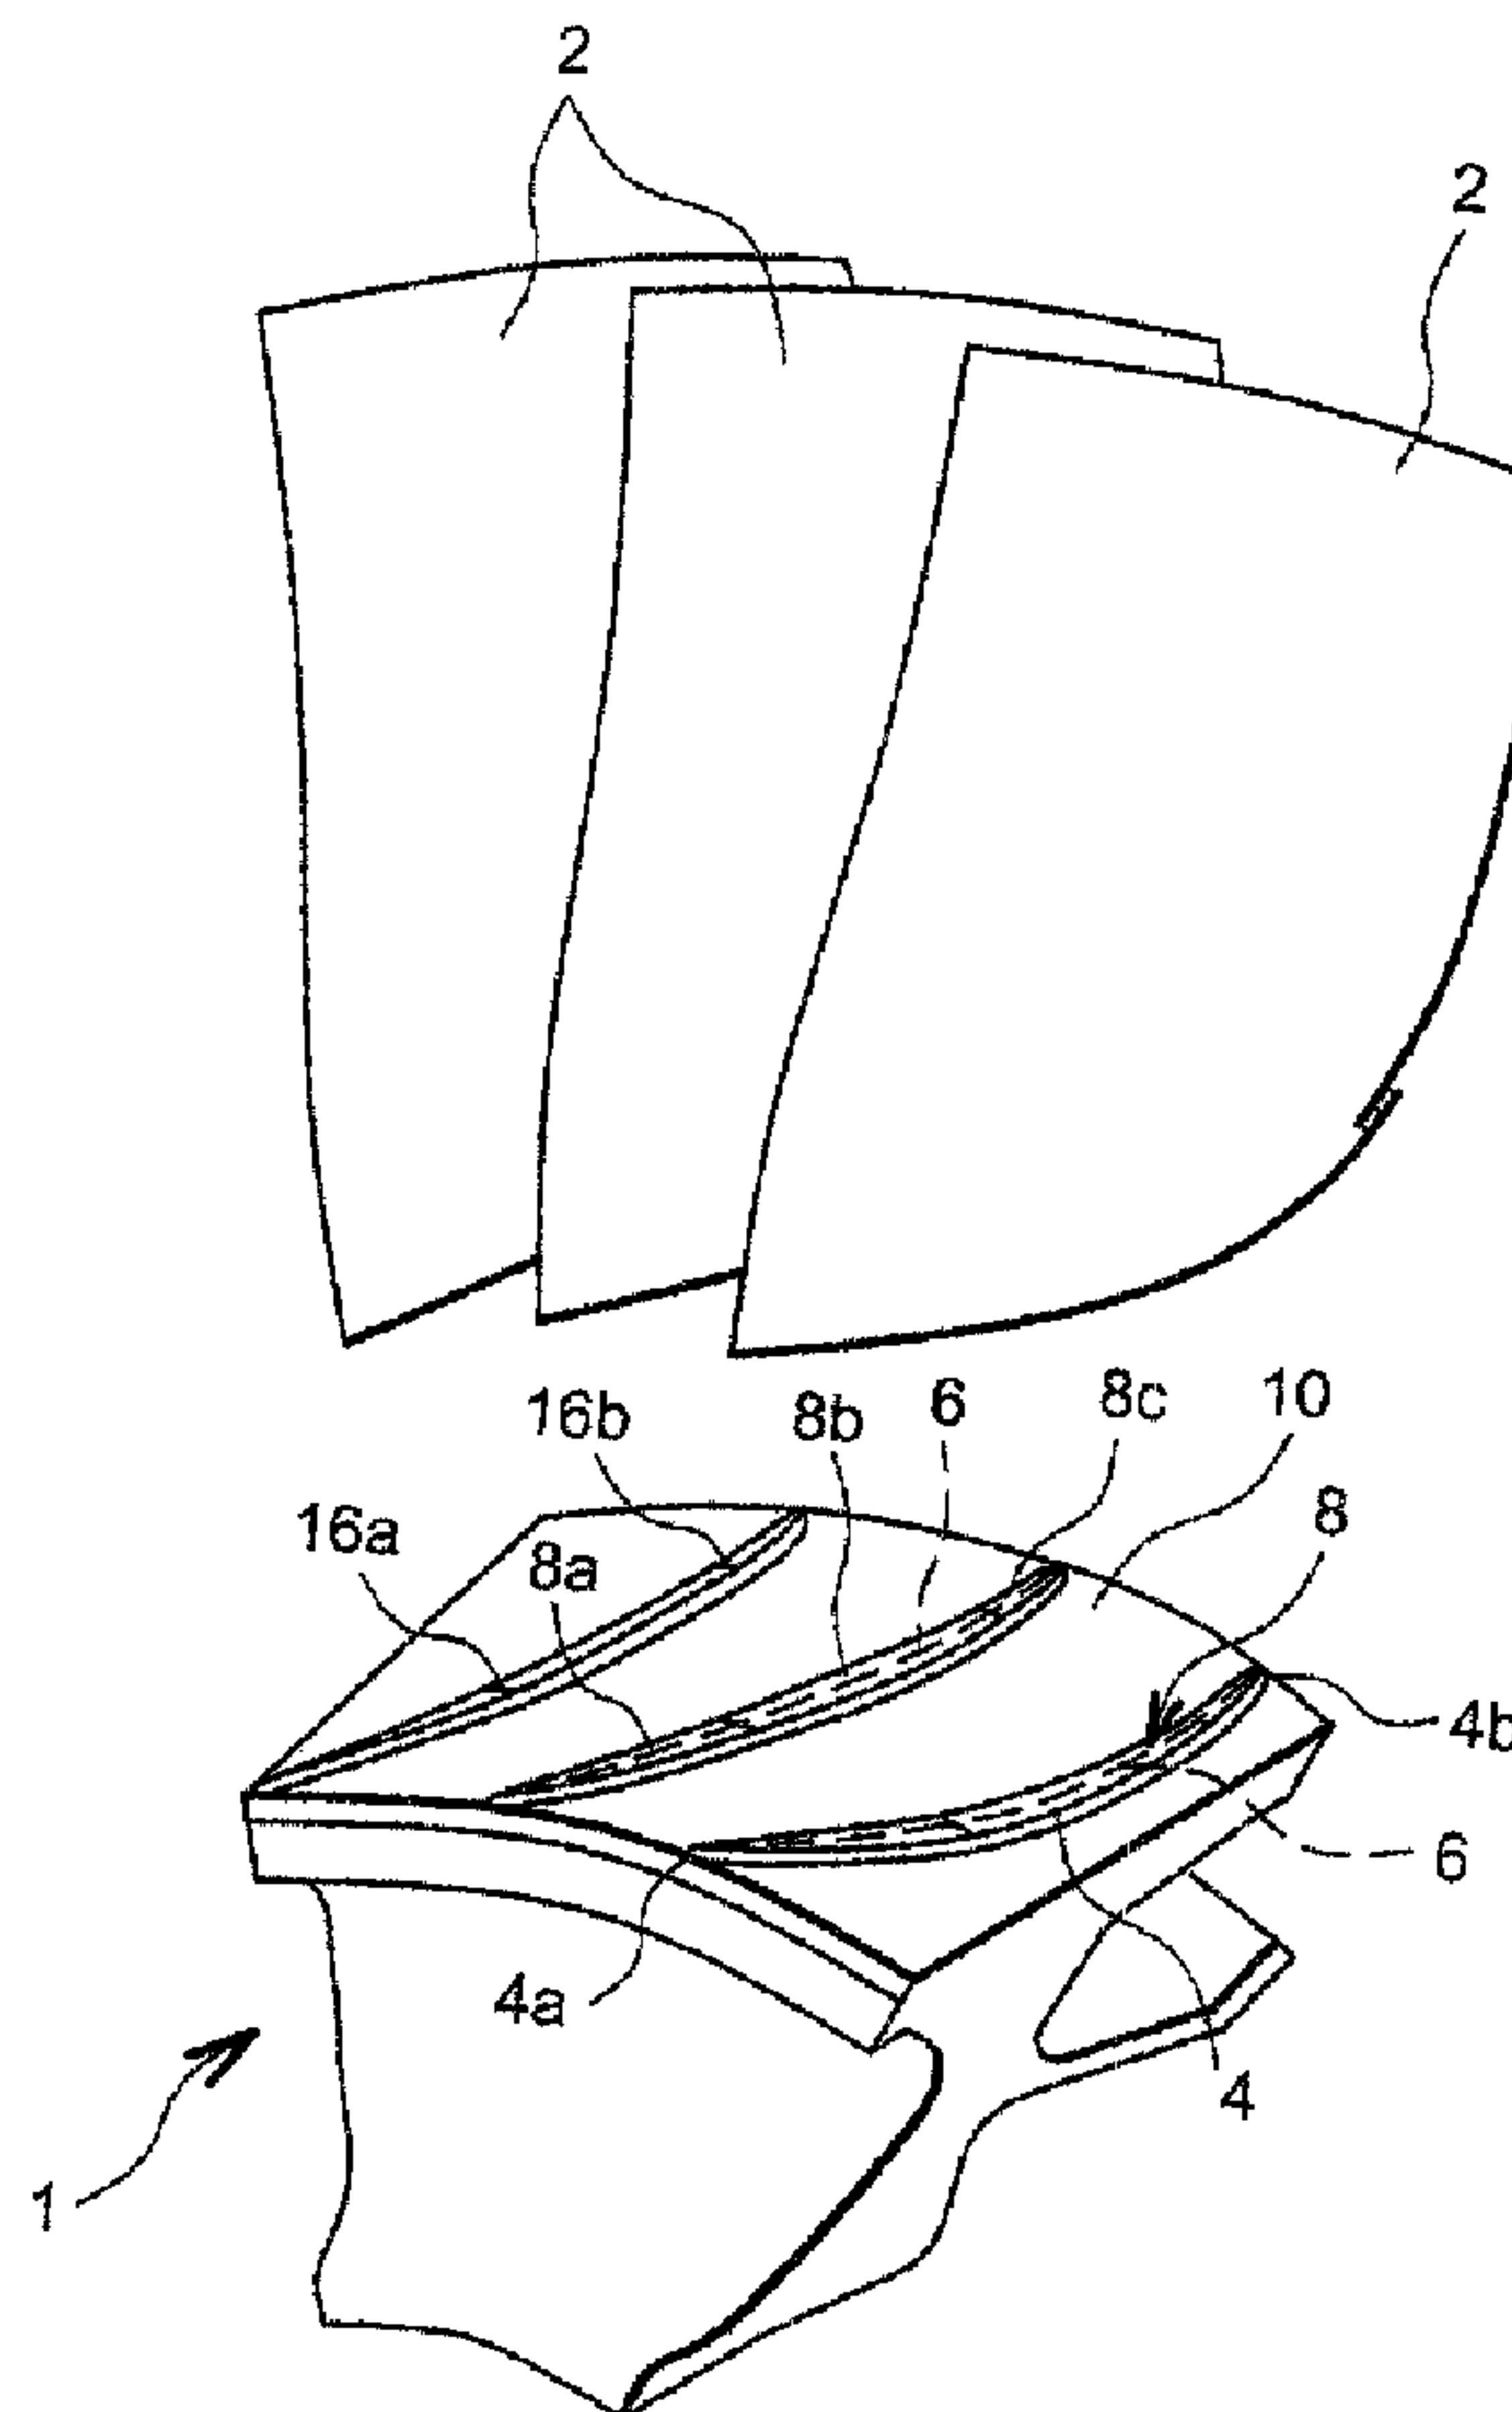

(57) Abrégé/Abstract:

The invention relates to a process for manufacturing or repairing a monobloc bladed disc including a stage of forming, on a protruding projection (4) belonging to a disc (1) and extending from an upstream end (4a) to a downstream end (4b) along a

(57) **Abrégé(suite)/Abstract(continued):**

protruding projection chord (6), a welded joint surface (8) intended to allow a subsequent stage of fitting a blade (2) by linear friction welding onto the protruding projection (4) of the disc (1). According to the invention, the stage of forming the welded joint surface (8) is carried out in such a way that it includes at least two butt-jointed plane portions (8a, 8b, 8c), arranged in sequence along the protruding projection chord (6).

Application to turboshaft engine rotors.

ABSTRACTPROCESS FOR MANUFACTURING OR REPAIRING A MONOBLOC
BLADED DISC

5

The invention relates to a process for manufacturing or repairing a monobloc bladed disc including a stage of forming, on a protruding projection (4) belonging to a disc (1) and extending
10 from an upstream end (4a) to a downstream end (4b) along a protruding projection chord (6), a welded joint surface (8) intended to allow a subsequent stage of fitting a blade (2) by linear friction welding onto the protruding projection (4) of the disc (1). According to
15 the invention, the stage of forming the welded joint surface (8) is carried out in such a way that it includes at least two butt-jointed plane portions (8a, 8b, 8c), arranged in sequence along the protruding projection chord (6).

20 Application to turboshaft engine rotors.

Figure 1.

PROCESS FOR MANUFACTURING OR REPAIRING A MONOBLOC
BLADED DISC

Technical field

5 The present invention relates in a general way to
a process for manufacturing or repairing a monobloc
bladed disc including the formation of a welded joint
surface on a projection protruding from a disc, this
welded joint surface being intended to allow a
10 subsequent fitting of a blade by linear friction
welding onto this same protruding projection.

Furthermore, the invention also relates to a disc
for a monobloc bladed disc comprising at least one
protruding projection onto which such a welded joint
15 surface is provided.

The invention applies most particularly but not
exclusively to the field of turboshaft engine rotors.

Prior art

20 In some turboshaft engine rotors, use is made of
monobloc bladed discs, in other words rotor portions to
which rotating blade stages are rigidly joined for
example by linear friction welding, unlike the
conventional design wherein blade roots with a cross-
25 section that is bulb-shaped, fantail-shaped or of some
other shape of the same type, are slid into disc
grooves of complementary cross-section. In a known and
advantageous way, monobloc bladed discs are on the
whole lighter, which explains why they may be
30 preferred.

To manufacture a monobloc bladed disc, the first operation is to manufacture the disc itself. This is done particularly by providing a plurality of protruding projections projecting from a vane of the disc, corresponding to a peripheral surface of the latter.

When manufacturing this disc, a stage of forming a welded joint surface is implemented on each protruding projection, this surface extending from an upstream end to a downstream end along a protruding projection chord, and being intended to allow a subsequent stage of fitting a blade by linear friction welding onto this same protruding projection. Additionally, it is specified that this blade has a complementary welded joint surface, intended to conform in shape to the welded joint surface of the protruding projection, during the course of the stage of fitting by linear friction welding.

To carry out this stage of forming the welded joint surface on the protruding projection, several solutions have been proposed in the prior art.

Indeed the initial proposal was to provide a plane welded joint surface, for example parallel to an axial direction of the disc and to a tangential direction of this disc.

Admittedly, in this respect, even if the fact of providing a plane and single surface makes it particularly easy to implement the surface forming stage, this solution is still nonetheless relatively restricting, for one essential reason which will be explained hereinafter.

Actually, discs usually have a vane of relatively complex geometry, which takes the form of a line that is curved in axial cross-section. By way of illustration, the vanes of discs encountered in the prior art often take the form of a concave surface.

Yet in a typical and known way, when the manufacture of the monobloc bladed disc is finished, the blade is connected to the vane of the disc by means of a connecting radius. The connecting radius therefore corresponds to a projection of material provided between the blade and the vane, and extends in a substantially consistent way all along it. Admittedly this connecting radius is at least partially formed by the projection initially provided on the disc.

Consequently, given the usually complex geometry of the vane, it is obvious that the fact of providing a single and plane welded joint surface almost of necessity involves a protruding projection that is designed with the intention of constituting not only the connecting radius, but also a part of the blade. In other words, by providing a plane welded joint surface, it is impossible to follow the profile of the vane of complex geometry correctly, with the result that at least one part of the welded joint surface must then perforce be made outside the future connecting radius or in a narrow portion of it. This obviously renders the implementation of the stage of fitting the blade by linear friction welding relatively tricky, on account of the small contact surface between the two components to be welded. Moreover, in such circumstances, the welded joint obtained then has of necessity have a

relatively thin portion which significantly lessens the blade holding rigidity of the disc.

In the document EP 0 887 143 A, the proposal was made to make a welded joint surface parallel to the
5 vane of the disc of complex geometry, and straight in the tangential direction of the disc in order to allow the blade to be fitted by linear friction welding onto the protruding projection.

However the complex three-dimensional form of this
10 welded joint surface is extremely difficult to achieve by machining, with the result that this solution is not totally satisfactory either.

Moreover, it is pointed out that the two prior art solutions outlined above apply not only to the
15 manufacture of a monobloc bladed disc, but also when a repair is involved consisting in replacing one or more blades of this bladed disc.

Naturally, during such a repair process, the drawbacks relating to the various solutions indicated
20 above recur in the same way as during the manufacture of this same monobloc bladed disc.

Disclosure of the invention

The invention therefore relates to
25 a process for manufacturing or repairing a monobloc bladed disc including the formation of a welded joint surface on a protruding projection of a disc, the process overcoming at least partially the drawbacks mentioned above in relation to the prior art
30 embodiments.

On the other hand, the invention relates to
a disc for a monobloc bladed
disc comprising at least one protruding projection, on
which a welded joint surface is provided formed
5 according to the process fulfilling the purpose
mentioned above.

To do this, the invention first provides for
a process for manufacturing or repairing a monobloc
bladed disc that includes a stage of forming, on a
10 protruding projection belonging to a disc and extending
from an upstream end to a downstream end along a
protruding projection chord, a welded joint surface
intended to allow a subsequent stage of fitting a blade
by linear friction welding onto the protruding
15 projection of the disc. According to the invention the
stage of forming the welded joint surface is carried
out in such a way that it includes at least two butt-
jointed plane portions, arranged one after the other
along the protruding projection chord.

20 To advantage, by virtue of the specific shape of
the welded joint surface of the protruding projection,
its formation is much faster and easier to achieve than
that described in the document EP 0 887 143 A, which
means as a result that the costs of implementing such a
25 process of monobloc bladed disc manufacture or repair
can be reduced.

Moreover, given the fact that at least two
portions are provided, plane and butt-jointed and
therefore inclined relative to each other, it is
30 therefore easy to form the welded joint surface as
close as possible to the vane of the disc, unlike the

prior art solution relating to the single plane welded joint surface. To this end, it is specified that by following the working surface of the disc as close as possible, the welded joint surface can easily be provided in such a way as to be wholly at the level of a future connecting radius between the vane and the blade concerned. In other words, the welded joint obtained following the stage of fitting the blade by linear friction welding can easily be entirely at the level of the connecting radius located between the two components.

Consequently, since the welded joint surface can to advantage be deprived of a relatively thin part, it is well understood that the implementation of the stage of fitting the blade by linear friction welding is made easier relative to that encountered in the first prior art solution described, and that the welded joint obtained naturally achieves improved blade holding relative to the disc.

Additionally, the presence of butt-jointed plane portions, connected to each other by intersections taking the form of parallel straight lines, makes it possible to achieve an accurate positioning of the blade relative to the protruding projection, and to reduce considerably the risks of unwanted displacements of this blade during the stage of fitting by linear friction welding. This is explained by the fact that the blade is held firmly between the multiple plane inclined portions of the welded joint surface, and is consequently self-centred onto it.

Preferentially, the stage of forming the welded joint surface is carried out in such a way that it consists exclusively of two butt-jointed plane portions, or else that it consists exclusively of three
5 butt-jointed plane portions. Clearly, the number of butt-jointed plane portions composing the welded joint surface could be higher, without departing from the framework of the invention. Admittedly, however, the number of two or three portions is preferred insofar as
10 it implies that the resulting welded joint surface is relatively simple to achieve, while being capable of following the vane of the disc correctly without departing from the future connecting radius, and this is the case practically whatever the complexity of the
15 shape of this vane.

Preferably, the stage of forming the welded joint surface is carried out in such a way that each intersection between two butt-jointed plane portions is parallel to a direction of oscillation adopted for
20 implementing the stage of fitting the blade by linear friction welding.

To this end, the direction of oscillation adopted for implementing the stage of fitting the blade by linear friction welding is selected from among the
25 group consisting of a tangential direction of the disc, and of all directions substantially perpendicular to the protruding projection chord, these indicative directions being naturally preferred but in no circumstances restricting.

30 Finally, in a relatively conventional way, the manufacturing or repair process according to the

invention preferably includes a stage of forming, on a blade, a complementary welded joint surface, susceptible of conforming in shape to the welded joint surface of the protruding projection of the disc.

5 On the other hand, the invention relates to a disc for a monobloc bladed disc comprising at least one protruding projection extending from an upstream end to a downstream end along a protruding projection chord, and on which a welded joint surface is provided
10 that is intended to allow a blade to be fitted by linear friction welding onto the protruding projection of the disc. According to the invention, for at least one protruding projection, the welded joint surface includes at least two butt-jointed plane portions,
15 arranged one after the other along the protruding projection chord.

 Preferably, for at least one protruding projection, the welded joint surface consists exclusively of two butt-jointed plane portions, or else
20 consists exclusively of three butt-jointed plane portions.

 Moreover, in a way similar to that outlined above, it may be provided that, for at least one protruding projection, each intersection between two butt-jointed
25 plane portions of the welded joint surface is parallel to a direction selected from among the group consisting of one tangential direction of the disc, and of all directions that are substantially perpendicular to the protruding projection chord.

8a

According to an aspect, the invention relates to a turbine engine including the disc for a monobloc bladed disc according to the invention as described above.

According to another aspect, the invention relates to a disc for a monobloc bladed disc including the disc and at least one blade, the disc comprising:

at least one projection means for receiving a blade, each projection means including a welded joint surface for welding the blade by linear friction welding onto the welded joint surface, the projection means extending from an upstream end to a downstream end along a protruding projection chord,

wherein for at least one projection means, the welded joint surface includes at least two butt-jointed plane portions inclined with respect to each other and arranged one after the other along the protruding projection chord.

According to yet another aspect, the invention relates to a turbine engine including the disc for a monobloc bladed disc according to the invention and as described above.

Other advantages and characteristics of the invention will emerge in the detailed non-restrictive description given below.

5 Brief description of the drawings

This description will be given in conjunction with the appended drawings in which;

- figure 1 shows a partial perspective view of a disc and of a plurality of blades intended to
10 constitute a monobloc bladed disc, after the stage of forming the welded joint surface of the manufacturing or repair process implemented according to a first preferred embodiment of the present invention;

- figure 2 shows a partial axial cross-section
15 view of the monobloc bladed disc obtained following the completion of the manufacturing or repair process according to the first preferred embodiment of the present invention;

- figure 3 shows a view from above of the disc
20 shown in figure 1;

- figure 4 shows a view similar to that in figure 3, when the manufacturing or repair process is implemented according to a variant of the first preferred embodiment of the present invention;

25 - figure 5 shows a partial view on a larger scale of the view shown in figure 1; and

- figure 6 shows a view similar to that in figure 5, when the manufacturing or repair process is implemented according to a second preferred embodiment
30 of the invention.

Detailed disclosure of preferred embodiments

With reference to figure 1, a disc 1 and a plurality of blades 2 can be seen that are intended to constitute a monobloc bladed disc, preferably to be fitted to a turboshaft engine rotor. In this figure, the disc 1 is shown in a state in which it is found following the completion of a stage of forming a welded joint surface in the manufacturing or repair process implemented according to a first preferred embodiment of the present invention.

As can be seen in this figure 1, the disc 1, also part of the subject matter of the present invention, includes a plurality of protruding projections 4 each extending from an upstream end 4a to a downstream end 4b other along a protruding projection chord 6. It is noted that the upstream and downstream ends 4a and 4b of a protruding projection 4 correspond to the leading edge and the trailing edge respectively of this same protruding projection 4.

In a known way, each protruding projection 4 is intended to constitute an anchoring support for an associated blade 2, the stage of fitting the latter onto the protruding projection 4 being carried out by linear friction welding.

To this end, on each protruding projection 4, there is actually a process applied of forming a welded joint surface 8, onto which the blade 2 will be welded by linear friction.

In this first preferred embodiment of the present invention, for each projection 4, the welded joint surface 8 consists of three butt-jointed plane portions

8a, 8b, 8c, which extend one after the other from the upstream end 4a to the downstream end 4b, along the protruding projection chord 6.

In this way, as can be seen in figure 1, the
5 welded joint surface 8 can follow as close as possible the vane 10 of the disc 1, which here has a substantially concave shape, and which is more generally known as "hollow vane".

With reference to figure 2, the monobloc bladed
10 disc can be seen that is obtained following the completion of the manufacturing or repair process according to the first preferred embodiment of the present invention.

As can clearly be seen in this figure and as has
15 been shown above in the prior art, the blade 2 is connected to the disc 1 by means of a connecting radius 12 also extending along the protruding projection chord 6.

It is noted that the welded joint surface 8
20 initially provided on the projection 4 is shown in dotted lines in figure 2 by way of indication, but that these dotted lines also show the location of a welded joint obtained following the completion of the stage of fitting the blade 2 onto the protruding projection 4 by
25 linear friction welding.

Given that this welded joint surface 8 may have been made as close as possible to the vane 10 implies that the welded joint obtained is located, to great advantage, wholly in the connecting radius 12. In
30 other words, when the monobloc bladed disc is in its final state as shown, the protruding projection 4

initially provided on the disc 1 constitutes only one lower radial portion of the connecting radius 12, whereas an upper radial portion 14 consists of material coming from the blade 2, and separated from the protruding projection 4 by the welding bead obtained.

Naturally, in the event of the vane 10 having an even more complex shape than the one shown, the number of butt-jointed plane portions 8a, 8b, 8c could be increased so that the welded joint surface 8 adapts correctly to the working surface 10, and so that it is again wholly located at the level of a future connecting radius between the blade 2 and the disc 1.

With reference to figure 3, it can be seen that the three butt-jointed plane portions 8a 8b, 8c are connected to each other by intersections 16a and 16b having the form of straight lines parallel to each other, and also parallel to a direction of oscillation adopted for implementing the stage of fitting the blade 2 by linear friction welding, this oscillation direction being shown diagrammatically by the arrow 18.

In this first variant of the first preferred embodiment of the invention, the welded joint surface 8 has been formed in such a way that these intersections 16a and 16b are parallel to a tangential direction of the disc 1, shown diagrammatically by the dotted line 20.

Consequently, given the holding of the blade 2 between the plane portions 8a, 8b, 8c during the stage of linear friction welding of this blade, it is well understood that the dangers of radial movements of the

blade 2, during this stage, are to advantage totally set aside.

As is shown in figure 4 which shows a second variant of the first preferred embodiment of the invention, the intersections 16a and 16b can be orientated in another direction, for example in all directions substantially perpendicular locally to the chord 6 of the protruding projection 4.

This is in fact the example shown in this figure 4, where the intersections 16a and 16b are parallel to a direction 22 perpendicular locally to a part of the protruding projection chord 6 which is in proximity to the upstream end 4a of the protruding projection 4. Moreover, these intersections 16a and 16b are also naturally parallel to the direction of oscillation 18 adopted for the implementation of the stage of fitting the blade 2 by linear friction welding, which therefore differs in this second variant from a direction parallel to the tangential direction of the disc 1.

By way of example, the plane portions 8a, 8b, 8c butt-jointed by intersections 16a and 16b and arranged one after the other along the protruding projection chord 6 can define, two by two, an angle of about 15°.

In the manufacturing or repair process according to the first preferred embodiment of the present invention, there is provided a stage of forming, on each blade 2 intended to be anchored to the disc 1, a complementary welded joint surface 24 shown in figure 5.

Clearly and as may be imagined from its definition, this surface 24 is complementary to the

welded joint surface 8 provided on the associated protruding projection 4, for the purpose of obtaining a perfect contact between the blade 2 and this same projection 4 during the stage of fitting by linear
5 friction welding.

In this way, the surface 24 consists, one after the other along a blade chord 25, of three butt-jointed plane portions 24a, 24b, 24c, identical respectively to the butt-jointed plane portions 8a, 8b, 8c of the
10 protruding projection 4 with which the blade 2 is associated.

It is noted that in this figure 5, the blade 2 is shown only by way of illustration, but that it has in fact preferentially a lower portion of much higher
15 volume than the rest of the blade on which the complementary surface 24 is actually provided, which is done for the purpose of allowing the stage of fitting the blade 2 by linear friction to operate properly.

Finally, with reference to figure 6, a disc 1 can
20 be seen and a blade 2 intended to be fitted onto it in order to make a monobloc bladed disc, the disc 1 being shown in a state in which it finds itself following the completion of a stage of forming a welded joint surface in the manufacturing or repair process implemented
25 according to a second preferred embodiment of the present invention.

The main difference relative to the first preferred embodiment lies in the fact that the welded joint surface 108 is formed in such a way as to have
30 only two butt-jointed plane portions 108a and 108b,

still arranged one after the other along the protruding projection chord 6.

Naturally, this embodiment is possible when the vane 10 and the disc 1 has a shape of no great
5 complexity, the main objective still being that this surface 108 is provided in such a way as to be wholly at the level of a future connecting radius between the vane 10 and the blade 2 concerned.

Here again, the single intersection 116 located
10 between the plane portions 108a and 108b is parallel to the direction of oscillation (not shown in this figure) adopted for the implementation of the stage of fitting the blade 2 by linear friction welding.

Finally, it is pointed out that the various
15 preferred embodiments described above apply irrespectively to the manufacture and to the repair of a monobloc bladed disc.

Clearly, various modifications can be made by the man skilled in the art to the processes and to the
20 discs 1 which have just been described, solely by way of example and non-respectively.

CLAIMS

1. A process for manufacturing or repairing a monobloc bladed disc, comprising:

forming, on a protruding projection belonging to a disc and extending from an upstream end to a downstream end along a protruding projection chord, a welded joint surface configured to allow a subsequent stage of fitting a blade by linear friction welding onto said protruding projection of the disc,

wherein the forming of the welded joint surface is carried out in such a way that it includes at least two butt-jointed plane portions inclined with respect to each other and arranged one after the other along the protruding projection chord.

2. The manufacturing or repair process according to claim 1, wherein the forming of the welded joint surface is carried out in such a way that it consists exclusively of two butt-jointed plane portions.

3. The manufacturing or repair process according to claim 1, wherein the forming of the welded joint surface is carried out in such a way that it consists exclusively of three butt-jointed plane portions.

4. The manufacturing or repair process according to claim 1, wherein the forming of the welded joint surface is carried out in such a way that each intersection between two butt-jointed plane portions is parallel to a direction

of oscillation adopted for implementing the stage of fitting the blade by linear friction welding.

5. The manufacturing or repair process according to claim 4, wherein the direction of oscillation adopted for implementing the stage of fitting the blade by linear friction welding is a tangential direction of the disc, or a direction substantially perpendicular to the protruding projection chord.

6. The manufacturing or repair process according to claim 1, further including forming, on a blade, a complementary welded joint surface, susceptible of conforming in shape to the welded joint surface of the protruding projection of the disc.

7. A disc for a monobloc bladed disc, comprising:

at least one protruding projection extending from an upstream end to a downstream end along a protruding projection chord, and on which protruding projection a welded joint surface is provided that is configured to allow a blade to be fitted by linear friction welding onto the protruding projection of the disc,

wherein for at least one protruding projection, the welded joint surface includes at least two butt-jointed plane portions inclined with respect to each other and arranged one after the other along the protruding projection chord.

8. The disc for a monobloc bladed disc according to claim 7, wherein for at least one protruding projection, the

welded joint surface consists exclusively of two butt-jointed plane portions.

9. The disc for a monobloc bladed disc according to claim 7, wherein for at least one protruding projection, the welded joint surface consists exclusively of three butt-jointed plane portions.

10. The disc for a monobloc bladed disc according to claim 7, wherein for at least one protruding projection, each intersection between two butt-jointed plane portions of the welded joint surface is parallel to a direction which is one tangential direction of the disc, or a direction that is substantially perpendicular to the protruding projection chord.

11. A turbine engine including the disc for a monobloc bladed disc according to claim 7.

12. A manufacturing or repair process including the process of claim 1, further comprising:

incorporating the monobloc bladed disc into a turbine engine.

13. A disc for a monobloc bladed disc including the disc and at least one blade, the disc comprising:

at least one projection means for receiving a blade, each projection means including a welded joint surface for welding the blade by linear friction welding onto the welded joint surface, said projection

means extending from an upstream end to a downstream end along a protruding projection chord,

wherein for at least one projection means, the welded joint surface includes at least two butt-jointed plane portions inclined with respect to each other and arranged one after the other along the protruding projection chord.

14. The disc for a monobloc bladed disc according to claim 13, wherein for at least one projection means, the welded joint surface consists exclusively of two butt-jointed plane portions.

15. The disc for a monobloc bladed disc according to claim 13, wherein for at least one projection means, the welded joint surface consists exclusively of three butt-jointed plane portions.

16. The disc for a monobloc bladed disc according to claim 13, wherein for at least one projection means, each intersection between two butt-jointed plane portions of the welded joint surface is parallel to a direction which is one tangential direction of the disc, or a direction that is substantially perpendicular to the protruding projection chord.

17. A turbine engine including the disc for a monobloc bladed disc according to claim 13.

SP.23389

1 / 3

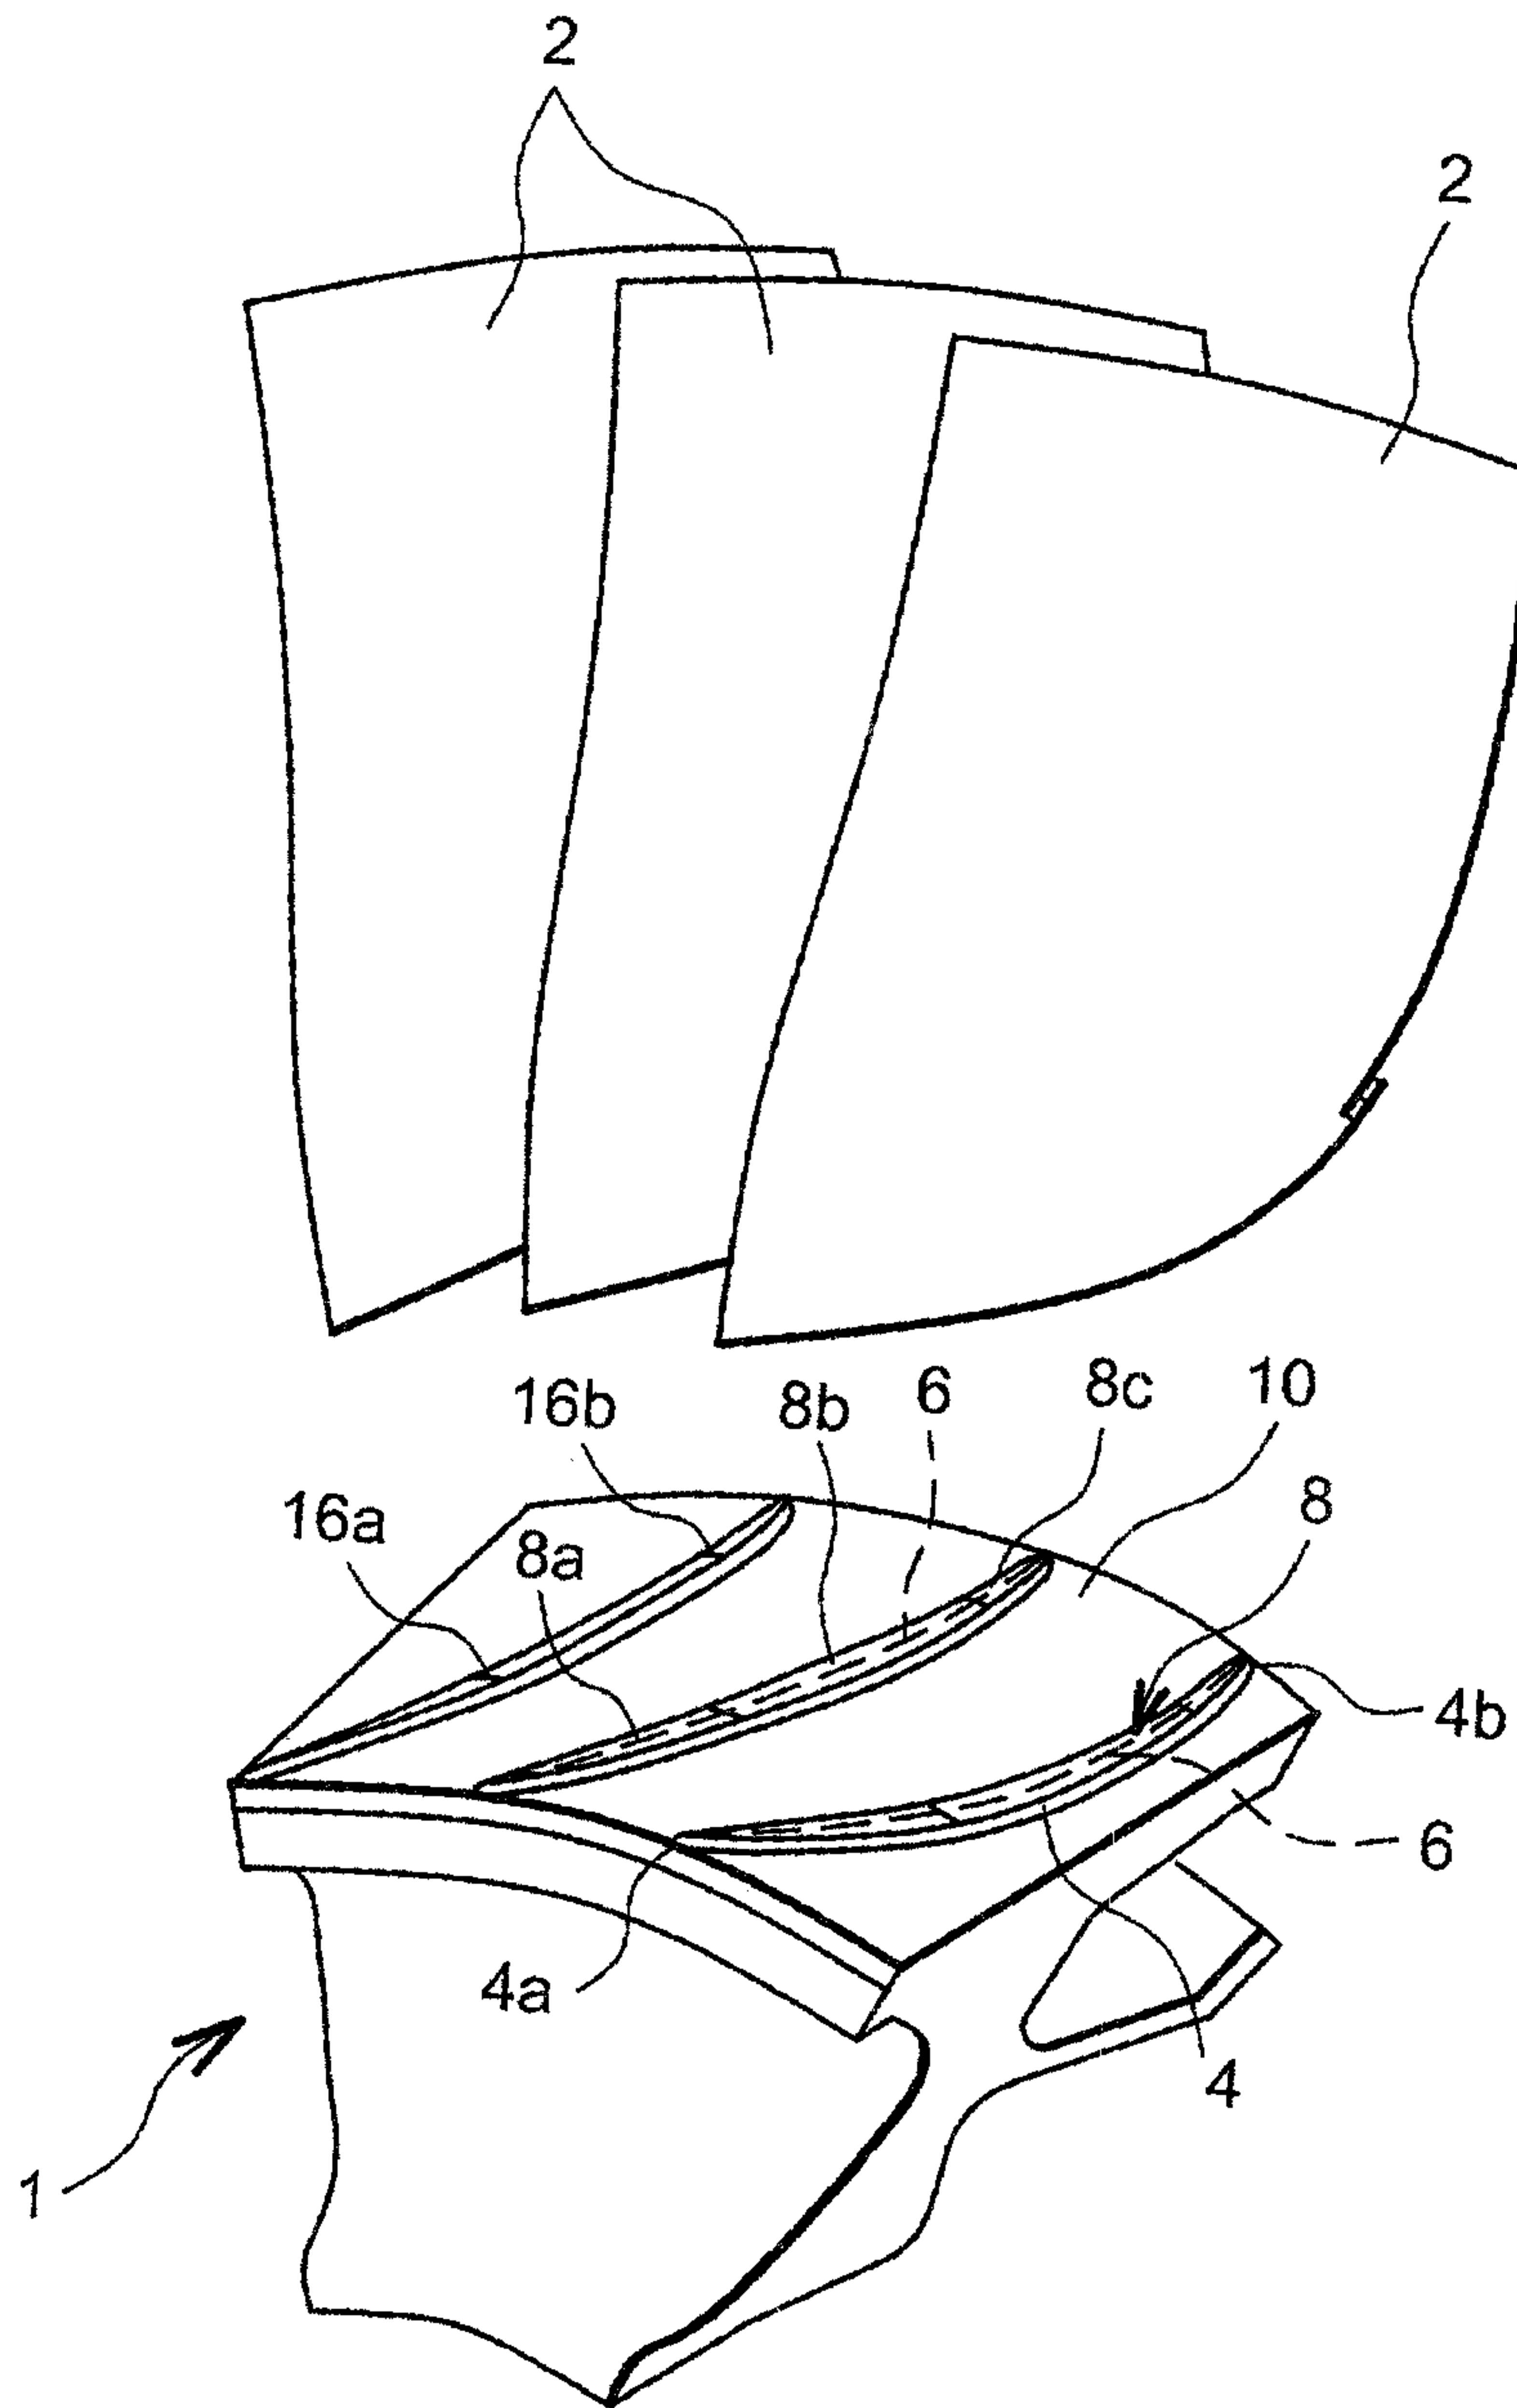


FIG. 1

2 / 3

FIG. 2



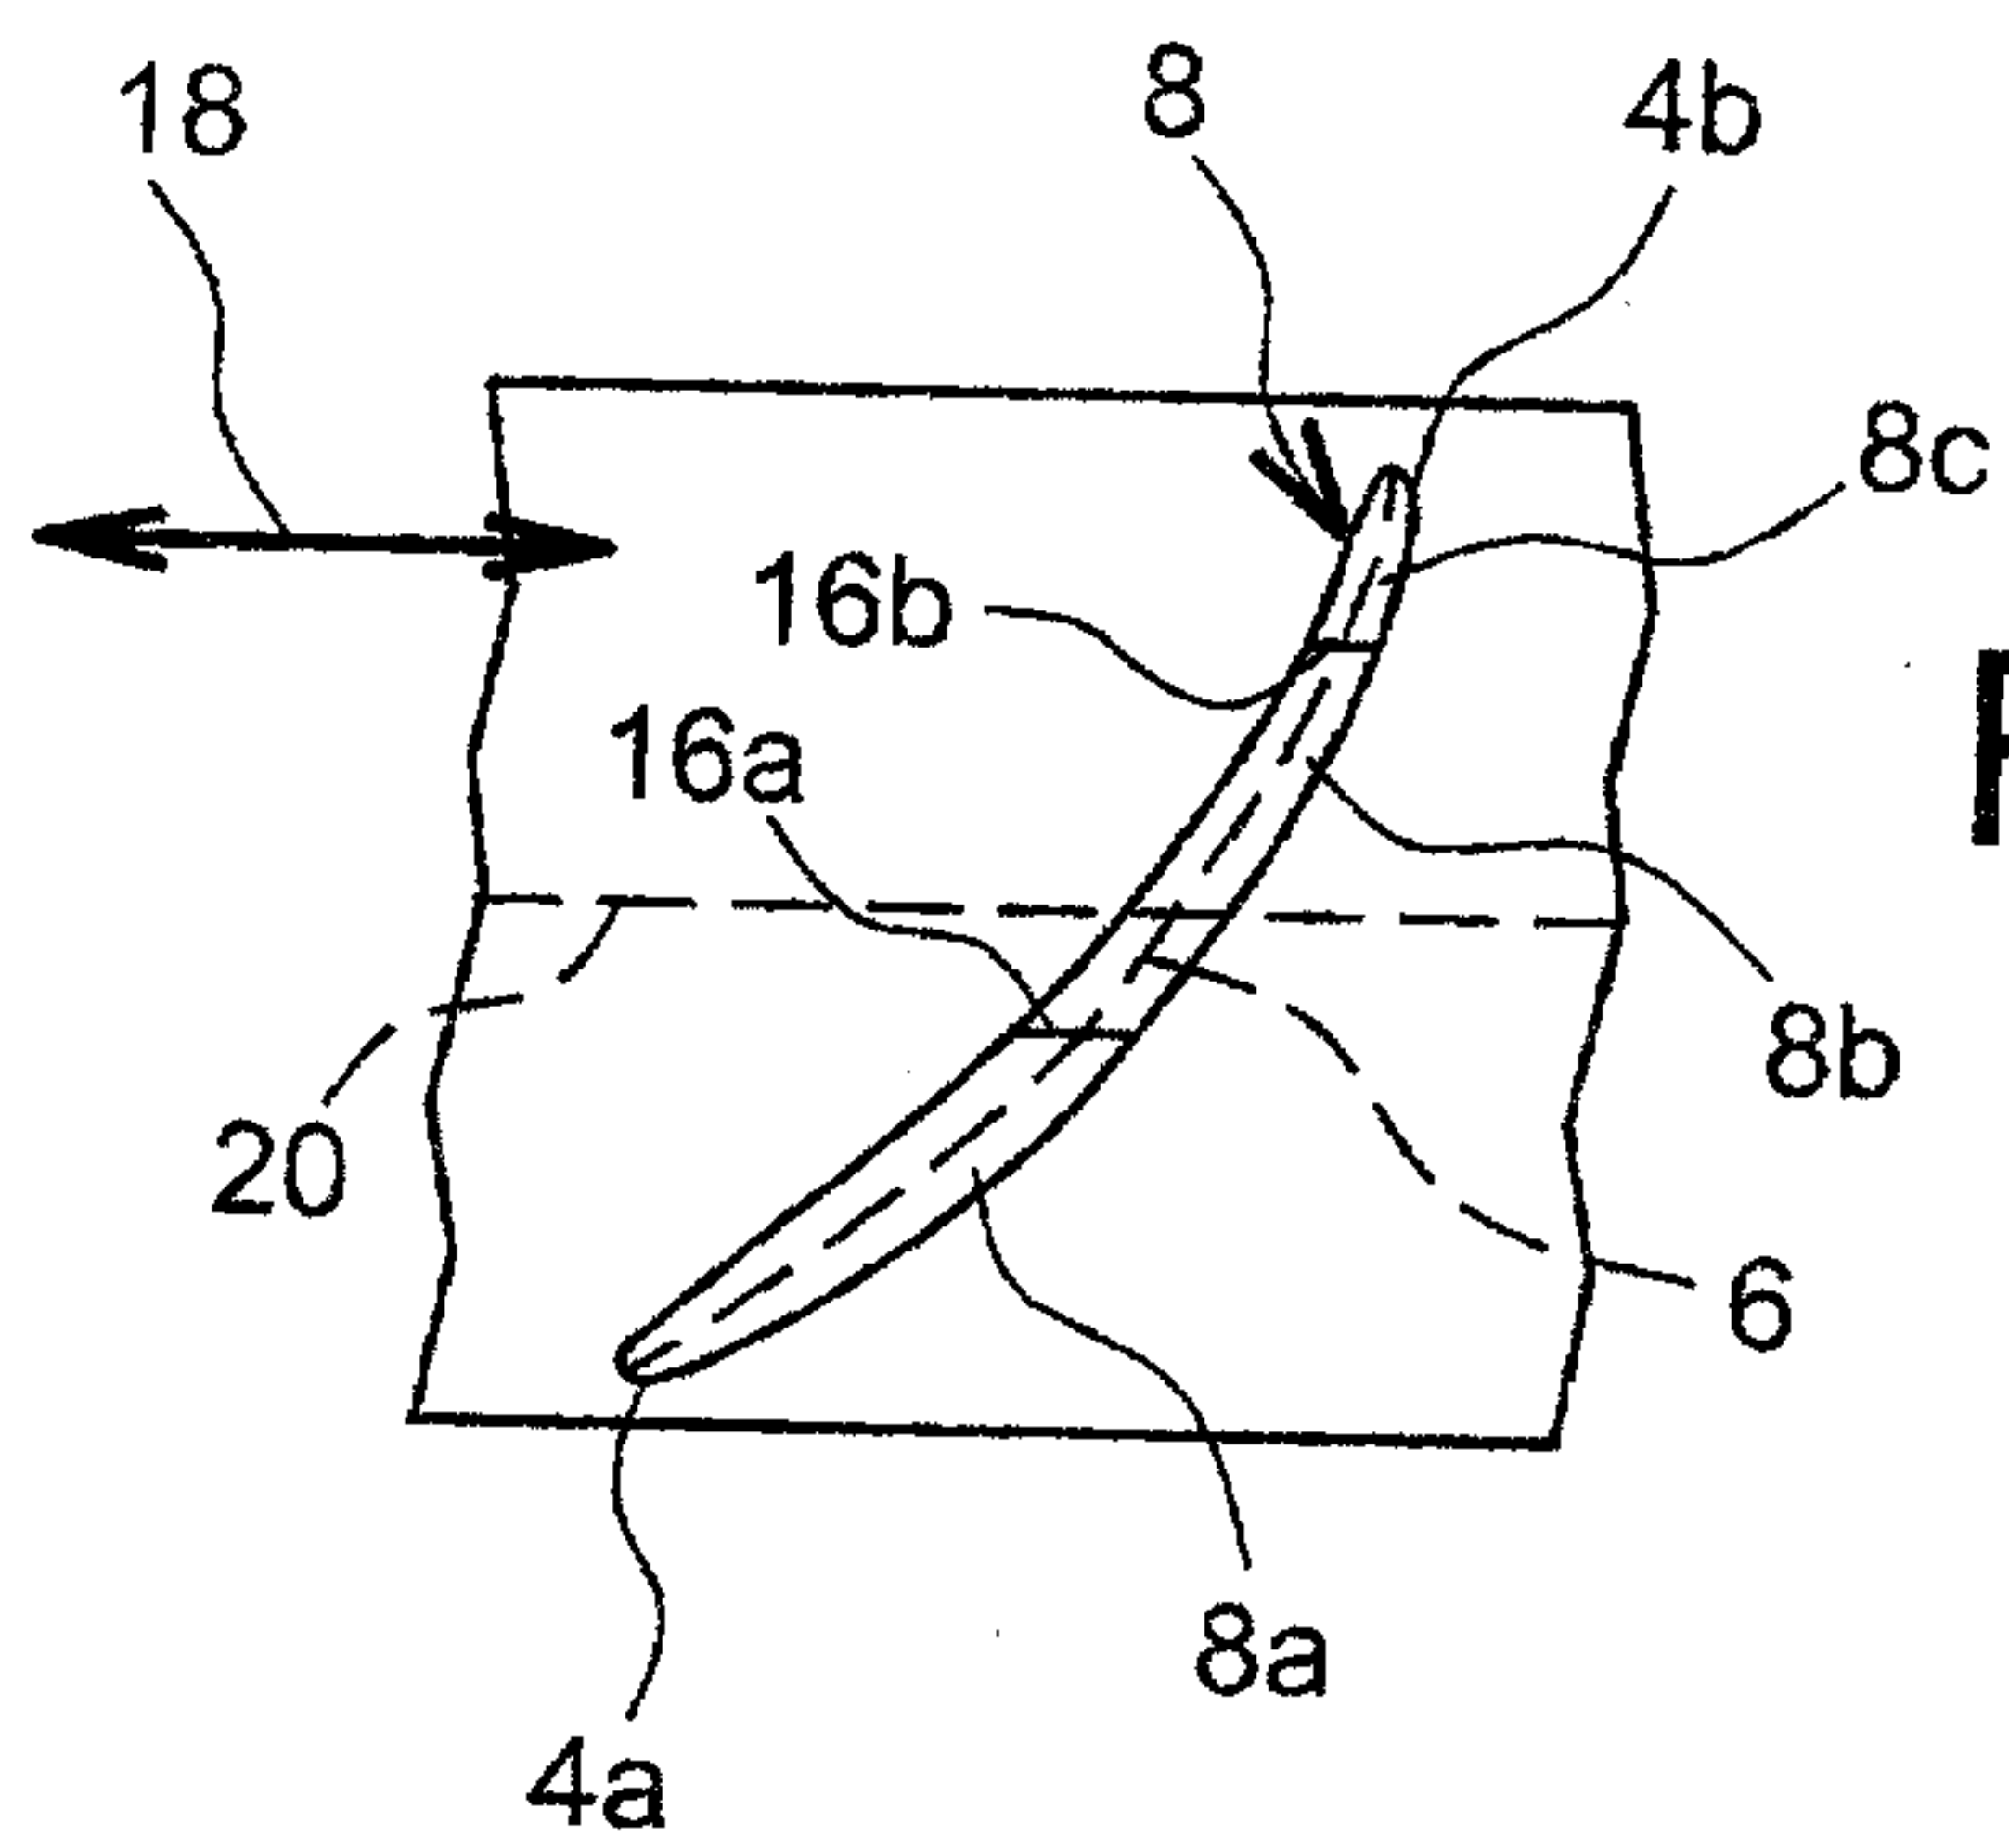


FIG. 3

FIG. 4

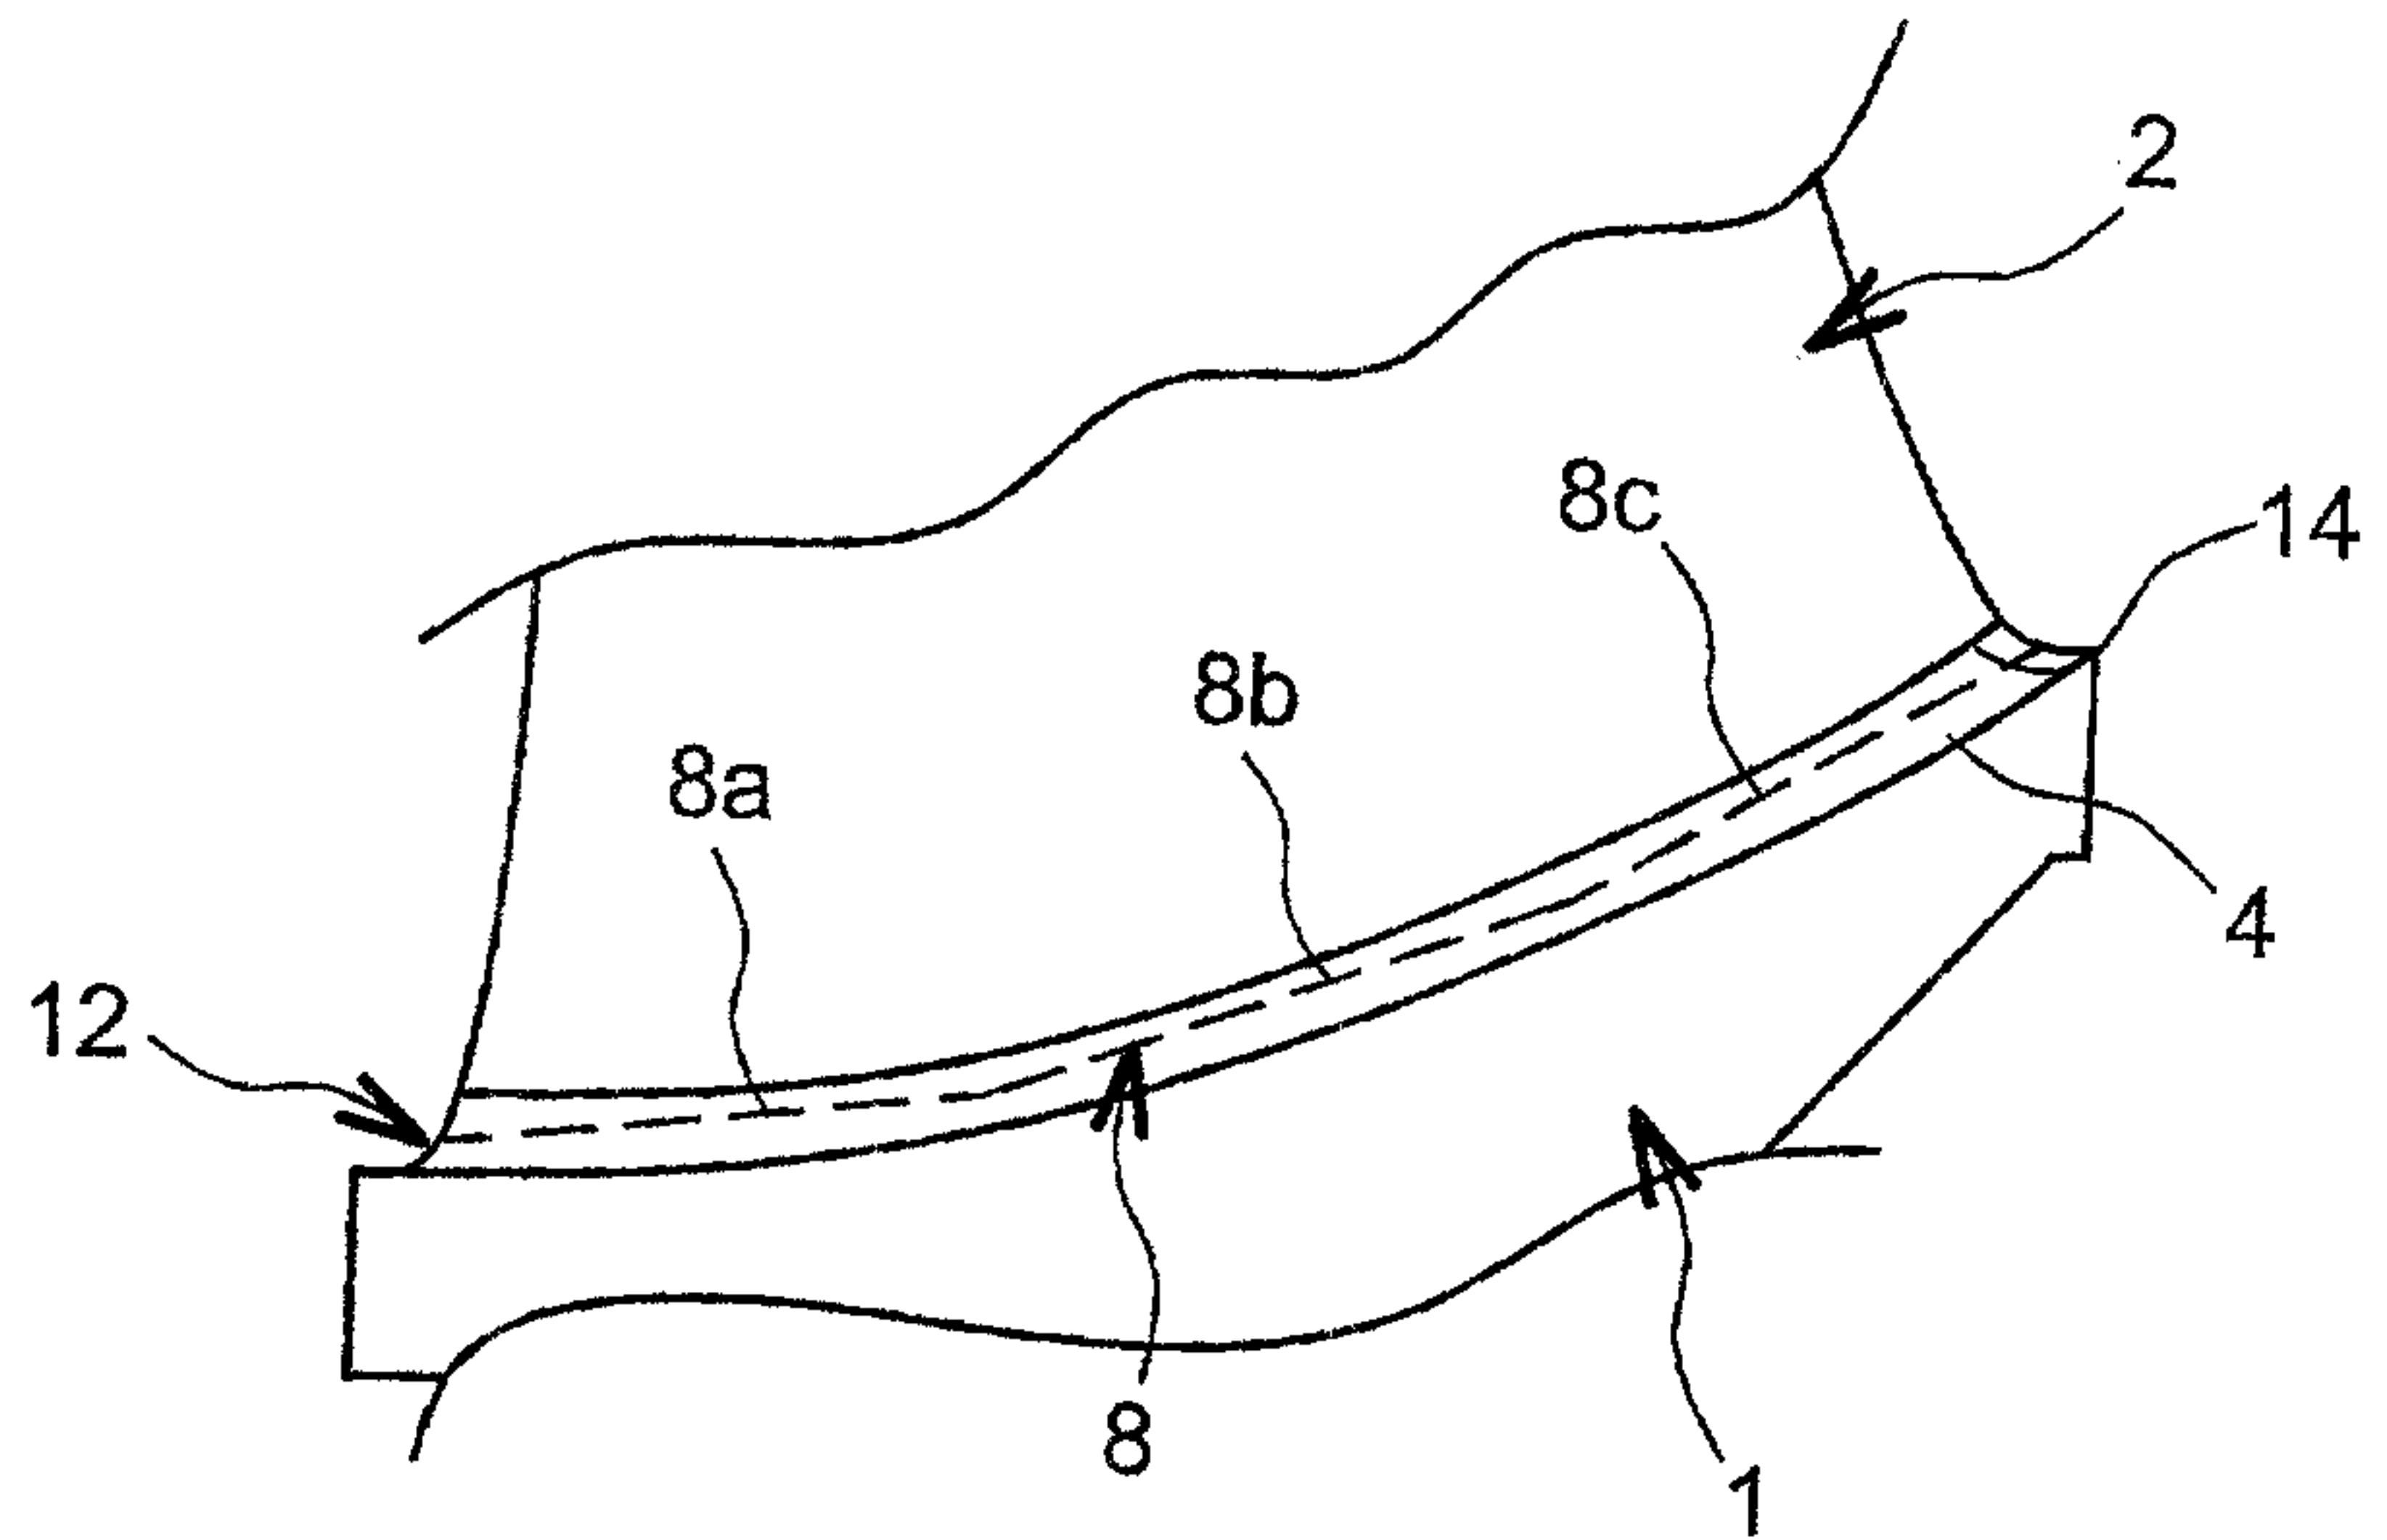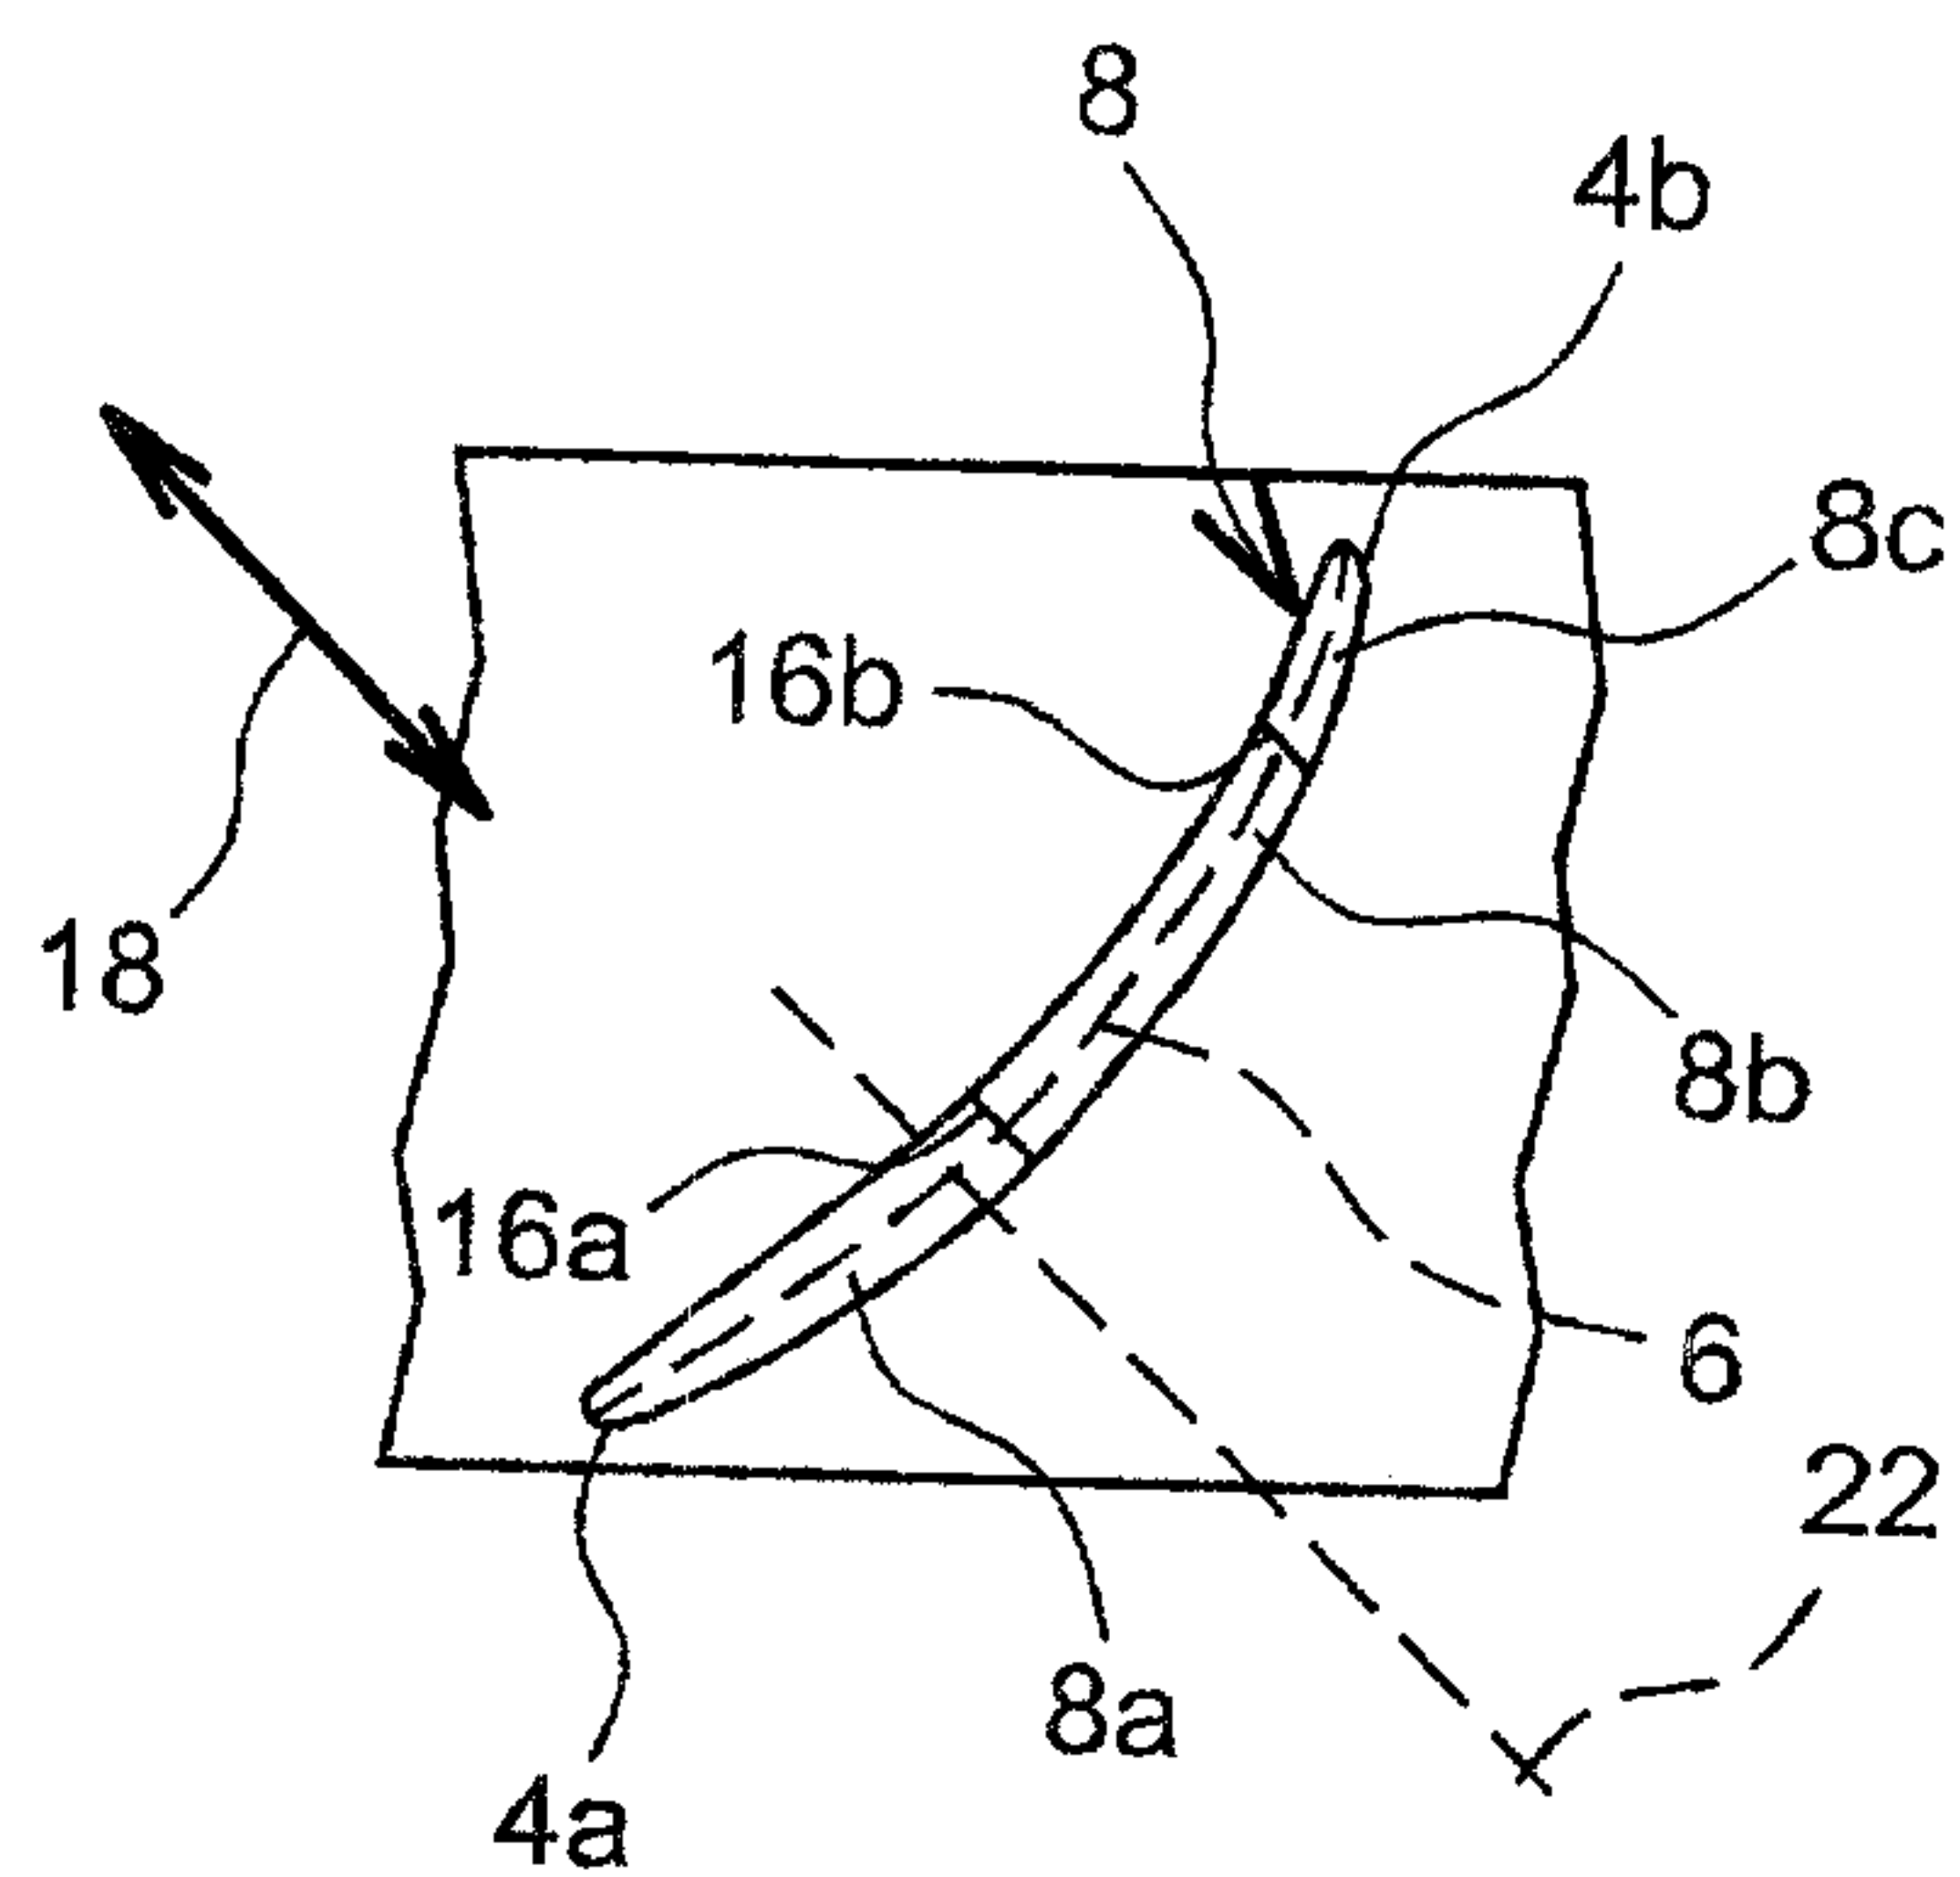

3 / 3

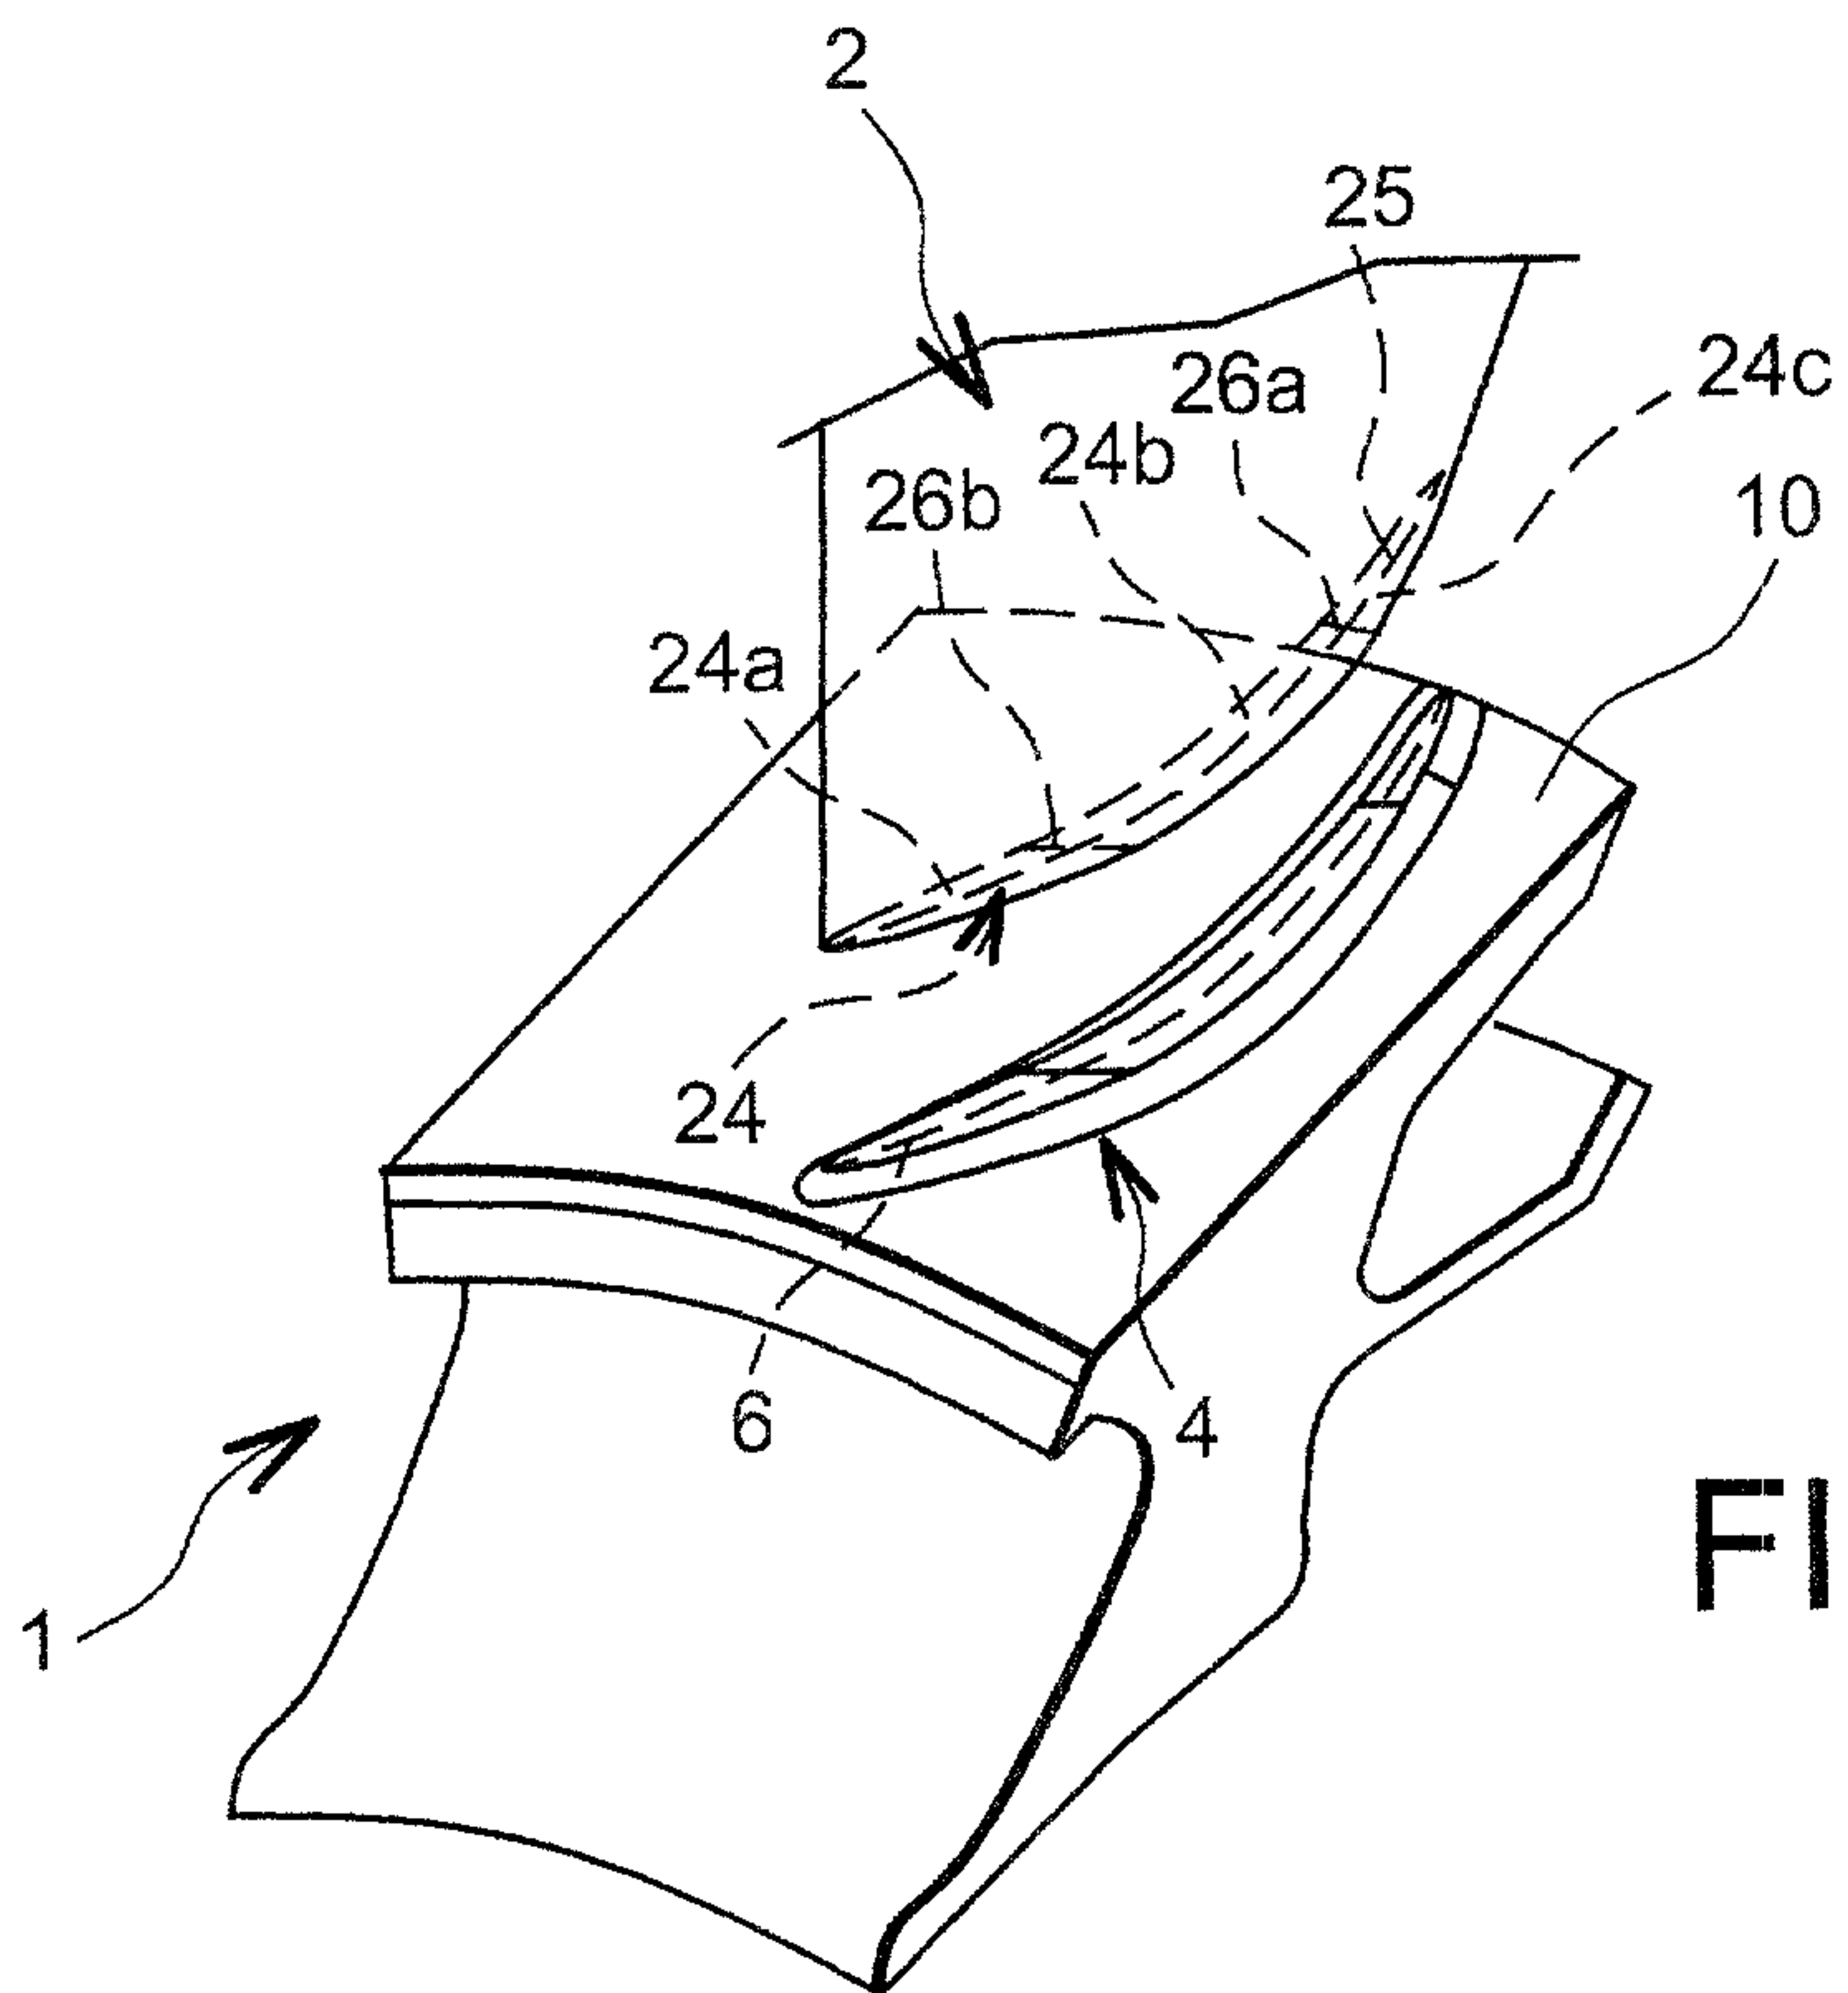


FIG. 5

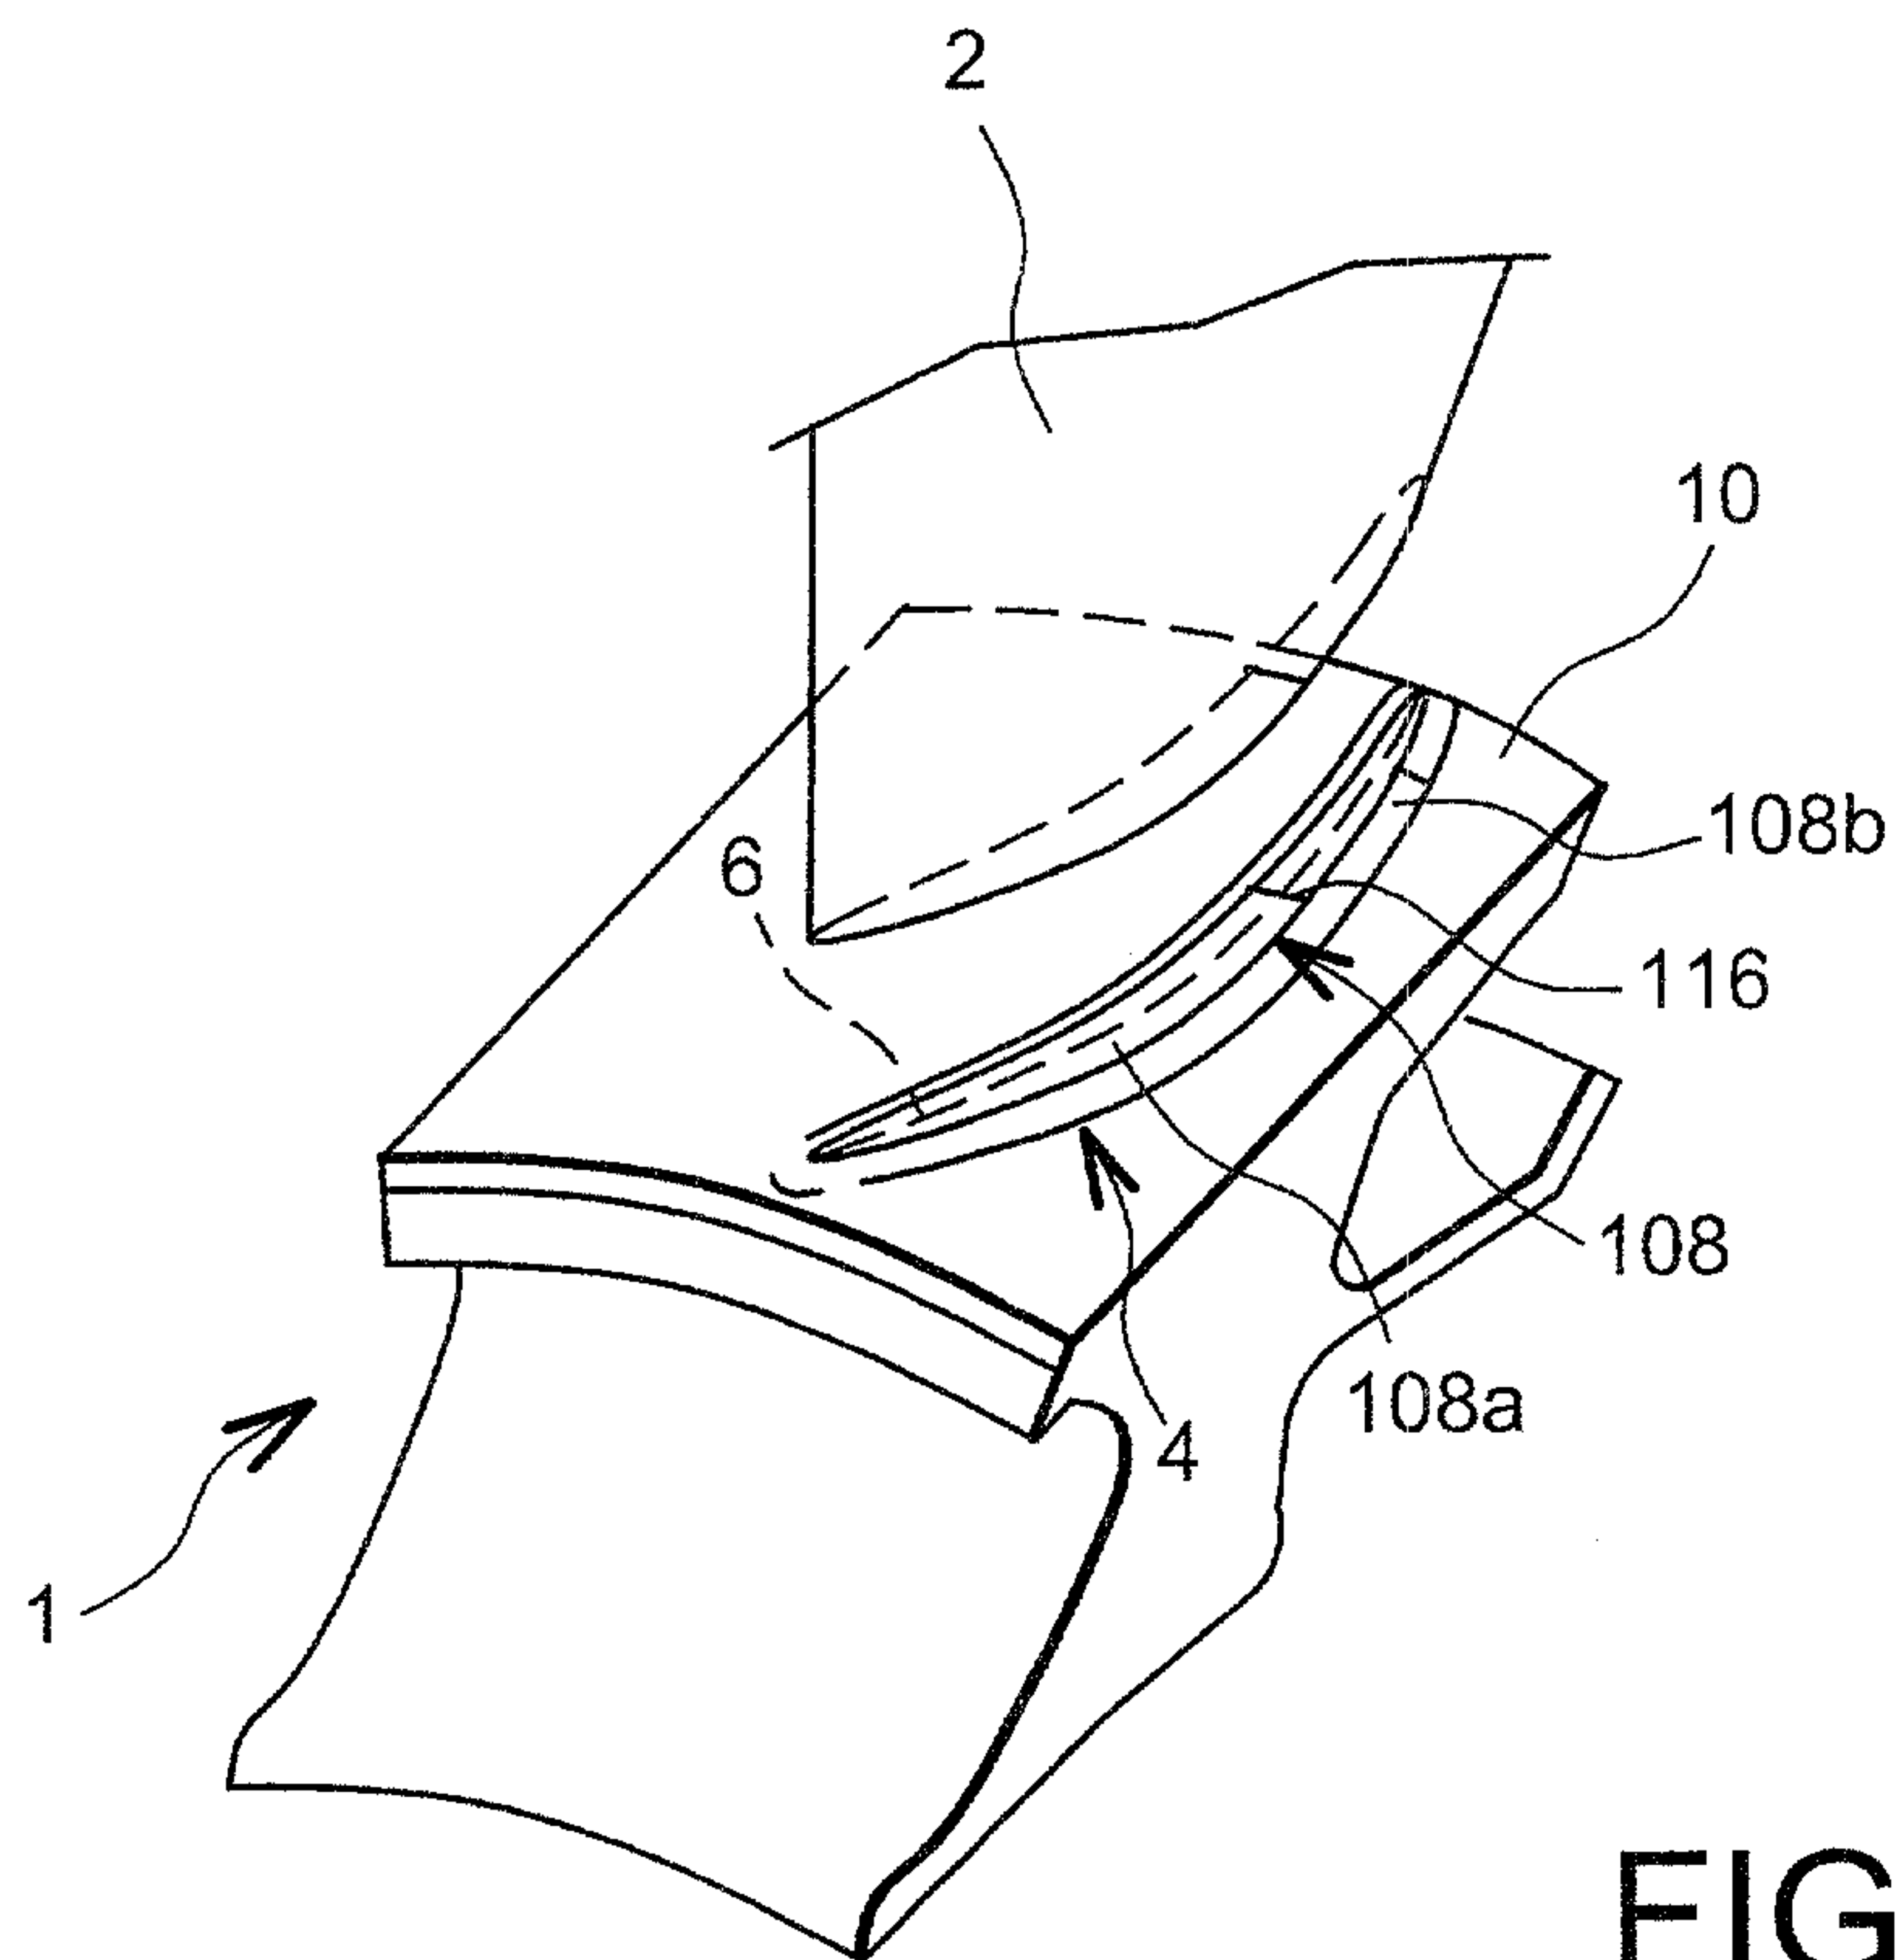


FIG. 6

