

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
26 February 2004 (26.02.2004)

PCT

(10) International Publication Number
WO 2004/017107 A1

- (51) International Patent Classification⁷: **G02B 3/00**, B29D 11/00, G02B 26/32 (74) Agent: SCHAEBERLE, Timothy, M.; Corning Incorporated, SP TI 3 1, Corning, NY 14831 (US).
- (21) International Application Number: PCT/US2003/023441 (81) Designated States (*national*): CN, JP, KR.
- (22) International Filing Date: 28 July 2003 (28.07.2003) (84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 10/219,031 14 August 2002 (14.08.2002) US
- (71) Applicant: CORNING INCORPORATED [US/US]; 1 Riverfront Plaza, Corning, NY 14831 (US).
- (72) Inventor: TROTTER, Donald, M., Jr.; 749 Millard Hill Road, Newfield, NY 14867 (US).
- Published:**
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: GRIN LENSES, THEIR USE IN DEVICES FOR TELECOMMUNICATION APPLICATIONS AND METHODS OF MANUFACTURE OF GRIN LENSES

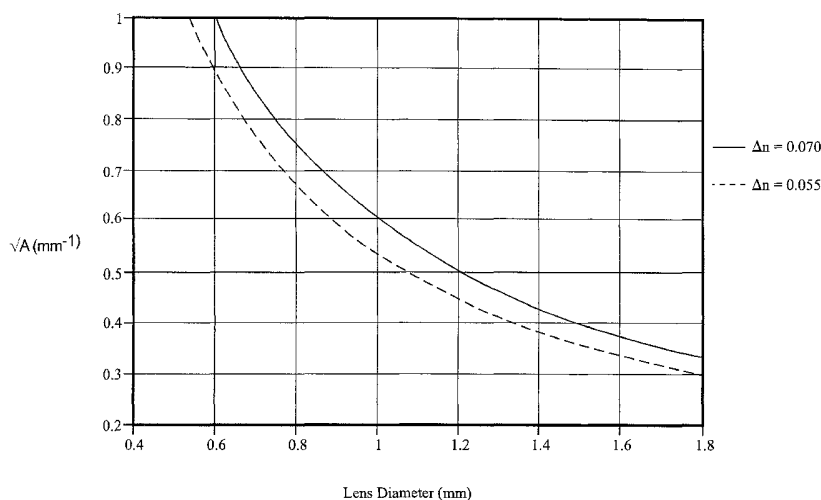

(57) Abstract: Graded index lenses, methods, and devices are disclosed. In certain embodiments, the lenses are made from generally cylindrical glass members having a radially varying refractive index and have a pitch less than about 0.23. Other embodiments relate to graded index lenses having a pitch between about 0.23 and 0.25 and an index gradient less than or equal to 0.3.

GRIN LENSES, THEIR USE IN DEVICES FOR TELECOMMUNICATION APPLICATIONS AND METHODS OF MANUFACTURE OF GRIN LENSES

FIELD OF THE INVENTION

[0001] This invention relates to gradient index (GRIN) lenses, devices including GRIN lenses and methods for making GRIN lenses.

BACKGROUND OF THE INVENTION

[0002] GRIN lenses are widely used in optical devices and telecommunications applications such as switches, circulators, isolators, and wavelength division multiplexers. GRIN lenses typically utilize a glass rod having a sufficient diameter such that the index of refraction of the GRIN lens can be gradually varied from the axis of the lens towards the outer periphery of the rod.

[0003] The trend toward miniaturization of photonic devices has led several manufacturers to offer gradient index (GRIN) lenses with diameters smaller than the industry standard 1.8 mm. Many manufacturers make these smaller diameter lenses by simply starting with smaller-diameter cane, and using an ion exchange process similar to that used for the larger diameter products. This results in the core refractive index, n_o , and the surface refractive, n_r , index being essentially the same as in the larger diameter lenses, so that the gradient

parameter, $\sqrt{A}$, $(= \frac{1}{r} \cdot \sqrt{2 \cdot \left(1 - \frac{n_r}{n_o}\right)})$ is larger for the smaller diameter lenses, where r is the radius of the lens. Since the lens properties (focal length, beam diameter, etc.) depend strongly on the value of $\sqrt{A}$, the performance of the smaller lenses differs markedly from that of the standard 1.8 mm lenses. In particular, the beam diameter (also known as spot size) is smaller for lenses having larger values of $\sqrt{A}$. This is undesirable for many applications since the smaller beam diverges more rapidly, has different misalignment sensitivities, and will adversely affect the performance of narrow-band Wavelength Division Multiplexing (WDM) filters.

[0004] One way to avoid this problem is to make a standard 1.8 mm lens, then perform a grinding and polishing operation to reduce the outside diameter of the lens. This produces a smaller diameter lens having the same $\sqrt{A}$ value as the standard lens. However, it is undesirable on two counts: it adds a costly grinding step to the manufacturing operation; and it wastes glass by producing fewer lenses for each pound of glass melted and formed into

cane. Another potential means to produce small diameter lenses producing beam diameters comparable with the standard diameter lenses would be to alter the glass composition, so that changes in n_r and n_o compensate for the change in r to produce the same value of $\sqrt{A}$. However, this is undesirable from a manufacturing standpoint, in that it requires different glasses to be produced for lenses of different properties, which adds complexity to the manufacturing process. It is preferable that a single glass could be used for a multitude of different lens products. While it would be possible to utilize a single glass by prolonging the ion exchange step or heat treatment step in lens manufacture to flatten the gradient, thereby reducing $\sqrt{A}$ for the smaller lenses, this is also undesirable from a manufacturing standpoint, since it lengthens the manufacturing time, thereby reducing throughput.

[0005] Although there is a particular interest in small diameter lenses having a diameter less than about 1.8 mm, many photonic devices, such as MEMs switches, require longer optical path distances than are provided with small diameter lenses. It would be desirable to provide a lens having a larger beam, hence a longer optical path distance, with a lens having the standard 1.8 mm diameter, since this would allow use of standard packaging and fixtures.

SUMMARY

[0006] Certain embodiments of the invention relate to graded index lenses having a pitch less than 0.23. Other embodiments relate to devices including such GRIN lenses, such as collimators. Still other embodiments relate to methods of making GRIN lenses having a pitch less than 0.23. Other embodiments relate to lens having pitch of about 0.23-0.25. It is to be understood that both the foregoing general description and the following detailed description are exemplary and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] FIG. 1 is a graph showing the dependence of the index gradient of a graded index lens on lens diameter;

[0008] FIG. 2 is a graph showing beam diameters for various pitch GRIN lenses as a function of index gradient;

[0009] FIG. 3 is a graph showing working distance versus index gradient for GRIN lenses of various pitches;

[00010] FIG. 4 is a graph showing lens length versus index gradient for GRIN lenses of various pitches;

[00011] FIG. 5 is a graph showing the sum of working distance and lens length versus index gradient for GRIN lenses of various pitches;

[00012] FIG. 6 is graph showing the margins of a Gaussian beam versus the distance from the end of an optical fiber;

[00013] FIG 7 is a graph of spot size of a Gaussian beam exiting a conventional GRIN lens having a pitch of about 0.25 versus the distance from the lens surface;

[00014] FIG. 8 is a graph of spot size of a Gaussian beam exiting a GRIN lens having a pitch of about 0.12 versus the distance from the lens surface;

[00015] FIG. 9 is a graph showing the margins of the Gaussian beam produced by lenses having pitches of 0.23 and 0.125;

[00016] FIG. 10 is a graph showing the calculated excess loss for a collimator pair of 0.23 or 0.125 pitch lenses as a function of separation;

[00017] FIG. 11 is a graph of working distance versus pitch for a lens having a core refractive index of 1.535 and an index gradient of 0.295 mm^{-1} ;

[00018] FIG. 12 is a graph of the sum of working distance and length versus pitch for a lens having a core refractive index of 1.535 and an index gradient of 0.295 mm^{-1} ;

[00019] Fig. 13 is a graph showing beam diameters for 0.23-0.25 pitch GRIN lenses as a function of index gradient; and

[00020] Fig. 14 is a graph showing the beam margins for a Gaussian beam output from a lens of 0.25 pitch.

DETAILED DESCRIPTION

[00021] Before describing several exemplary embodiments of the invention, it is to be understood that the invention is not limited to the details of construction or process steps set forth in the following description. The invention is capable of other embodiments and of being practiced or carried out in various ways.

[00022] In overview, certain embodiments of the present invention pertain to a graded index lens comprising a generally cylindrical glass member having a radially varying index of refraction, the glass member having a length such that the lens has a pitch of less than about 0.23. As used herein, the pitch length of the lens, L_0 , is $2\pi/\sqrt{A}$; the fractional pitch, or, hereafter, pitch, is $L/L_0 = L\sqrt{A}/2\pi$, where L is the physical length of the lens. In various

embodiments, the pitch is between about 0.08 and 0.23, such as, for example, lenses having pitches of 0.22, 0.21, 0.20, 0.19, 0.18, 0.17, 0.16, 0.15, 0.14, 0.13, 0.12, 0.11, 0.10, 0.09 and 0.08. Some embodiments relate to small diameter lenses, such as lenses having a diameter less than or equal to about 1 mm, for example, 0.8 mm. In certain embodiments, lenses having a diameter less than about 1 mm are operative to produce a beam having a mode field diameter between about 350 microns and 450 microns when illuminated with a beam having a mode field diameter of about 10.4 microns.

[00023] Other embodiments of the invention relate to conventional lenses having larger diameters between about 1.5 mm and 2 mm. For example, lenses having larger diameters between about 1.5 and 2 mm are operative to produce a beam having a mode field diameter exceeding about 500 microns when illuminated with a beam having a mode field diameter of about 10.4 microns.

[00024] Other embodiments of the invention relate to optical devices including lenses of the various embodiments. Such optical devices include, but are not limited to fiber optic collimators that include a fiber and a GRIN lens in a spaced apart relationship. The GRIN lenses can be used in a wide variety of devices, including DWDM's, OADM's, isolators, circulators, hybrid optical devices, optical attenuators, MEMs devices, and optical switches.

[00025] In one specific embodiment, a collimator is provided including an optical fiber and a generally cylindrical radial gradient index lens in a spaced apart relationship, wherein the lens has a pitch less than about 0.23. In a more specific embodiment, for a lens having a diameter of about 1.8 mm, a core refractive of about 1.535, a pitch greater than about 0.10 and an index gradient of about 0.295 mm^{-1} , the working distance between the lens and the fiber is less than about 4 mm. In another specific embodiment, for a lens having a diameter less than about 1 mm, the working distance between the lens and the fiber is less than about 2.5 mm. In yet another specific embodiment, for a lens having a diameter less than about 0.8 mm, the working distance between the lens and the fiber is less than about 2.0 mm. In yet another embodiment, for a lens of diameter between about 1.5 and 2.0 mm, the $\sqrt{A}$ is between about 0.1 and 0.3 mm^{-1} .

[00026] Other embodiments of the invention relate to methods of making a graded index lens. Certain method embodiments include obtaining a generally cylindrical glass member having a radially varying index of refraction and forming the glass member having a length such that the lens has a pitch of less than about 0.23. According to certain

embodiments, the pitch of the lens is between 0.23 and 0.08. In certain other embodiments, GRIN lenses have pitch between about 0.23 and 0.25.

[00027] Graded index lenses are generally cylindrical glass bodies or members having an index of refraction that is highest at the central axis of the body. The refractive index decreases with radial distance from the central axis to a minimum value at the outer surface or circumference of the lens. The gradient constant of the lens, $\sqrt{A}$, is defined by the equation

$$\sqrt{A} = \frac{1}{r} \cdot \sqrt{2 \cdot \left(1 - \frac{n_r}{n_o}\right)},$$

where n_o represents the core refractive index, n_r represents the refractive index at the peripheral surface of the glass, and r is the radius of the member. Such lenses are made by well known ion exchange processes and are available commercially from NSG America Inc. and Corning, Inc.

[00028] The relationship of diameter versus $\sqrt{A}$ is shown in Figure 1 for a lens made from a glass with n_o at 1550 nm of about 1.535. The solid line in the graph represents a lens having a theoretical Δn of about 0.070, and the dashed line in the graph represents a lens having an actual value of Δn of about 0.055 due to ion exchange or post heat treatment causing the presence of the index-reducing ion in the central portion of the lens.

[00029] When GRIN lenses are used with single mode fibers having a mode field diameter between about 9 microns and 11 microns, and typically about 10.4 microns, to collimate or transfer optical signals, they produce a beam with a characteristic diameter. To ensure capture of all of the optical power without loss, the lens diameter should be approximately twice the diameter of the beam being transmitted. Figure 2 is a graph showing beam diameters for lenses of various pitches having $n_o=1.535$ as a function of $\sqrt{A}$. The boxed areas in Figure 2 show the useful parameters for lenses having diameters of 1.0 mm and 0.8 mm. As shown by the boxed areas, 1 mm lenses producing about a 400 mm beam diameter can be made between about 0.25 pitch and 0.12 pitch. Lenses having a diameter of 0.8 mm producing a beam diameter of about 0.4 mm (beam diameter is listed as 400 mm and the chart shows it as 0.4 mm ... inconsistency that needs to be corrected??) can be made which exhibit a pitch between about 0.25 and 0.08. The most favorable condition would be the smallest pitch lenses which would be shortest, thus producing more lenses per rod of glass manufactured. However, as will be seen below, the requirement that the lens diameter be about twice the input beam diameter precludes use of the very smallest pitch lenses.

[00030] In addition, for small diameter lenses, reducing the pitch of the lens will increase the working distance, as shown in Figure 3. The boxed areas of Figure 3 illustrate the working distance versus gradient index for 1.0 mm and 0.8 mm diameter lenses. As used herein, the working distance of a lens is the distance between the surface of the lens and its focal point. However, the lens length is also reduced as the pitch is reduced, as shown in Figure 4. As shown in Figure 5, however, the overall component length, which is the sum of the working distance plus lens length, is essentially constant, except for very small pitch lenses.

[00031] One factor that must be kept in mind when manufacturing a lens is that as the distance between the fiber and lens increases, the spot size incident on the lens from the fiber increases. As mentioned above, this spot size generally should be smaller than about one-half of the lens diameter for all of the light to be captured. Figure 6 shows the margins of a 10.4 micron diameter light beam typically emitted by a single mode optical fiber at 1550 nm as the beam propagates away from the end of the fiber. To ensure that all of the light is captured, the fiber should be no farther than about 2 mm from the end of a 0.8 mm lens, and about 2.5 mm from a 1 mm lens. This limits the lens design to the boxed region in Figure 3, or to lenses greater than about 0.10 pitch.

[00032] Figures 7 and 8 show beam profiles for two different lenses for several fiber to lens distances in the vicinity of their working distances at 1550 nm. Fig. 7 shows beam profiles for a lens with $\sqrt{A}$ equal to about 0.295 and a pitch of 0.244, when the beam entering the lens is a Gaussian beam having a mode field diameter of 10.4 microns located various distances from the input surface of the lens. Fig. 8 shows beam profiles for a lens with $\sqrt{A}$ equal to about 0.500 and a pitch equal to about 0.119, when the beam entering the lens is a Gaussian beam having a mode field diameter of 10.4 microns located various distances from the input surface of the lens. The beam profiles for both cases are essentially the same as a function of displacement from the working distance. Thus, reducing the diameter of the lens made from a glass used to make conventional 1.80 mm diameter lenses using a standard ion exchange process raises the $\sqrt{A}$ value of the lens, which decreases the beam diameter. However, reducing the pitch of the lens to produce the same beam diameter as a 1.8 mm lens allows the same glass to be used for the smaller diameter lenses and results in a larger number of lenses per ion-exchanged rod produced; i.e., an increased yield.

[00033] In another embodiment of the invention, the pitch of conventional GRIN lenses, i.e., lenses having a diameter between about 1.5 mm and 2 mm, and more typically about 1.8 mm, can be reduced to make lenses which produce beams which spread more slowly with distance away from the lens. Slowing the spread of the beam increases the useful separation at which devices utilizing the lenses can be used without excess loss. Thus, conventional GRIN lenses having a reduced pitch of between about 0.23 and 0.10 are operative to produce beam diameters (Gaussian mode field diameters) in excess of 500 microns when illuminated with a Gaussian beam having a mode field diameter of between about 9 and 11 microns and more typically about 10.4 microns (typical of single mode optical fiber) having its waist near the focal point of the lens. The larger beam diameter provides a longer useful separation for the lenses, which allows them to be used in longer path length devices such as micro-electromechanical (MEMs) switches. The same glass and ion exchange process may be used for many products, with the beam diameter being adjusted for various applications by varying the pitch as a result cutting the lenses to different lengths. Since the lenses are physically shorter than conventional lenses having pitches exceeding 0.23, more lenses may be made for each quantity of glass produced and formed into rods.

[00034] Referring to Fig. 9, the margins of the Gaussian beam produced by placing the 10.4 μ m beam waist exiting a single mode fiber at the focal points of two lenses are shown. One set of curves represents the beam produced by a 0.23 pitch lens, as represented by the dotted line, with $n_0=1.535$ and $\sqrt{A}=0.295$. The other set of curves are produced by a similar lens with 0.125 pitch, as represented by the solid line. The end of the lens is on the left-hand side of Figure 9. The 0.125-pitch lens produces an initially larger beam, but this spreads more slowly as it propagates away from the lens, and ultimately is substantially smaller than the beam produced by the 0.23-pitch lens. This results in a longer distance over which the beam can be captured by a similar lens without substantial loss, providing a larger useful separation distance between lenses.

[00035] If even larger useful separations are required, lenses of the standard 1.8 mm diameter having pitches between 0.23 and 0.25 but with reduced values of $\sqrt{A}$ may be employed. Such lenses may be produced by altering the ion exchange and heat treatment of standard lenses to increase the amount of index-reducing ion or ions migrating to the center of the lens. This is less convenient from a manufacturing standpoint than reducing pitch, since it requires a prolonged manufacturing step or steps, but may be desirable to produce lenses providing longer useful optical separations. Since the focal point of such lenses is at

or near the input surface of the lens, no considerations of the effect of working distance on input beam diameter need be made. In Figure 13, the boxed area shows the region in which the output beam (spot size) of a 1.8 mm lens with 0.23-0.25 pitch still meets the criterion that the beam diameter is less than about $\frac{1}{2}$ of the lens diameter. This range is $\sqrt{A}$ about 0.10 to 0.30 mm^{-1} . Referring now to Figure 14, lenses in this range will exhibit improved useful separations over lenses having larger values of $\sqrt{A}$. Figure 14 shows the output margins of beams resulting from an input 10.4 micron Gaussian beam at the focal point of the lens are shown for two 0.25 pitch lenses having $\sqrt{A}$ values of 0.295 and 0.15 mm^{-1} . Although the beam from the lens with the lower value of $\sqrt{A}$ is initially larger, it spreads more slowly, and thus provides a larger useful optical separation. Also note that the diameter of this beam where it exits the lens is approximately 0.85 mm, so it is still slightly less than $\frac{1}{2}$ the lens diameter. Also shown for comparison in Fig. 14 is the beam from a reduced pitch lens of 0.125 pitch with $\sqrt{A}$ equal to 0.295 mm^{-1} . Although the useful optical separation of this lens exceeds that of the 0.25 pitch lens of the same $\sqrt{A}$ value, it is slightly inferior to that of the 0.25 pitch lens with reduced $\sqrt{A}$. The decision as to whether to use a reduced pitch or a reduced $\sqrt{A}$ value will depend on both magnitude of useful optical separation required and degree to which a more prolonged manufacturing process can be tolerated.

[00036] Figure 10 shows the calculated excess loss for a collimator pair of .23-pitch and .125-pitch lenses as a function of separation. The calculation assumes that the collimators are designed to produce minimum loss at zero separation. Clearly, the distance over which the collimators can be separated while maintaining acceptable loss is greater for the smaller pitch lenses.

[00037] Another consideration is that as the fiber-lens distance increases, the size spot incident on the lens from the fiber increases. This must be smaller than about $\frac{1}{2}$ the lens diameter for all of the light to be captured. For a 1.8 mm lens, as shown in Fig. 6 this distance must be less than about 4 mm. In Fig. 11 the working distances for lenses of $n_0=1.535$, $\sqrt{A}=1.535$ are shown as a function of pitch. If working distances less than about 4 mm are required, the lens pitch is restricted to values greater than about 0.08.

[00038] Referring now to Fig. 12, as in the discussion above with respect to smaller diameter GRIN lenses, the sum of working distance plus lens length varies only slowly in the pitch range of interest, so the size of the finished collimator does not become excessive. This is demonstrated in Fig. 12.

[00039] According to some embodiments of the present invention, smaller pitch lenses may be made directly from cane drawn to the desired final outside diameter. This process avoids extra processing step of grinding and polishing the outside diameter of the finished lenses. According to some embodiments, the same glass and ion exchange process may be used for many products, with the beam diameter being adjusted for various applications by varying the pitch length by grinding the lenses to different lengths. The lenses are physically shorter than the larger pitch lenses that are typically in the range of about 0.23-0.25 and higher. Therefore, more lenses may be made for each quantity of glass produced and cane processed, lowering manufacturing costs of the lenses and devices using such lenses. However, for some applications it may be necessary to reduce $\sqrt{A}$ by a prolonged ion exchange and/or heat treatment to produce the longest possible useful optical separations. In this case, these manufacturing advantages are not operative.

[00040] It will be apparent to those skilled in the art that various modifications and variations can be made to the present invention without departing from the spirit or scope of the invention. For example, while several of the figures show the optical performance of lenses at 1550 nm wavelengths, it will be understood that the invention is not limited to a particular operating wavelength and other wavelengths are within the scope of the invention. Thus, it is intended that the present invention covers modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A graded index lens comprising a generally cylindrical glass member having a radially varying index of refraction, the glass member having a length such that the lens has a pitch of less than about 0.23.
2. The graded index lens of claim 1, wherein the glass member exhibits a diameter of less than or equal to about 1 mm.
3. The graded index lens of claim 2, wherein the lens is operative to produce a beam having a mode field diameter between about 350 microns and 450 microns when illuminated with a beam having a mode field diameter of about 10.4 microns.
4. The graded index lens of claim 1, wherein the diameter of the lens is between about 1.5 mm and 2 mm.
5. The graded index lens of claim 4, wherein the lens is operative to produce a beam having a mode field diameter exceeding about 500 microns when illuminated with a beam having a mode field diameter of about 10.4 microns.
6. A method of making a graded index lens comprising obtaining a generally cylindrical glass member having a radially varying index of refraction and forming the glass member having a length such that the lens has a pitch of less than 0.23.
7. The method of claim 6, wherein the diameter of the cylindrical member exhibits a diameter of less than or equal to about 1 mm.
8. The method of claim 7, wherein the lens is operative to produce a beam having a mode field diameter of between about 350 microns and about 450 microns when illuminated with a beam having a mode field diameter of about 10.4 microns.
9. The method of claim 7, wherein the diameter of the cylindrical member is between about 1.5 mm and 2 mm.
10. The method of claim 9, wherein the lens is operative to produce a beam having a mode field diameter exceeding about 500 microns when illuminated with a beam having a mode field diameter of about 10.4 microns.
11. A collimator comprising an optical fiber and a generally cylindrical graded index lens in a spaced apart relationship, wherein the lens has a pitch less than about 0.23.


12. The collimator of claim 11, wherein for a lens having a diameter of about 1.8 mm and a pitch greater than about 0.10 the working distance between the lens and the fiber is less than about 4 mm.


13. The collimator of claim 11, wherein for a lens having a diameter less than about 1 mm and a pitch greater than about 0.10, the working distance between the fiber and the lens is less than about 2.5 mm.


14. A graded index lens comprising a generally cylindrical glass member having a radially varying index of refraction, a pitch between about 0.23 and 0.25 and an index gradient less than or equal to about 0.3 mm^{-1} .

15. The graded index lens of claim 14, wherein the diameter of the lens is between about 1.5 and 2.0 mm.

FIG. 1

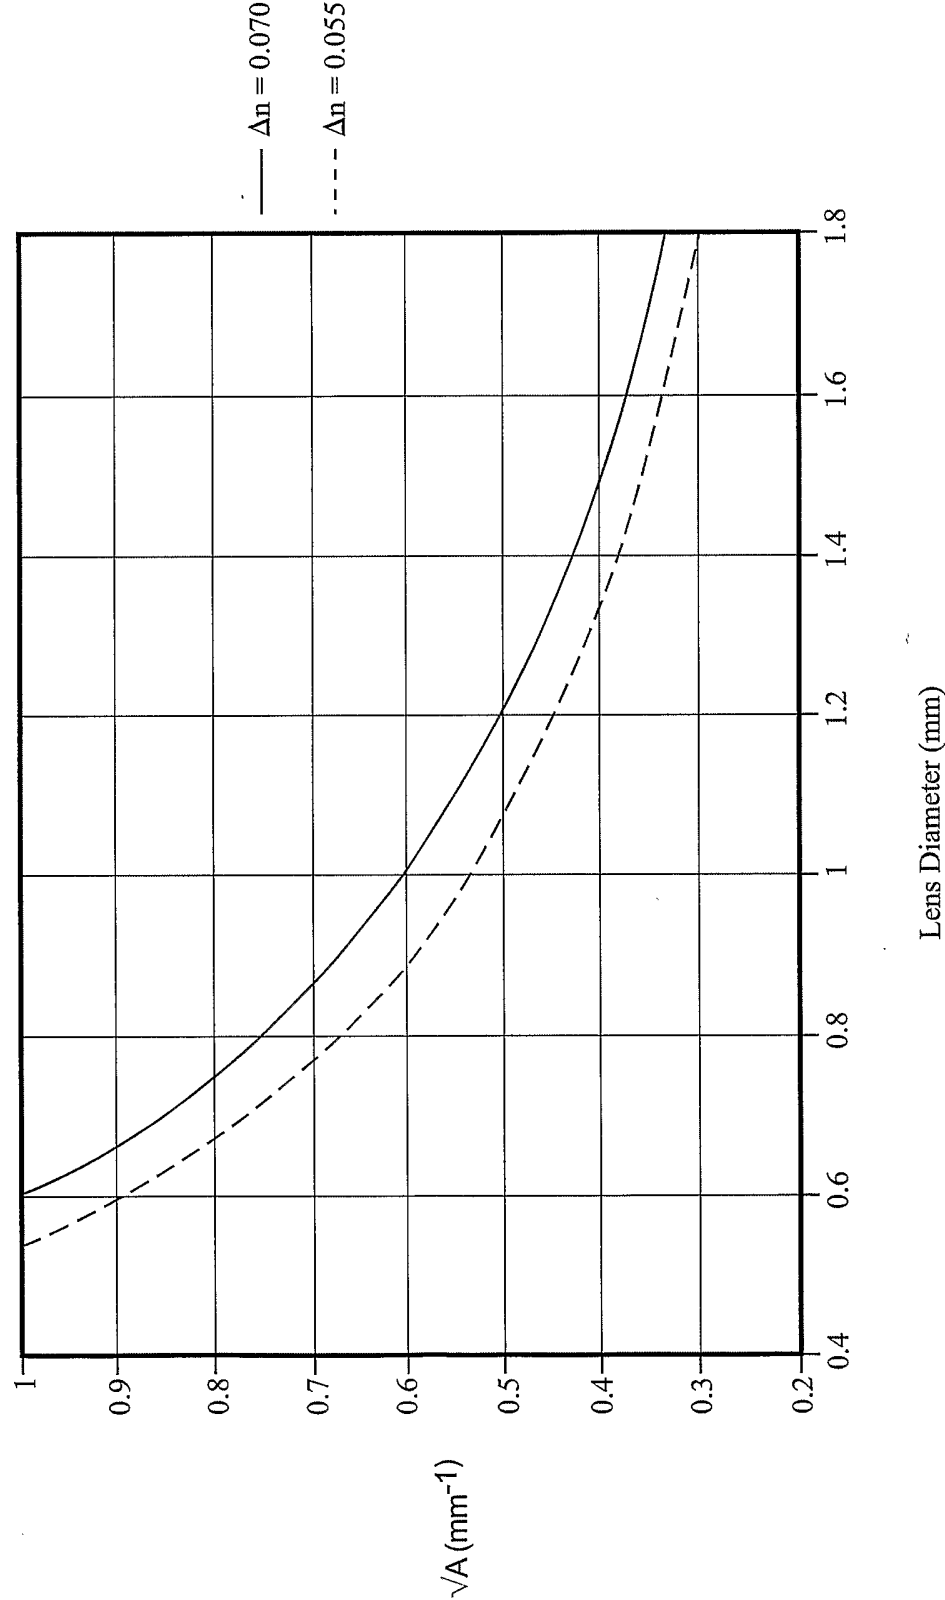

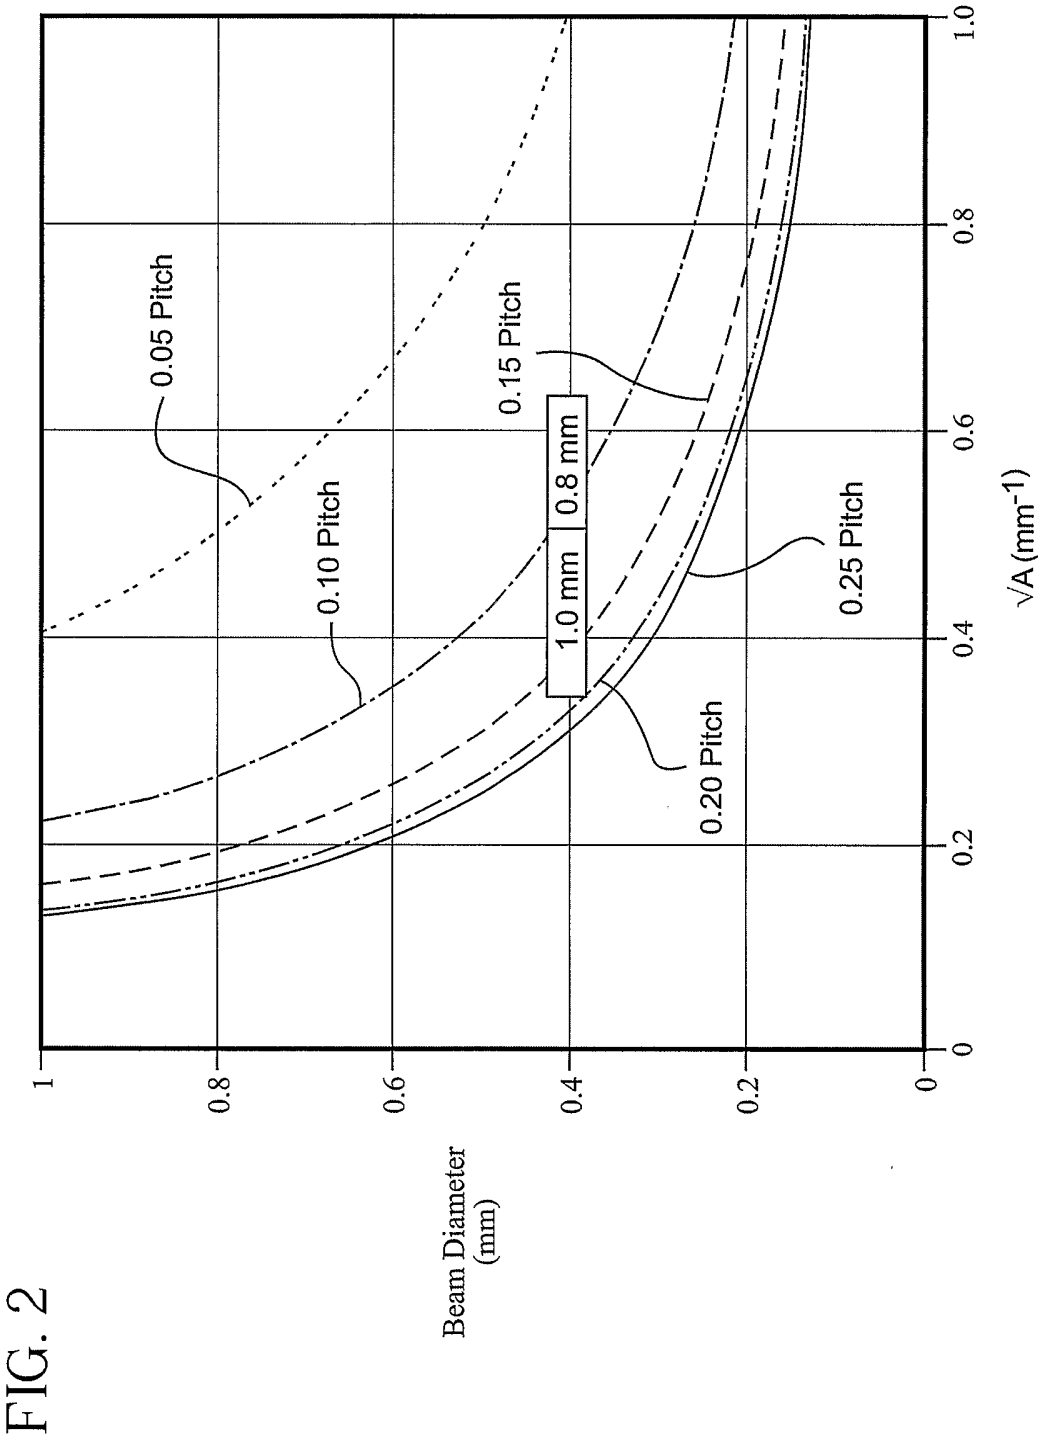

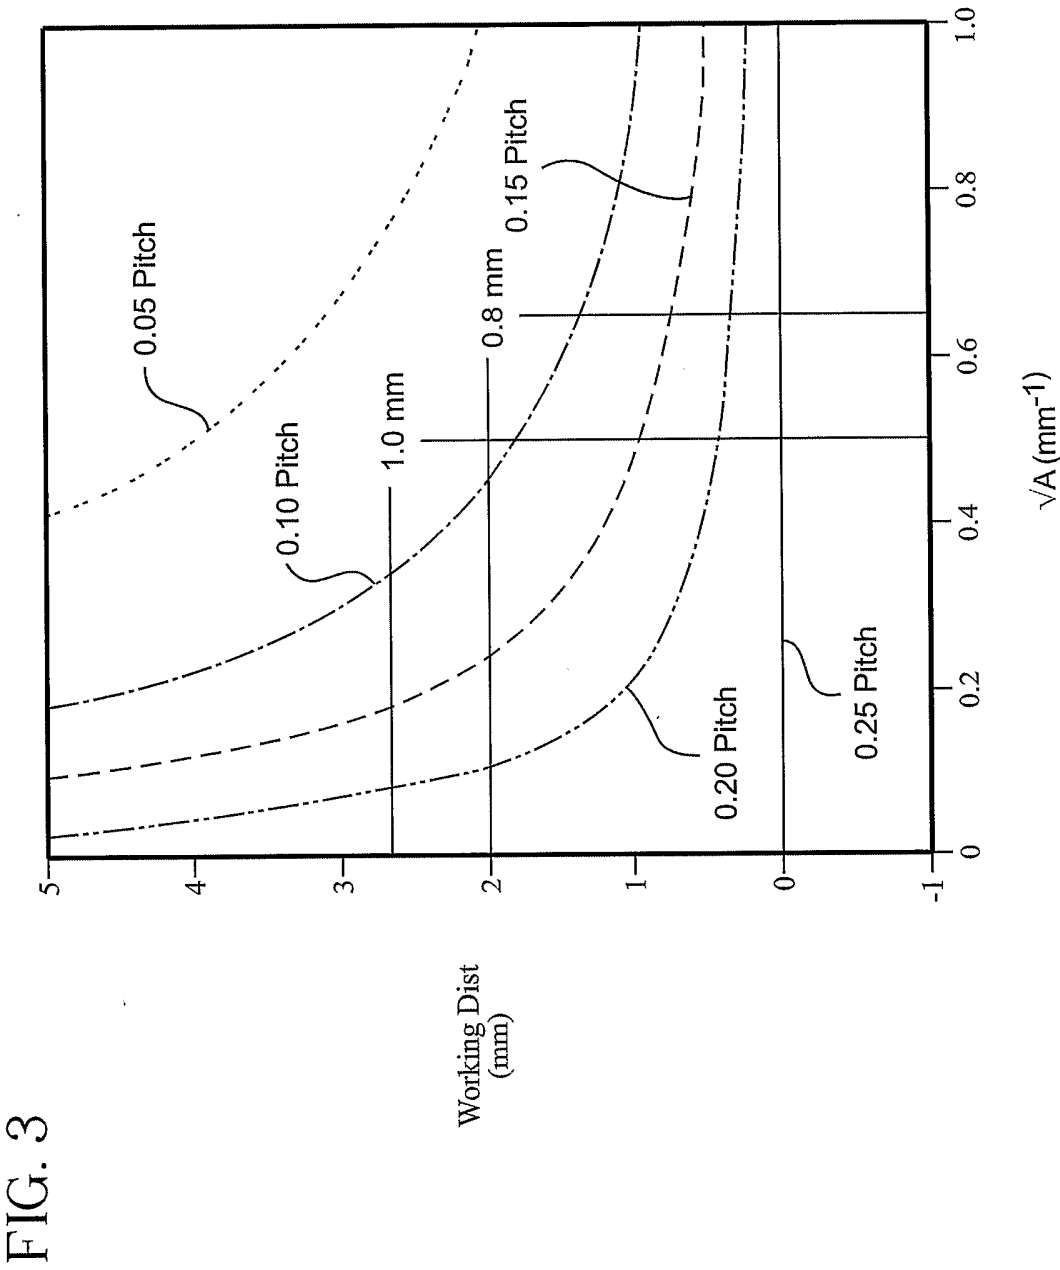

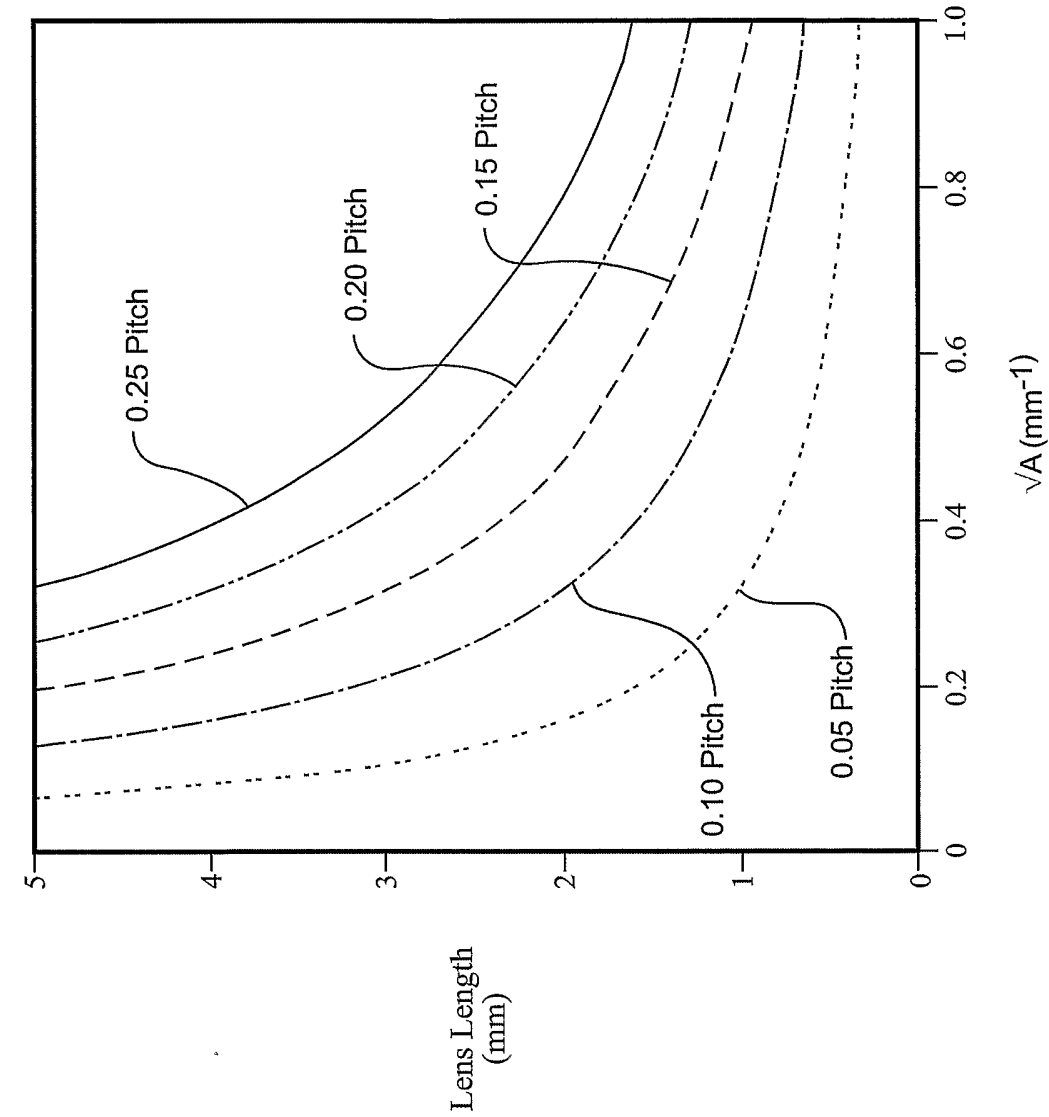


FIG. 4

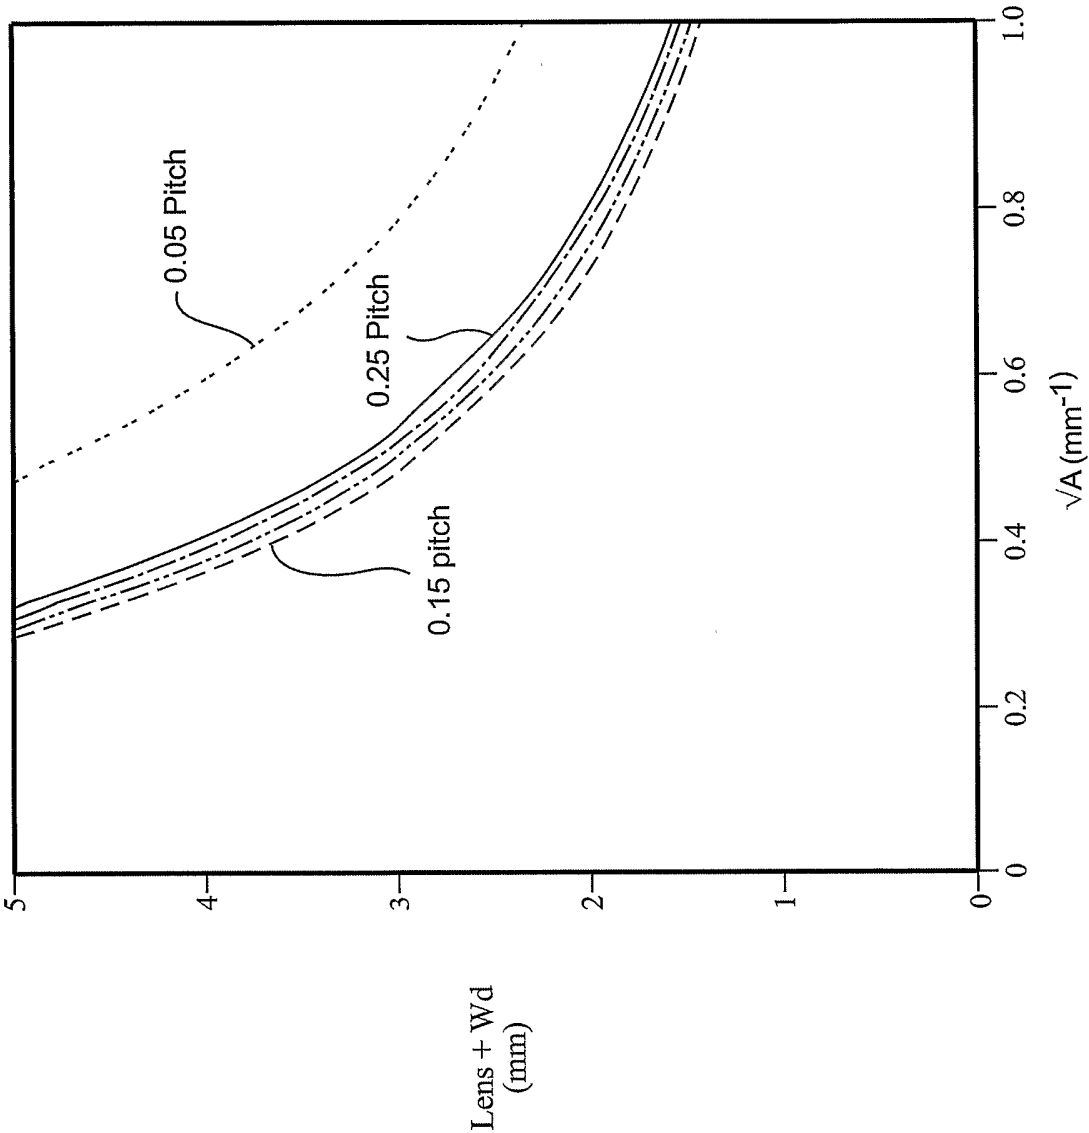


FIG. 5

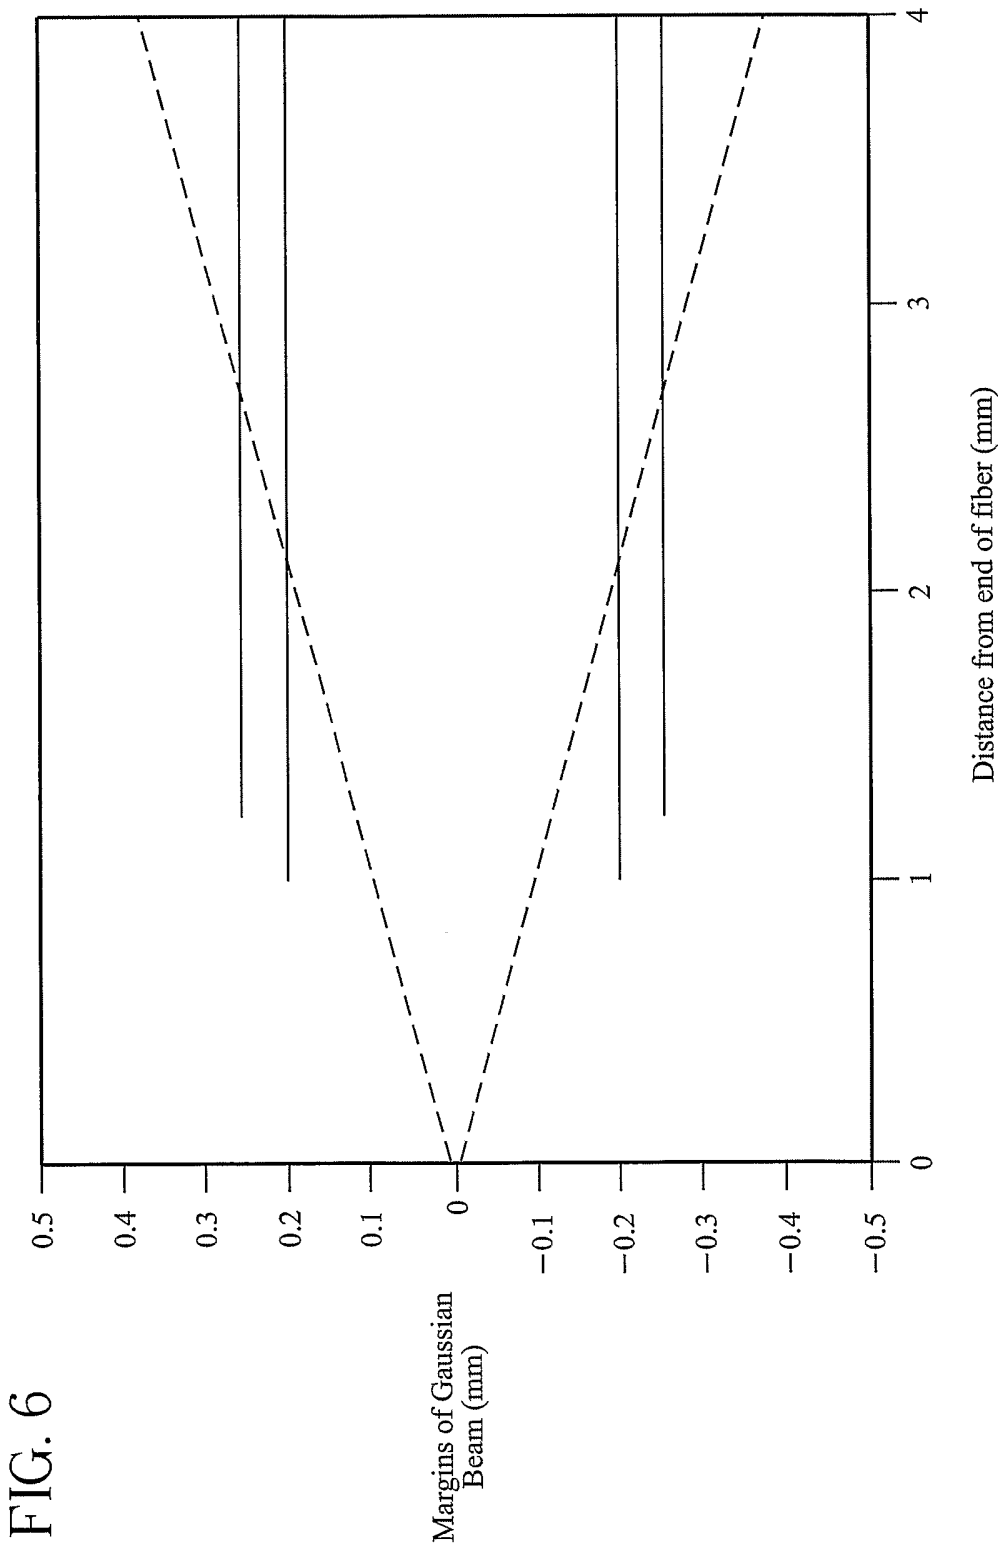
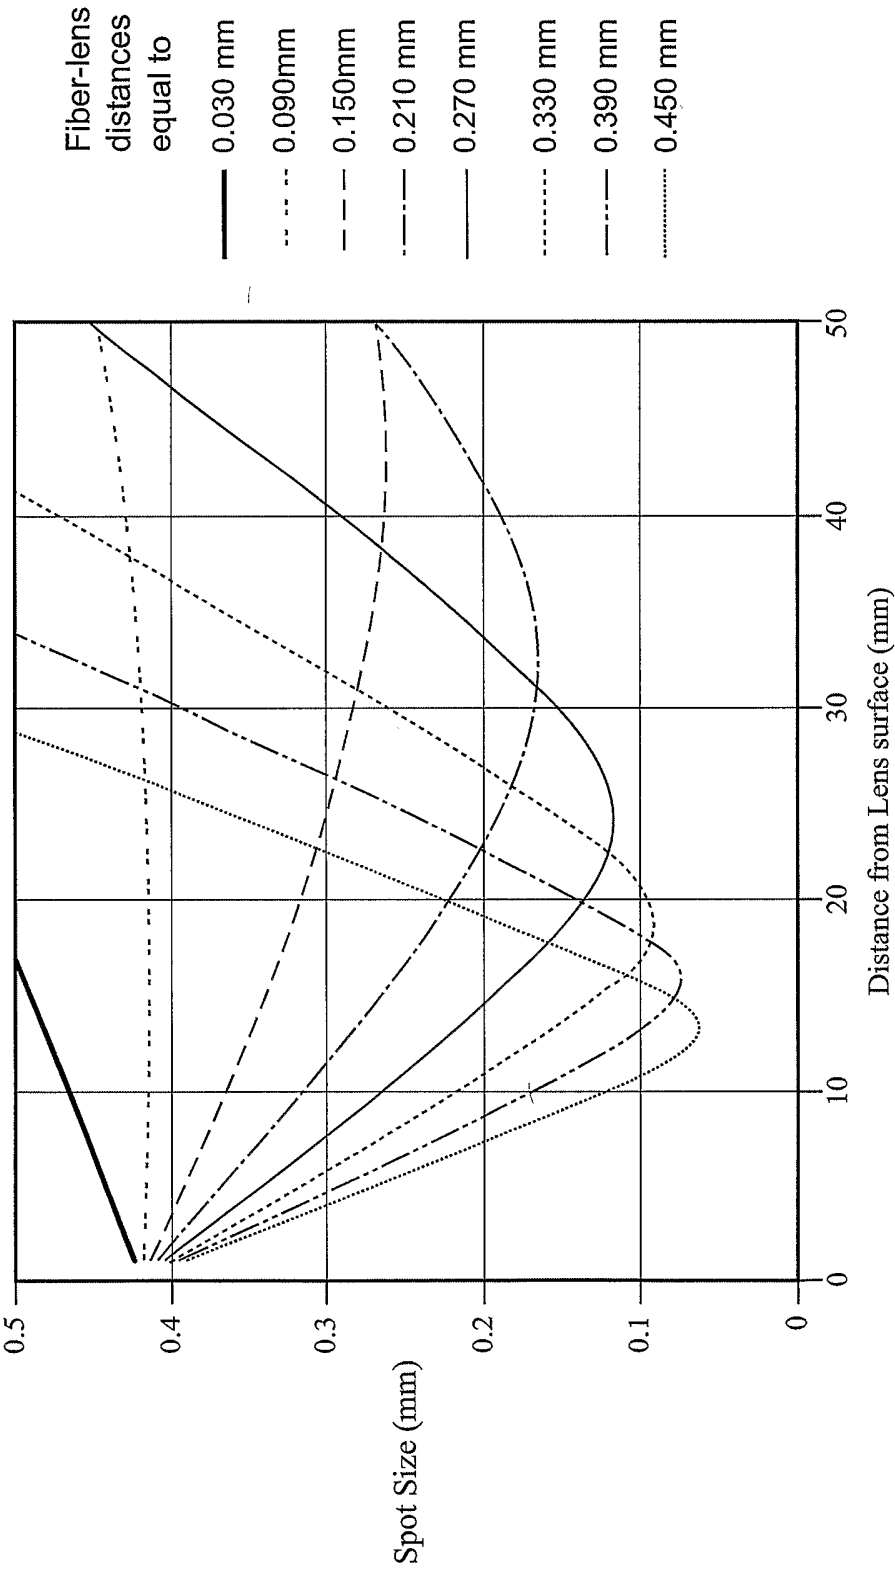


FIG. 7



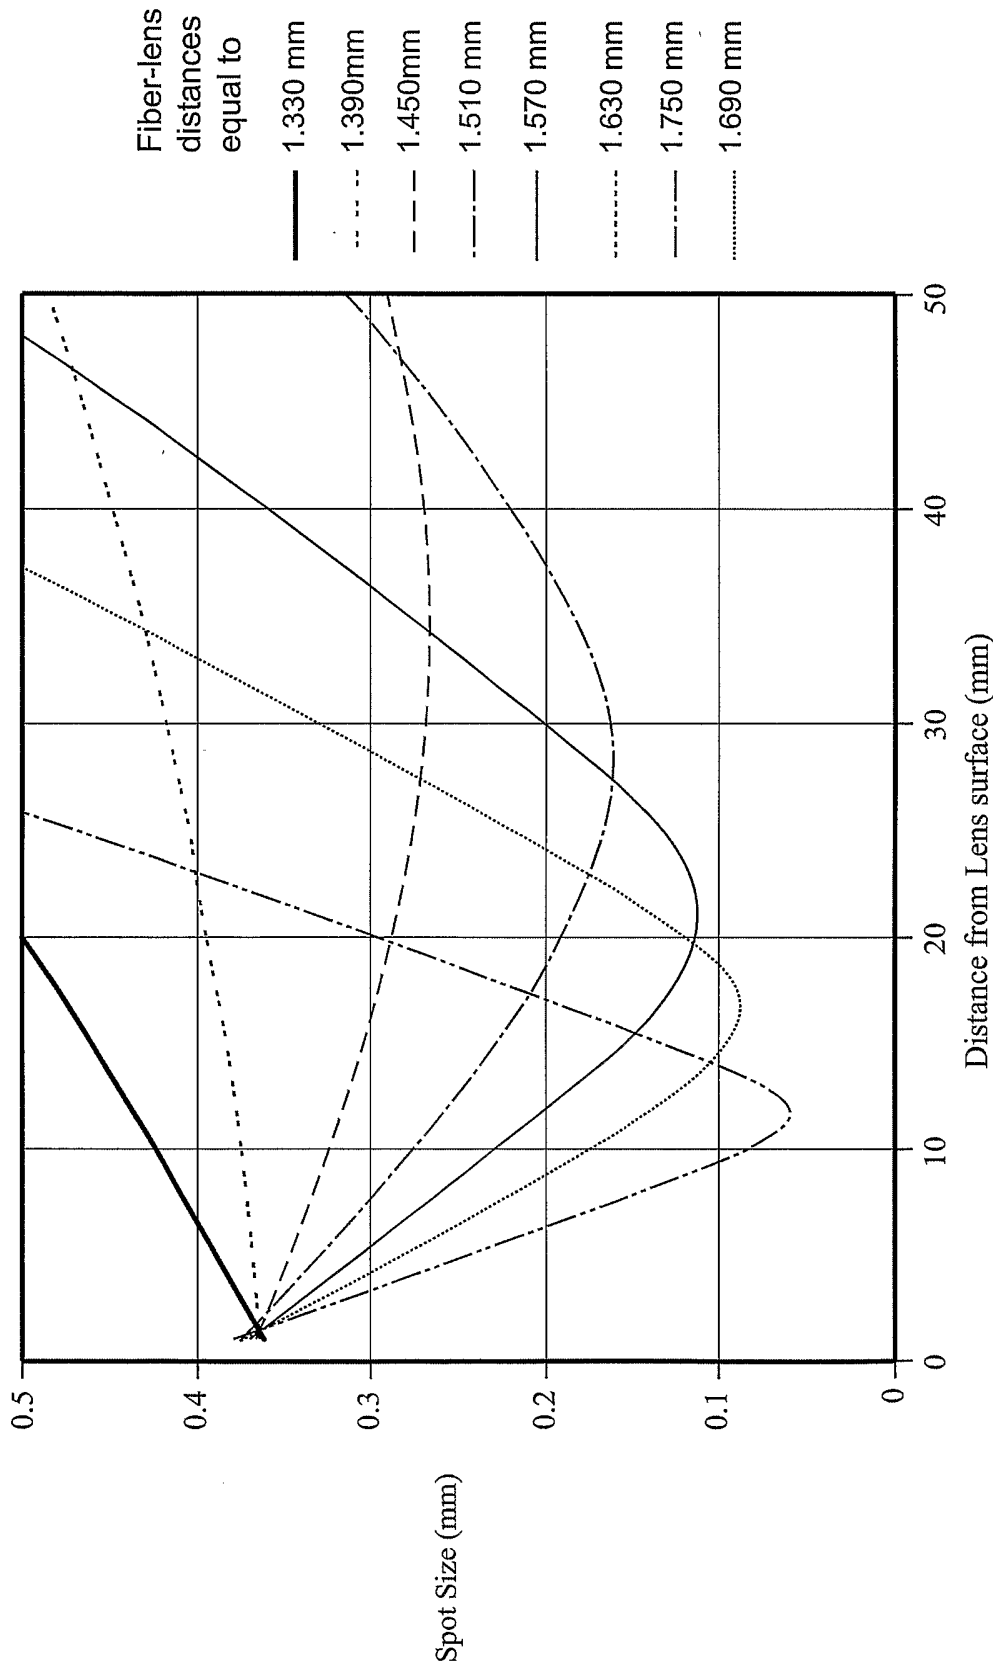


FIG. 9


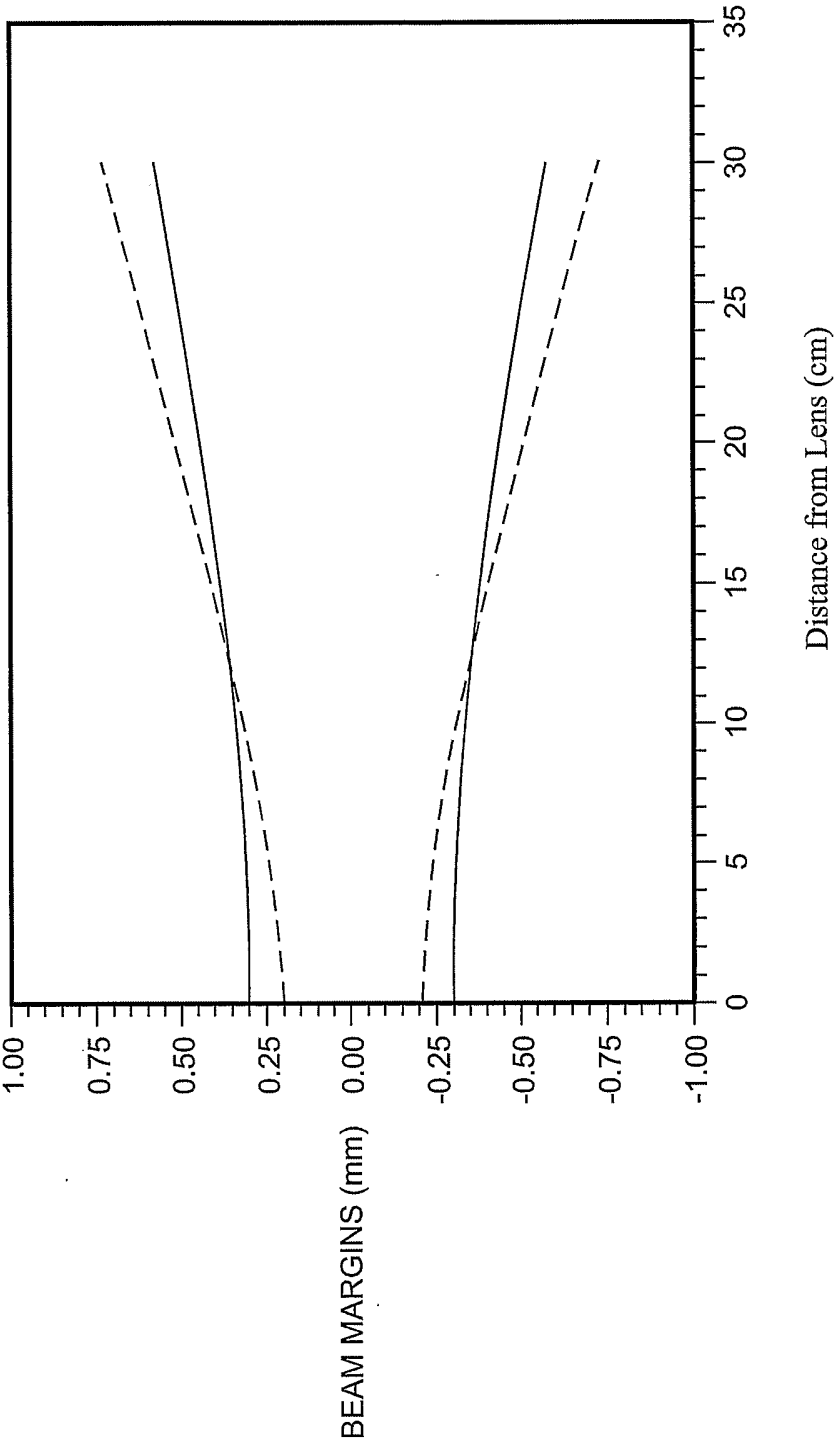


FIG. 10

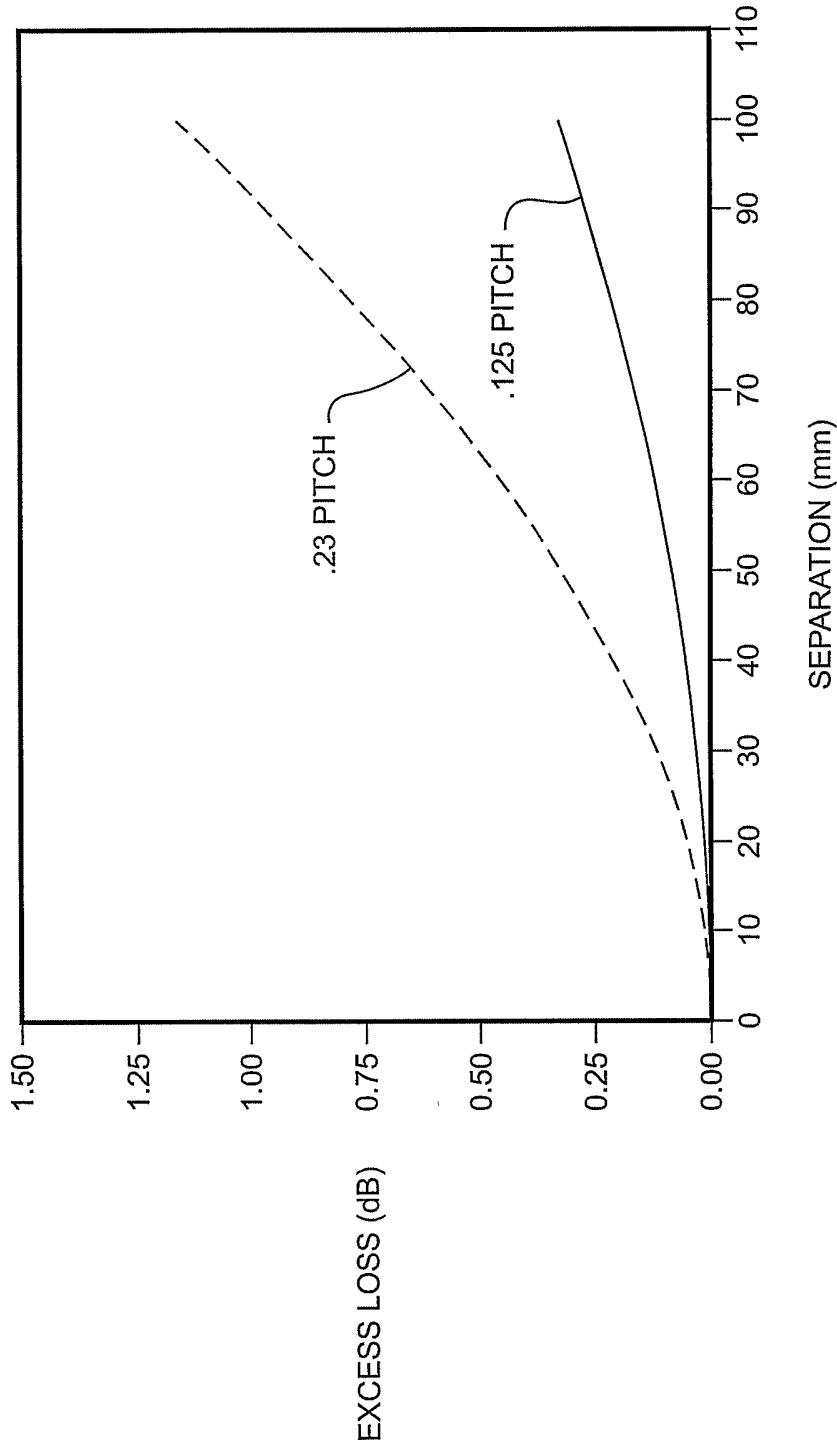

11/14

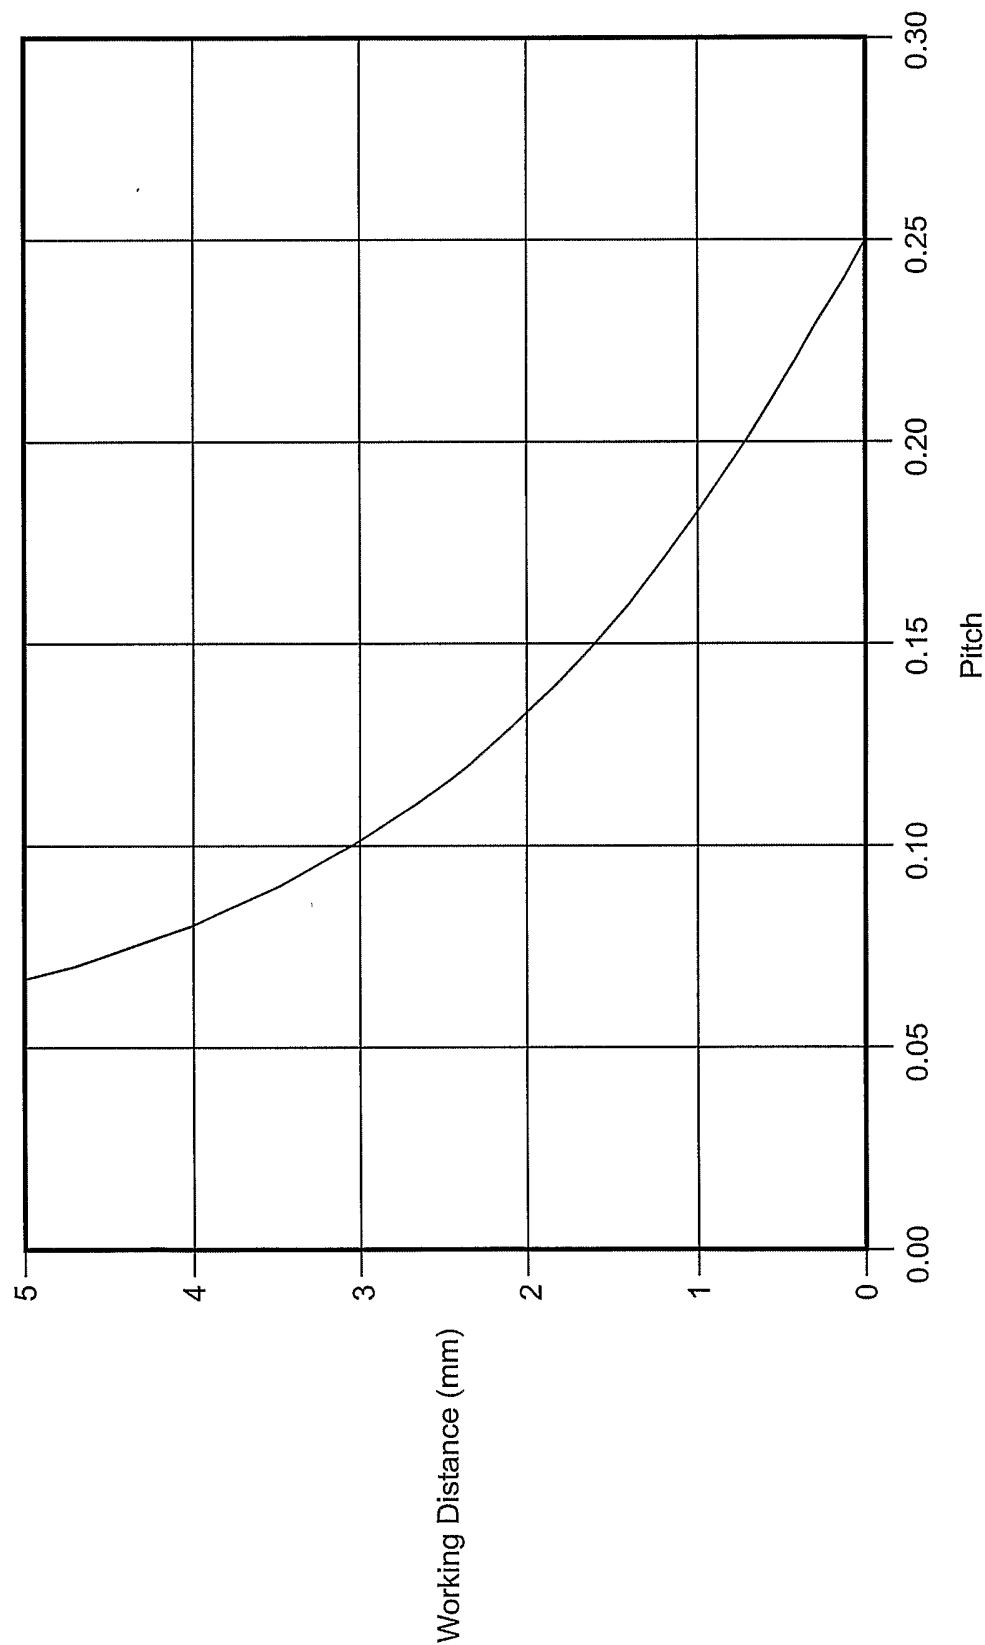
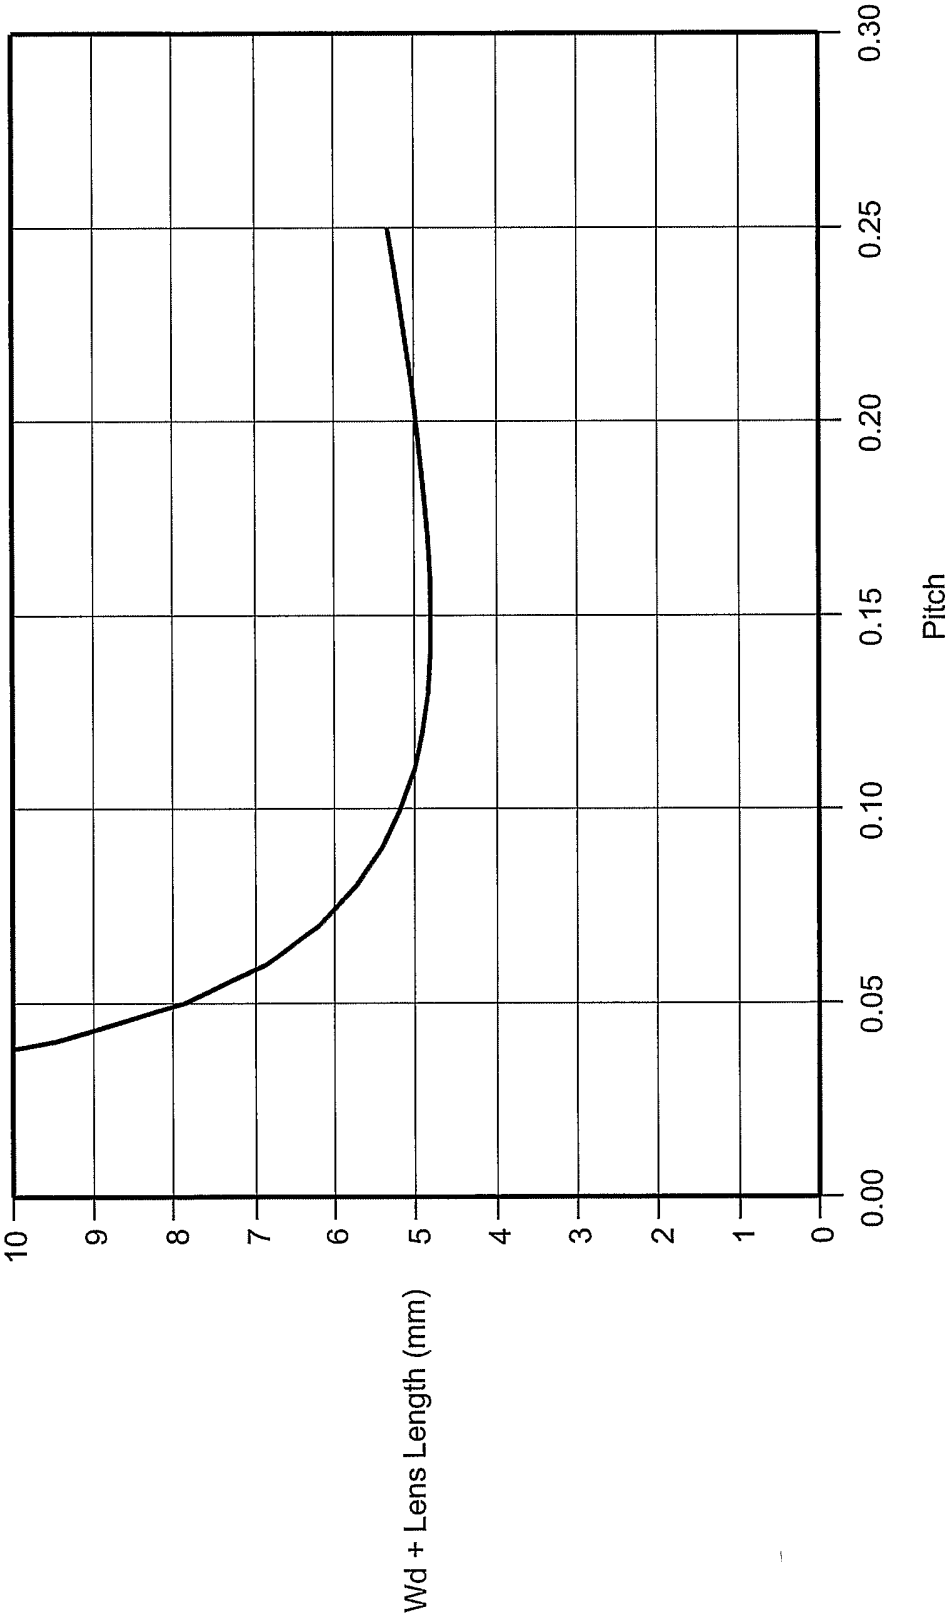


FIG. 11

12/14

FIG. 12




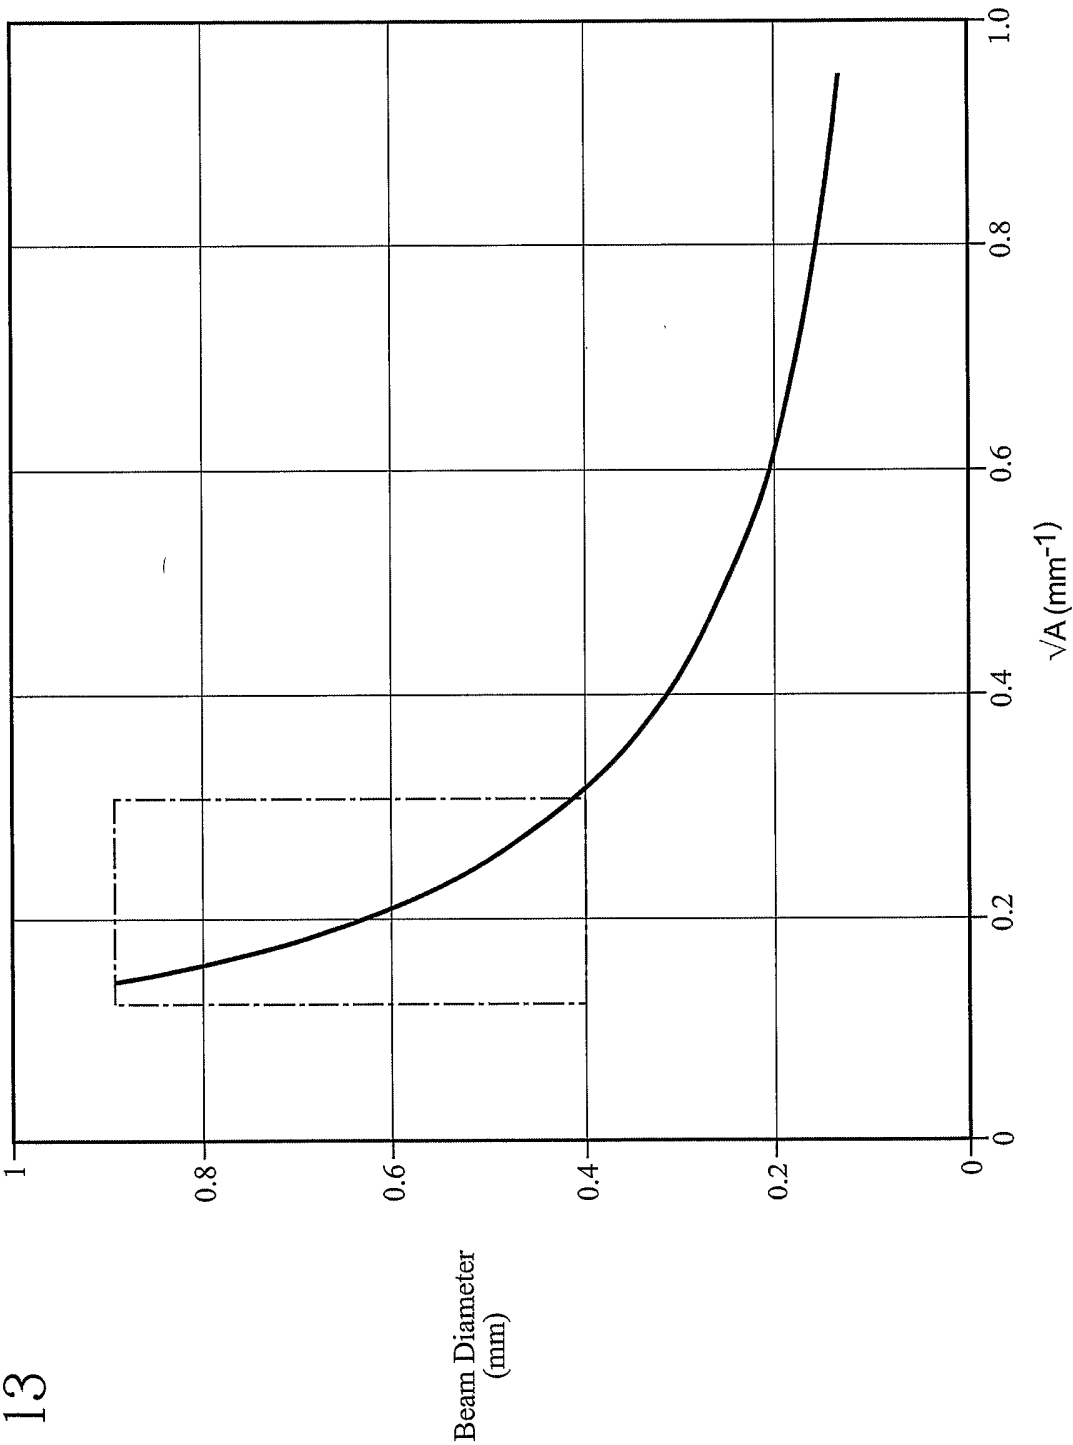


FIG. 14

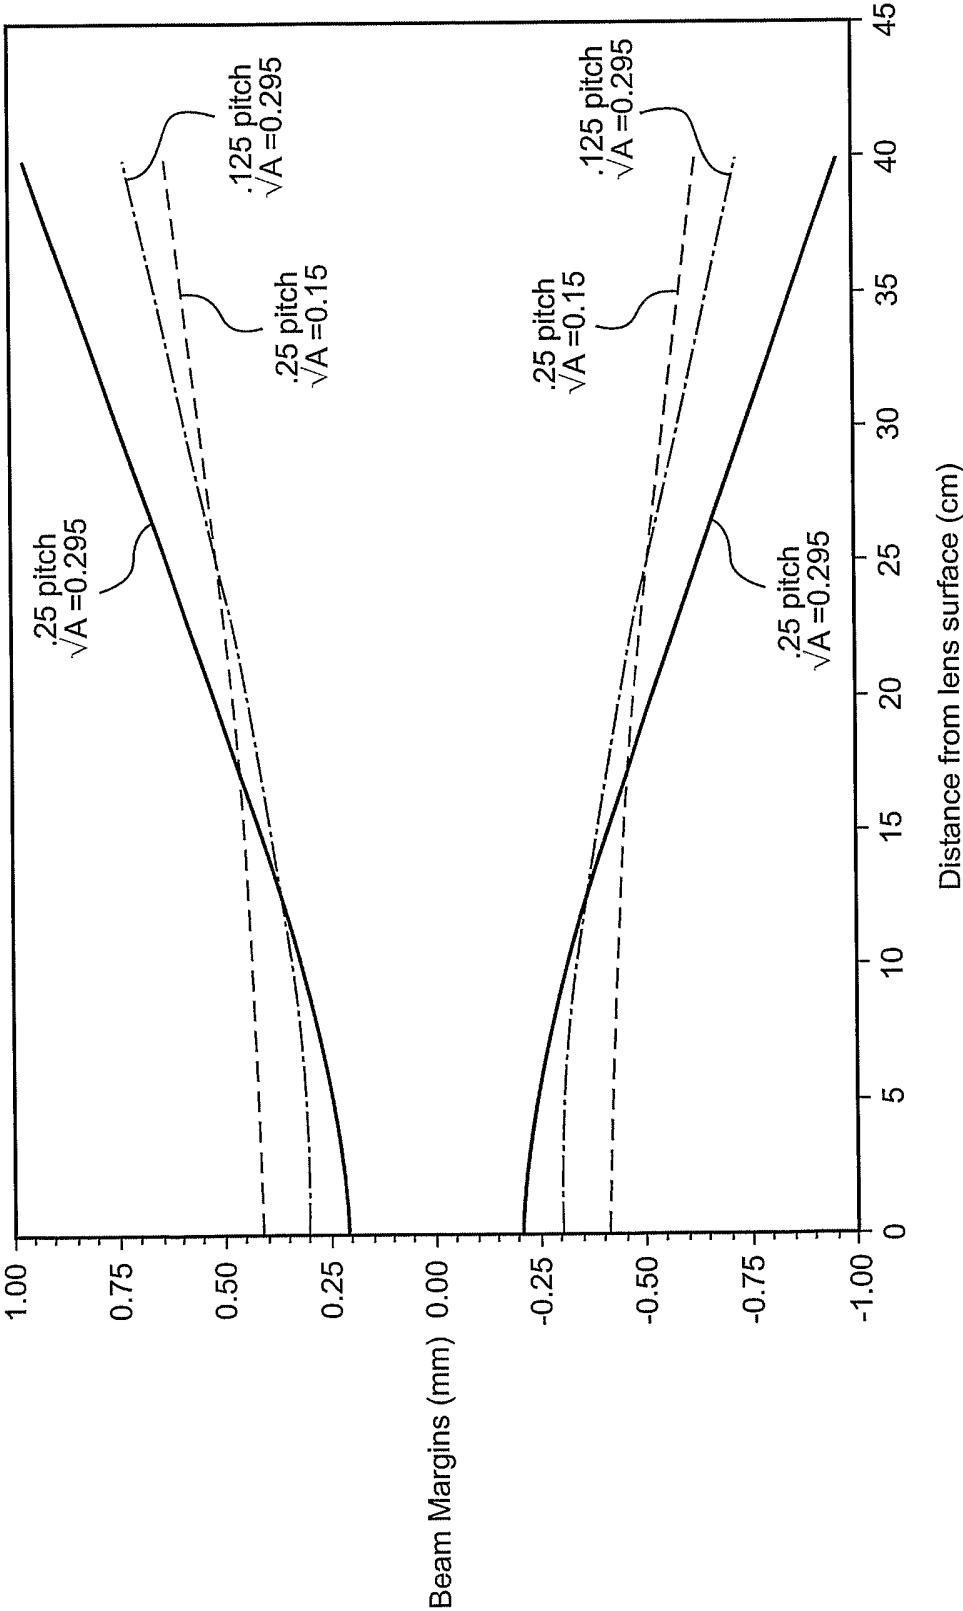

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/23441

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G02B3/00 B29D11/00 G02B6/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G02B B29D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 973 851 A (JA YU HONG) 26 October 1999 (1999-10-26) column 3, line 3 - column 5, line 61; table 1	1,2,4,6, 7,9, 11-13
X	US 6 282 339 B1 (ZHENG YU) 28 August 2001 (2001-08-28) column 6, line 20 - column 7, line 15; figures 2A,2B	1,4,6,9, 11-13
X	WO 99/50844 A (SEAGATE TECHNOLOGY) 7 October 1999 (1999-10-07) page 16, line 4 - line 23; figure 8 ----- -/--	1,6,11



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

29 October 2003

Date of mailing of the international search report

30.01.2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Rödig, C

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/23441

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	"SELFOC Product Guide" SELFOC PRODUCT GUIDE, SEPTEMBER 1993, PAGE(S) 1-35 , XP002190689 page 1 - page 10 -----	
P,X	EP 1 312 952 A (NIPPON SHEET GLASS CO LTD) 21 May 2003 (2003-05-21) paragraph [0005] - paragraph [0007] -----	1,2,4,6, 7,9, 11-13

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US 03/23441

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-13

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-13

gradient index lenses having a pitch of less than about 0.23

2. claims: 14,15

gradient index lenses having a pitch between 0.23 and 0.25
and a index gradient below 0.3 mm⁻¹

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/23441

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5973851	A	26-10-1999	NONE	
US 6282339	B1	28-08-2001	NONE	
WO 9950844	A	07-10-1999	CN 1295708 T	16-05-2001
			CN 1295709 T	16-05-2001
			CN 1295710 T	16-05-2001
			CN 1296615 T	23-05-2001
			DE 69907891 D1	18-06-2003
			DE 69907897 D1	18-06-2003
			DE 1068613 T1	06-09-2001
			EP 1066629 A1	10-01-2001
			EP 1068613 A1	17-01-2001
			EP 1066630 A1	10-01-2001
			EP 1066631 A1	10-01-2001
			JP 2002510115 T	02-04-2002
			JP 2002510116 T	02-04-2002
			JP 2003532963 T	05-11-2003
			JP 2003522362 T	22-07-2003
			WO 9950841 A1	07-10-1999
			WO 9950842 A1	07-10-1999
			WO 9950843 A1	07-10-1999
			WO 9950844 A1	07-10-1999
			US 6298027 B1	02-10-2001
			US 6609841 B1	26-08-2003
			US 6587421 B1	01-07-2003
			US 2002027865 A1	07-03-2002
			US 2002172134 A1	21-11-2002
			US 6324319 B1	27-11-2001
EP 1312952	A	21-05-2003	CA 2411779 A1	15-05-2003
			EP 1312952 A1	21-05-2003
			JP 2003215390 A	30-07-2003