

No. 630,547.

Patented Aug. 8, 1899.

R. LIEBMANN & J. F. TOUSSAINT.
BADGE.

(Application filed June 7, 1899.)

(No Model.)

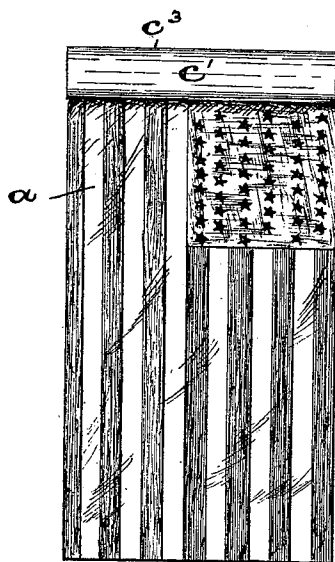


FIG. 1

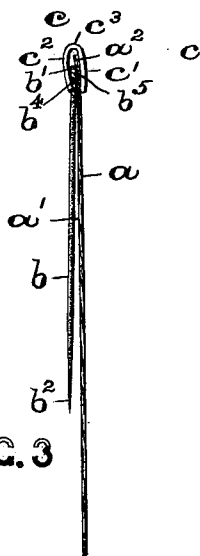


FIG. 3

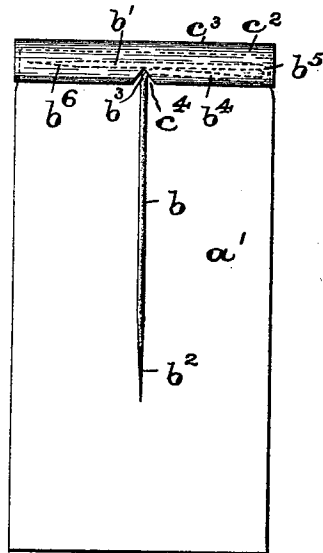


FIG. 2

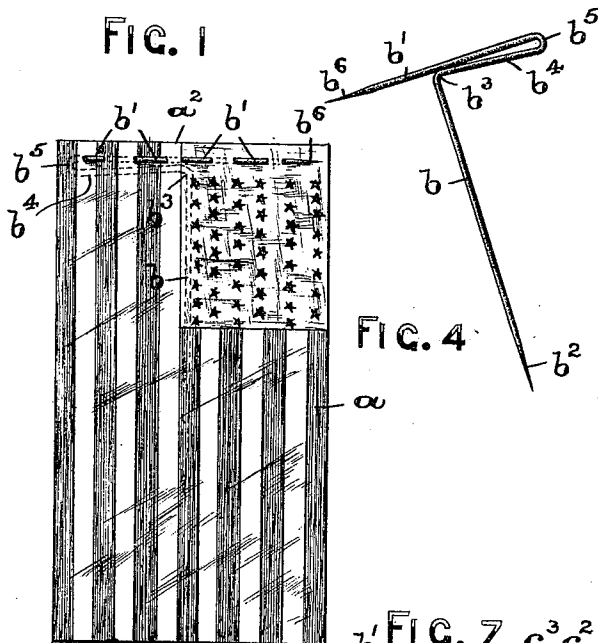


FIG. 4

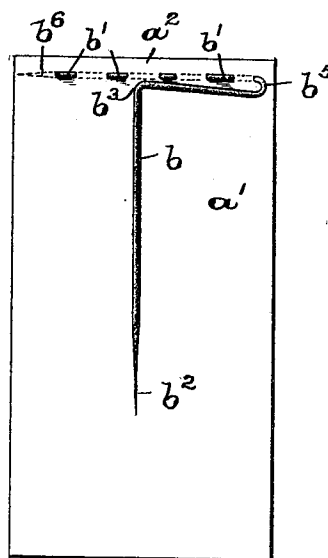


FIG. 5

WITNESSES:

Walter H. Falmagne.

[Signature]




FIG. 6

INVENTORS:
RUDOLPH LIEBMANN &
JULIUS F. TOUSSAINT.

BY
Fred C. Fraentzel,
ATTORNEY

UNITED STATES PATENT OFFICE.

RUDOLPH LIEBMANN, OF EAST ORANGE, NEW JERSEY, AND JULIUS F. TOUSSAINT, OF NEW YORK, N. Y.

BADGE.

SPECIFICATION forming part of Letters Patent No. 630,547, dated August 8, 1899.

Application filed June 7, 1899. Serial No. 719,685. (No model.)

To all whom it may concern:

Be it known that we, RUDOLPH LIEBMANN, residing at East Orange, county of Essex, and State of New Jersey, and JULIUS F. TOUSSAINT, residing at New York, in the county of New York and State of New York, citizens of the United States, have invented certain new and useful Improvements in Badges; and we do hereby declare the following to be a full, clear, and exact description of the invention, such as will enable others skilled in the art to which it appertains to make and use the same, reference being had to the accompanying drawings, and to letters of reference marked thereon, which form a part of this specification.

This invention relates to improvements in badges; and the invention has for its primary object to provide a simple and attractive badge and a novel means for attaching the badge portion, which is made in the manner of a ribbon, to a wire stem, preferably provided with a pair of pin-points and a cross-bar on which a portion of the ribbon is arranged and held and a clamping means connected with these parts of the badge, with a view of cheapening the cost of construction in assembling the parts and also providing a more secure method of attaching the ribbon portion to the head-piece of the badge.

Another principal object of this invention is to avoid the objectionable use of paste or glue for attaching a portion of the ribbon around the cross-bar connected with the pin, as heretofore, and to increase the durability and utility of the badge and, furthermore, to obtain other advantages and results, such as will be more fully described in the accompanying specification and finally embodied in the clauses of the claim.

The invention therefore consists in the improved construction of ribbon badge and pin therefor herein described and also in the several novel arrangements and combinations of the parts thereof, all of which will be fully set forth in the accompanying specification.

The invention is clearly illustrated in the accompanying drawings, in which—

Figure 1 is a face view of the badge embodying the principles of our present invention. Fig. 2 is a back view of the same, and

Fig. 3 is an edge view of the badge. Fig. 4 is a perspective view of one form of wire stem or pin to be employed in connection with the ribbon badge for securing the latter in position upon a garment. Figs. 5 and 6 are a face and rear view, respectively, of a ribbon and pin connected therewith before securing the same to the top or head-piece at the upper edge of the ribbon; and Fig. 7 is a back view of the upper portion of a ribbon badge and head-piece of a slightly-modified form of construction.

Similar letters of reference are employed in all of the said above-described views to indicate corresponding parts.

In said drawings, *a* indicates a piece of ribbon or other suitable fabric, the face of which is suitably ornamented and may bear an insignia, design, emblem, or the like, as will be clearly understood. The back of said ribbon is indicated by the reference-letter *a'*, and secured at or near the upper transverse edge *a²* of said ribbon *a* is the cross-bar *b'*, of a piece of wire or pin *b*. The said wire or pin *b* is provided at its lower end with a pin-point *b²* and at its upper end is bent, as at *b³*, to form an arm *b⁴*, which extends to one side of the main body portion of said stem or wire *b* at right angles to said stem, or approximately so, and is connected, by means of a loop or curved portion *b⁵*, with the cross-bar *b'*. Said cross-bar *b'* is preferably provided at its free end with a pin-point *b⁶*, all of which is clearly illustrated in Fig. 4. When the pin-piece or holding-stem for securing the ribbon badge to a garment is made in this manner, the curved part *b³* at the upper end of the main portion *b* and the arm *b⁴* is preferably made to lie in close contact with a portion of the cross-bar *b'*, thereby providing a suitable holding or clamping means, as and for the purposes hereinafter more fully set forth.

As clearly illustrated in Figs. 5 and 6, to attach the ribbon to the cross-piece *b'* of the pin or wire stem *b*, the pin-point *b⁶* is forced through the ribbon *a* along its upper edge *a²*, as shown, thereby dispensing with the folding of the ribbon and the use of paste or glue, as heretofore, whereby the ribbon is more rapidly attached to the cross-piece *b'*, and also producing a saving of ribbon by thus being

enabled to do away with the lap or folded part of the ribbon and a saving of paste or glue by dispensing with the use of the latter.

By the arrangement of the bent or curved part b^3 , which forms a knee, when in close holding contact with a portion of the cross-piece b' a suitable holding or clamping means is provided, which permits of the proper arrangement of the ribbon upon the said bar b' , but prevents the lateral displacement of the ribbon therefrom, as will be clearly understood.

A head-piece c of sheet metal, which can be suitably ornamented, may be employed, if desired, said head-piece or top bar, as will be seen from an inspection of Figs. 1, 2, and 3, consisting, essentially, of a pair of clamping members c' and c^2 , which are connected along their upper edges by a curved part c^3 . Between these two clamping members c' and c^2 the upper edge a^2 of the ribbon a , with the cross-bar b , and the arm b^4 attached to the ribbon, is laid, the said member c^2 having an opening or cut-away portion c^4 , and the curved knee portion b^3 of the wire stem b being arranged in said cut-away part c^4 , substantially as shown in Fig. 2. The said members c' and c^2 are then tightly closed down by pressure upon the opposite sides of the ribbon, whereby the ribbon and its securing-pin are securely connected with the said head-piece or top bar c and cannot become disconnected therefrom.

If desired the member c^2 may be provided with serrations or holding-teeth c^5 along its lower edge, which embed themselves firmly in the back of the ribbon a , when the members c' and c^2 are closed down, thereby serving as an extra means to prevent displacement of the head-piece from the ribbon a ; but of course it will be evident that this arrangement of serrations or teeth is not absolutely necessary.

Having thus described our invention, what we claim is—

1. A badge, comprising a ribbon, and a stem for attaching said badge to a garment, said stem, consisting, essentially, of a main body portion having a pin-point at its lower end, and a cross-bar at the opposite end of said body portion, arranged at a right angle, or approximately so, to said main body portion, and a pin-point at the free end of said cross-bar, said pin-point extending in a direction at right angles, or approximately so, away from said main body portion, for inserting it through said ribbon, substantially as and for the purposes set forth.

2. A badge, comprising a ribbon, and a stem for attaching said badge to a garment, said stem, consisting, essentially, of a main body portion having a pin-point at its lower end, and a cross-bar at the opposite end of said body portion, said cross-bar having a pin-point for inserting it through said ribbon, and a head-piece or top bar c , comprising a pair of members c' and c^2 clamped over the upper

edge of said ribbon, and on opposite sides of said cross-bar, substantially as and for the purposes set forth.

3. A badge, comprising a ribbon, and a stem for attaching said badge to a garment, said stem consisting, essentially, of a main body portion having a pin-point at its lower end, an arm at the upper end of said main body portion, extending therefrom at a right angle, or approximately so, and a cross-bar connected with said arm, said cross-bar having a pin-point for inserting it through said ribbon, substantially as and for the purposes set forth.

4. A badge, comprising a ribbon, and a stem for attaching said badge to a garment, said stem consisting, essentially, of a main body portion having a pin-point at its lower end, an arm at the upper end of said main body portion, extending therefrom at a right angle, or approximately so, and a cross-bar connected with said arm, said cross-bar having a pin-point for inserting it through said ribbon, and a head-piece or top bar c , comprising a pair of members c' and c^2 clamped over the upper edge of said ribbon, and on opposite sides of said arm and cross-bar, substantially as and for the purposes set forth.

5. A badge, comprising a ribbon, and a stem for attaching said badge to a garment, said stem consisting, essentially, of a main body portion having a pin-point at its lower end, a curved knee portion at the upper end of said stem, an arm connected with said knee portion, arranged at a right angle to said main body portion, or approximately so, and a cross-bar connected with said arm, said cross-bar having a pin-point for inserting it through said ribbon, and said knee portion on the upper end of said main body portion of the stem being in holding contact with a portion of said cross-bar to provide a holding means, substantially as and for the purposes set forth.

6. A badge, comprising a ribbon, and a stem for attaching said badge to a garment, said stem consisting, essentially, of a main body portion having a pin-point at its lower end, a curved knee portion at the upper end of said stem, an arm connected with said knee portion, arranged at a right angle to said main body portion, or approximately so, and a cross-bar connected with said arm, said cross-bar having a pin-point for inserting it through said ribbon, and said knee portion on the upper end of said main body portion of the stem being in holding contact with a portion of said cross-bar to provide a holding means, and a head-piece or top bar c , comprising a pair of members c' and c^2 clamped over the upper edge of said ribbon and on opposite sides of said arm and cross-bar, and said member c^2 having a cut-away portion in which said knee portion of said stem is arranged, substantially as and for the purposes set forth.

7. The herein-described wire stem for a badge, consisting, essentially of a main body portion having a pin-point at its lower end, a

cross-bar connected with the upper end of said main body portion, and a pin-point at the free end of said cross-bar, said pin-point extending in a direction at right angles, or approximately so, away from said main body portion, substantially as and for the purposes set forth.

8. The herein-described wire stem for a badge, consisting, essentially, of a main body portion having a pin-point at its lower end, a curved knee portion at the upper end of said stem, an arm connected with said knee portion, arranged at a right angle to said main body portion, or approximately so, and a cross-bar connected with said arm, said cross-bar having a pin-point, substantially as and for the purposes set forth.

9. A badge, comprising a ribbon, and a stem for attaching said badge to a garment, said stem having a cross-bar at the top with which said ribbon is connected, and a head-piece or top bar, comprising a pair of clamping members, clamped over the upper edge of said rib-

bon, and around said cross-bar of said stem, substantially as and for the purposes set forth. 25

10. A badge, comprising a ribbon, and a stem for attaching said badge to a garment, said stem having a cross-bar at the top with which said ribbon is connected, and a head-piece or top bar, comprising a pair of clamping members, clamped over the upper edge of said ribbon, and around said cross-bar of said stem, and one of said clamping members having an opening or cut-away portion into which the said stem is fitted, to prevent lateral displacement of said ribbon on the cross-bar of said stem, substantially as and for the purposes set forth. 30 35

In testimony that we claim the invention set forth above we have hereunto set our hands this 31st day of May, 1899. 40

RUDOLPH LIEBMANN.
JULIUS F. TOUSSAINT.

Witnesses:

FREDK. C. FRAENTZEL,
WALTER H. VALMAGE.