

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
29 May 2008 (29.05.2008)

PCT

(10) International Publication Number  
**WO 2008/061738 A1**

(51) International Patent Classification:  
**G02B 21/22** (2006.01)

(21) International Application Number:  
PCT/EP2007/010095

(22) International Filing Date:  
21 November 2007 (21.11.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
06024158.5 21 November 2006 (21.11.2006) EP  
60/860,398 21 November 2006 (21.11.2006) US

(71) Applicant (for all designated States except US): **SWISS MEDICAL TECHNOLOGY GMBH** [CH/CH]; Nöllenstr. 13, CH-9443 Widnau (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LUBER, Joachim** [DE/CH]; Apfelbergstr. 29, CH-9430 St. Margrethen (CH). **JANIK, Steffen-Volker** [DE/CH]; Fähnernstrasse 2, Ch-9434 Au (CH).

(74) Agents: **VOSSIUS, Volker** et al.; Geibelstrasse 6, 81679 München (DE).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(54) Title: STEREO VIDEO MICROSCOPE SYSTEM

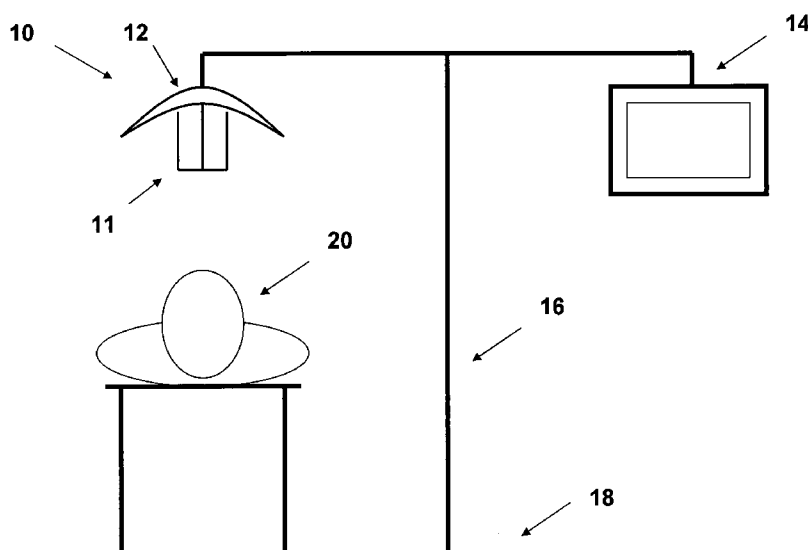

(57) Abstract: A stereo video microscope system (10), comprising: a stereo video microscope (11) having two output channels for providing stereo image data and including an internal lighting; a display unit (14) having two input channels for receiving and displaying stereo image data; and a control unit operably connected to the stereo video microscope (11) and the display unit (14) such that the control unit can control the operation of the stereo video microscope (11) and the display unit (14) and the flow of stereo image data between the two output channels of the stereo video microscope (11) and the two input channels of the display unit (14). In one embodiment the control unit is configured for performing an image rotation and/or exchanging the output channels such that the stereo image is always upright.

WO 2008/061738 A1

5

## STEREO VIDEO MICROSCOPE SYSTEM

### TECHNICAL FIELD OF THE INVENTION

10 The invention relates to a stereo video microscope system and in particular to a stereo video microscope system to be employed by medical professionals and especially dentists and surgeons.

### BACKGROUND OF THE INVENTION

15 In the medical field it is becoming more and more common practice to use stereo microscopes for assisting medical professionals in performing such tasks as medical surgeries, examinations, treatments and the like. The medical professional using a conventional stereo microscope has to look through the eye-pieces thereof in order to study a region of interest. This, however, is often very inconvenient, because of the awkward  
20 positions the medical professional has to place himself in, in order to be able to look through the eye-pieces of the stereo microscope and to work with his hands within the region of interest. Obviously, such a situation is rather dissatisfying for the medical professional or the patient being examined and/or treated.

25 The position of the stereo basis of a stereo microscope is of major importance for displaying the stereo image on a display unit as well for actions of the medical professional which are triggered by what the medical professional perceives on the display unit. However, conventional stereo microscopes with a fixed stereo base have the problem that a change of the position of the microscope can lead to a rotation of the image and even to the image  
30 being displayed upside down. Obviously, this leads to an exchange of the two stereo channels on the display unit. The medical professional, i.e. the viewer, will perceive such rotations and/or exchanges in that an actual heightening is displayed as a depression and vice versa. Again, such a situation is rather confusing and, consequently, dissatisfying for the medical professional using a conventional stereo microscope.

35

Dentists often have to examine remote parts of the dental region of a patient which sometimes can be visually accessed only by means of a hand mirror. Consequently, such mirrors are still important even in case a stereo microscope is employed. However, using a

mirror in combination with a stereo microscope involves additional challenges in that any light coming from the parts of the dental region of a patient being examined with a mirror will experience one additional interaction with the mirror (i.e. a reflection) before entering the stereo microscope. Conventional stereo microscopes do not have any means for compensating for such an effect.

The size of the field of view of a stereo microscope depends among other factors on the chosen magnification. For instance, in a zoom system with a ratio of 4:1 the diameter of the field of view would change e.g. from 100 mm to 25 mm. In conventional stereo microscopes the region illuminated by the internal lighting of the stereo microscope is fixed. This has the consequence that in conventional stereo microscopes only for a special setting the actual field of view coincides with the area illuminated by the internal lighting of the microscope. For any other setting the field of view and the area illuminated by the internal lighting of the microscope do not match such that either only a part of the actual field of view gets illuminated or that the area illuminated by the internal lighting of the microscope is larger than the actual field of view. In the latter case only a small part of the light emitted by the internal lighting of the microscope is actually "used", whereas the bulk thereof is being wasted.

In conventional stereo microscopes the focus distance is changed at a constant rate. This has the consequence that at low magnifications the change of the focus is perceived to be rather slow, whereas at high magnifications the change of the focus is perceived to be rather fast. This, in turn, leads to a difficult, if not impossible fine adjustment of the focus distance at high magnifications in conventional stereo microscopes.

The internal lighting of a conventional stereo microscope generally illuminates the field of view thereof in a fixed angular relationship with respect to the optical axis of the stereo microscope. However, as already outlined further above, a medical professional and especially a dentist often will need to examine regions which are difficult to illuminate and, thus, to image by conventional stereo microscopes having a fixed internal lighting. Obviously, this situation is dissatisfying for the medical professional.

Microscopes employed in the medical field are often used together with an external light source each being mounted to a separate support system. The separate support systems of the microscope and the external light source are prone to colliding and interfering with each other and, consequently, it is often very difficult to manipulate and adjust these separate elements for providing an optimal internal and external illumination. Again, such a situation is

rather dissatisfying for the medical professional using a conventional microscope together with an external light source.

The object of the present invention is to provide a stereo video microscope system  
5 overcoming or at least mitigating the problems associated with conventional systems as outlined above.

### SUMMARY OF THE INVENTION

The above object is achieved by a stereo video microscope system according to claim 1.

10 The stereo video microscope system according to the present invention comprises a stereo video microscope having two output channels for providing stereo image data and including an internal lighting, a display unit having two input channels for receiving and displaying stereo image data and a control unit. The control unit is operably connected to the stereo video microscope and the display unit such that the control unit can control the operation of  
15 the stereo video microscope and the display unit and the flow of stereo image data between the two output channels of the stereo video microscope and the two input channels of the display unit.

Further preferred beneficial embodiments are defined in the sub-claims.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 shows schematically a preferred embodiment of the stereo video microscope system according to the present invention.

### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

25 A preferred embodiment of the stereo video microscope system 10 according to the present invention is shown in figure 1. The stereo video microscope system 10 comprises a stereo video microscope 11 which in addition to its own internal lighting (not shown) is embedded within an external lighting unit 12. A stereo video microscope 11 which suitably can be  
30 employed in the stereo video microscope system 10 according to the present invention is described, for instance, in EP 05 026 775 (assigned to the same applicant as the present application).

The stereo video microscope 11 and the external lighting unit 12 are mounted to a common  
35 support structure 16. Although the support structure 16 is shown in figure 1 as fixedly mounted to a base 18 resting on the floor, the support structure 16 equally could be fixedly mounted to a wall or a ceiling. Also, the support structure 16 could be resting on a movable

base 18 such that the stereo video microscope system 10 according to the present invention can be moved to any desired location. The person skilled in the art will appreciate that an appropriate support structure 16 could be made out of a variety of elements, such as support rods or telescope arms, hinged connections connecting these elements, stabilizing elements and the like. Therefore, the details of these elements will not be described in any greater detail herein.

As shown in figure 1, also the display unit 14 is preferably mounted to the support structure 16, e.g. to a further arm thereof. The stereo video microscope 11 and the display unit 14 should be connected e.g. to two separate arms of the support structure 16 such that these two arms can be rotated freely with respect to the support structure 16 without interfering with each other. For instance, this can be readily achieved by positioning the arm connecting the stereo video microscope 11 to the support structure 16 and the arm connecting the display unit 14 to the support structure 16 at different heights thereof.

The stereo video microscope 11 is connected to a control unit (not shown) which in turn is connected to the display unit 14. Such a control unit could be integrated into the stereo video microscope 11 or external thereto. The control unit is configured to allow for user input to control the stereo video microscope 11 and/or the display unit 14 and to manage the flow of stereo image data from the stereo video microscope 11 to the display unit 14. Thus, the stereo image data acquired by the two channels of the stereo video microscope 11 is transferred via the control unit to the display unit 14 and displayed in an appropriate form on a screen thereof. As the person skilled in the art will appreciate an auto-stereoscopic or a stereoscopic monitor represent viable embodiments of the display unit 14 capable of displaying the stereo image data provided by the two channels of the stereo video microscope 11 in an appropriate manner.

Auto-stereoscopic and stereoscopic monitors display a left eye image and a right eye image, which are transmitted to the brain of the viewer for processing. In order to perceive a stereoscopic effect several techniques have been developed to ensure that each eye sees the image it is supposed to see, i.e. the left eye of the viewer sees the left eye image and the right eye sees the right eye image. When, for instance, a viewer is looking through synchronized shutter glasses at a stereoscopic monitor, the glasses "shutter" on and off, alternatively showing the left eye only the left eye image and the right eye only the right eye image. The shutter switches on and off so quickly that the viewer's brain "fuses" the two images into a single stereoscopic image such that a three-dimensional stereo image is perceived. As known to the person skilled in the art a similar effect can be provided in the

case of auto-stereoscopic monitors by techniques known, for instance, as parallax barrier or lenticular plate.

Preferably, also the external lighting unit 12 is connected to and controllable by the control unit. The external lighting unit 12, preferably, includes a plurality of light emitting diodes (LEDs) which e.g. could be arranged as a ring of LEDs centered around the stereo video microscope 11 and a reflector for illuminating the field of view of the stereo video microscope 11 in the direction of the patient 20. According to the present invention the LEDs of the external lighting unit 12 can be driven and controlled by the control unit. To this end, an appropriate interface between the external lighting unit 12 and the control unit can be provided. The control unit should allow for modes of operation providing only light from the external lighting unit 12, only light from the internal lighting of the stereo video microscope 11 as well as a combination of light from the external lighting unit 12 and the internal lighting of the stereo video microscope 11. These operation modes can be selected by means of the control unit connected to the stereo video microscope 11 and the external lighting unit 12.

According to a further aspect of the invention the control unit of the stereo video microscope system 10 comprises means or is configured for performing an image rotation and/or exchanging the two output channels provided by the stereo video microscope 11 for certain positions of the stereo video microscope 11 such that it is assured that the stereo image displayed on the display unit 14 is always upright and not laterally reversed (i.e. "left is left and right is right"). The image rotation can e.g. be provided by an appropriately configured software algorithm implemented within the control unit which processes the stereo image data provided by the two channels of the stereo video microscope 11. Alternatively, the image rotation can be achieved by means of a mechanical rotation of the stereo video microscope 11 itself about its optical axis under control of the control unit. Preferably, the control unit is further configured to perform an image rotation and/or an exchange of the two stereo channels upon corresponding instructions issued by a user, e.g. by means of a switch or a keypad connected to the control unit or voice commands. Alternatively, the control unit initiates an image rotation and/or an exchange of the two stereo channels automatically if a positioning sensor (not shown) indicates that the stereo video microscope 11 is located in a position relative to the object of interest, e.g. the patient 20, which necessitates such an action by the control unit in order to provide for an upright and not laterally reversed display of the stereo image data by the display unit 14.

According to a still further aspect of the invention the control unit is furthermore configured or comprises means for providing for an appropriate image rectification in case a mirror is used

in combination with the stereo video microscope system 10. In order to provide for an upright and not laterally reversed image displayed by the display unit 14 the image rectification procedure preferably involves producing respective mirror images of the images provided by the two channels of the stereo video microscope 11 and exchanging the two channels of the display unit 14. Again, the control unit is configured to perform such an image rectification upon being provided with the information that a mirror is used, such as by corresponding instructions issued by a user, by means of a switch or a keypad connected to the control unit or voice commands. Alternatively, the control unit is configured to automatically establish that a mirror is used. This can be accomplished e.g. by an appropriately configured software algorithm implemented in the control unit which is able to establish the presence of a mirror in the stereo image data provided by the stereo video microscope 11. The person skilled in the art will, however, appreciate that several other means exist allowing for an automatic determination that a mirror is being used, such as magnetic field sensors detecting the presence of the ferrous mirror within the region of interest, a contact sensor in the mirror holder and the like.

According to a yet still further aspect of the present invention the control unit is configured to adjust the size of the area illuminated by the internal lighting of the stereo video microscope 11 and/or the external lighting unit 12 to the size of the actual field of view of the stereo video microscope 11. Such an adjustment of the size of the illuminated area by means of the control unit provides for a better efficiency in case the lighting power of the internal lighting of the stereo video microscope 11 and/or the external lighting unit 12 are kept constant. Alternatively, it becomes possible to reduce the intensity of the light emitted by the internal lighting of the stereo video microscope 11 and/or the external lighting unit 12 without degrading the illumination, by keeping the ratio of emitted light to illuminated area substantially constant. Obviously, the latter case is beneficial and preferred due to the reduced energy consumption and, thus, a prolonged lifetime of the internal lighting of the stereo video microscope 11 and/or the external lighting unit 12. In any event, due to the adjustment of the area illuminated by the internal lighting of the stereo video microscope 11 and/or the external lighting unit 12 to the actual field of view of the stereo video microscope 11 no light energy is being lost or wasted.

According to a further aspect of the present invention the control unit is configured to continuously adjust the rate of changing the focus distance, i.e. the focus speed, depending on the chosen magnification of the stereo video microscope 11. Preferably, the control unit is configured to automatically select a higher focus speed for lower magnifications than for higher magnifications of the stereo video microscope 11. For instance, for a magnification of

10x the focus speed could be twice as large as for a magnification of 20x. This could be achieved e.g. by continuously adjusting the focus speed ( $FS$ ) to the chosen magnification ( $MG$ ) according to the following equation:

$$5 \quad FS(MG) = FS_{MAX} - \frac{FS_{MAX} - FS_{MIN}}{MG_{MAX} - MG_{MIN}} * (MG - MG_{MIN}),$$

wherein  $FS_{MAX}$ ,  $FS_{MIN}$ ,  $MG_{MAX}$  and  $MG_{MIN}$  are the maximal focus speed, the minimal focus speed, the maximal magnification and the minimal magnification of the stereo video microscope 11, respectively. The person skilled in the art, however, will appreciate that other specific functional relationships between the focus speed and the magnification can be chosen which fulfil the requirement that the focus speed is higher for lower magnifications than for higher magnifications of the stereo video microscope 11. The relation between the focus speed and the magnification preferably can be adjusted by the user via the control unit or the stereo video microscope 11 in order to best suit his needs.

15

In case a user simultaneously adjusts the rate of changing the focus distance, i.e. the focus speed, and the magnification of the stereo video microscope 11, the control unit is configured to select the optimal respective default values of these quantities. This can be achieved e.g. by an appropriately configured software algorithm implemented in the control unit or the stereo video microscope 11 determining the direction of these simultaneous changes.

20

According to a further aspect of the present invention the stereo video microscope 11 is provided with an optical lighting port connected to the internal lighting thereof. A small flexible optical fiber (not shown) is attached to the lighting port, such that the small flexible fiber can be grasped and guided by a user to provide light in regions which cannot be illuminated by the internal lighting of the stereo video microscope 11 and/or the external lighting unit 12 directly.

25

According to a further aspect of the present invention it is possible to change the angle between the optical axis of the stereo video microscope 11 and the symmetry axis of the internal lighting thereof. This can be achieved by means of an internal mirror system being user-adjustable with respect to the angle and the position of the mirror. Alternatively, the external lighting unit 12 could be configured to be positionable or adjustable with respect to the stereo video microscope 11 in such a way, that a user could easily change the angle and the position of the light beam illuminating the field of view of the stereo video microscope.

30  
35



The present invention as described in detail above is not limited to the particular devices, uses and methodology described as these may vary. It is also to be understood that the terminology used herein is for the purpose of describing particular embodiments only, and is not intended to limit the scope of the present invention which will be limited only by the appended claims. Unless defined otherwise, all technical and scientific terms used herein have the same meanings as commonly understood by one of ordinary skill in the art.

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integer or step.

Several documents are cited throughout the text of this specification. Each of the documents cited herein (including all patents, patent applications, scientific publications, manufacturer's specifications, instructions, etc.), whether *supra* or *infra*, are hereby incorporated by reference in their entirety. Nothing herein is to be construed as an admission that the invention is not entitled to antedate such disclosure by virtue of prior invention.

5

## CLAIMS

- 10 1. A stereo video microscope system (10), comprising:  
a stereo video microscope (11) having two output channels for providing stereo  
image data and including an internal lighting;  
a display unit (14) having two input channels for receiving and displaying stereo  
image data; and  
15 a control unit operably connected to the stereo video microscope (11) and the display  
unit (14) such that the control unit can control the operation of the stereo video microscope  
(11) and the display unit (14) and the flow of stereo image data between the two output  
channels of the stereo video microscope (11) and the two input channels of the display unit  
(14).
- 20 2. System according to claim 1, further comprising an external lighting unit (12), wherein  
the stereo video microscope (11) is embedded within the external lighting unit (12).
3. System according to claims 1 or 2, further comprising a support structure (16),  
25 wherein the stereo video microscope (11) and/or the external lighting unit (12) are mounted  
to the support structure (16).
4. System according to claim 3, wherein the display unit (14) is mounted to the support  
structure (16).
- 30 5. System according to any one of the preceding claims, wherein the control unit is  
integrated in the stereo video microscope (11).
6. System according to any one of the preceding claims, wherein the display unit (14) is  
35 an auto-stereoscopic, a stereoscopic monitor or a stereoscopic viewing device..
7. System according to claim 2, wherein the external lighting unit (12) is connected to  
and controllable by the control unit.

8. System according to claim 7, wherein the external lighting unit (12) includes a plurality of light emitting diodes and a reflector for illuminating the field of view of the stereo video microscope (11).

9. System according to any one of the preceding claims, wherein the control unit comprises means for performing an image rotation and/or means for exchanging the two output channels of the stereo video microscope (11) for certain positions of the stereo video microscope (11) such that the stereo image displayed by the display unit (14) is always upright and not laterally reversed.

10. System according to claim 9, wherein the means for performing an image rotation and/or the means for exchanging the two output channels of the stereo video microscope (11) are provided by a software algorithm implemented within the control unit.

11. System according to claim 9, wherein the means for performing an image rotation can control a mechanical rotation of the stereo video microscope (11) about its optical axis.

12. System according to claims 9, 10 or 11, wherein the means for performing an image rotation and/or the means for exchanging the two output channels of the stereo video microscope (11) are controlled by corresponding commands issued by a user.

13. System according to claims 9, 10 or 11, wherein the means for performing an image rotation and/or the means for exchanging the two output channels of the stereo video microscope (11) are automatically triggered to perform an image rotation and/or to exchange the two output channels of the stereo video microscope (11) if a positioning sensor indicates that the stereo video microscope (11) is located in a position which necessitates such an action.

14. System according to any one of the preceding claims, wherein the control unit comprises means for performing an image rectification in case a mirror is used in combination with the stereo video microscope system (10).

15. System according to claim 14, wherein the means for performing an image rectification are configured to produce respective mirror images of the images provided by the two channels of the stereo video microscope (11) and to exchange the two channels of the display unit (14).

16. System according to claims 14 or 15, wherein the means for performing an image rectification are controlled by corresponding commands issued by a user.

17. System according to claims 14 or 15, wherein means for performing an image rectification are automatically triggered by the control unit to perform an image rectification in the event that the usage of a mirror is established.

18. System according to claim 17, wherein the control unit comprises means for establishing the presence of a mirror in the stereo image data provided by the stereo video microscope (11).

19. System according to claim 17, further comprising at least one magnetic field sensor and/or at least one contact sensor for establishing the usage of a mirror.

20. System according to any one of the preceding claims, wherein the control unit is configured to adjust the size of the area illuminated by the internal lighting of the stereo video microscope (11) and/or the external lighting unit (12) to the size of the actual field of view of the stereo video microscope (11).

21. System according to claim 20, wherein the control unit reduces the intensity of the light emitted by the internal lighting of the stereo video microscope (11) and/or the external lighting unit (12) if the size of the area illuminated thereby decreases and vice versa.

22. System according to any one of the preceding claims, wherein the control unit is configured to adjust the rate of changing the focus distance depending on the chosen magnification of the stereo video microscope (11).

23. System according to claim 22, wherein the control unit is configured to automatically select a higher rate of changing the focus distance for lower magnifications than for higher magnifications of the stereo video microscope (11).

24. System according to any one of the preceding claims further comprising a flexible optical fiber attached to a lighting port of the stereo video microscope (11).

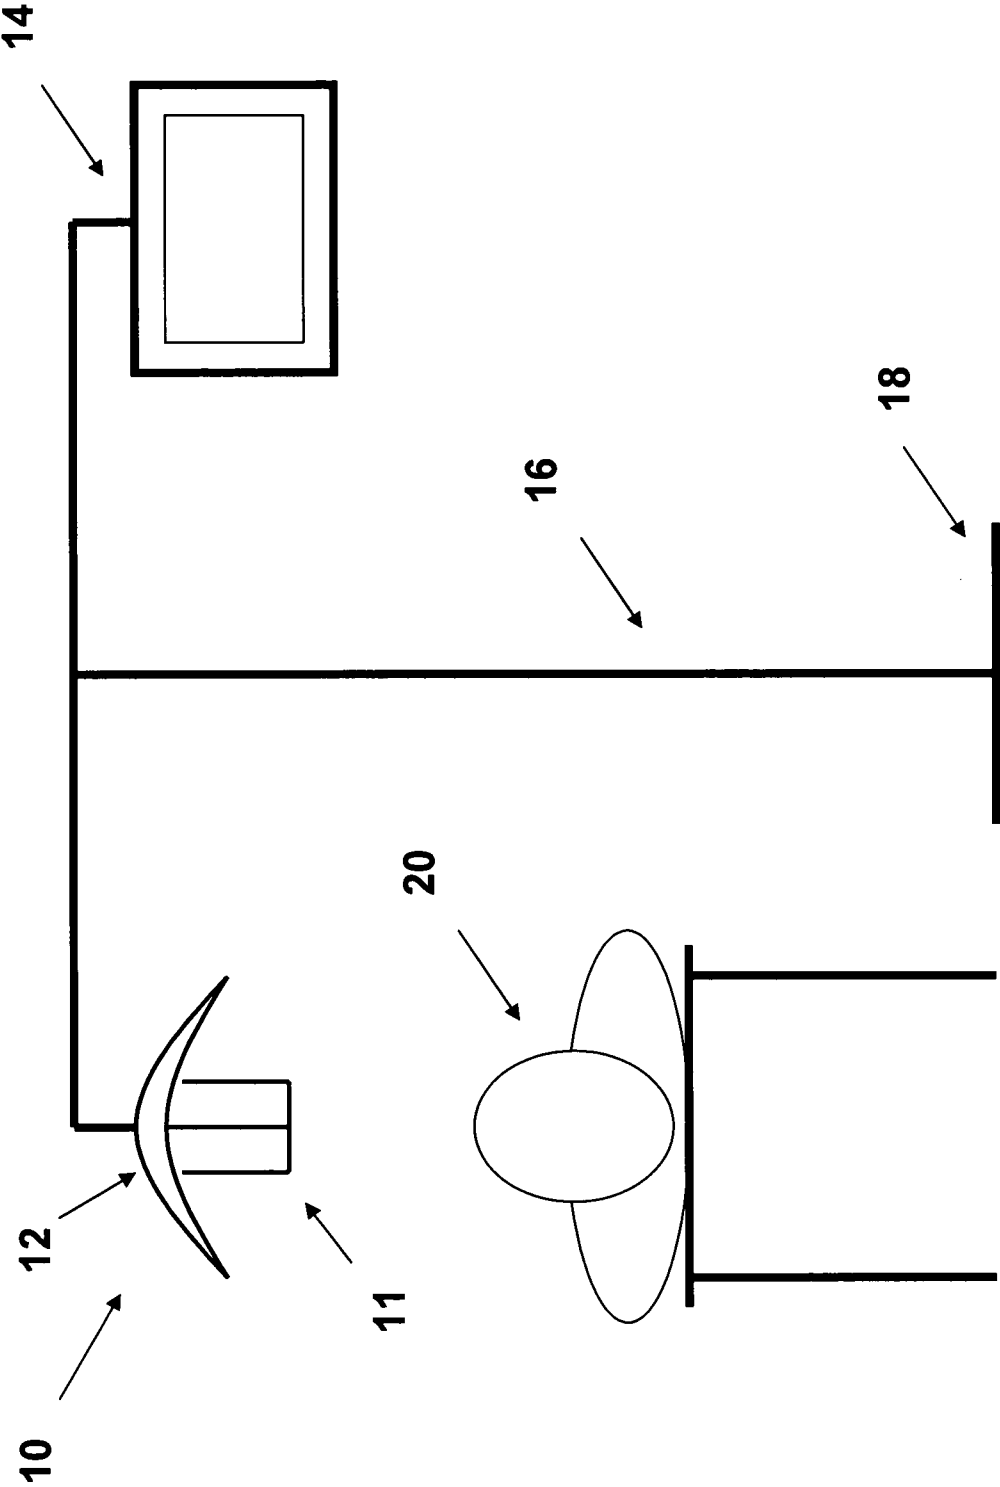


Fig. 1

# INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2007/010095

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. G02B21/22

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

G02B H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 867 210 A (ROD SAMUEL R [US]) 2 February 1999 (1999-02-02)	1,3,5,6, 9,10,12, 14-19 20,21,24
Y	column 8, lines 20,21 column 2, line 12 - line 15 column 3, line 39 - line 65 column 4, line 61 - line 65; figure 1 column 6, line 21 - line 45; figure 2 column 7, line 11 - line 28; figure 4 claim 4  ----- -/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the International filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the International filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

18 March 2008

Date of mailing of the international search report

31/03/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Ciarrocca, Marco

# INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2007/010095

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2004/036962 A1 (BRUNNER ROBERT [DE] ET AL) 26 February 2004 (2004-02-26)	1-7, 9-11,13, 20,21 17,18
A	paragraph [0036] - paragraph [0039]; figure 1	
Y	paragraph [0051]; figures 6,7 paragraph [0032]	20,21
X	US 2005/046933 A1 (LUECKE CHRISTIAN [DE] ET AL) 3 March 2005 (2005-03-03)	1-7, 9-11, 14-16
	paragraph [0032] - paragraph [0035]; figure 2 paragraph [0040] - paragraph [0042]; figures 1,3	
X	EP 1 293 816 A (SIBATA IEKADO [JP]; SEIKI YOSHIKATSU [JP]) 19 March 2003 (2003-03-19) paragraphs [0009], [0011], [0012], [0025] paragraphs [0039] - [0041]; figures 3,4 paragraph [0047]; figure 5 paragraph [0056]; figures 8,9 paragraph [0059]; figures 10,11 paragraphs [0067], [0068]	1,6,9, 10,12-16
X	JP 2000 089123 A (OLYMPUS OPTICAL CO) 31 March 2000 (2000-03-31) & PAJ abstract	1,6,9, 10,13
X	JP 2001 145640 A (OLYMPUS OPTICAL CO) 29 May 2001 (2001-05-29) & PAJ abstract	1,6,9,10
X	US 2003/112509 A1 (TAKAHASHI SUSUMU [JP]) 19 June 2003 (2003-06-19) paragraph [0065] - paragraph [0066]; figure 1 paragraph [0086] - paragraph [0090]; figures 9-11 paragraphs [0102], [0103]	1,3-6, 9-15,24
Y	MUENTENER J: "Surgical operating microscopes, series M 600 from Wild Heerbrugg Ltd" NEUROSURGICAL REVIEW, GRUYTER, BERLIN, DE, vol. 7, June 1984 (1984-06), pages 103-107, XP008087843 ISSN: 0344-5607 figure 1 page 105, right-hand column, paragraph 4	20,21
	-/--	

# INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2007/010095

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	D.F. VASCONCELLOS S/A TECHNICAL PUBLICATIONS DEPARTMENT: "MC-M902MF INSTRUCTIONS"[Online] August 2001 (2001-08), XP002473073 Retrieved from the Internet: URL: <a href="http://www.endoscopia.com.mx/index.php?option=com_docman&amp;task=doc_download&amp;gid=104">http://www.endoscopia.com.mx/index.php?option=com_docman&amp;task=doc_download&amp;gid=104</a> > [retrieved on 2008-01-23] pages 6,15,16 page 21	20,21,24
Y	CARL ZEISS SURGICAL: "OPMI Vario/S 88 System"[Online] 2002, XP002473112 Retrieved from the Internet: URL: <a href="http://www.zeiss.com/C1256E3C00542C9B/0/D88EE6743A3F9227C1256E66002C3685/\$file/30_324_ii_e.pdf">http://www.zeiss.com/C1256E3C00542C9B/0/D88EE6743A3F9227C1256E66002C3685/\$file/30_324_ii_e.pdf</a> > [retrieved on 2008-03-14] page 5	20,21
A	US 2002/015224 A1 (GANSER MICHAEL [DE]) 7 February 2002 (2002-02-07) paragraphs [0004] - [0006] paragraphs [0020] - [0023]	5,20,21,24
A	US 5 690 417 A (POLIDOR EDWARD T [US] ET AL) 25 November 1997 (1997-11-25) column 3, line 25 - column 4, line 55; figures 1,2,5,6	2,7,8
A	US 2005/111090 A1 (KLEINTEICH LOTHAR [DE] ET AL) 26 May 2005 (2005-05-26) paragraphs [0030], [0036], [0040]; figures 1-8	20,21,24
A	US 6 046 844 A (DUIS WILHELM [DE]) 4 April 2000 (2000-04-04) column 1, line 60 - column 2, line 32; figure 1	23,24



# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/EP2007/010095

## Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2. ☐ Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
  
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers allsearchable claims.
  
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
  
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search reportcovers only those claims for which fees were paid, specifically claims Nos.:
  
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1 in combination with 6,9-19

Stereo microscope with control unit for image rotating or  
exchanging image output channels  
---

2. claims: 1 in combination with 2-5,7,8,24

Mechanical and optical aspects of a stereo microscope:  
external lighting unit, support structure, optical fiber  
---

3. claims: 1 in combination with 20-21

Stereo microscope with control unit for adjusting the size  
of the area illuminated  
---

4. claims: 1 in combination with 22-23

Stereo microscope with control unit for the adjusting rate  
of changing the focus distance  
---

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2007/010095

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5867210	A	02-02-1999	NONE	
US 2004036962	A1	26-02-2004	CH 696044 A5 DE 10203215 A1	30-11-2006 07-08-2003
US 2005046933	A1	03-03-2005	DE 10336475 A1 JP 2005095594 A	10-03-2005 14-04-2005
EP 1293816	A	19-03-2003	US 2003053202 A1	20-03-2003
JP 2000089123	A	31-03-2000	NONE	
JP 2001145640	A	29-05-2001	NONE	
US 2003112509	A1	19-06-2003	NONE	
US 2002015224	A1	07-02-2002	DE 20013359 U1	23-11-2000
US 5690417	A	25-11-1997	DE 19653234 A1 FR 2748577 A1 JP 10054940 A	20-11-1997 14-11-1997 24-02-1998
US 2005111090	A1	26-05-2005	DE 10355523 A1 EP 1533640 A2 JP 2005157335 A	11-08-2005 25-05-2005 16-06-2005
US 6046844	A	04-04-2000	NONE	