



(86) **Date de dépôt PCT/PCT Filing Date:** 2014/02/20
(87) **Date publication PCT/PCT Publication Date:** 2014/08/28
(85) **Entrée phase nationale/National Entry:** 2015/08/21
(86) **N° demande PCT/PCT Application No.:** US 2014/017445
(87) **N° publication PCT/PCT Publication No.:** 2014/130701
(30) **Priorité/Priority:** 2013/02/21 (US61/767,509)


(51) **Cl.Int./Int.Cl. A61N 1/36** (2006.01),
A61N 1/05 (2006.01), **A61N 1/372** (2006.01),
A61N 1/378 (2006.01)

(71) **Demandeur/Applicant:**
MEAGAN MEDICAL, INC., US

(72) **Inventeurs/Inventors:**
CARROLL, WILLIAM J., US;
SCHOENING, MARK EDWARD, US;
SCRANTON, PATRICK ALLEN, US;
HUSEBY, WILLIAM RICHARD, US


(74) **Agent:** STIKEMAN ELLIOTT S.E.N.C.R.L.,SRL/LLP

(54) **Titre : STIMULATION EN CHAMP CUTANE AU MOYEN DE COMPOSANTS RECHARGEABLES ET JETABLES**
(54) **Title: CUTANEOUS FIELD STIMULATION WITH DISPOSABLE AND RECHARGEABLE COMPONENTS**

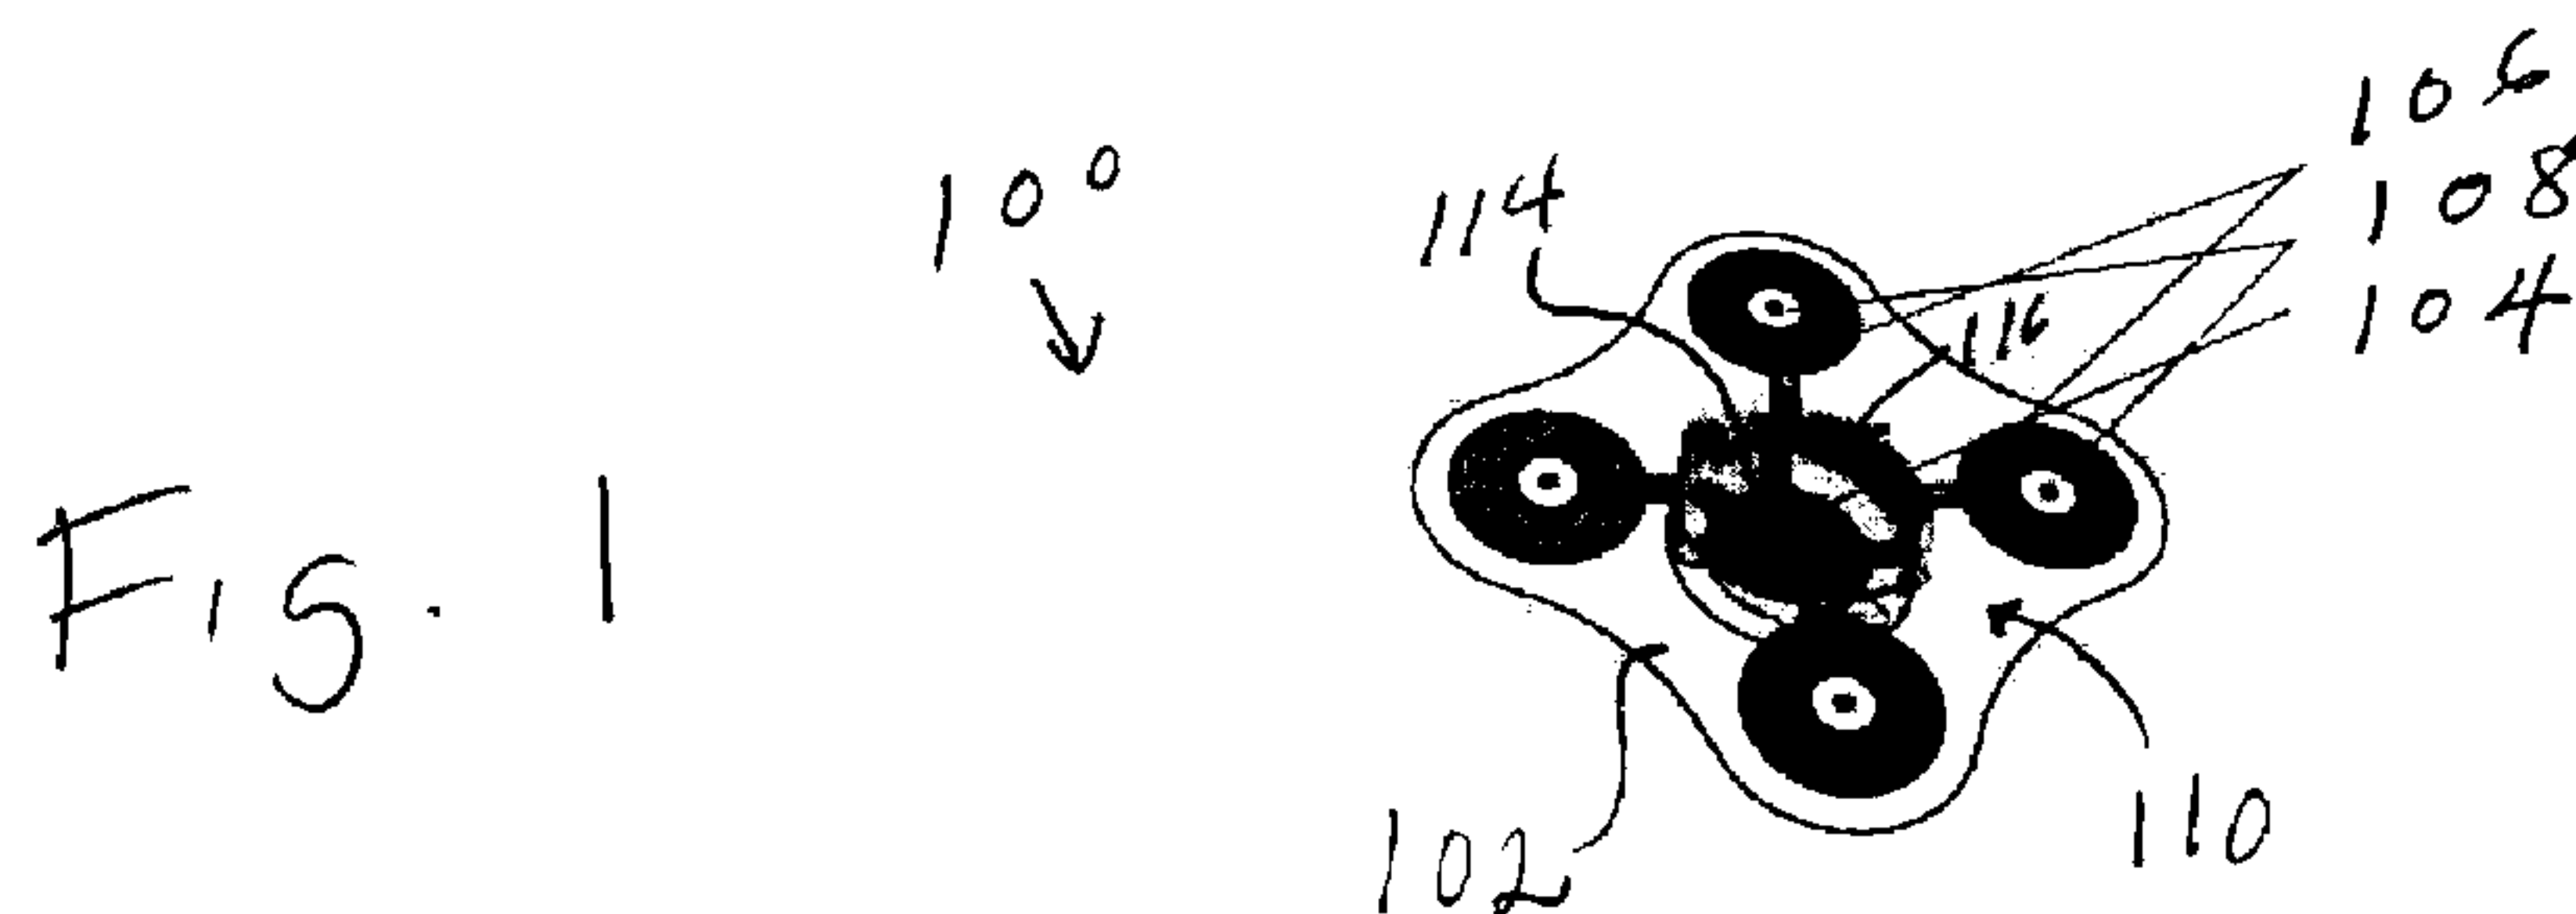

(57) **Abrégé/Abstract:**

A CFS system includes self-adhesive, disposable pads. Each pad is combined with a sealed, cleanable battery/controller pod and then placed on the body where needed. The battery/controller pod preferably has wireless capability, such as Bluetooth® capability. The patient can download an application to a smartphone or similar mobile device to control the pods.

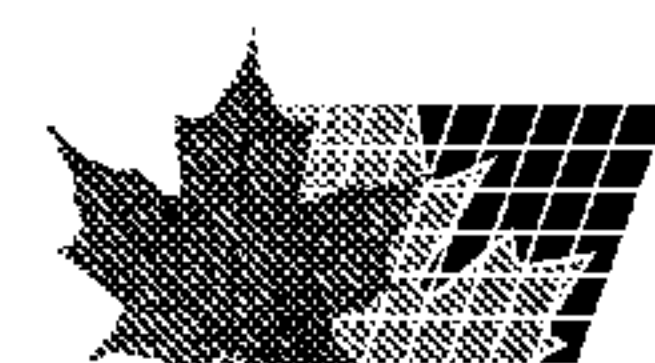

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)
(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
28 August 2014 (28.08.2014)




(10) International Publication Number
WO 2014/130701 A1

- (51) **International Patent Classification:**
A61N 1/36 (2006.01) *A61N 1/378* (2006.01)
A61N 1/372 (2006.01) *A61N 1/05* (2006.01)
- (21) **International Application Number:**
PCT/US2014/017445
- (22) **International Filing Date:**
20 February 2014 (20.02.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/767,509 21 February 2013 (21.02.2013) US
- (71) **Applicant:** MEAGAN MEDICAL, INC. [US/US]; 14401 S.E. First Street, Vancouver, Washington 98623 (US).
- (72) **Inventors:** CARROLL, William J.; 14400 N.E. First Street, Vancouver, Washington 98684 (US). SCHOEN-ING, Mark Edward; 8842 NW Shepherd Street, Portland, Oregon 97231 (US). SCRANTON, Patrick Allen; 2406 NE 139th Street #152, Vancouver, Washington 98686 (US). HUSEBY, William Richard; 12310 NW 31st Avenue, Vancouver, Washington 98685 (US).
- (74) **Agent:** GREENBAUM, Michael C.; BLANK ROME LLP, 600 New Hampshire Avenue NW, Washington, District of Columbia 20037 (US).

- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report (Art. 21(3))

(54) **Title:** CUTANEOUS FIELD STIMULATION WITH DISPOSABLE AND RECHARGEABLE COMPONENTS

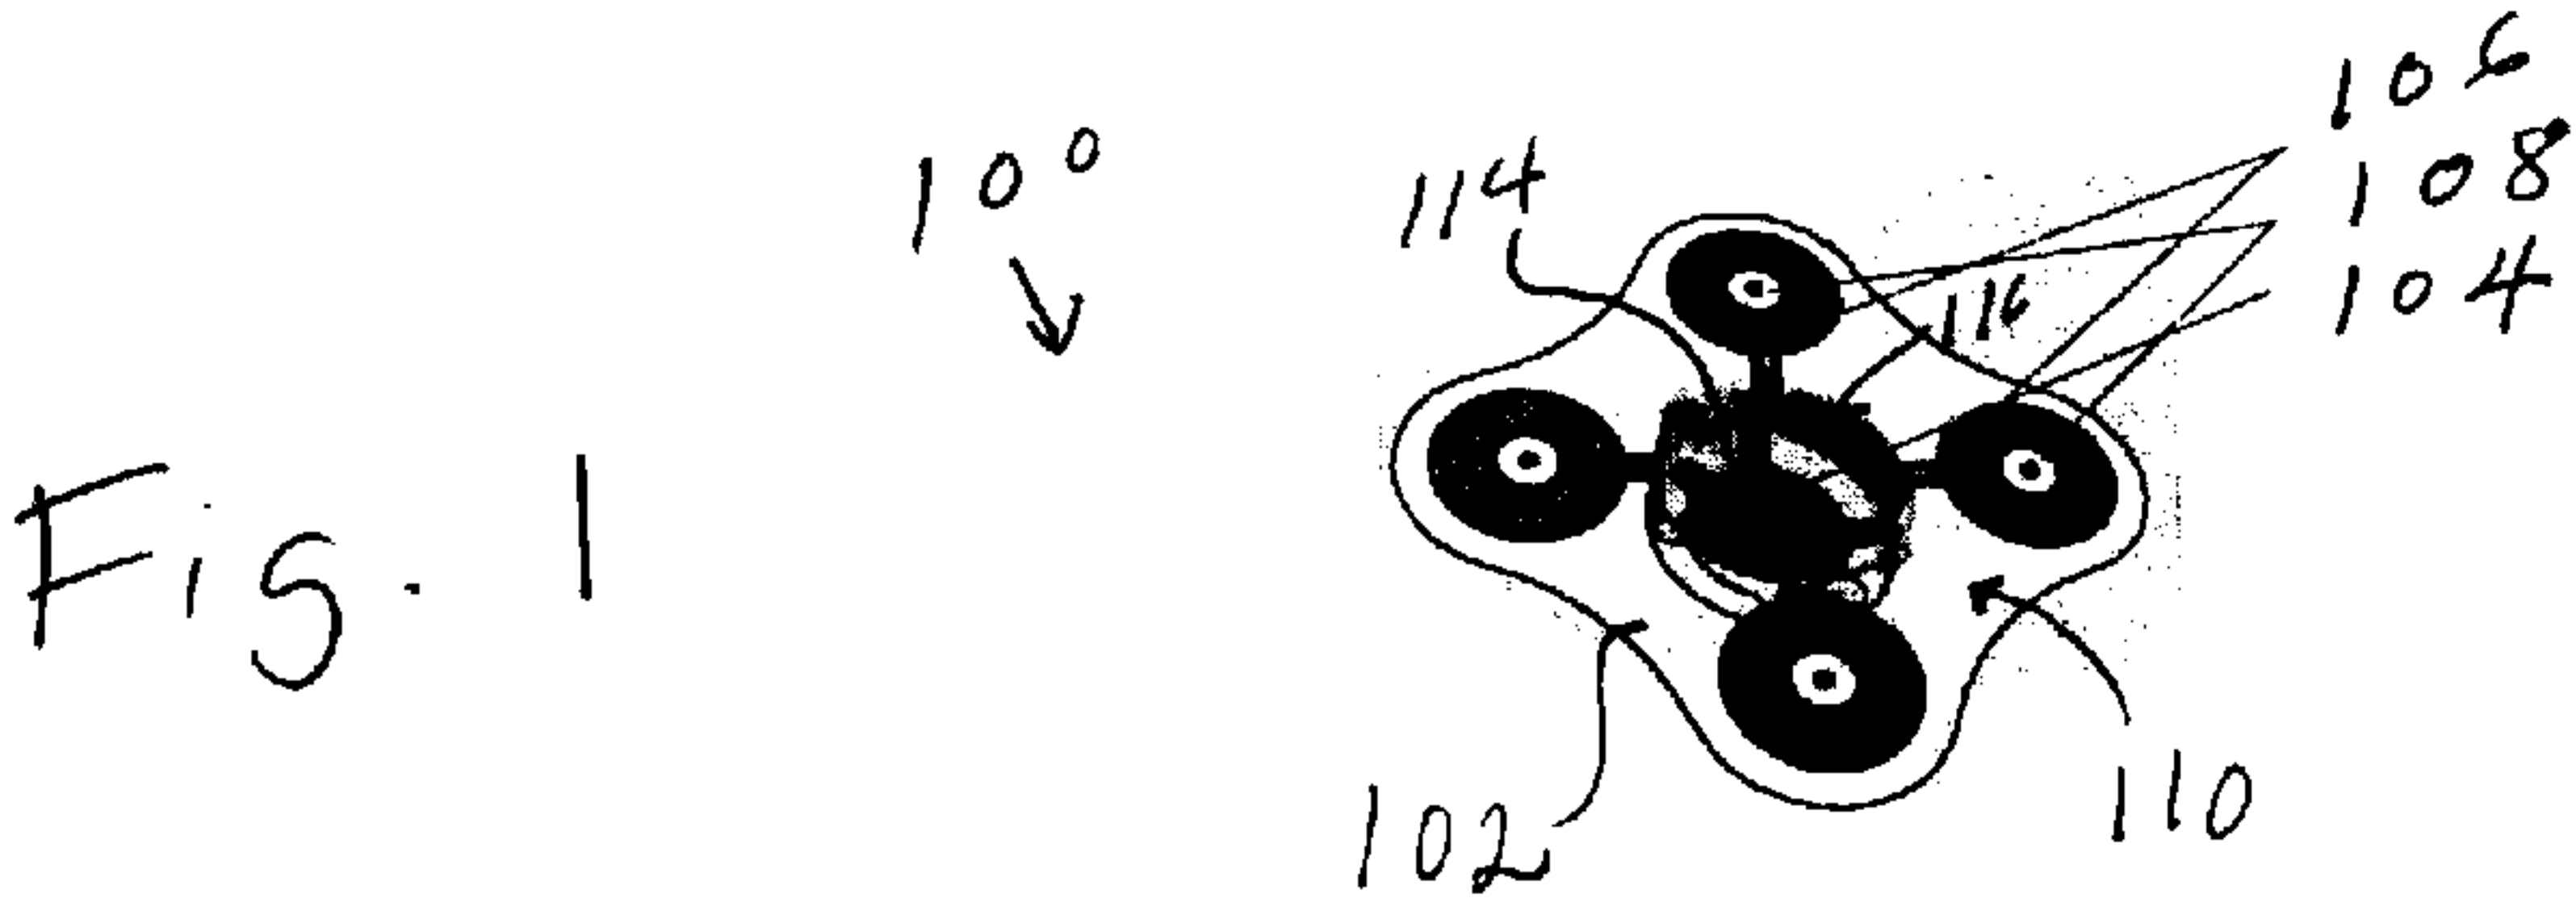

(57) **Abstract:** A CFS system includes self-adhesive, disposable pads. Each pad is combined with a sealed, cleanable battery/controller pod and then placed on the body where needed. The battery/controller pod preferably has wireless capability, such as Bluetooth® capability. The patient can download an application to a smartphone or similar mobile device to control the pods.

WO 2014/130701 A1

CUTANEOUS FIELD STIMULATION WITH DISPOSABLE AND RECHARGEABLE COMPONENTS

Reference to Related Applications

[0001] The present application claims the benefit of U.S. Provisional Patent Application No. 61/767,509, filed February 21, 2013. Related subject matter is disclosed in U.S. Patent Application Publication No. 2010/0274327 A1 and in U.S. Patent Nos. 8,086,322 and 8,386,005. The disclosures of all of the above applications and patents are hereby incorporated by reference in their entireties into the present disclosure.

Field of the Invention

[0002] The present invention is directed to cutaneous field stimulation and more particularly to such stimulation with disposable and rechargeable components.

Description of Related Art

[0003] Electroanalgesic therapies are known nonpharmacologic alternatives to conventional analgesic drugs for the management of acute and chronic pain. For example, percutaneous electrical nerve stimulation (PENS) is a known form of electroanalgesic therapy typically used for the treatment of intractable pain associated with chronic low back pain syndrome by stimulating the spinal cord (SCS) using electrodes implanted percutaneously into the epidural space as a trial before a more permanent total implantation of an SCS System. The term PENS has also been used to describe a technique for inserting 32-gauge acupuncture needles into soft tissues or muscles to electrically stimulate peripheral nerve fibers in the sclerotomal, myotomal, or dermatomal distribution corresponding to a patient's pain symptoms. Medical devices having arrays of percutaneous electrodes that utilize microstructure needles, which are less invasive than deeper-penetrating acupuncture needles, have also been used for

delivering PENS. The microstructure needles provide sufficient penetration to overcome the electrical impedance of the skin tissue for effectively recruiting sensory fibers.

[0004] As the understanding of the topographical organization of nociceptive systems becomes more detailed, the target location of the stimulation, the percutaneous electrodes' depth of penetration, and the current amplitude become more exacting. Percutaneous neuromodulation therapy (PNT) and cutaneous field stimulation (CFS) are specific forms of PENS that have been developed using that understanding. PNT is used for the treatment of cervical and lumbar pain and utilizes longer, acupuncture-type needles having a depth of penetration into the skin tissue of up to 3 cm. CFS is used more generally to treat pain and itch and utilizes an array of microstructure needles introduced close to the nerve endings in the skin. Because of the stringent requirements established for needle electrodes by the Food and Drug Administration (FDA) regarding the packaging, sterilization, reuse, and disposal of such electrodes, treatments utilizing such electrodes have generally been administered under the supervision of a physician (e.g., in a doctor's office or a clinic).

[0005] CFS is used to assist in the management of chronic nociceptive and neuropathic pain based on the understanding that specific types of sensory nerves that are linked to diminishing the perception of pain can be activated by low amplitude, long duration electrical stimulation if electrodes having sharp tips (i.e., microstructure needles) are introduced close to the nerve endings in the skin. CFS treatment also influences specific active components necessary for perceiving itch by inducing long lasting inhibitory mechanisms in central pathways and by actually normalizing the number of epidermal sensory fibers in itchy skin. Accordingly, CFS also provides an alternative to known treatments for localized itch.

[0006] The sensory receptors stimulated by CFS are axons within the skin tissue known as nociceptors, specifically $A\delta$ and C nerve fibers. The stimulation of $A\delta$ and C nerve fibers, although effective in diminishing the perceptions of both pain and itch, can be a relatively uncomfortable treatment because a prickling and/or burning sensation is perceived from the stimulation of the $A\delta$ and C nerve fibers, which can be uncomfortable and painful. Because the aversiveness of $A\delta$ and C nerve fiber stimulation can be masked by $A\beta$ fiber stimulation, it would be a considerable advantage to combine $A\beta$ fiber stimulation (e.g., transcutaneous electrical nerve stimulation (TENS)) and $A\delta$ and C fiber stimulation (e.g., CFS) in the same equipment. Accordingly, there is a need for a method and device that combines $A\beta$ fiber stimulation and $A\delta$ and C fiber stimulation in one treatment. Moreover, there is a need for a method and device that combines TENS and CFS in one treatment.

[0007] Cutaneous Field Stimulation (CFS) is a technique for relieving itch and pain that allows topographically restricted and tolerable electrical stimulation of thin ($A\delta$ and C) cutaneous fibers but is not well suited for the stimulation of $A\beta$ fibers. CFS uses a flexible plate with multi-array needle-like electrodes regularly fixed at 2-cm intervals. Each electrode is surrounded by an elevated "stop-device" about 2.0 mm in diameter that protrudes 2.0 mm from the plate. The electrode tip usually protrudes 0.3 mm to 0.4 mm from the stop-device. When gently pressing the electrode plate against the skin, the electrode tips are introduced close to the receptors in the epidermis and the superficial part of dermis. Since the electrodes traverse the electrically isolating horny layer of the epidermis and the current density is high near the sharp electrode tips, the voltage and current required for stimulating cutaneous nerve fibers are small, typically less than 50 V and up to 2 mA, respectively. As the current density decreases rapidly with distance, localized stimulation is achieved. The electrodes are

stimulated consecutively with a constant current stimulator, each electrode with a frequency of 1-10 Hz (pulse duration 1.0 ms) and treatment duration of 5-45 min. In its original embodiment, a self-adhesive surface (TENS) electrode served as anode and was usually placed about 5-30 cm away from the needle electrode plate.

[0008] Recent improvements in CFS are taught, e.g., in U.S. Patent No. 8,086,322. However, it would be helpful to provide a CFS system that is less expensive and more easily used than present systems.

[0009] CFS works best on pain or itch that is focused in one main area. Therefore, one of the challenges of using CFS for itch or pain that is not focused in one particular area is the distribution of the signal. CFS is most effective when placed directly over the area of pain or itch. Therefore, pain or itch that is distributed over multiple areas requires repeated use of the stimulator serially in each zone of pain or itch. Having a system that would allow simultaneous stimulation of multiple sites with an easy to use interface would be advantageous.

Summary of the Invention

[0010] It is therefore an object of the invention, in at least some embodiments, to provide a system using less expensive pads.

[0011] It is another object of the invention, in at least some embodiments, to provide such a system that is easier and more convenient for the patient to use.

[0012] It is still another object of the invention, in at least some embodiments, to provide such a system that uses, as its controller, a device that the patient will likely already own, such as a smartphone.

[0013] To achieve the above and other objects, the present invention, in at least some embodiments, is directed to a CFS system having self-adhesive, disposable pads. Each pad is combined with a sealed, cleanable battery/controller pod and then placed on the body where needed.

[0014] The battery/controller pod preferably has wireless capability, such as Bluetooth® capability. The patient can download an application to a smartphone or similar mobile device (e.g., iPhone, iPad, or Android smartphone). The application guides the patient in the placement of the pads and then controls the smartphone or other mobile device to connect with the battery/controller pods wirelessly and to act as a central controller for the battery/controller pods. The use of that application allows both easy upgradability and a user-friendly graphical user interface and also makes use of a device that the patient likely already has and with which the patient is familiar.

[0015] The patient is also provided with an inductive charger for the battery/controller pods. The inductive charger can also have cleaning capability. Once the treatment is over, the patient discards the pads and places the pods into the charger.

[0016] A CFS system that has multiple channels with a fewer number of needle like (NL) electrodes per electrode plate (4 to 6 instead of 14 to 16) could be tailored to more effectively treat each zone of pain or itch by titrating the level of stimulation or amplitude for each channel or zone. The size of the treatment zone could also be increased or decreased by adding multiple disposable electrode plates to match the size of the pain or itch zone. The level of stimulation or amplitude of each electrode plate could be individually adjusted and tuned to provide the optimal amount needed at each zone. Using a remote controller (e.g., a smartphone) to adjust the output and parameters of each zone and connecting the controller with each of the electrode plates using Bluetooth or other wireless technology would greatly increase the convenience and ease of use of the CFS system. This type of CFS system would provide a more effective and easier to use treatment of pain and itch due to its scalability, convenience and adjustability.

Brief Description of the Drawings

[0017] A preferred embodiment of the present invention will be set forth in detail with reference to the drawings, in which:

[0018] Figure 1 is a drawing showing the configuration of a pad;

[0019] Figure 2 is a drawing showing a retail package in which the pads are sold to the patient;

[0020] Figure 3 is a drawing showing the way in which the pad and the pod are combined for use;

[0021] Figure 4 is a schematic diagram showing the circuitry in the pod of Figure 3;

[0022] Figure 5 is a drawing showing the way in which the pods are placed into the charger after use;

[0023] Figure 6 is a drawing showing the smartphone running the CFS application, the communication between the mobile device and the pads, and the placement of the pads on the patient's body;

[0024] Figures 7A through 7L are diagrams showing steps in the use of the CFS system;

[0025] Figure 8 is a drawing showing a possible modification of the pads;

[0026] Figure 9 is a drawing showing one possible configuration for the charger;

[0027] Figure 10A is a perspective view showing another possible configuration for the charger;

[0028] Figure 10B is a cross-sectional view taken along lines XB-XB of Figure 10A; and

[0029] Figure 11 is a drawing showing another possible modification of the pads.

Detailed Description of the Preferred Embodiment

[0030] A preferred embodiment of the present invention and variations thereof will be set forth in detail with reference to the drawings, in which like reference numerals refer to like elements or steps throughout.

[0031] Figure 1 shows a pad 100 according to the preferred embodiment. The pad 100 includes a substrate 102 carrying a flexible circuit 104, TENS pads 106, and CFS blades 108. An adhesive 110 is applied to allow adhesion to the patient's skin, and a cover 112 (not shown in Figure 1, but shown in Figure 7B) is disposed on the pad 100. The flexible circuit 104 has a portion 114 formed in a pocket 116 in the substrate 102 to receive power from a pod (to be described below).

[0032] The pad 100 is consumable, disposable, and self-adhesive. It has a flexible circuit, one-use gel pads, and one-use CFS blades.

[0033] Figure 2 shows multiple pads 100 in an over-the-counter consumer 12-pack 200 having a sheet 202 and an envelope 204. Of course, the pads 100 could be packaged singly or in any number, and the configuration of the packaging can be changed as desired as long as the pads 100 are adequately protected.

[0034] Figure 3 shows a pod 300 for use with the pad 100. The pod 300 is reusable and rechargeable and is inserted into the pocket 116 of the pad 100. The pod 300 can have a surface antimicrobial treatment to assure cleanliness and decrease any possibility of contamination. In addition, or instead, a disinfecting device, to be described below, can be used, or the pods can be wiped with disinfecting cloths between uses.

[0035] Figure 4 is a circuit diagram showing the circuitry contained in the pod 300. The pod 300 contains a 3V battery 402 and output circuitry 404 for providing a 50V output. The battery

402 has a life of 20 minutes and operates under control of a microelectronic controller 406 and a Bluetooth communication device 408. Of course, any suitable values and any suitable communication protocol could be used instead.

[0036] Figure 5 shows an inductive pod charger 500 into which multiple pods 300 are inserted for inductive charging.

[0037] Figure 6 shows multiple pads 100 placed on the back of a patient *P*. A suitably programmed smartphone or other wireless device 600 communicates with the pods (not shown in Figure 6) using a Bluetooth connection 602.

[0038] Figures 7A through 7L show steps in the use of the preferred embodiment. In Figure 7A, the patient *P* is suffering from lower-back and shoulder pain. In Figure 7B, the patient *P* peels off the cover 112 from the pad 100 and inserts a battery/controller pod 300. In Figure 7C, the patient *P* places a pad, with the pod inserted, at each pain zone. In Figure 7D, the patient *P* runs the smartphone application on the smartphone 600 and selects the transducer locations on the application's graphical user interface 702. The application can also prompt the patient on where to place the pads using diagrams or photographs taken by the doctor at the initial appointment. Of course, the order of performing the steps of Figures 7B-7C and the step of Figure 7D could be reversed. In Figure 7E, the patient *P* chooses a treatment program for each zone on the graphical user interface 702. The programs can be custom-designed by the user and saved and named if liked, or the doctor can set and lock each program. In Figure 7F, the patient *P* presses the "Start Treatment" button 704 on the graphical user interface 702. The graphical user interface 702 can show intensity, program curves, and the like. The application can also play music or video or allow the patient to play a game. In Figure 7G, the pods 300 and the smartphone 600 communicate wirelessly over

the Bluetooth connection 602 to control each pod 300 to load and start the appropriate treatment to the zone where it is located. In Figure 7H, the treatment programs are running, and the patient *P* can relax during treatment. In Figure 7I, the treatment programs are finished, and the patient *P* removes each pad 100 and removes each pod 300 from its corresponding pad. In Figure 7J, each pad, which is intended for a single use, is discarded. In Figure 7K, the pods 300 are placed into an inductive charger 500. In Figure 7L, the process ends, and the patient's pain is relieved.

[0039] The application can wirelessly transmit information after each treatment to the doctor for the patient's file. The details can include duration, program setting, date and time. The application can also provide regular reminders to help the patient tailor and follow treatment guidelines as fits the patient's schedule. Communication with the doctor's office can be by any suitable communication technology, e.g., the data connection or SMS functionality in the smartphone 600.

[0040] The use of a smartphone or tablet means less physical product to track, produce, repair, or update, since the application can be implemented on hardware that the patient likely already has. Alternatively, a dedicated device can be produced. Product updates can largely be done by releasing updates of the application. Such updates can upgrade the look/feel and performance of the user interface and the programs.

[0041] The product will conform to the patient's aesthetics because the patient has already chosen the device and the cover. The user interface can also include options to customize such things as the color schemes.

[0042] Small, independent transducers (pad/pod combinations) make placement, coverage, and focus easier. In a variation of the preferred embodiment, shown in Figure 8, changeable

color-coded rings 800 provide a visual reference for placement and program options in the user interface.

[0043] Figure 9 shows an example of an inductive charging pad 500. The charging pad 500 has a dimple 902 into which each pod 300 can be snapped for charging. Some sort of contact charging can be provided instead.

[0044] Figures 10A and 10B are a perspective view and a cross-sectional view, respectively, of a charging box 1000 that charges one side and disinfects the other side simultaneously. The box 1000 includes an inductive charging mat 1002 and a capillary foam 1004 for applying a sterilization fluid 1006 to the pod 300.

[0045] Figure 11 shows multiple sheets 1100 to keep different colored transducers 1102 separate. This can be useful if, for example, different types of transducers are provided.

[0046] While a preferred embodiment and variations thereon have been set forth in detail above, those skilled in the art who have reviewed the present disclosure will readily appreciate that other embodiments can be realized within the scope of the invention. For example, numerical values are illustrative rather than limiting, as are disclosures of specific technologies, technical standards, and methods of charging the pods. Therefore, the present invention should be construed as limited only by the appended claims.

What is claimed is:

1. A device for cutaneous field stimulation, the device comprising:
a sealed and cleanable battery/controller pod; and
a disposable pad that is configured such that the pod is insertable into the pad, the pad comprising:
a substrate;
a plurality of TENS pads on the substrate;
a plurality of CFS blades on the substrate; and
circuitry on the substrate for conveying power from the pod to the plurality of TENS pads and the plurality of CFS blades.
2. The device of claim 1, wherein the pod comprises a battery and a microcontroller.
3. The device of claim 2, wherein the pod further comprises a communication device for wireless communication between the microcontroller and an external device.
4. The device of claim 1, further comprising a charger for the pod.
5. The device of claim 4, wherein the charger is an inductive charger.
6. The device of claim 4, wherein the charger comprises a component for disinfecting the pod while charging the pod.
7. A system for cutaneous field stimulation, the system comprising:
a processing device;
a plurality of sealed and cleanable battery/controller pods, each of the pods being configured for wireless communication with the processing device; and
a plurality of disposable pads that are configured such that each pod is insertable into one of the pads, each of the pads comprising TENS pads and CFS blades;

wherein the processing device is configured to control the pods over the wireless communication to implement the cutaneous field stimulation.

8. The system of claim 7, wherein the processing device is a smartphone or tablet running an application for controlling the pods.

9. The system of claim 7, wherein the pads comprise at least two sets of pads, the at least two sets of pads being color-coded with different colors.

10. The system of claim 7, wherein each of the pods comprises:

a battery;

a microcontroller; and

a communication device for wireless communication between the microcontroller and the processing device.

11. The system of claim 7, further comprising a charger for the pods.

12. The system of claim 11, wherein the charger is an inductive charger.

13. The system of claim 11, wherein the charger comprises a component for disinfecting the pod while charging the pod.

14. A method for cutaneous field stimulation, the method comprising:

(a) providing:

a processing device;

a plurality of sealed and cleanable battery/controller pods, each of the pods being configured for wireless communication with the processing device; and

a plurality of disposable pads that are configured such that each pod is insertable into one of the pads, each of the pads comprising TENS pads and CFS blades;

wherein the processing device is configured to control the pods over the wireless communication to implement the cutaneous field stimulation;

(b) determining locations on a patient's body where the cutaneous field stimulation is needed;

(c) selecting a set of the pads to place on the locations determined in step (b);

(d) inserting one of the pods into each of the pads selected in step (c);

(e) placing the pads selected in step (c) with the pods inserted in step (d) onto the locations determined in step (b); and

(f) controlling the pods placed in step (e) with the processing device to apply the cutaneous field stimulation through the pads.

15. The method of claim 14, wherein the processing device is a smartphone or tablet running an application for controlling the pods.

16. The method of claim 14, wherein the pads provided in step (a) comprise at least two sets of pads, the at least two sets of pads being color-coded with different colors.

17. The method of claim 14, wherein each of the pods provided in step (a) comprises:

a battery;

a microcontroller; and

a communication device for wireless communication between the microcontroller and the processing device.

18. The method of claim 14, wherein step (a) further comprises providing a charger for the pods.

19. The method of claim 18, wherein the charger is an inductive charger.

20. The method of claim 18, wherein the charger comprises a component for disinfecting the pod while charging the pod.

21. The method of claim 14, wherein step (f) comprises:

(i) running an application on the processing device, the application providing a graphical user interface; and

(ii) inputting the locations determined in step (b) into the processing device through the graphical user interface.

22. The method of claim 21, wherein step (f) further comprises:

(iii) selecting treatment programs to be applied to the locations determined in step (b), using the graphical user interface.

23. The method of claim 22, wherein step (f)(iii) comprises selecting different ones of the treatment programs for different ones of the locations.

24. The method of claim 14, further comprising, after step (f):

(g) removing the pads and the pods from the locations;

(h) removing the pods from the pads; and

(i) disposing of the pads.

25. The method of claim 24, further comprising, after step (h):

(j) recharging the pods.

26. The method of claim 25, further comprising, after step (h):

(k) disinfecting the pods.

27. The method of claim 26, wherein steps (j) and (k) are performed concurrently, using a charging and disinfecting device.

28. A method for cutaneous field stimulation, the method comprising:

- (a) providing:
- a sealed and cleanable battery/controller pod; and
- a disposable pad that is configured such that the pod is insertable into the pad, the pad comprising:
- a substrate;
- a plurality of TENS pads on the substrate;
- a plurality of CFS blades on the substrate; and
- circuitry on the substrate for conveying power from the pod to the plurality of TENS pads and the plurality of CFS blades;
- (b) inserting the pod into the pad; and
- (c) applying the pod and the pad to a part of a patient's body where the cutaneous field stimulation is desired.

29. The method of claim 28, wherein the pod comprises a battery and a microcontroller.

30. The method of claim 29, wherein the pod further comprises a communication device for wireless communication between the microcontroller and an external device.

31. The method of claim 28, further comprising:

(d) supplying a charger for the pod; and

(e) charging the pod, using the charger.

32. The method of claim 31, wherein the charger is an inductive charger.

33. The method of claim 31, wherein the charger comprises a component for disinfecting the pod while charging the pod, and further comprising (f) disinfecting the pod, using the charger.

34. The method of claim 33, wherein steps (e) and (f) are performed concurrently.

Fig. 1


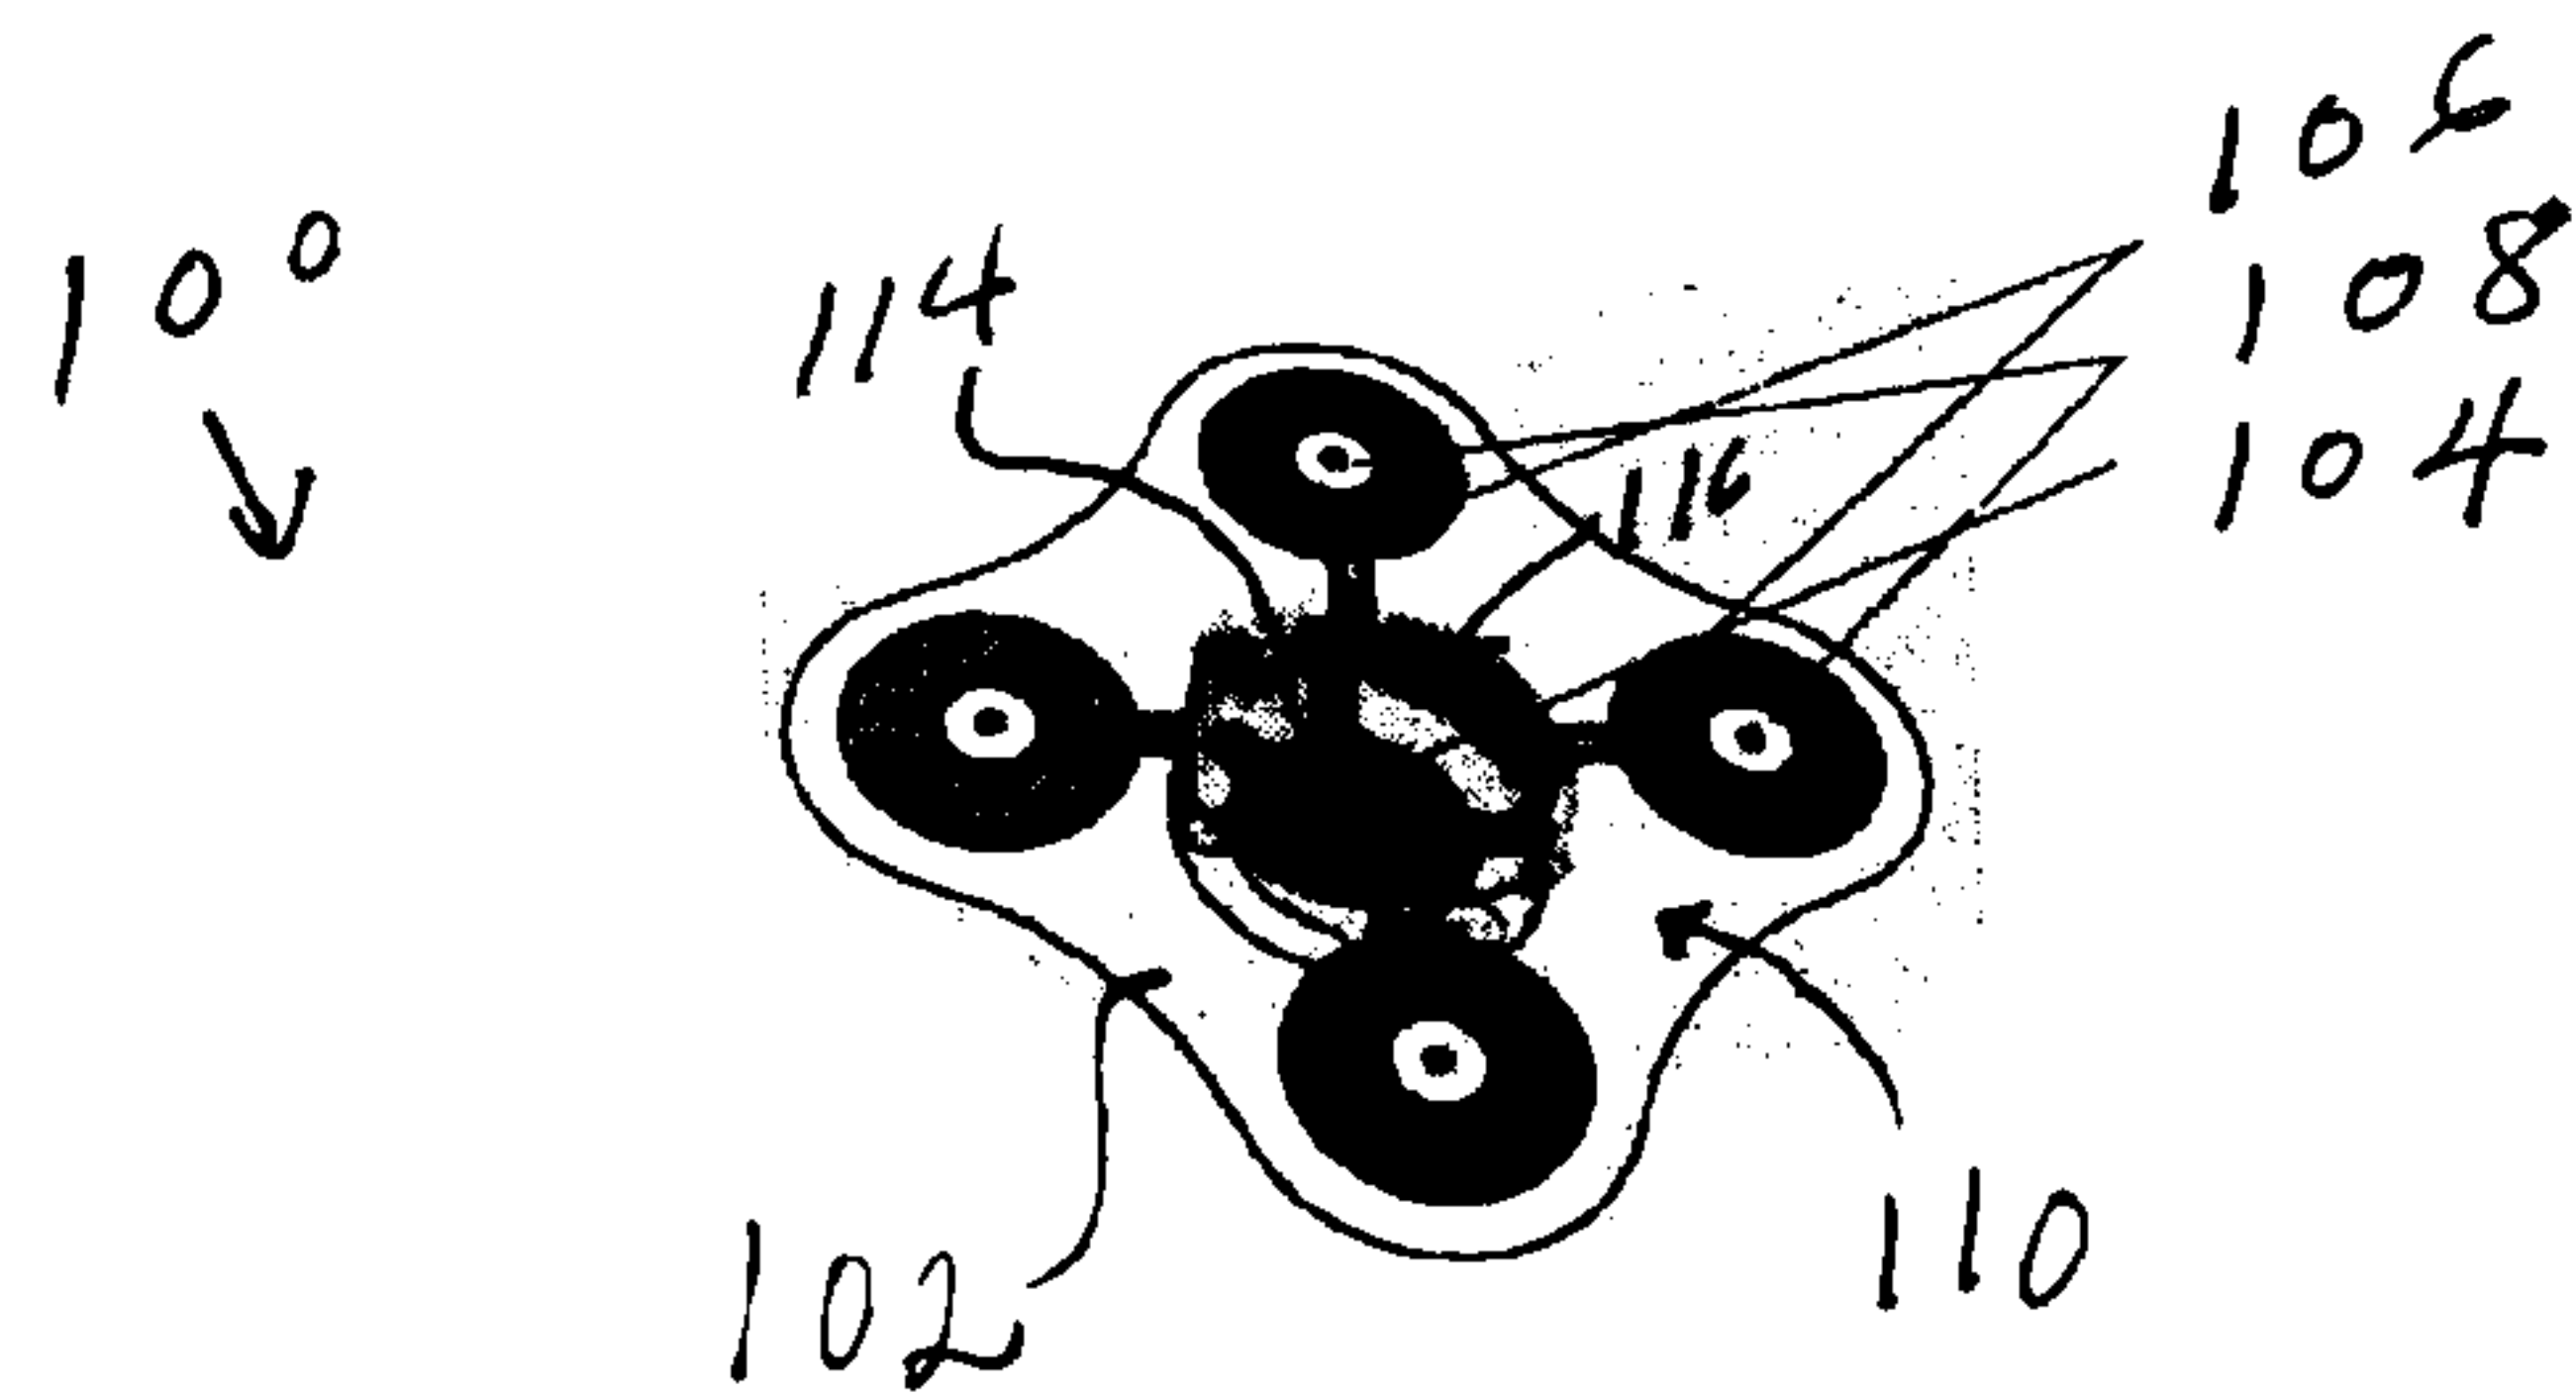


Fig. 2

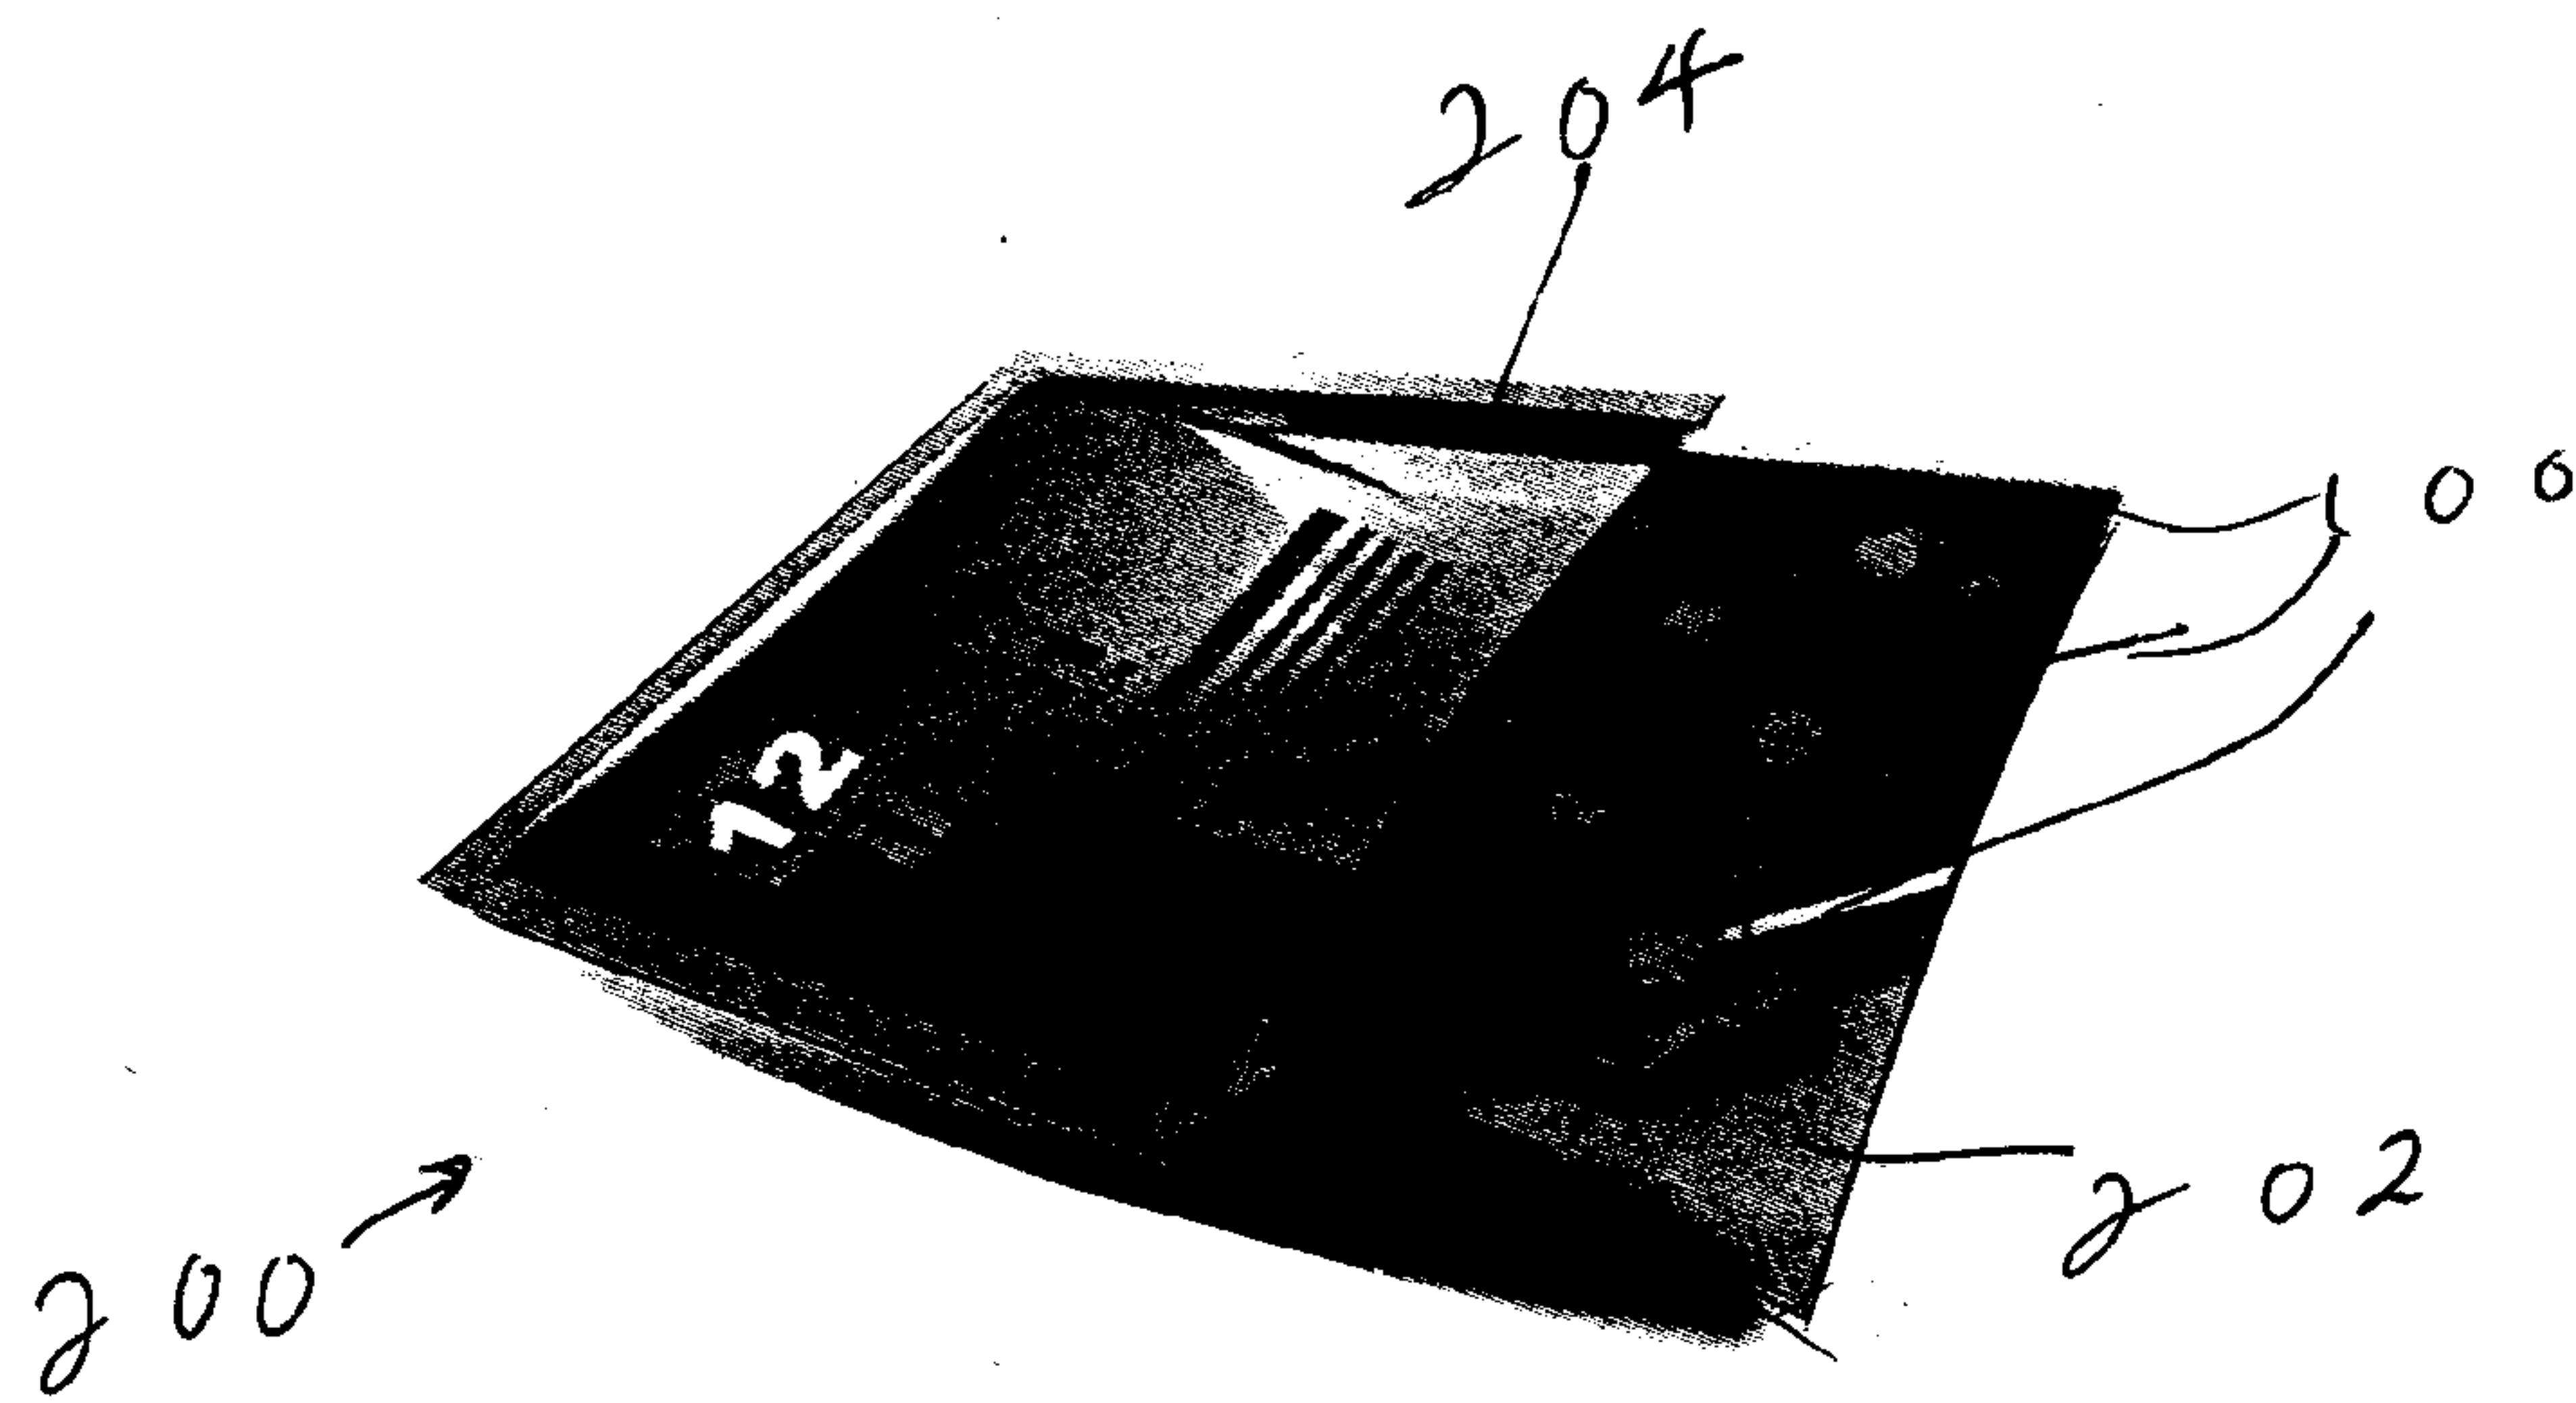

2/6


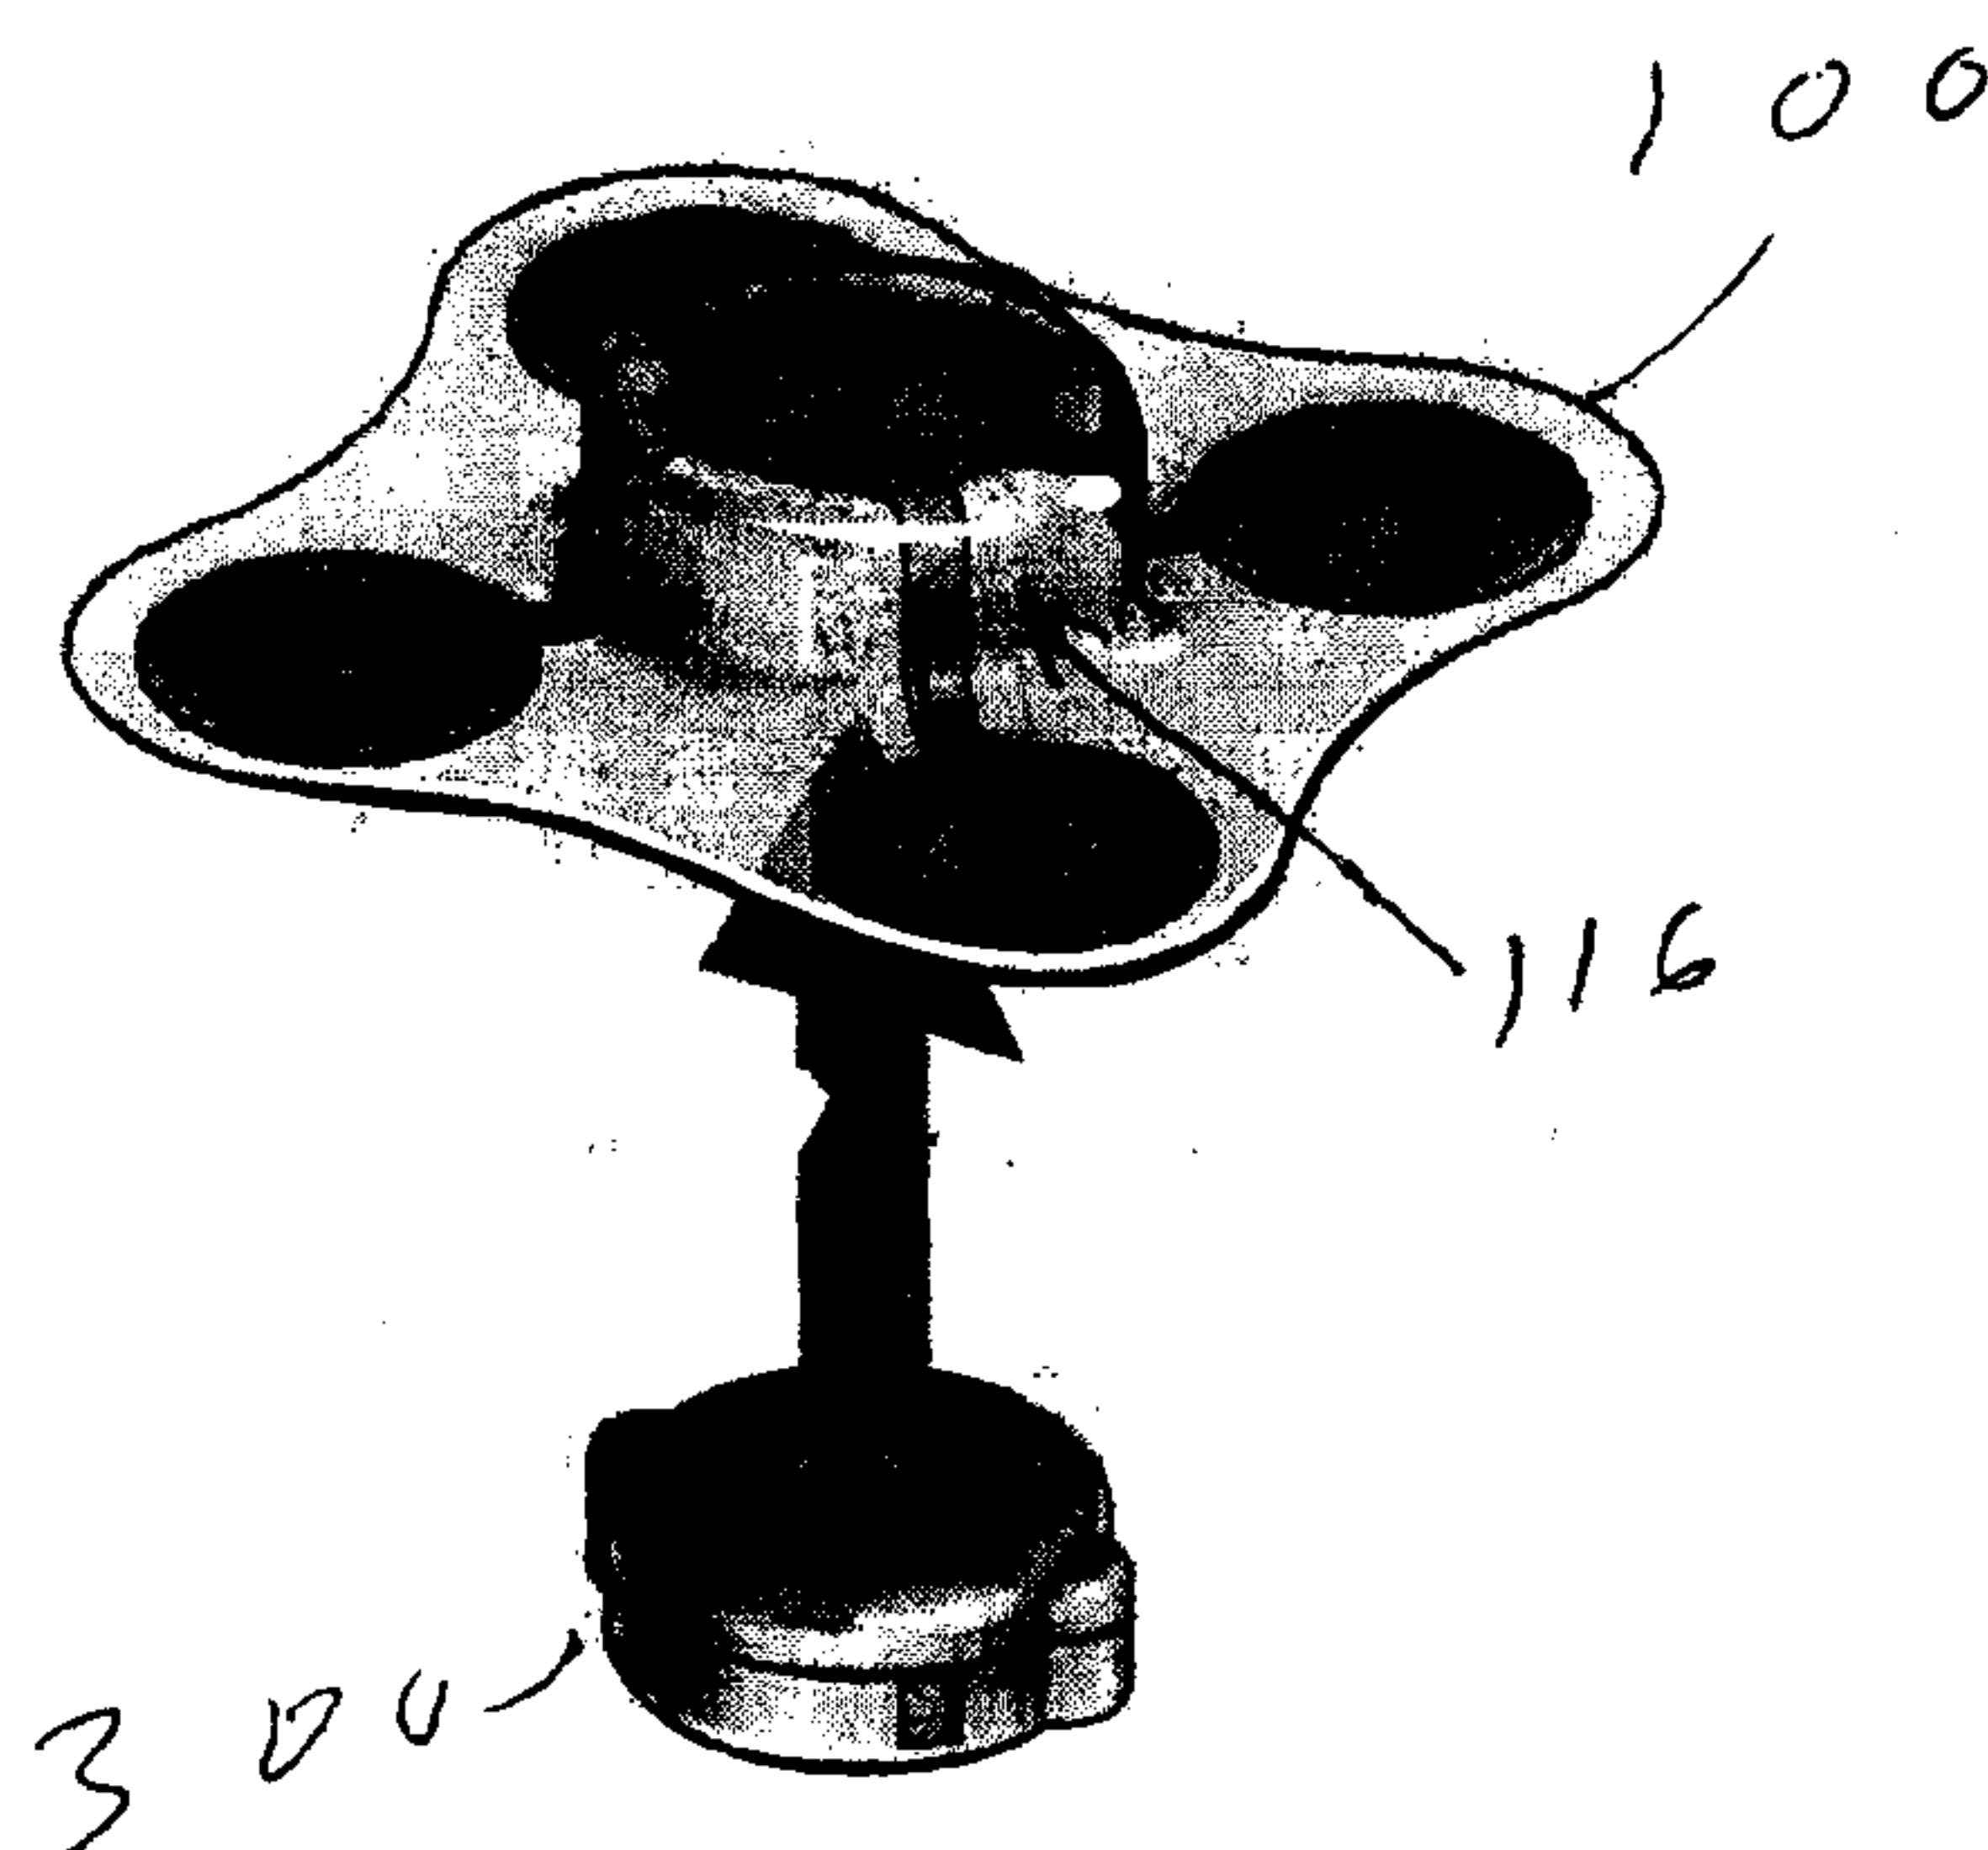
Fig.
3

Fig. 4

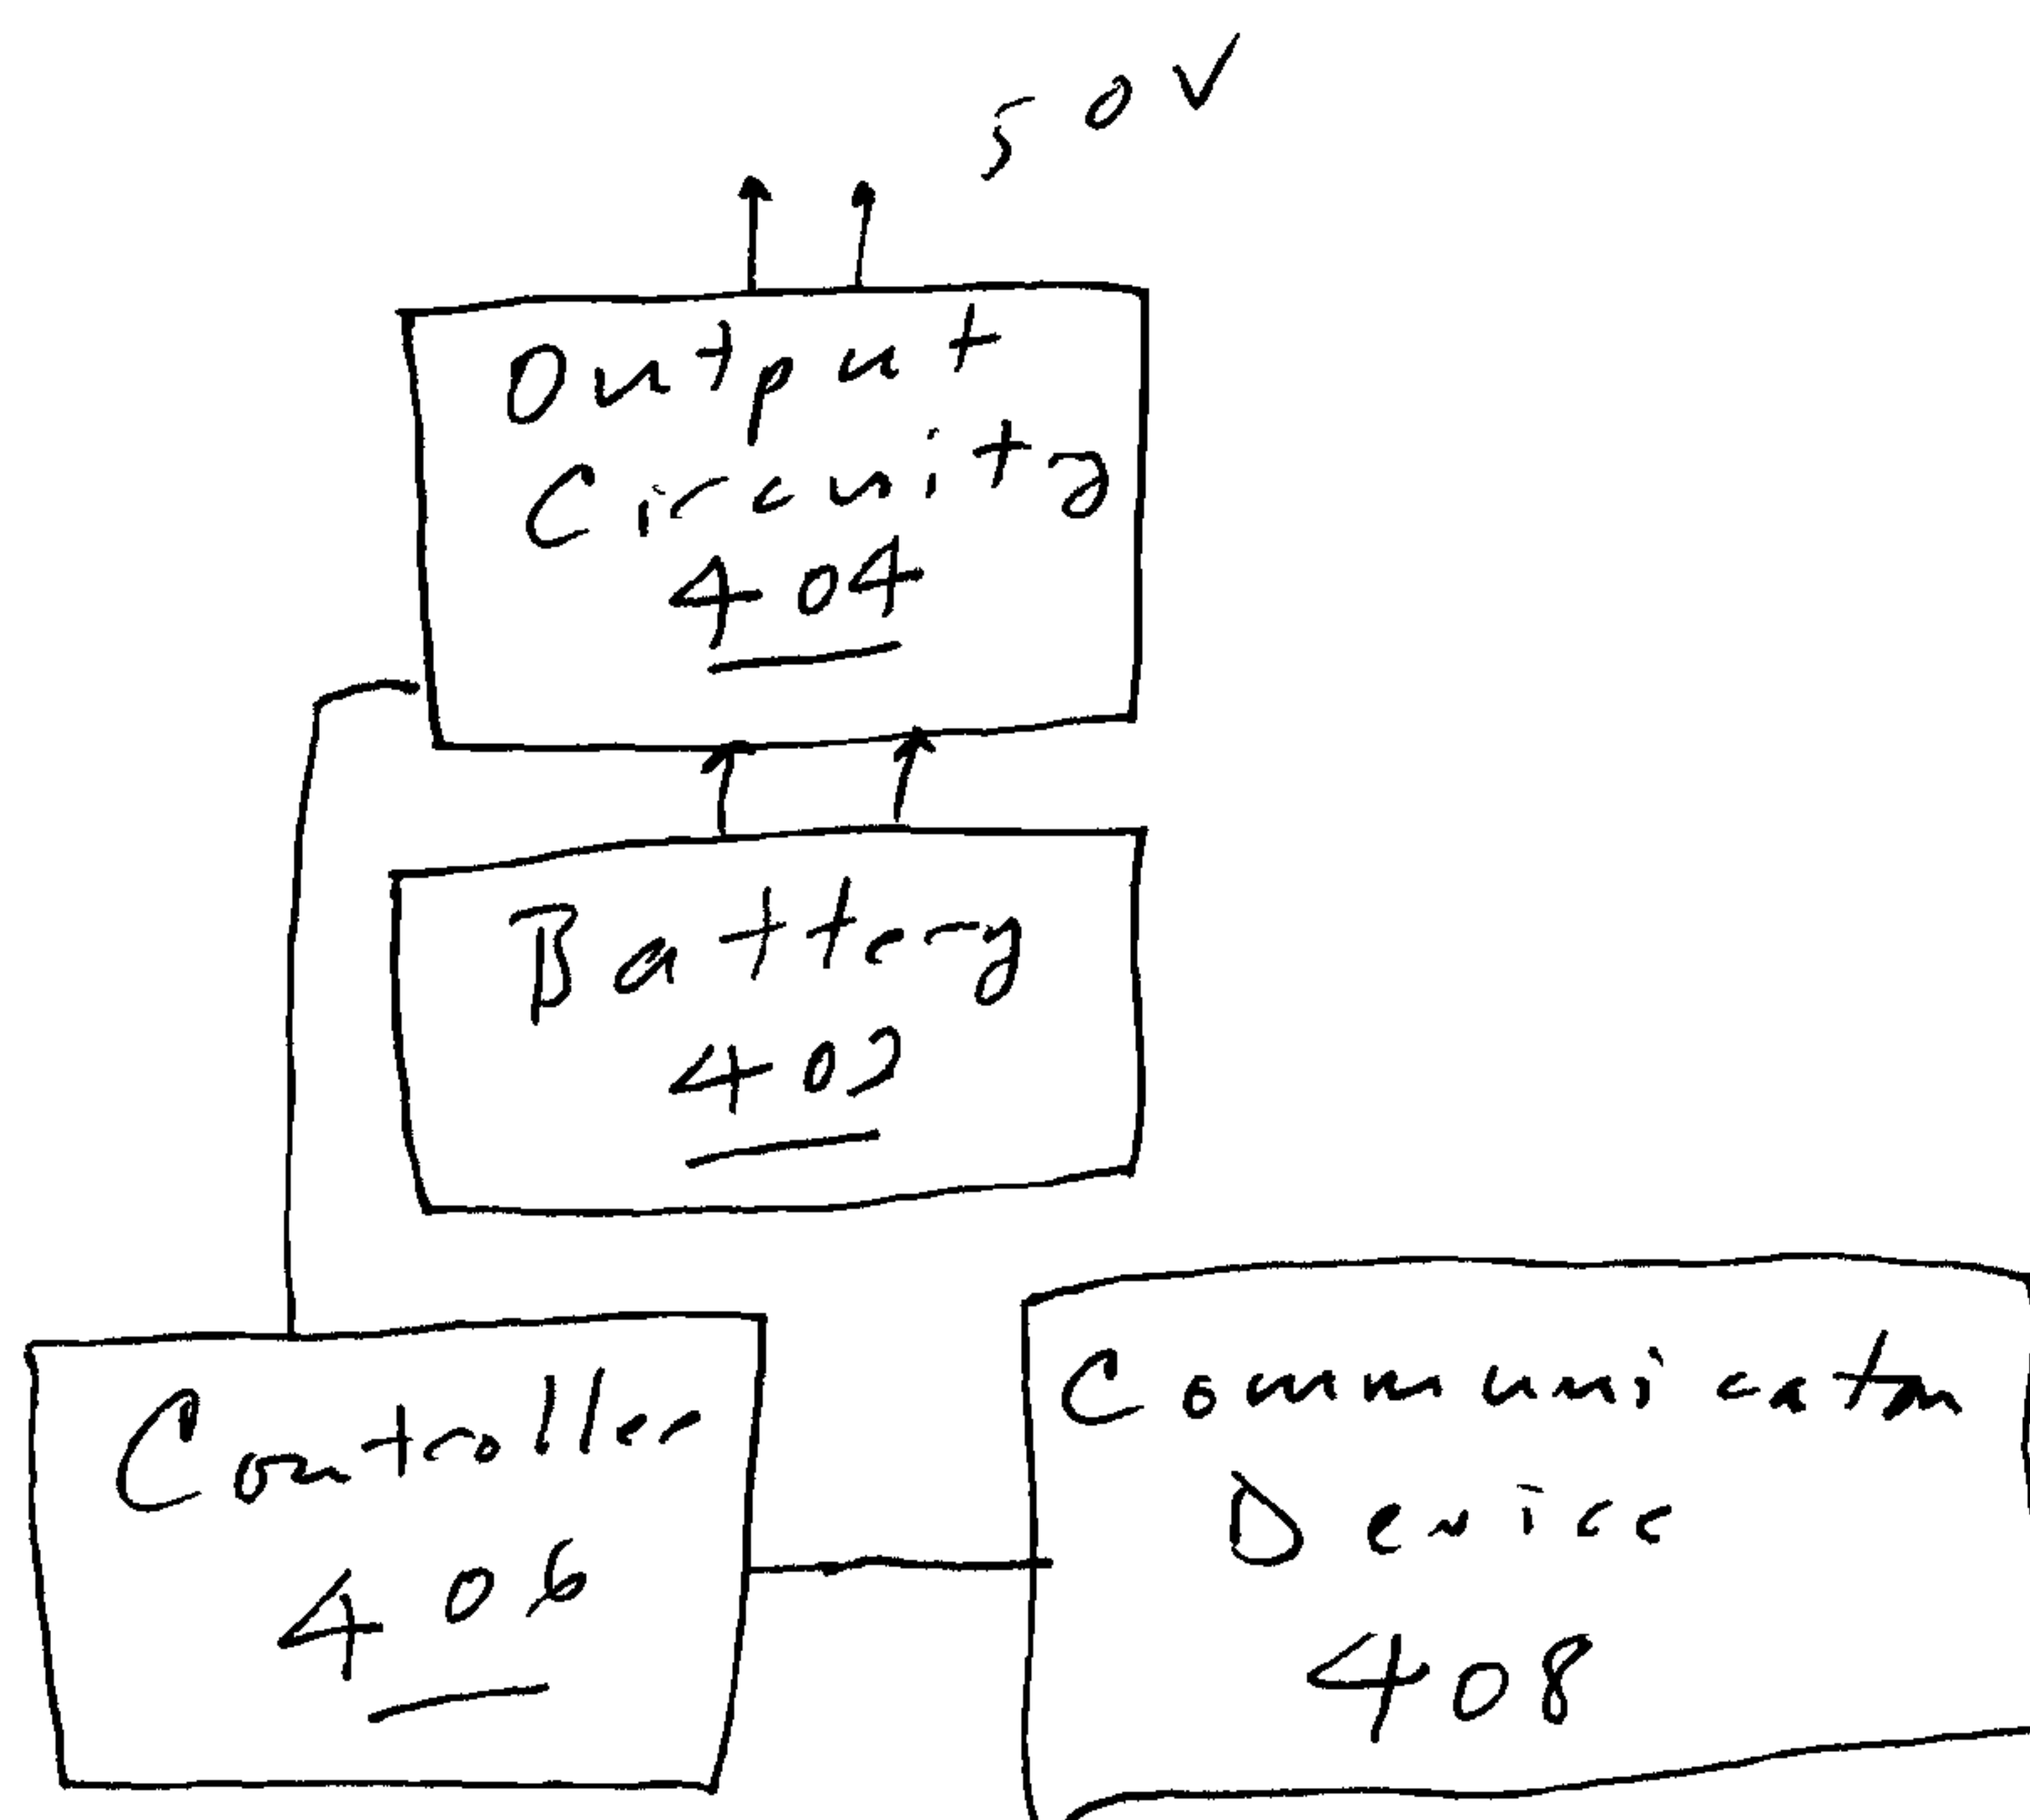

3/6



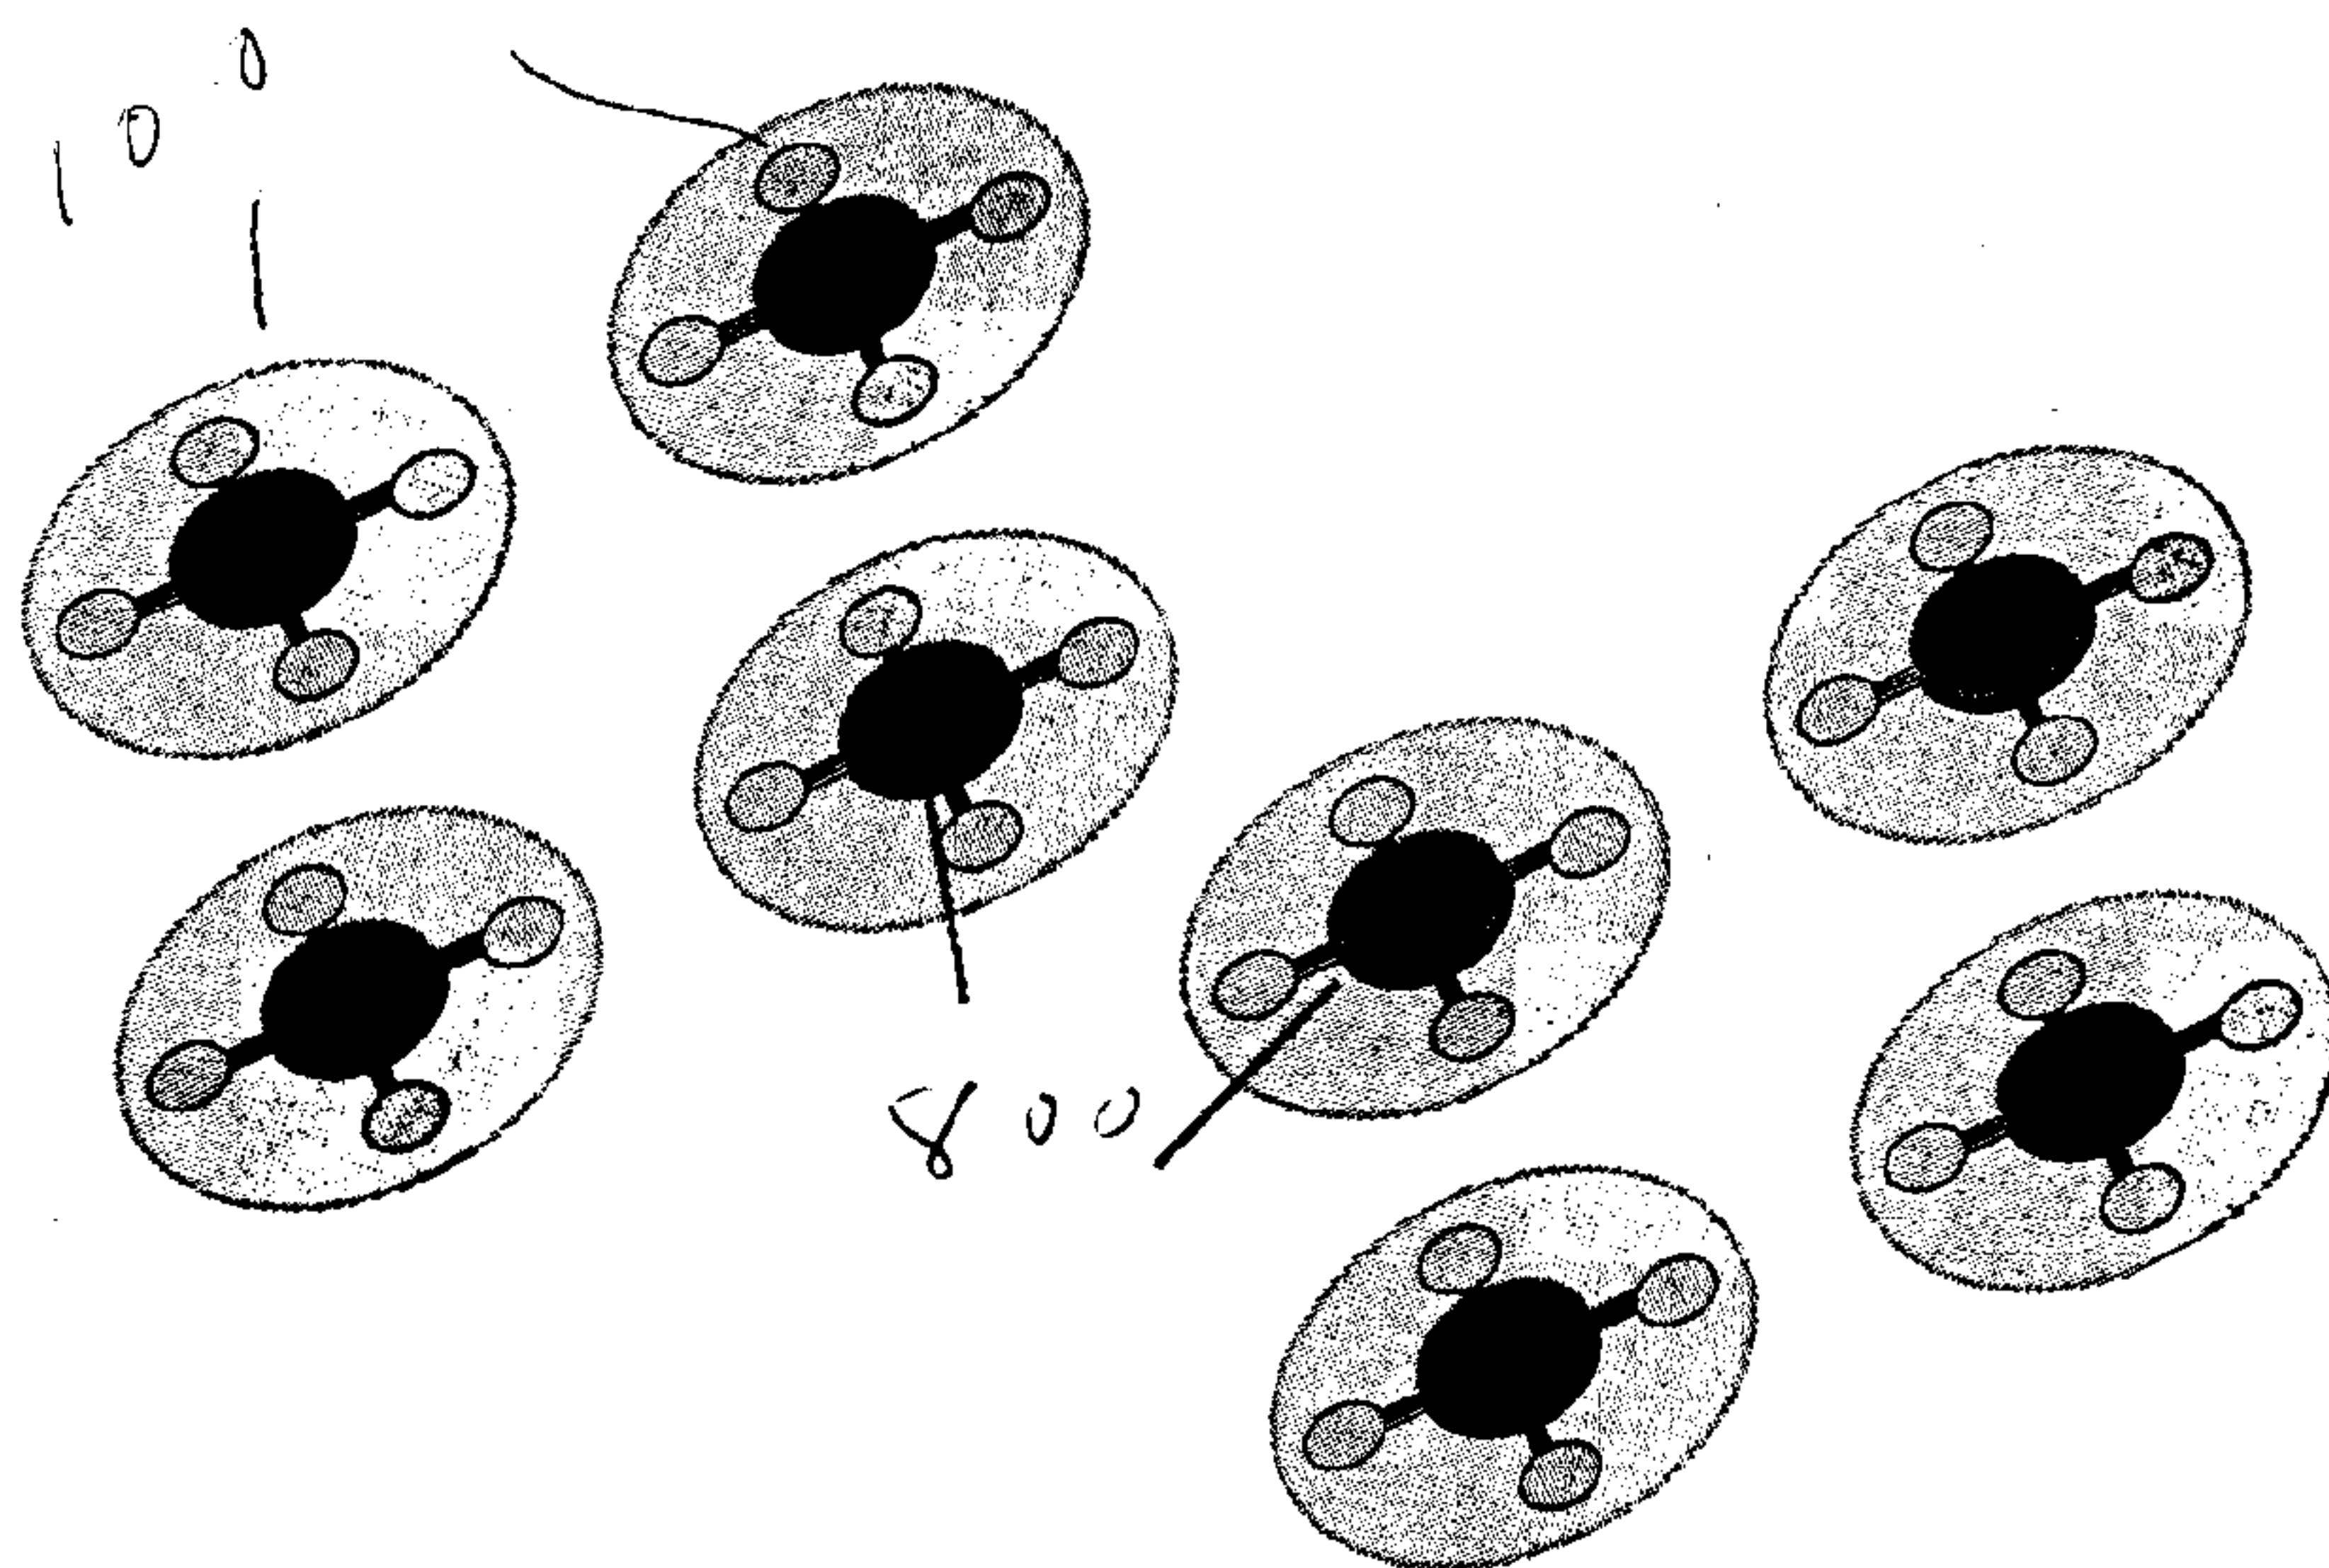



Fig. 8

Fig. 6

600

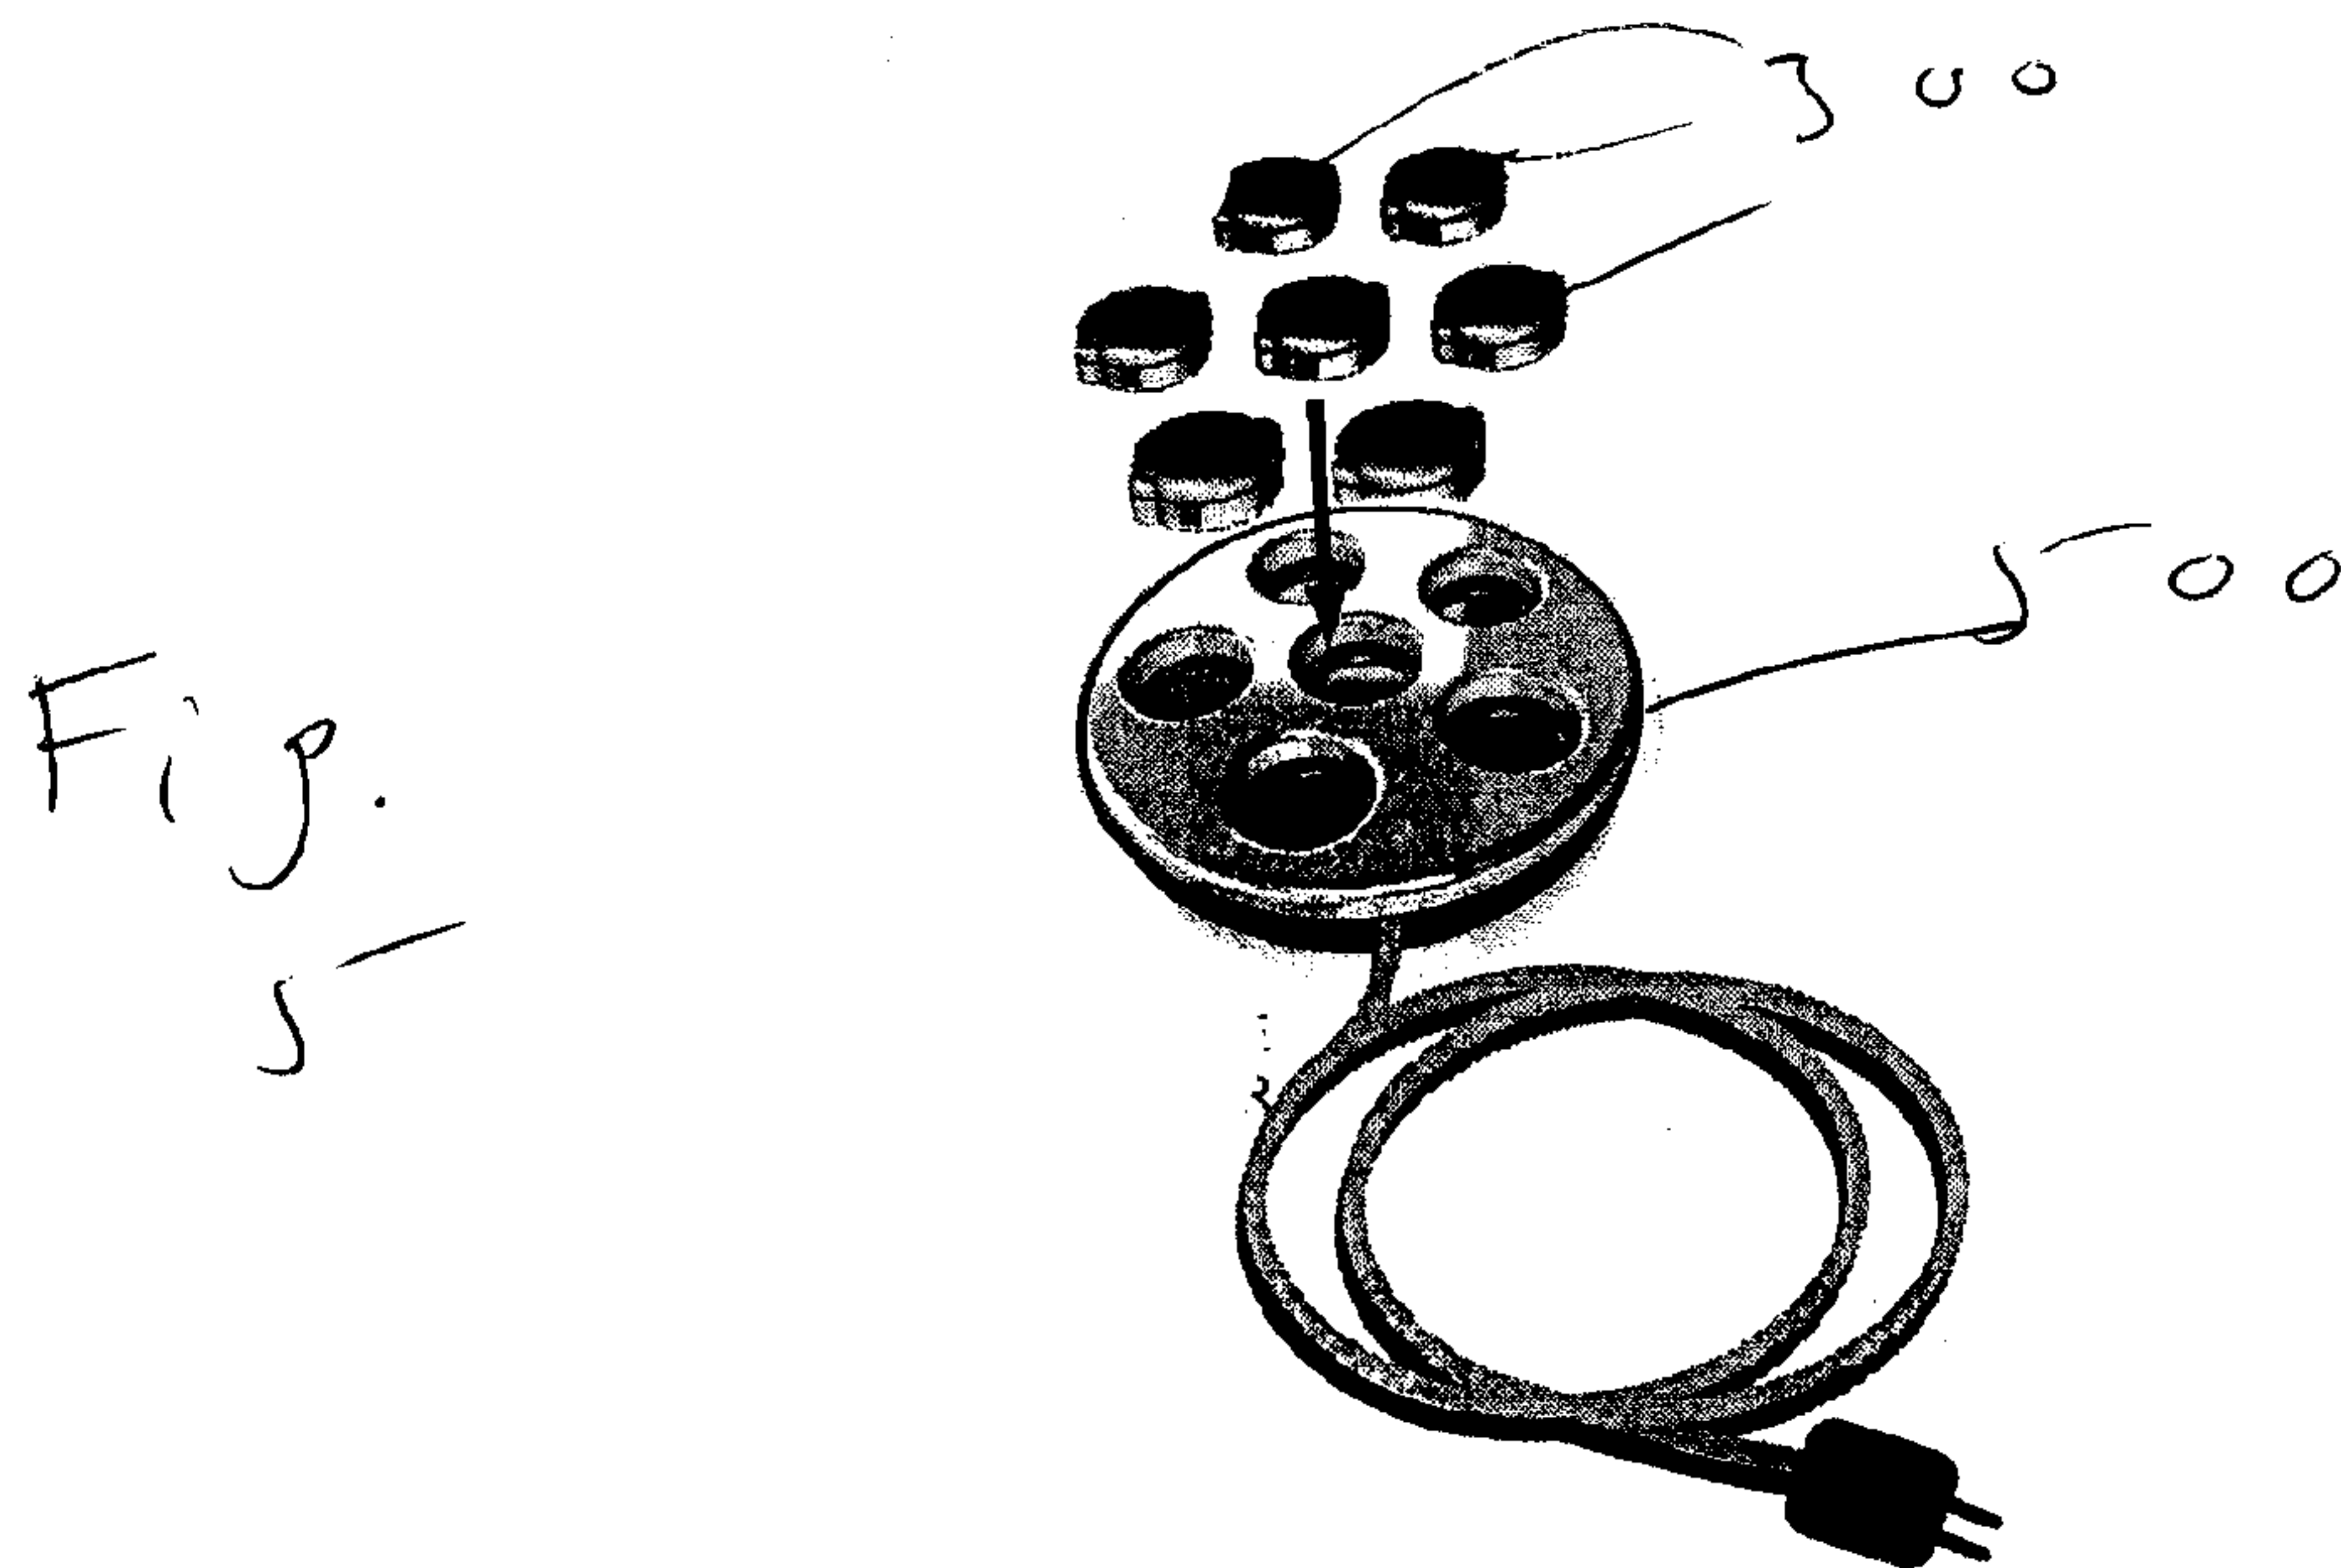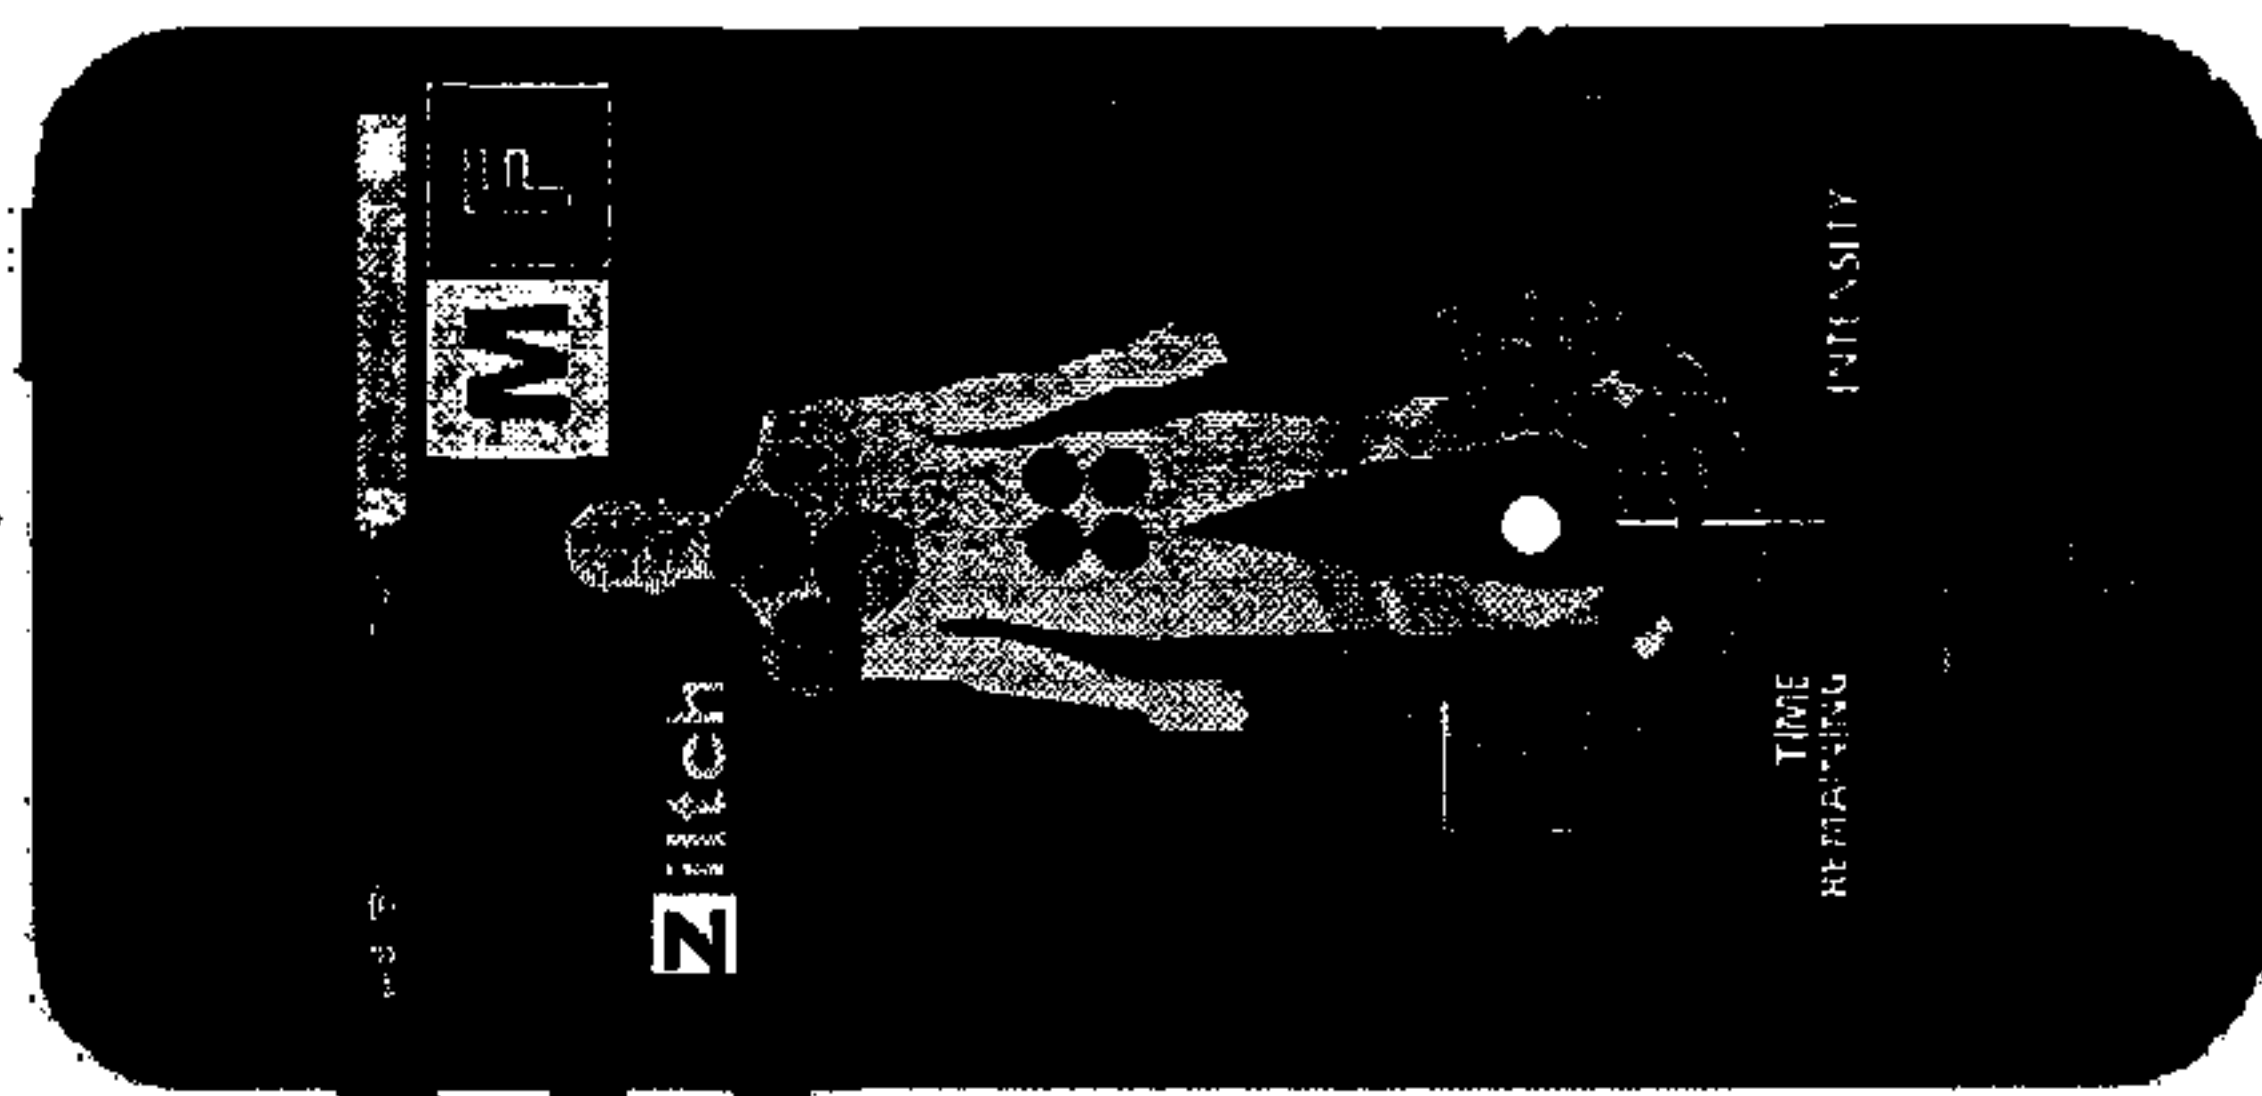

602

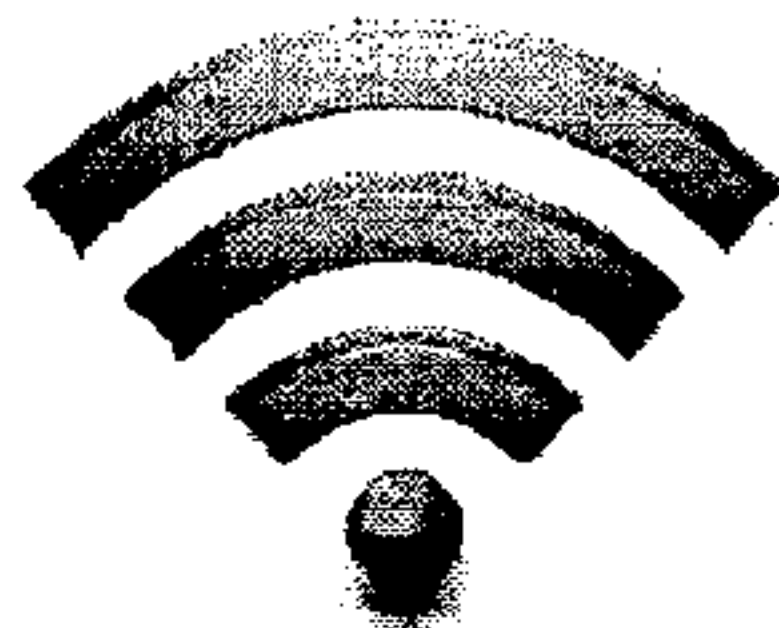

600

Fig 7A

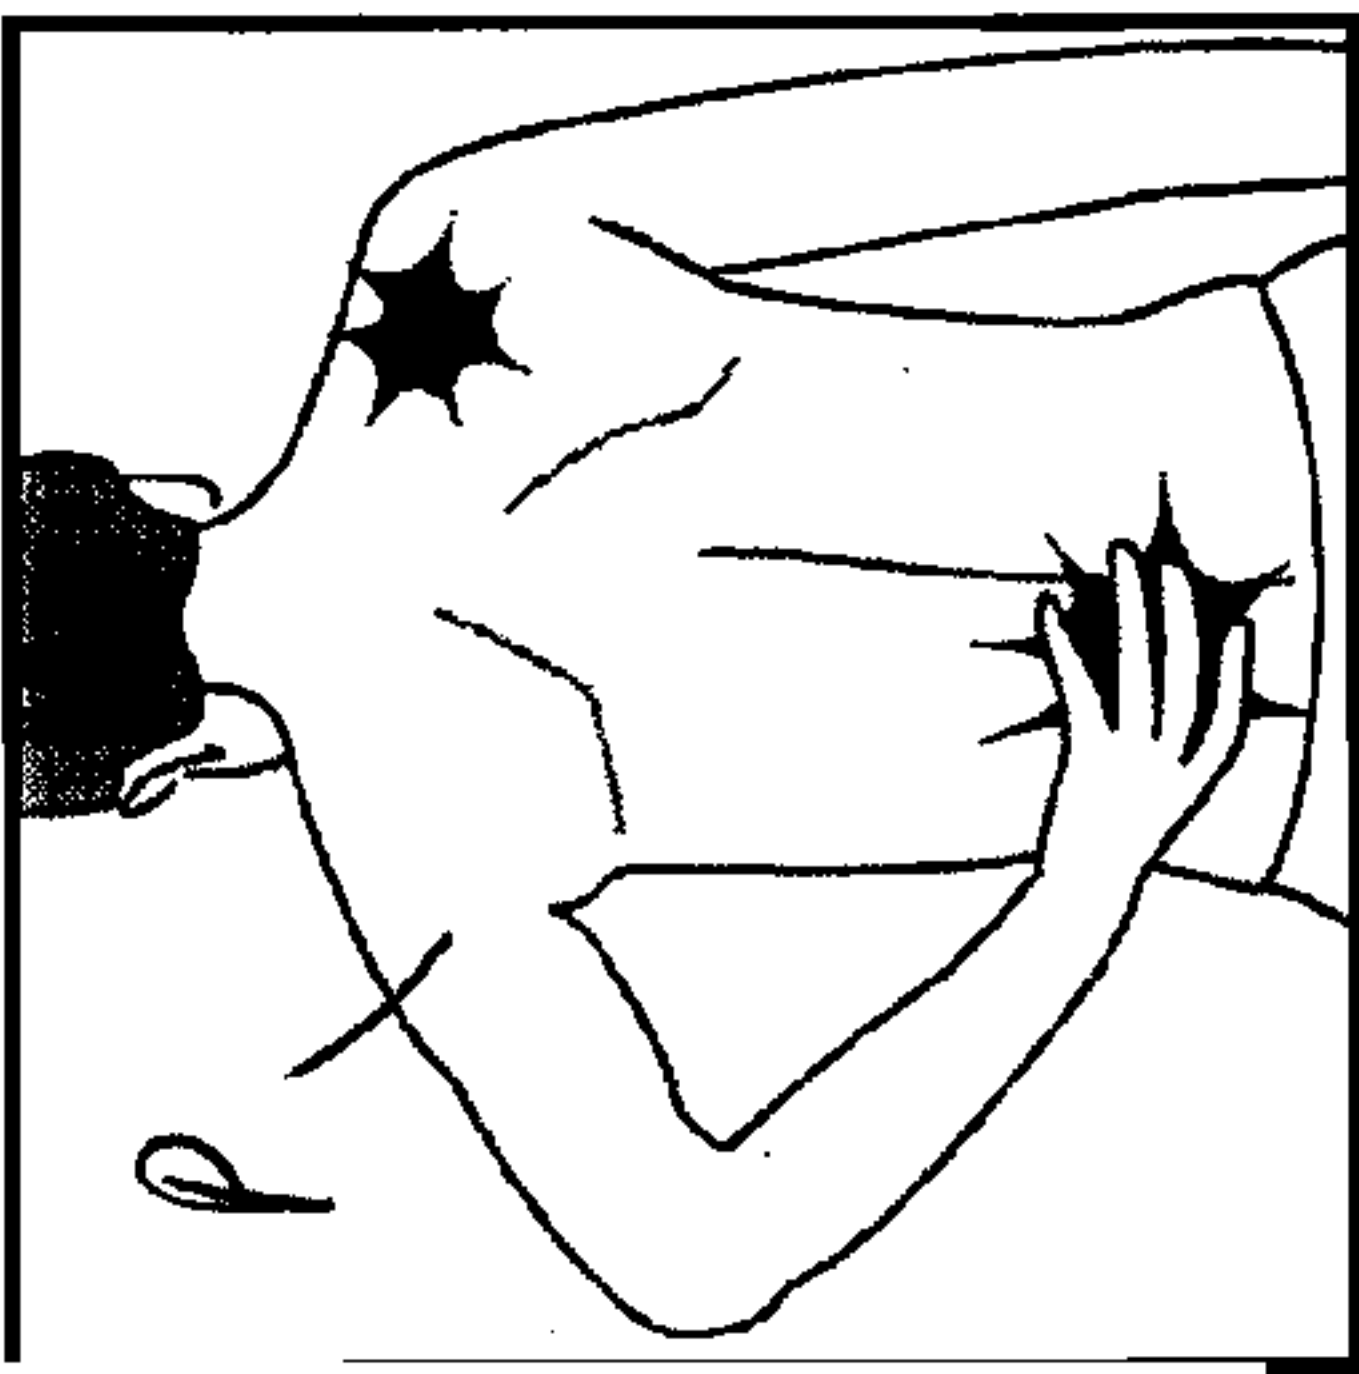


Fig 7B

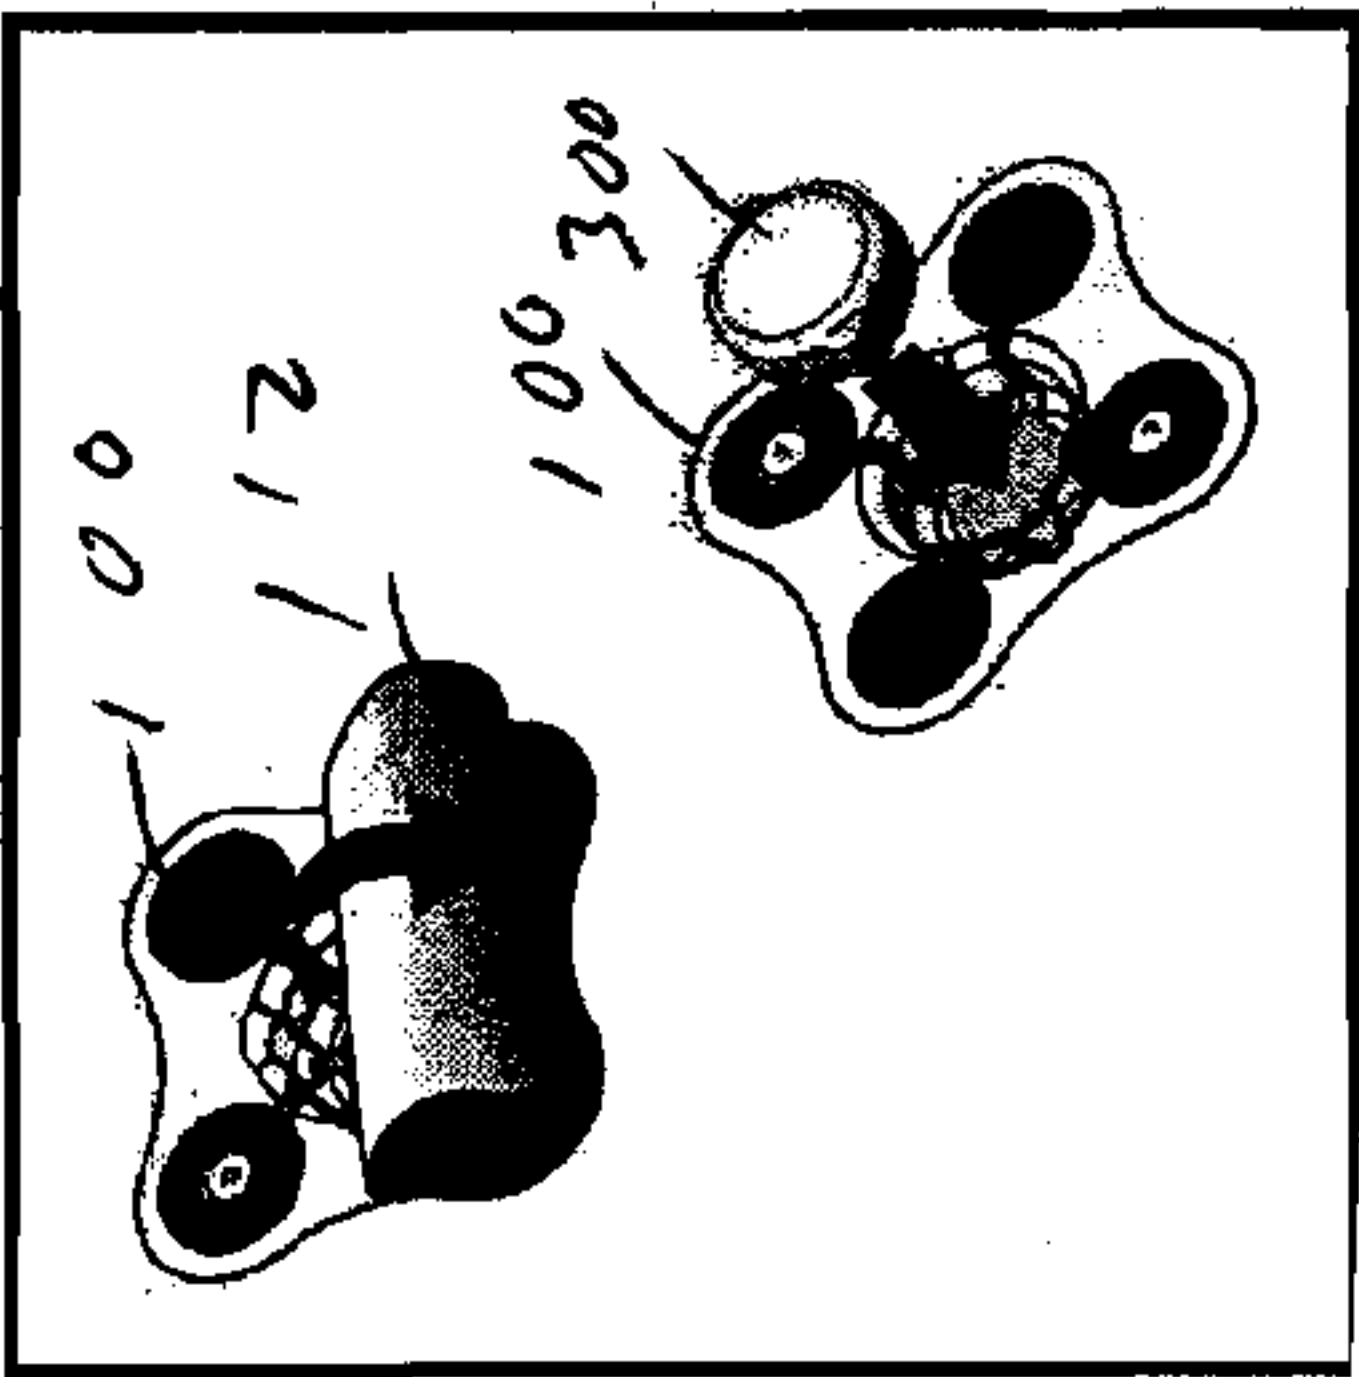


Fig 7C

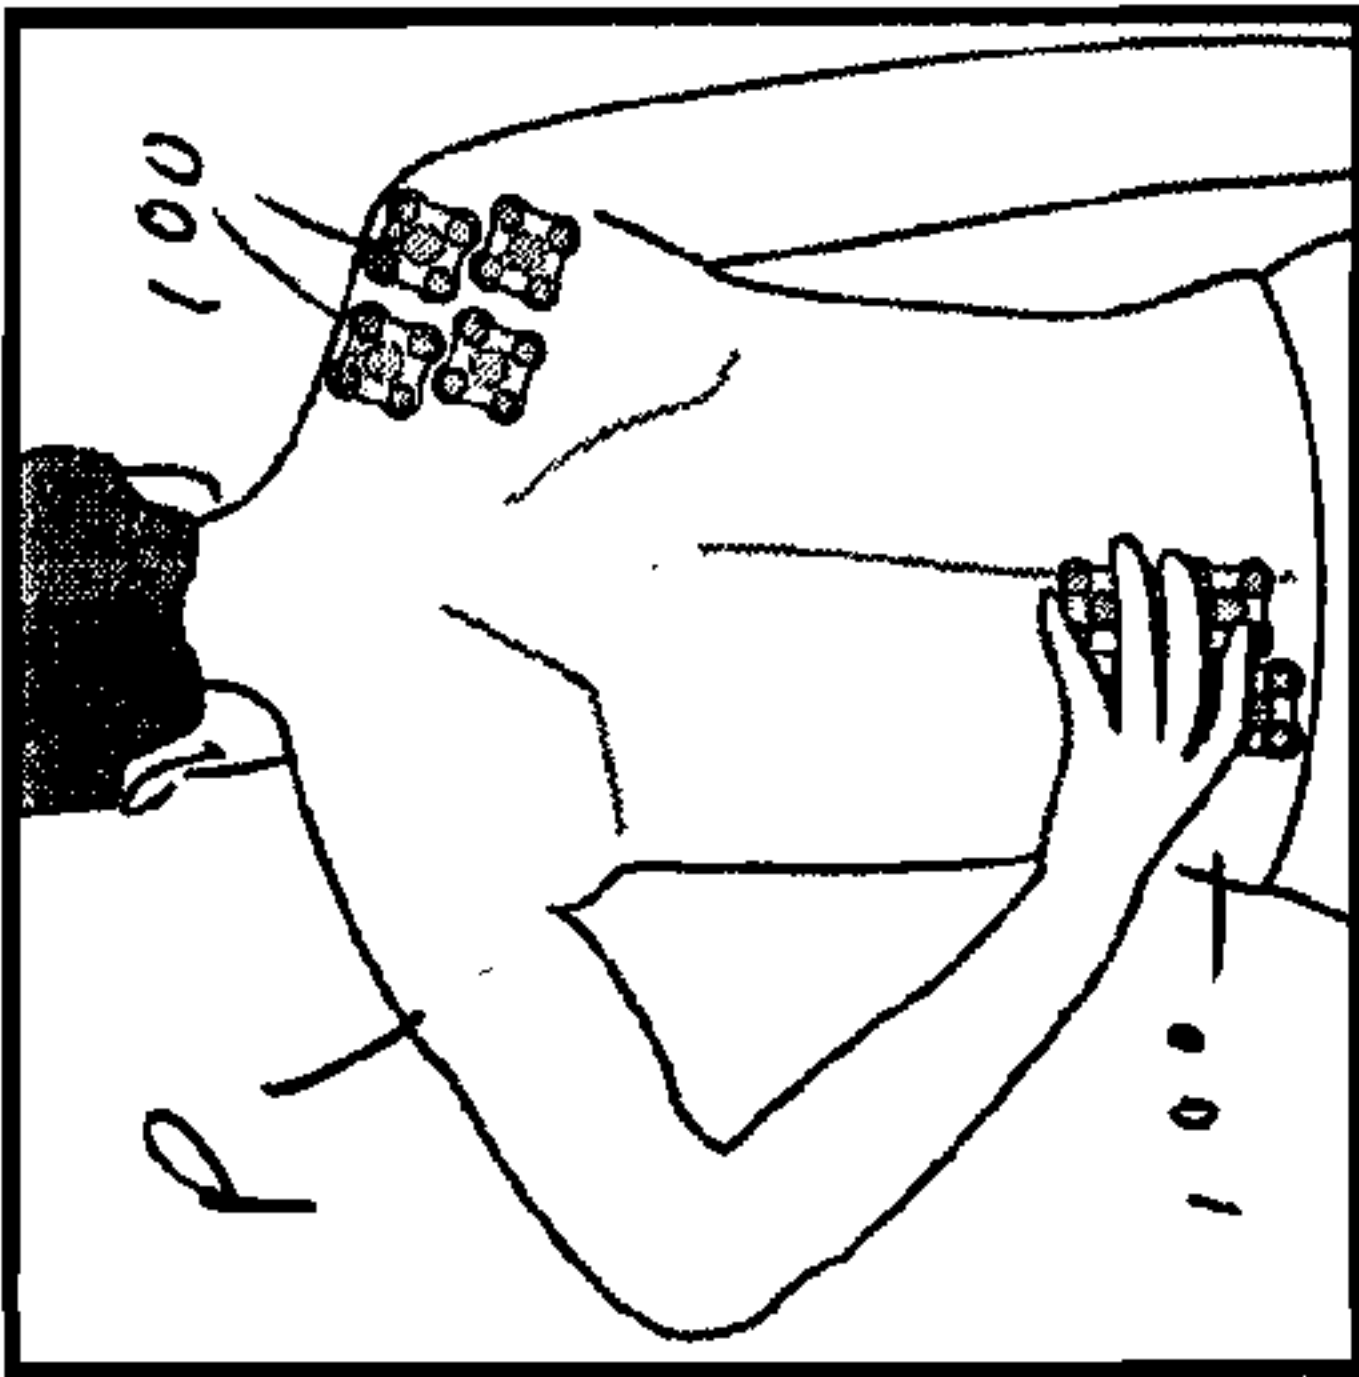


Fig 7D

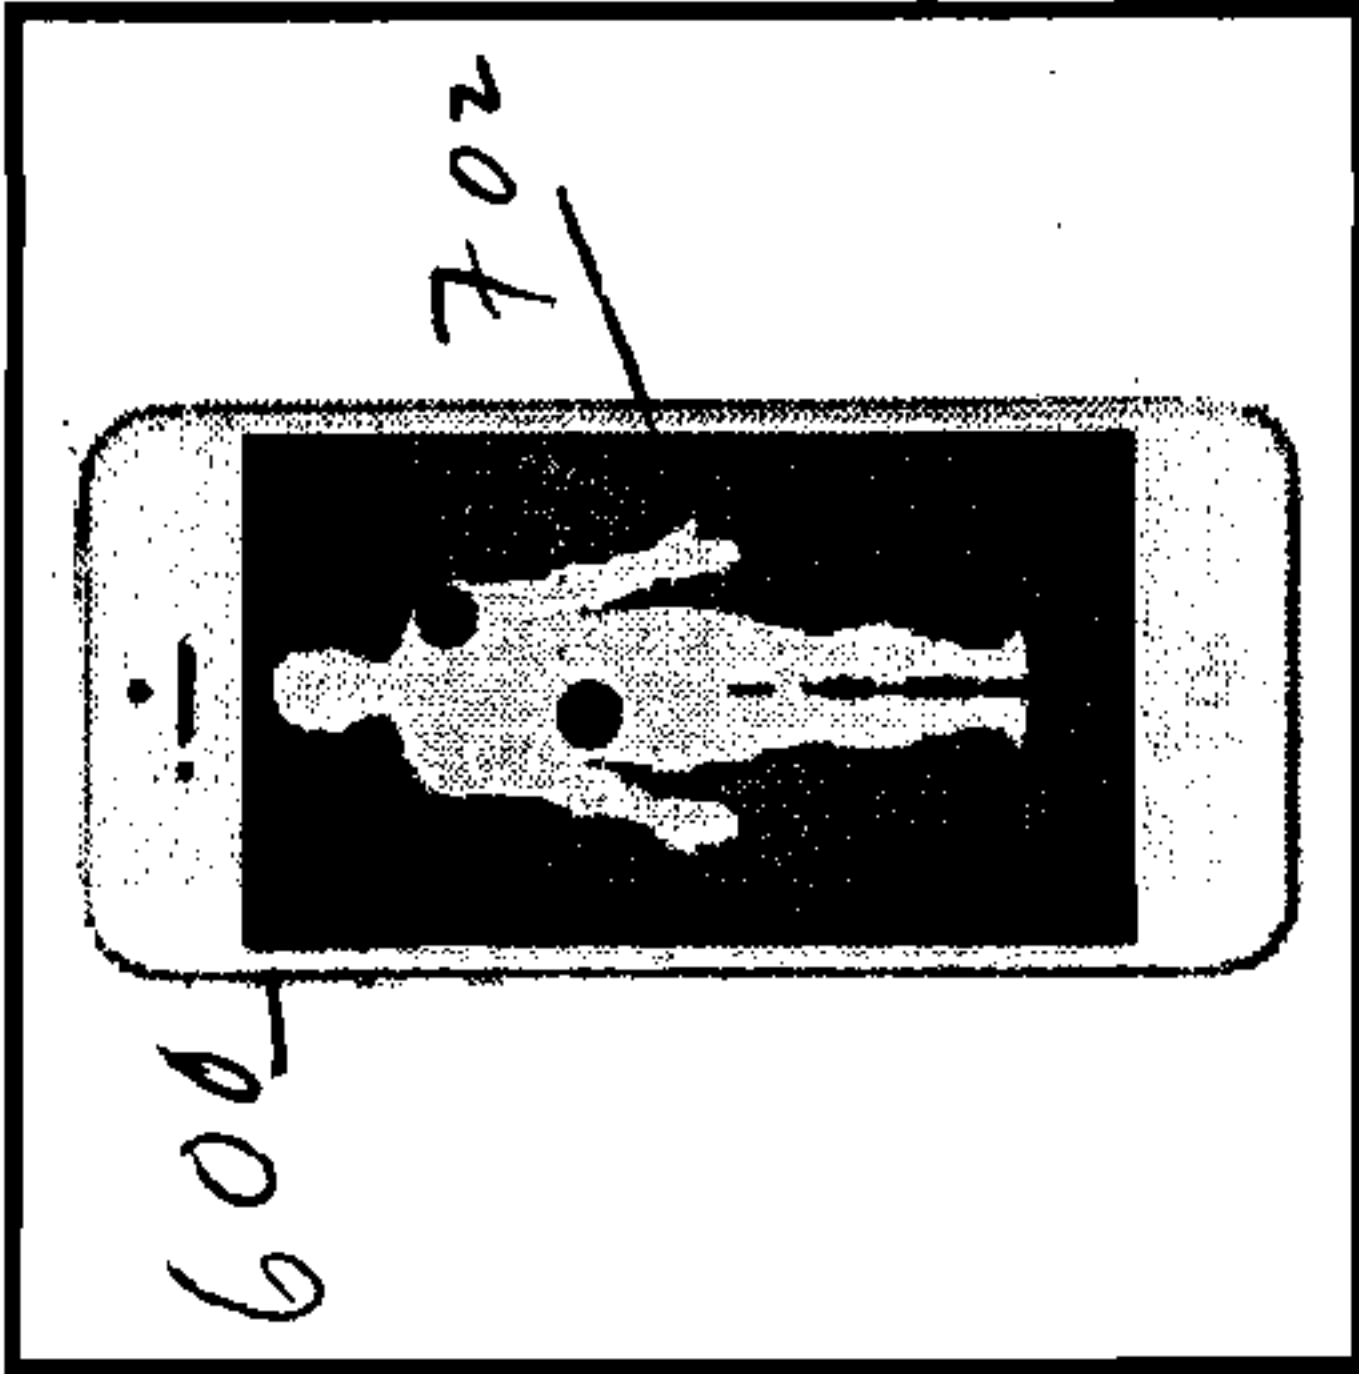


Fig 7E

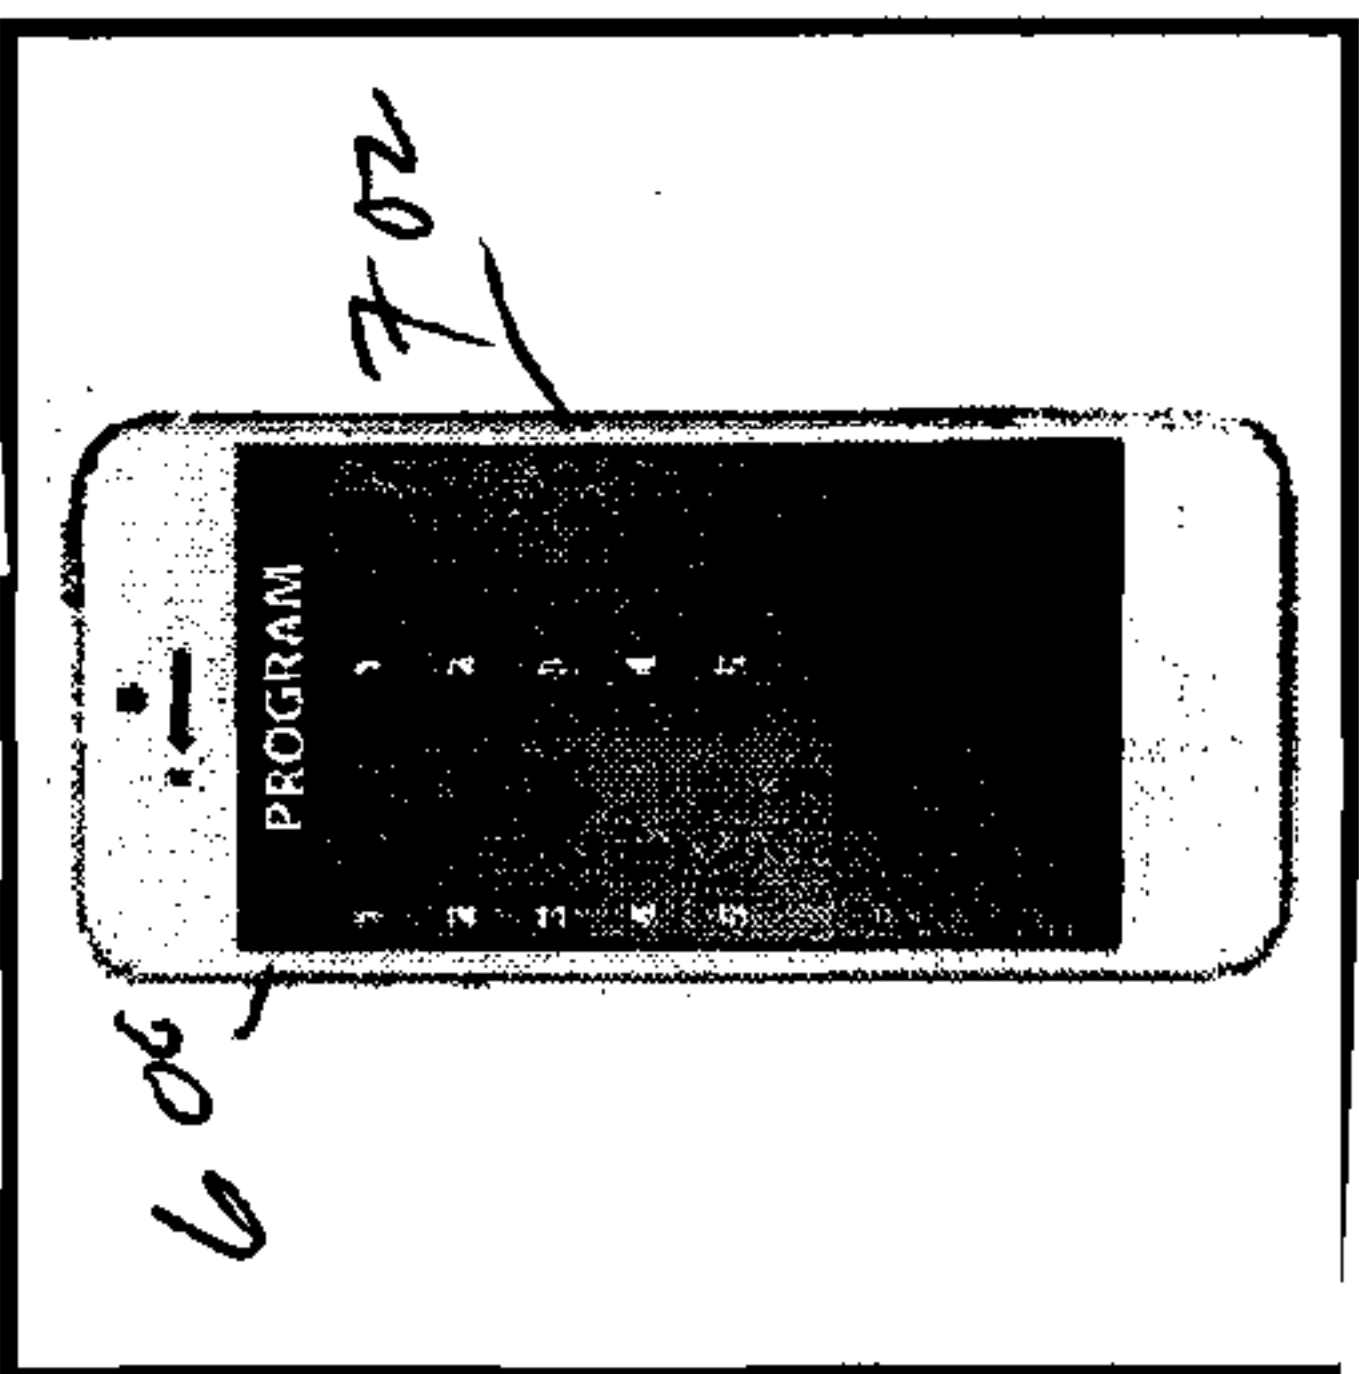


Fig 7F

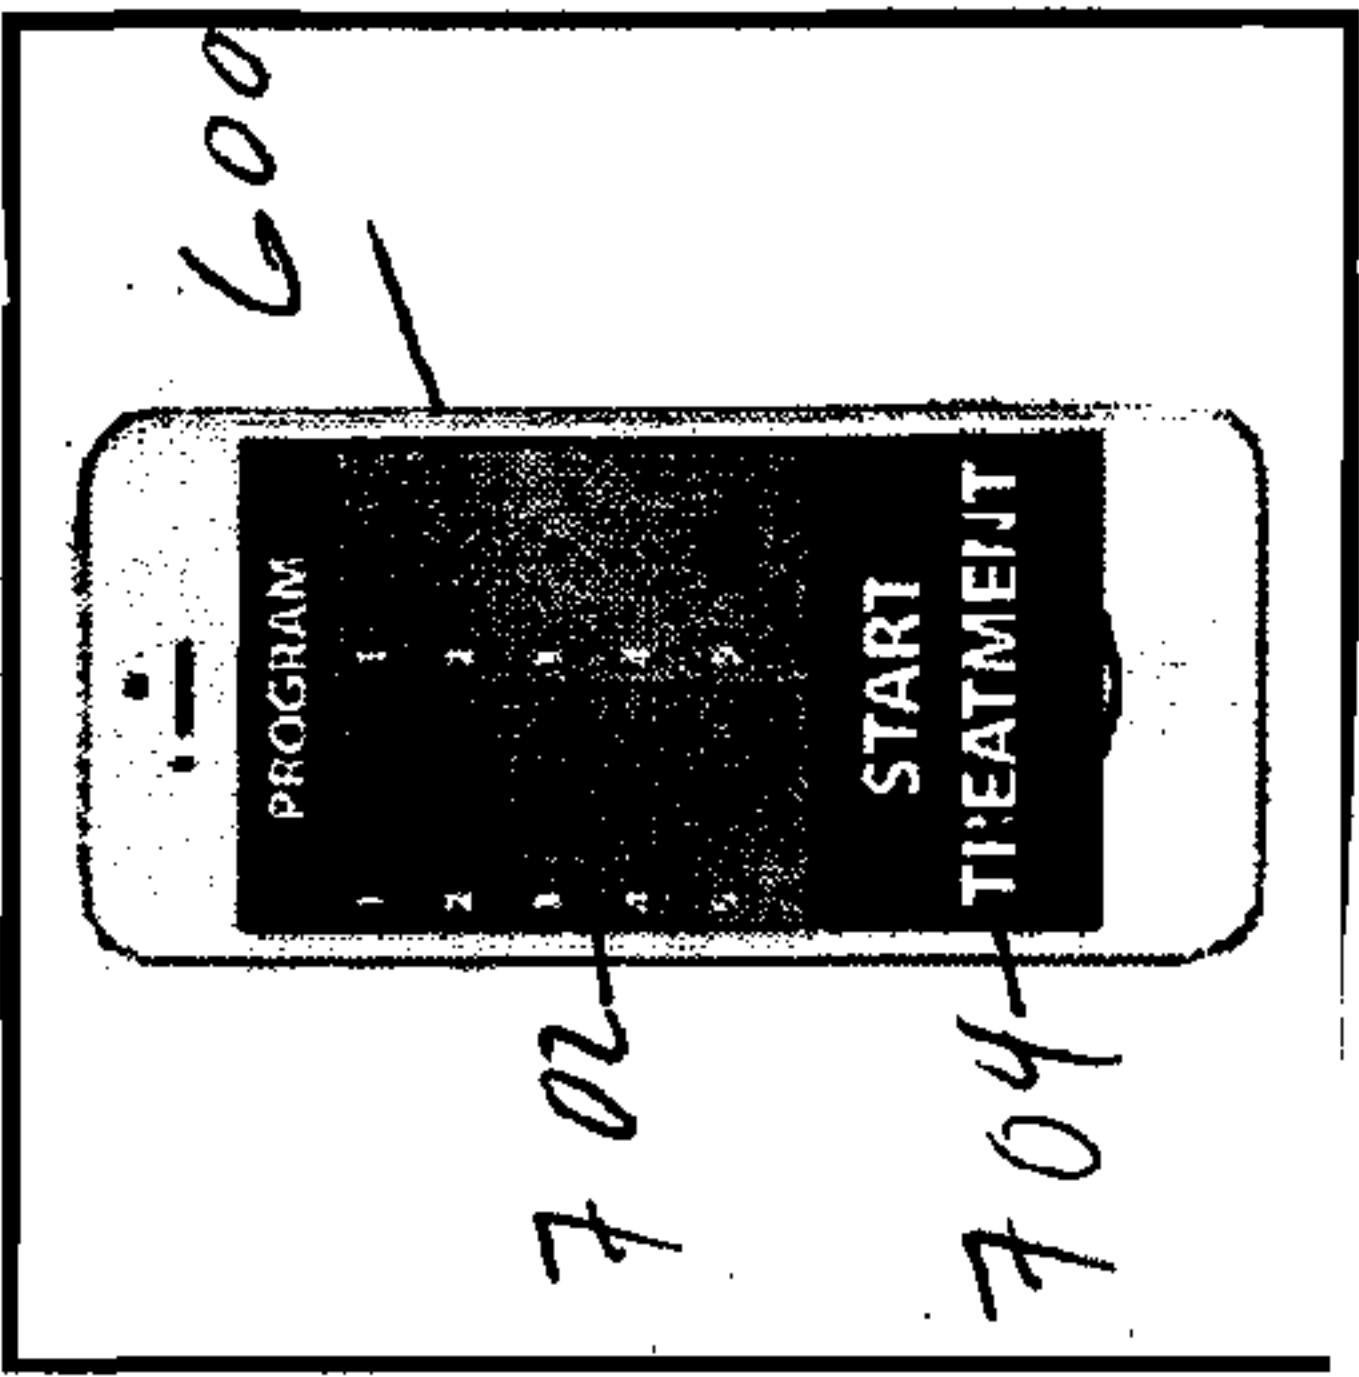


Fig 7G

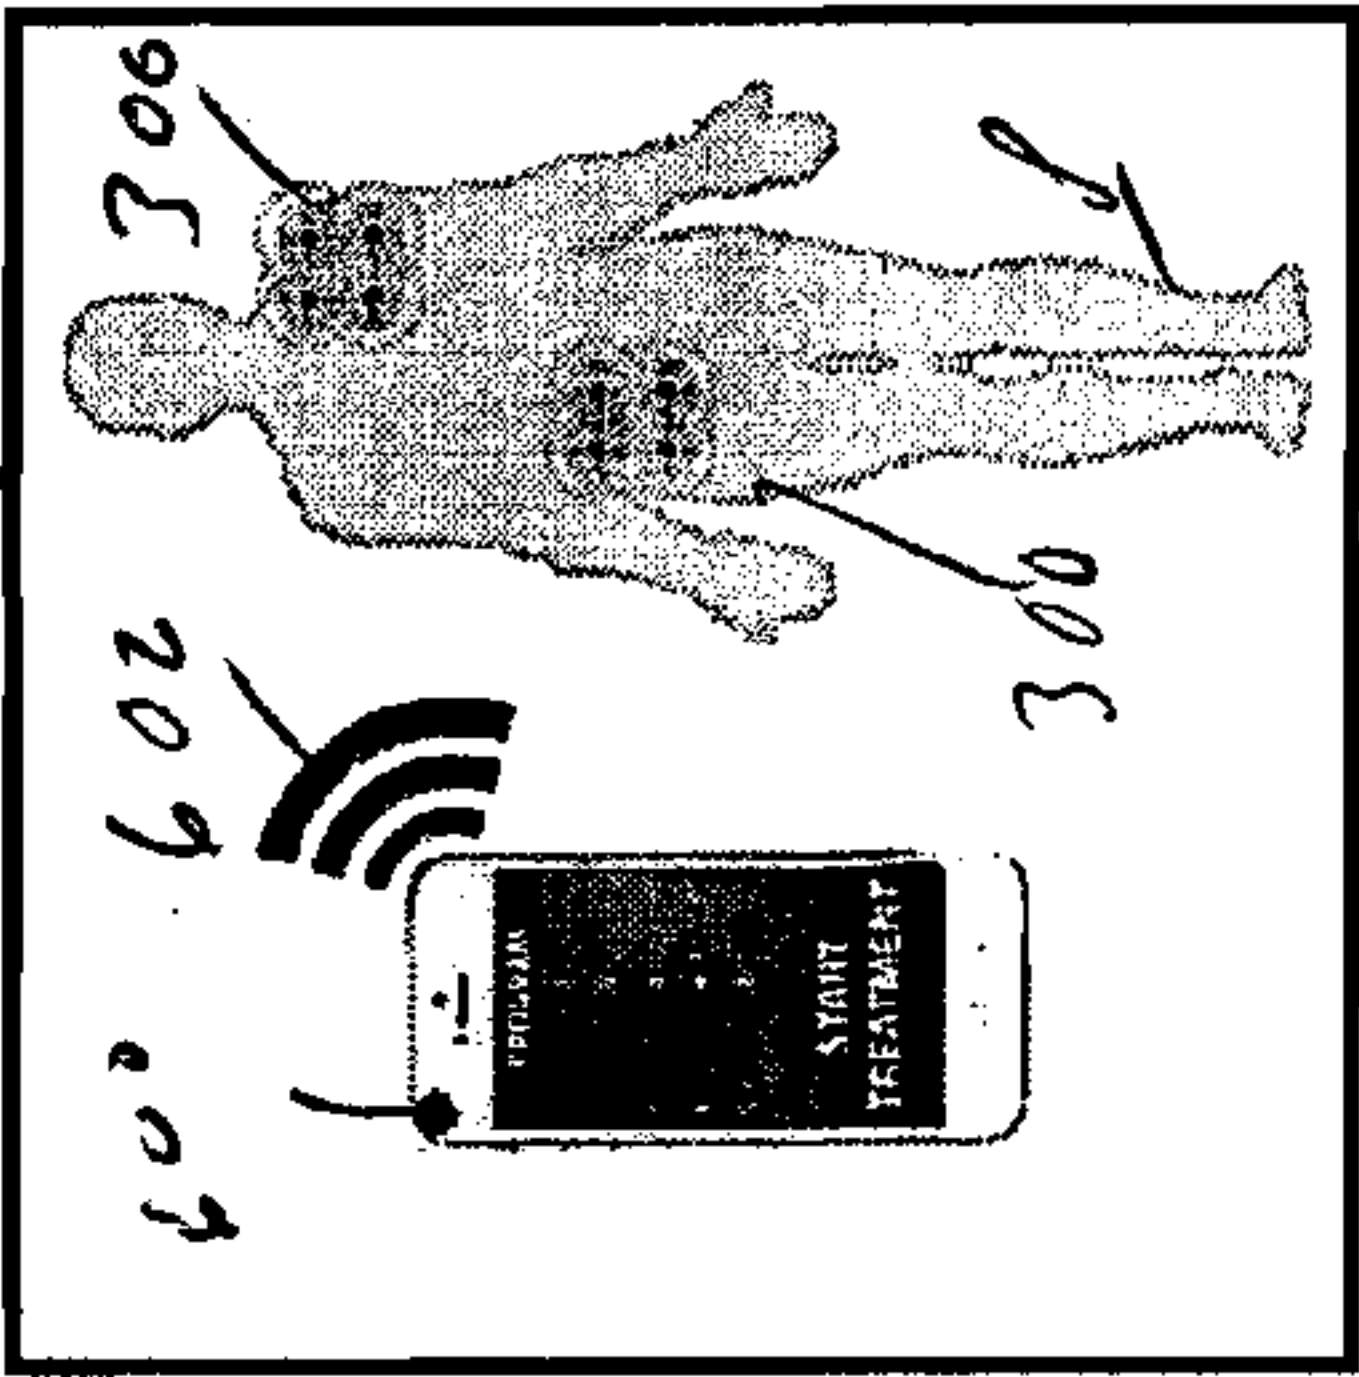


Fig 7H

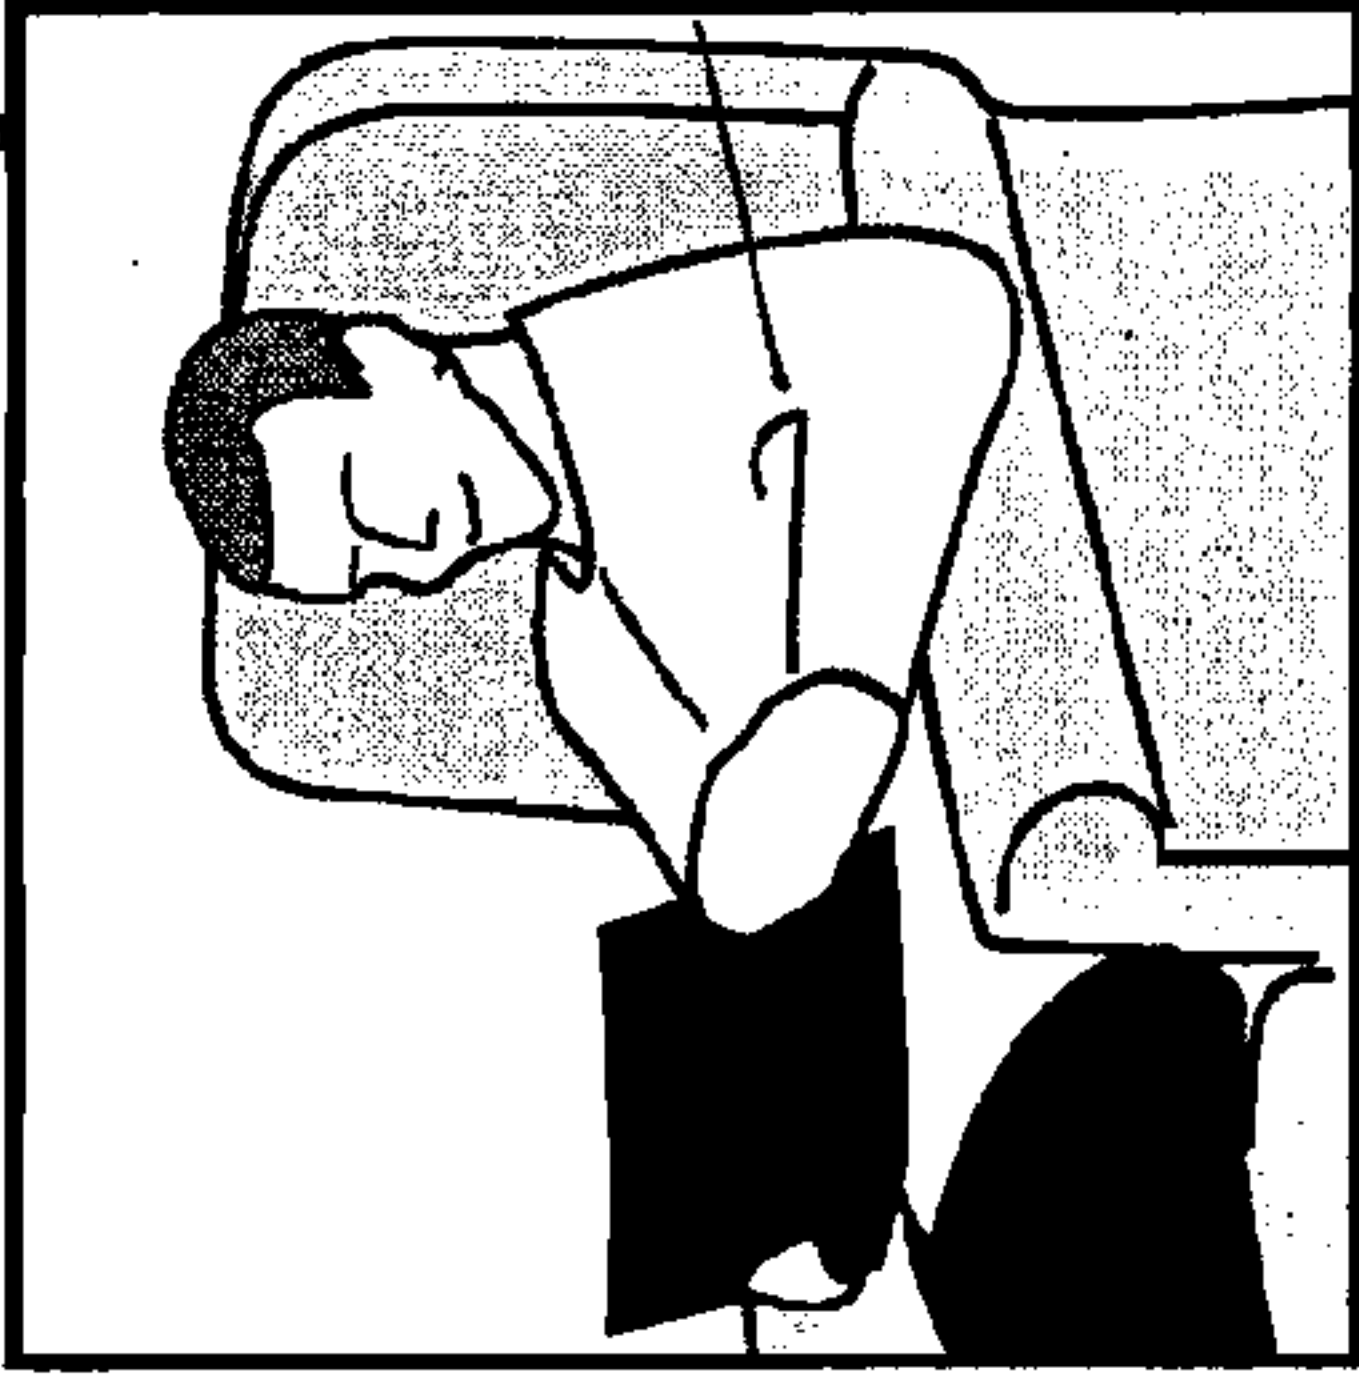


Fig 7I

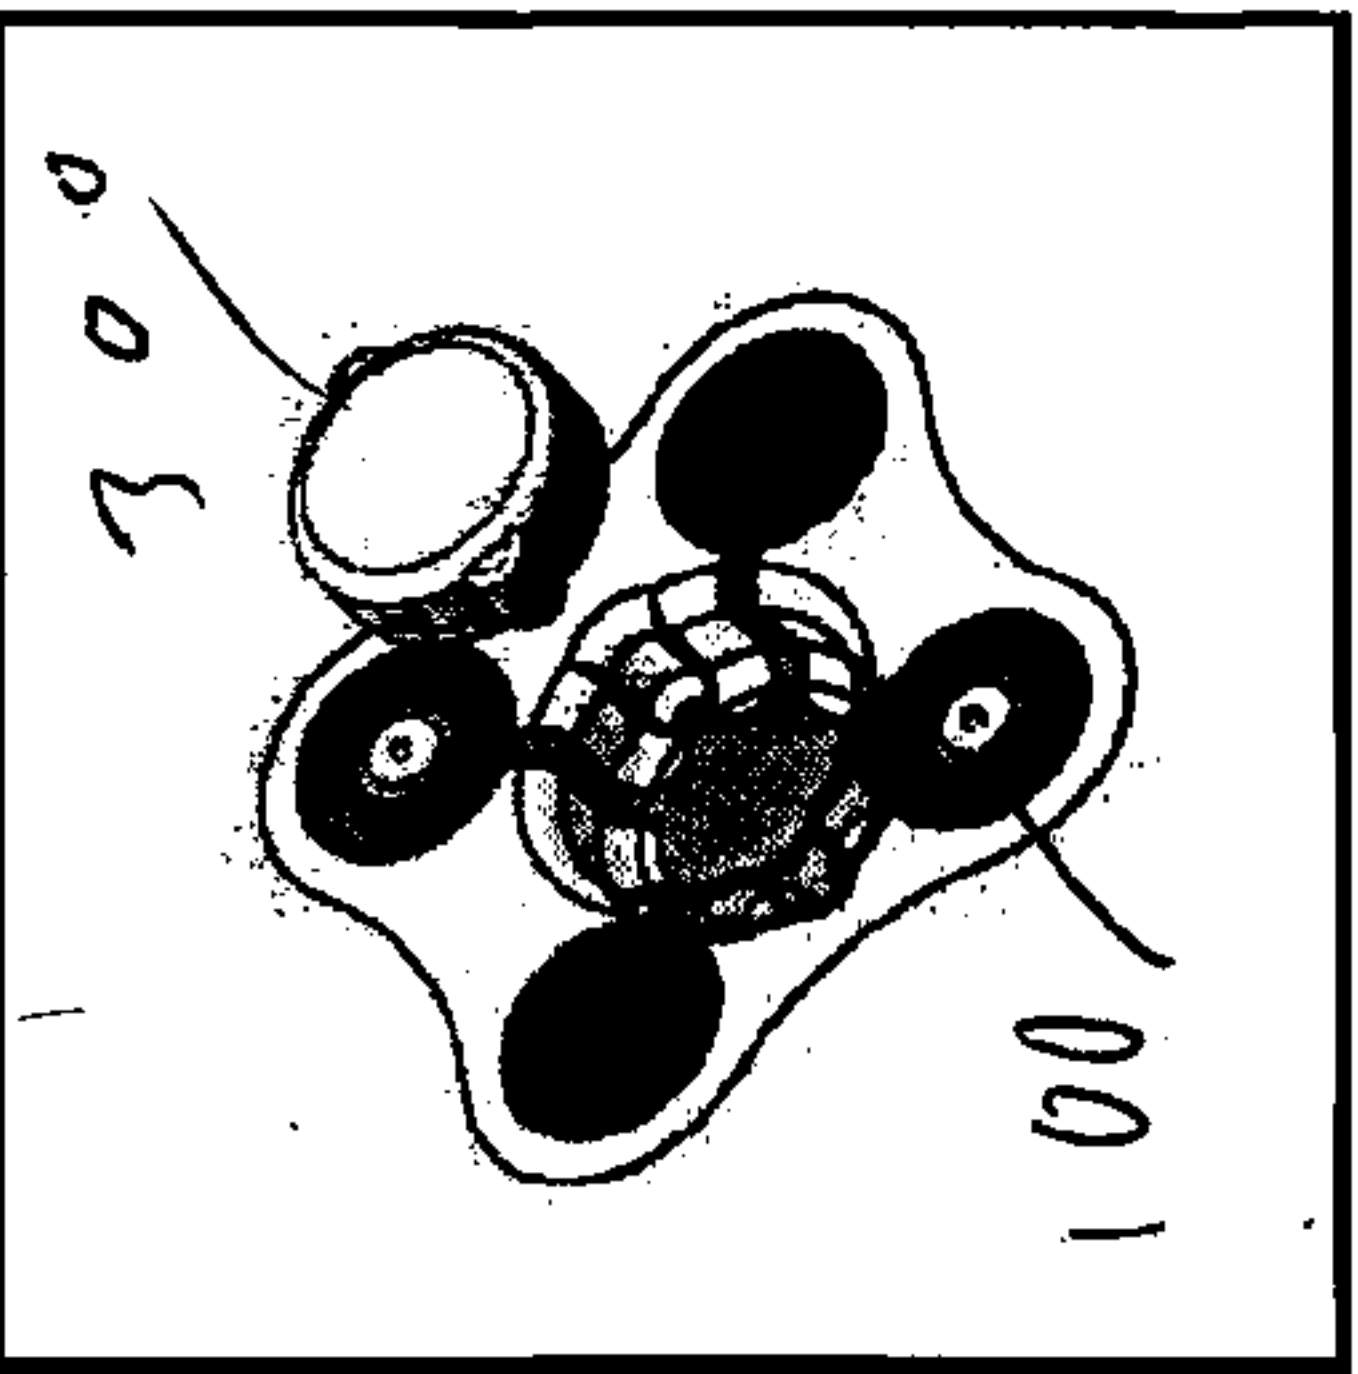


Fig 7J

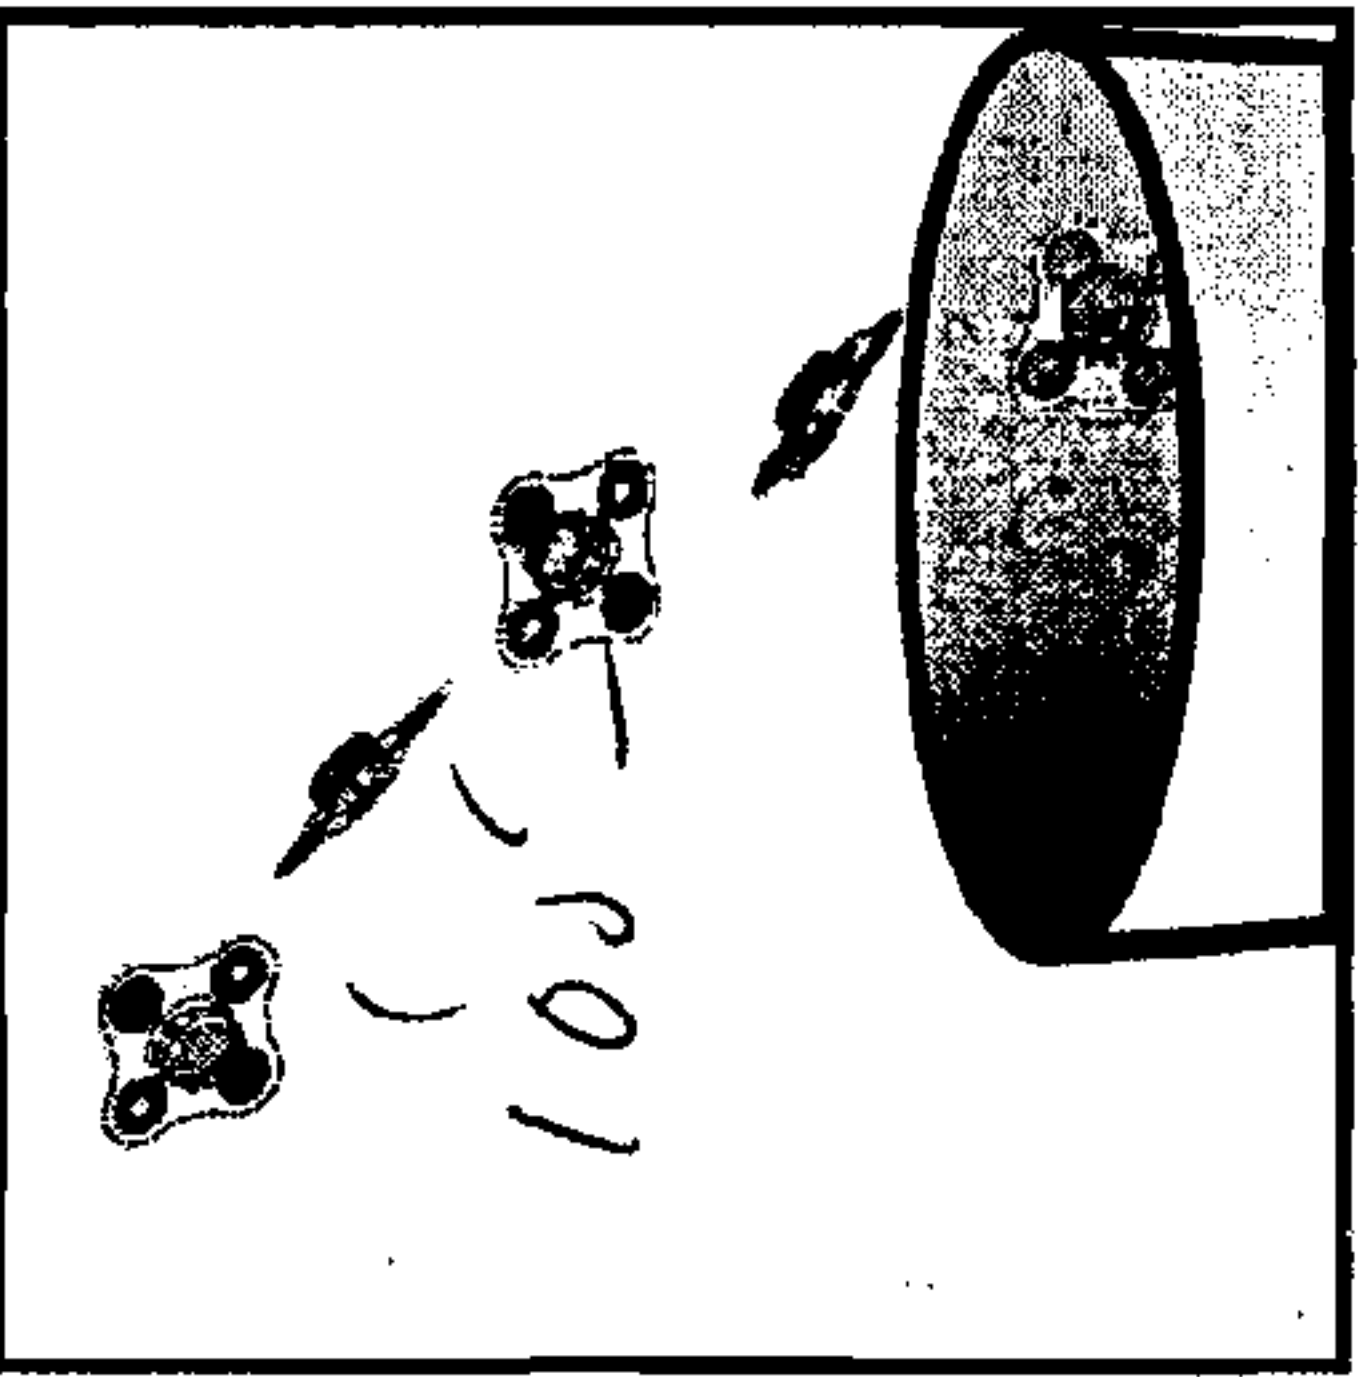


Fig 7K


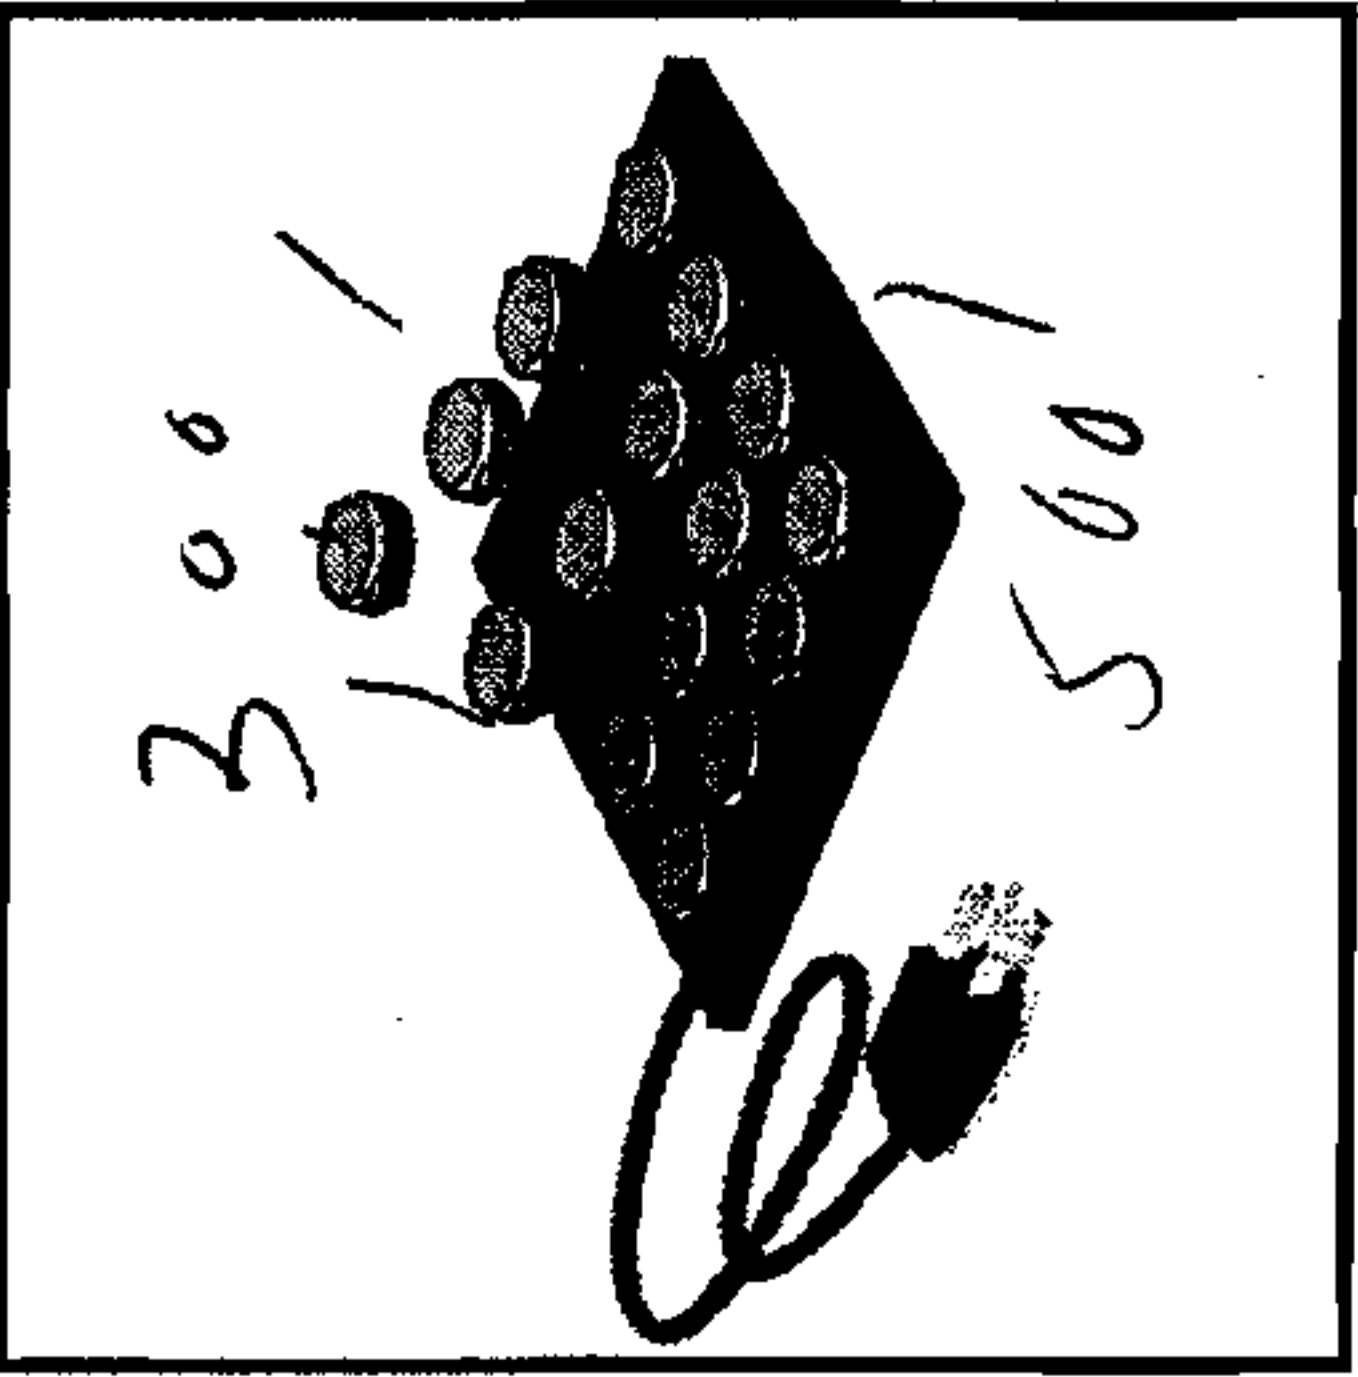


Fig 7L

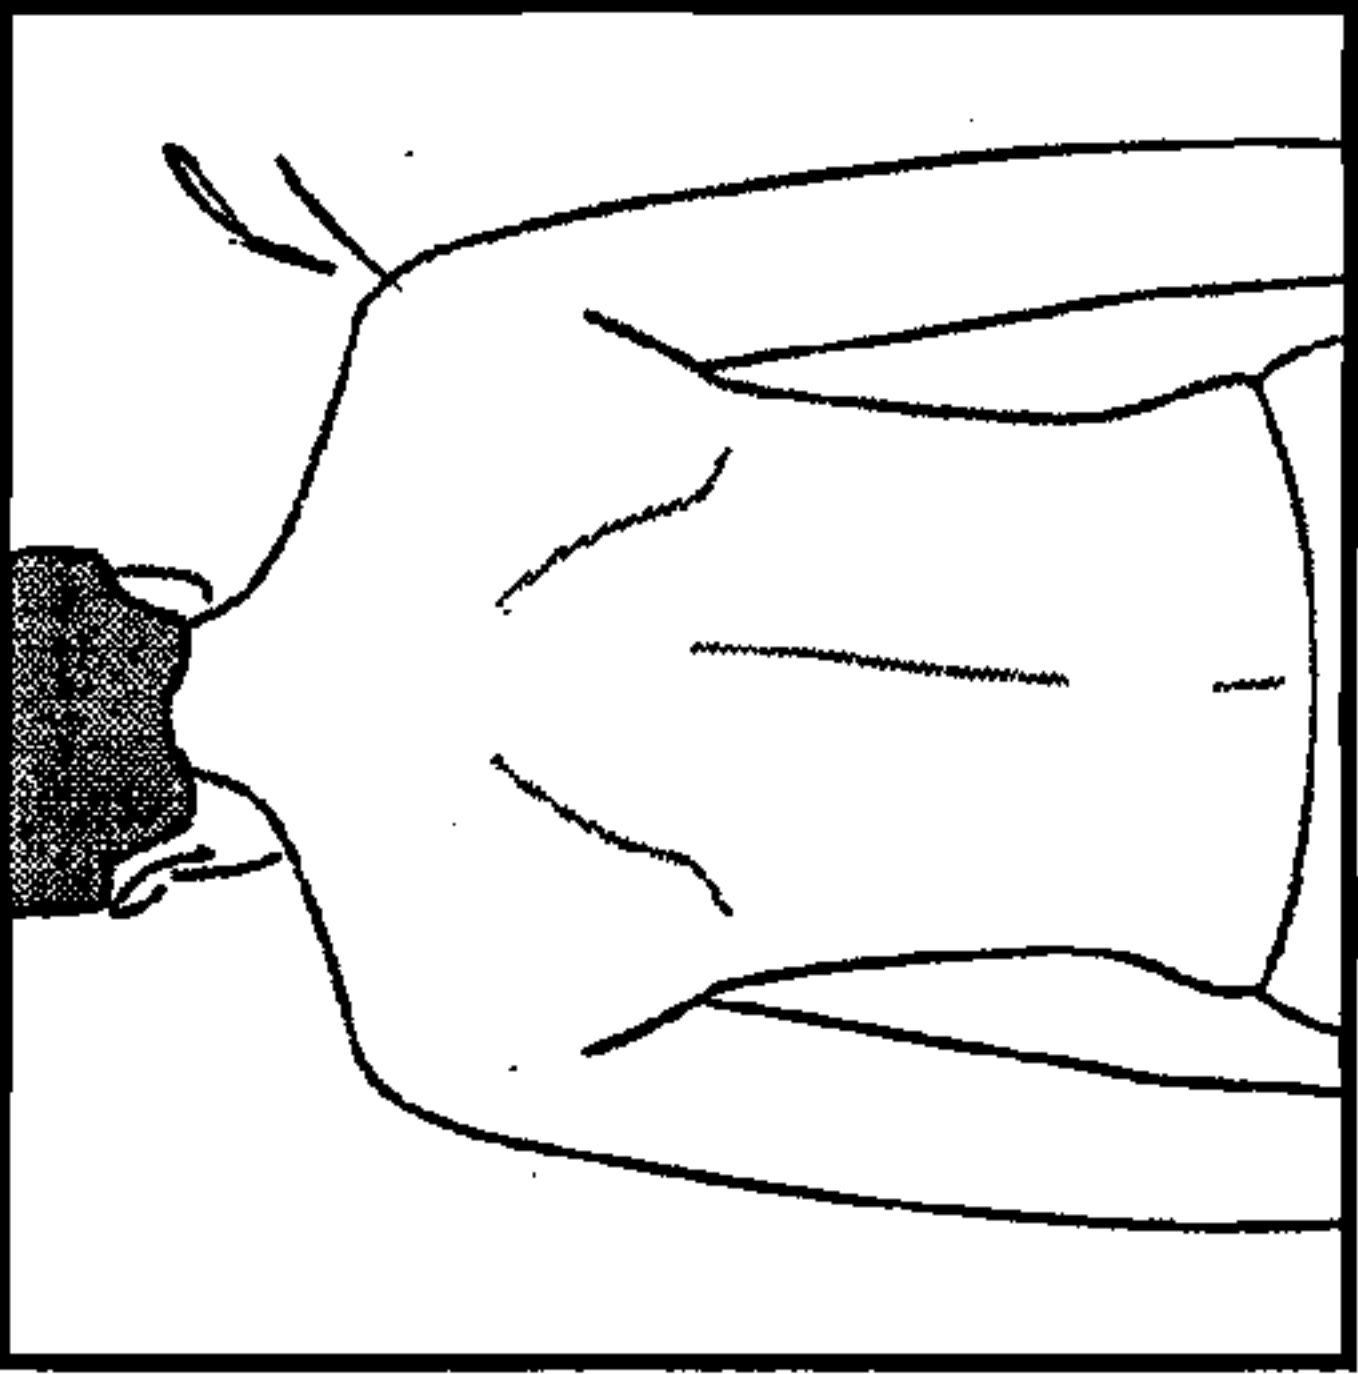

6/6

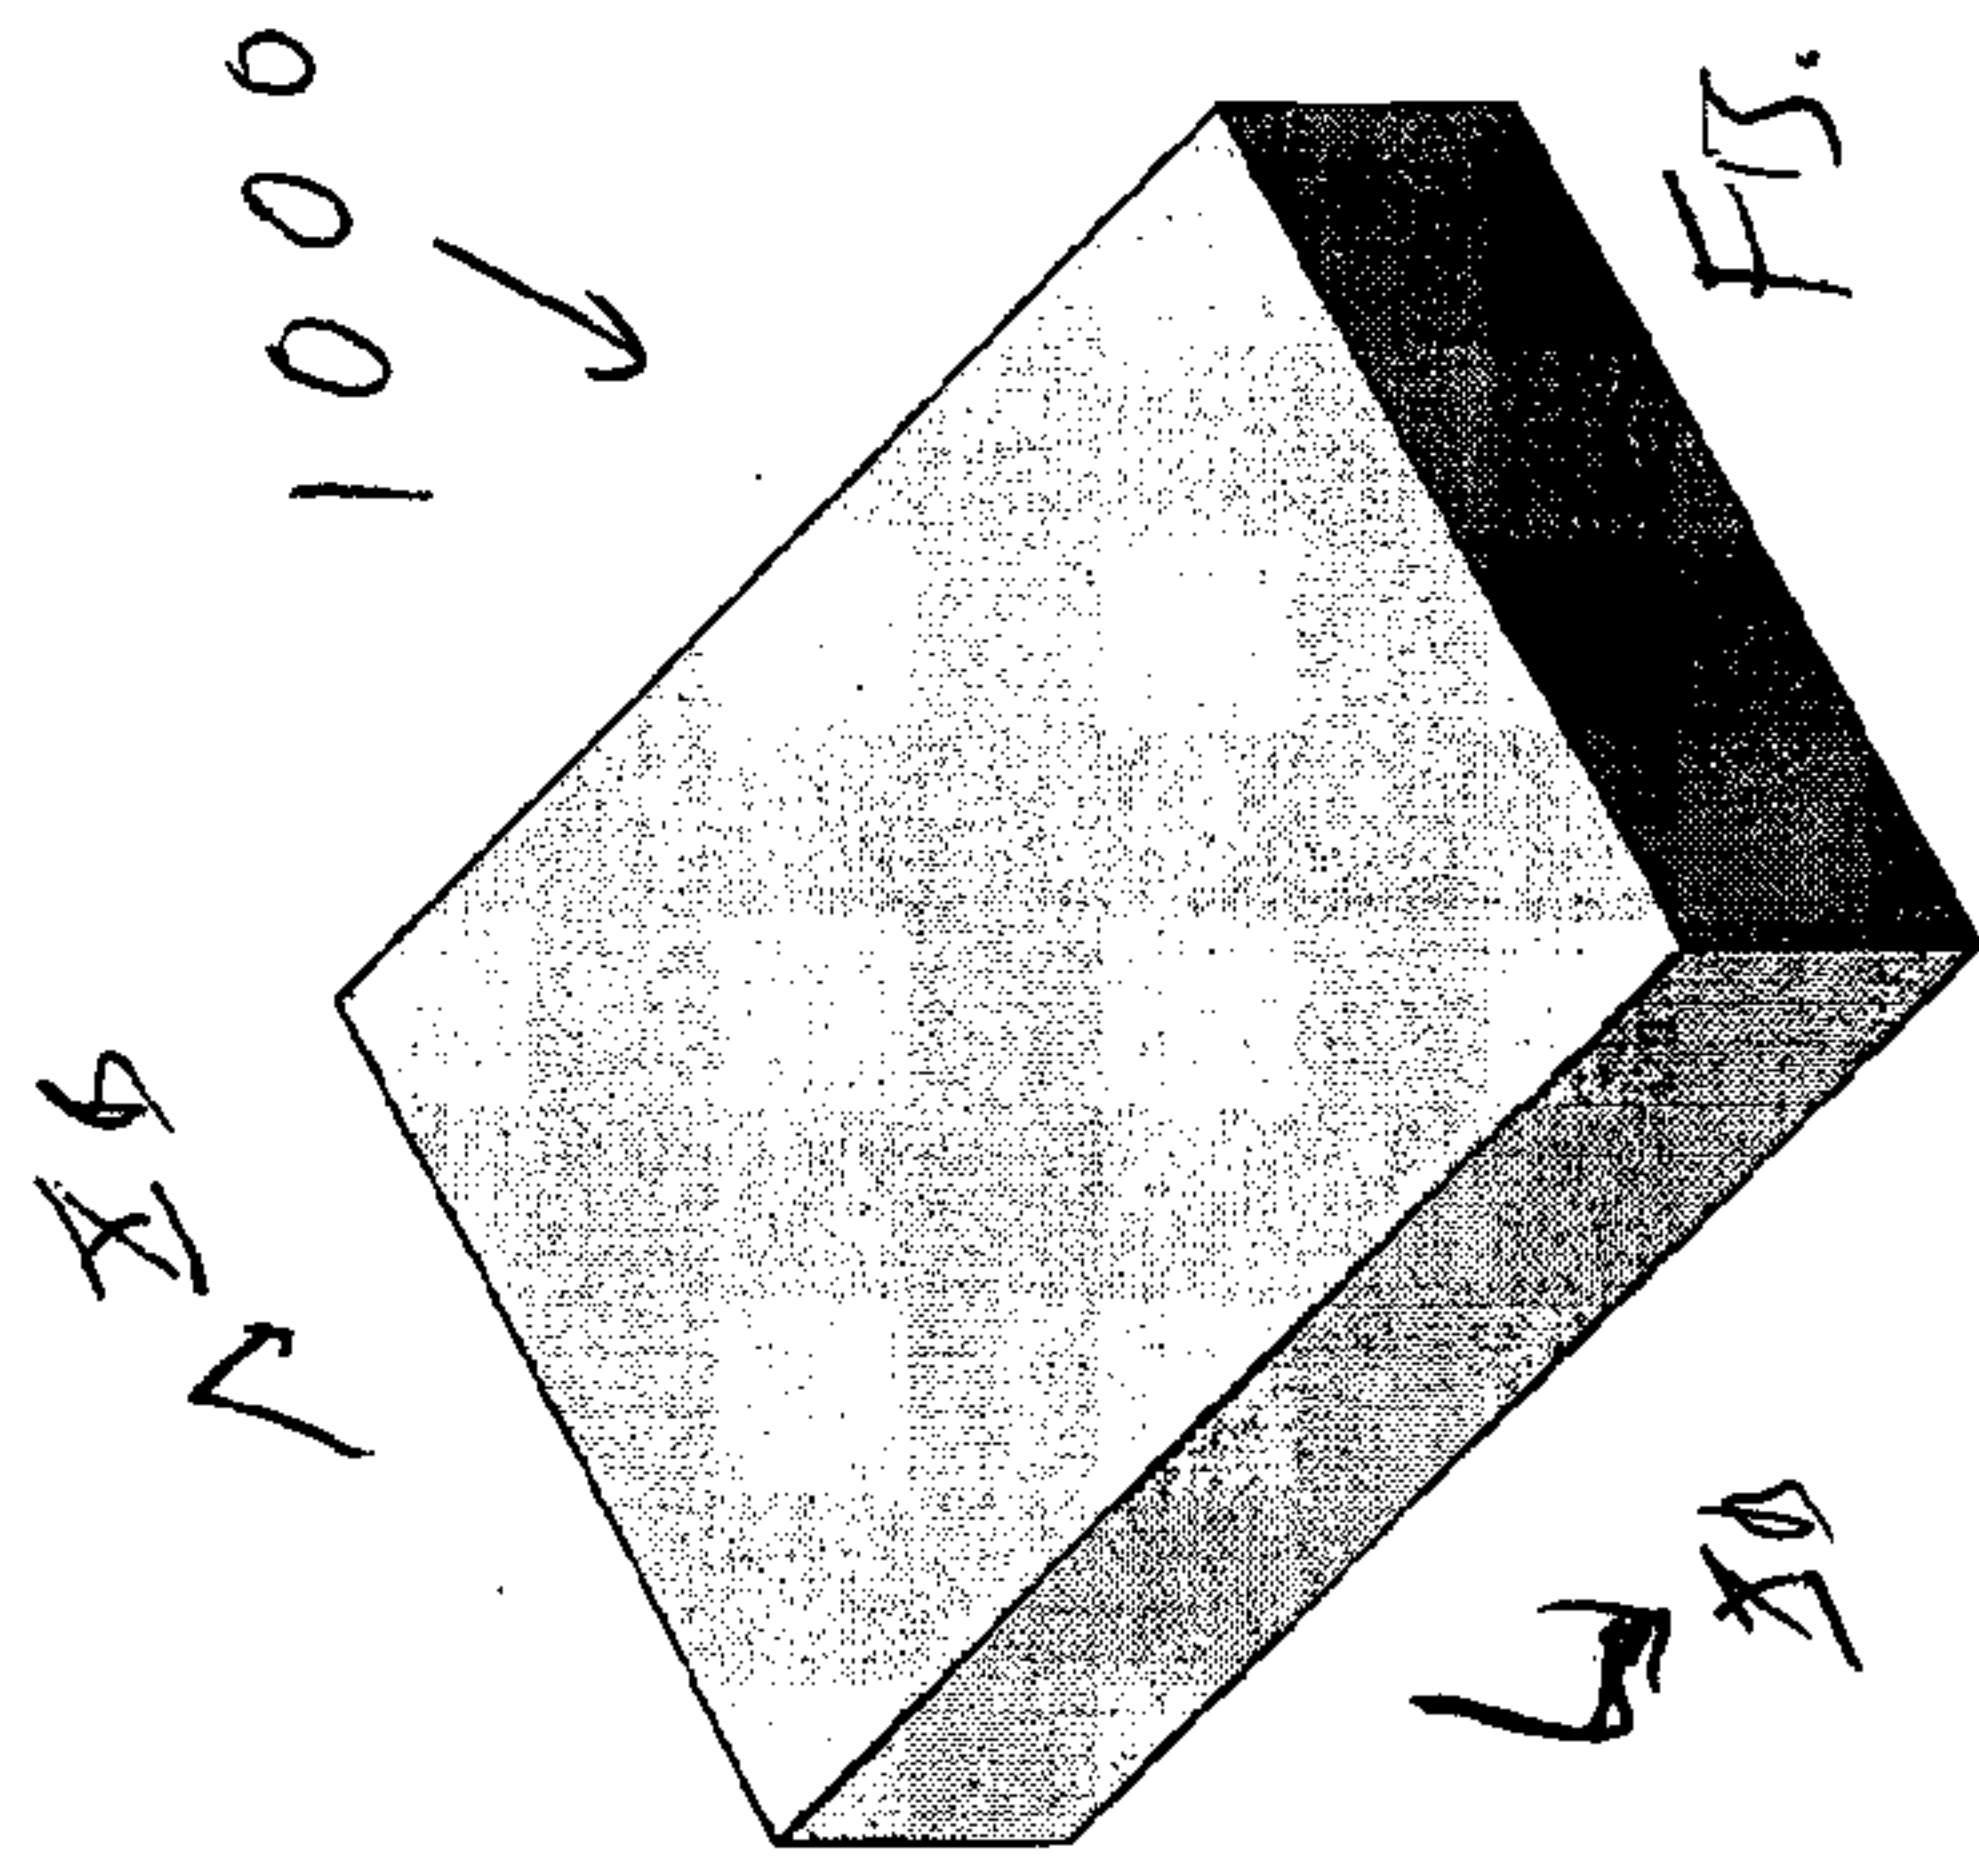


Fig. 10A

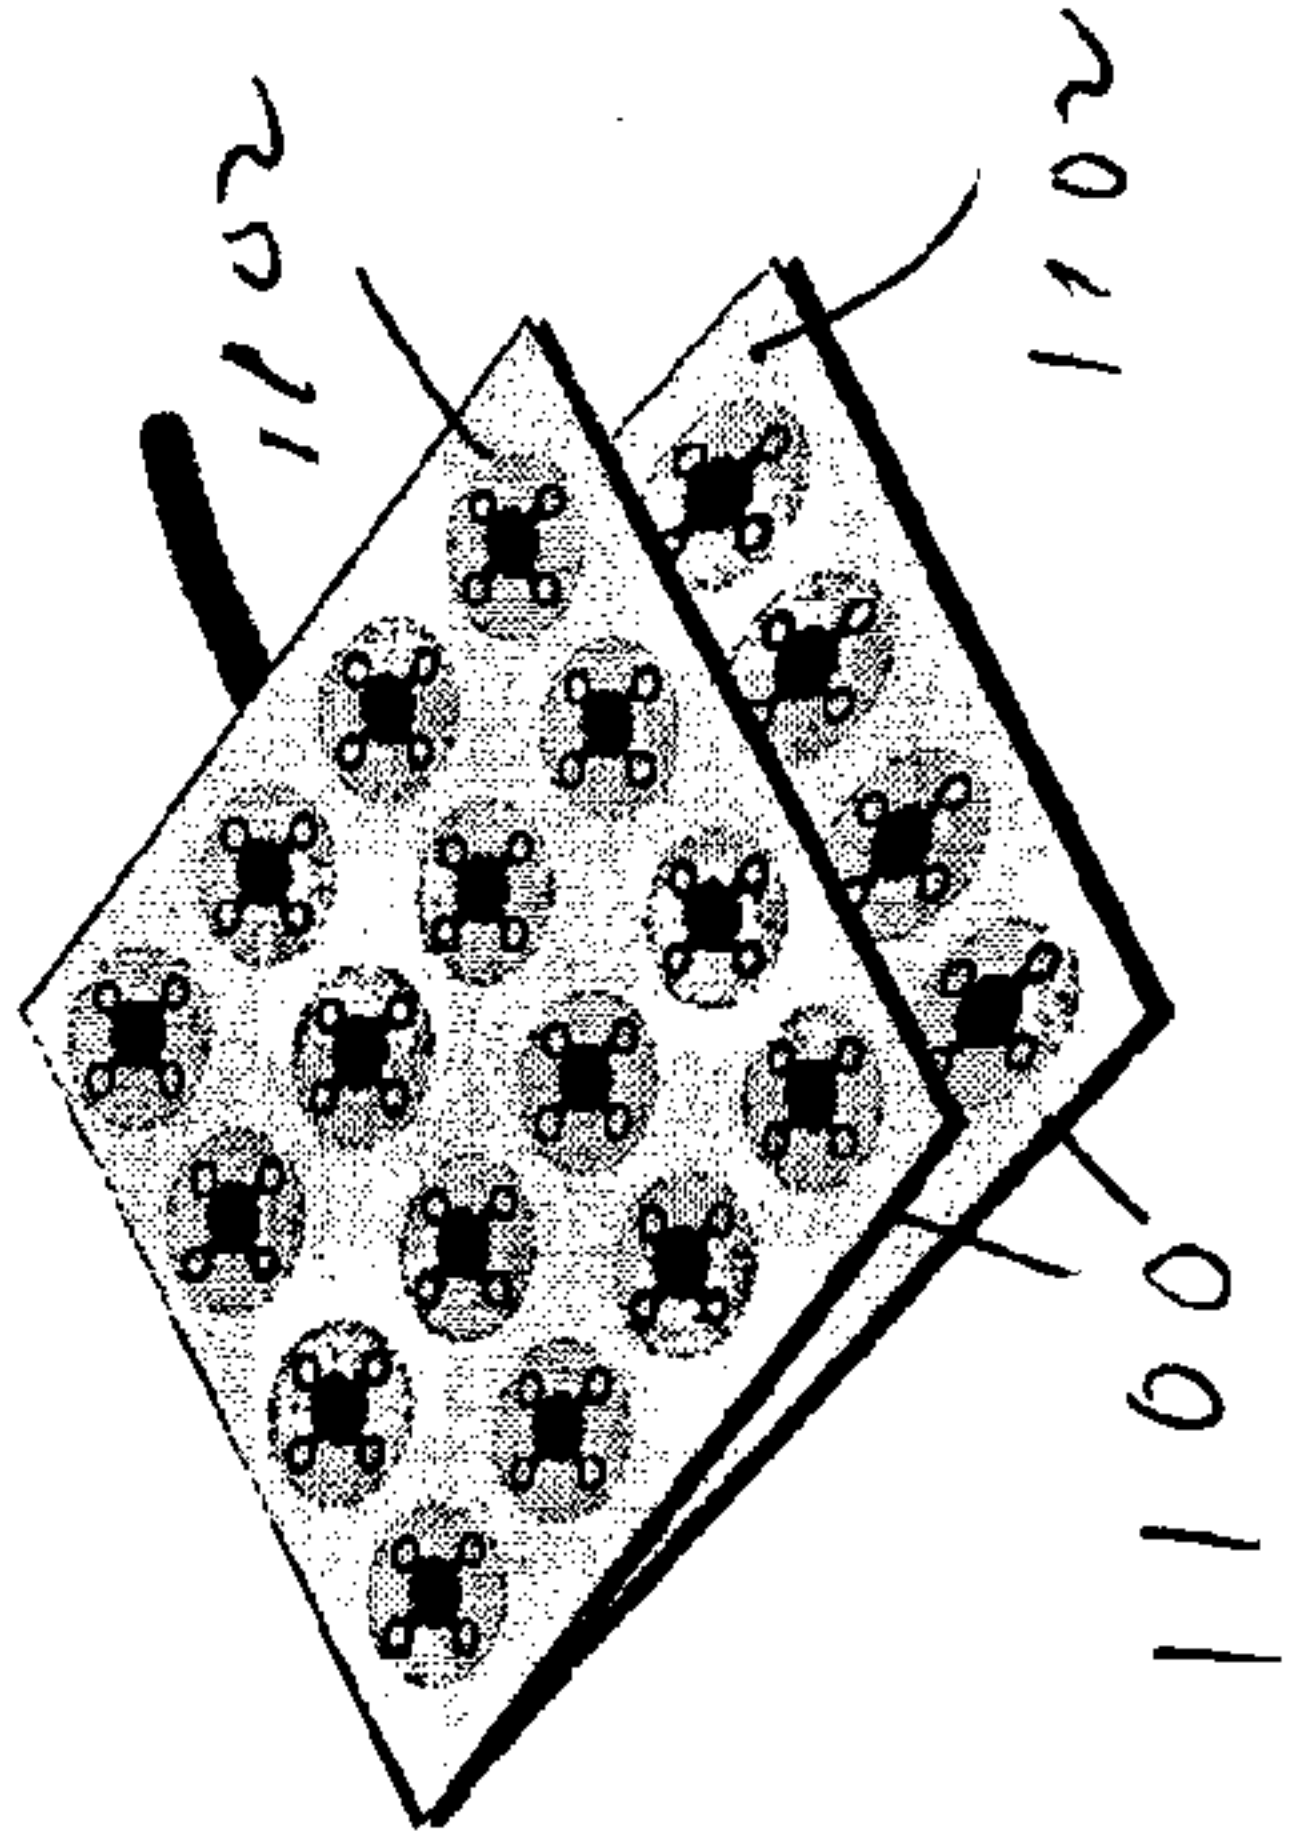


Fig. 15

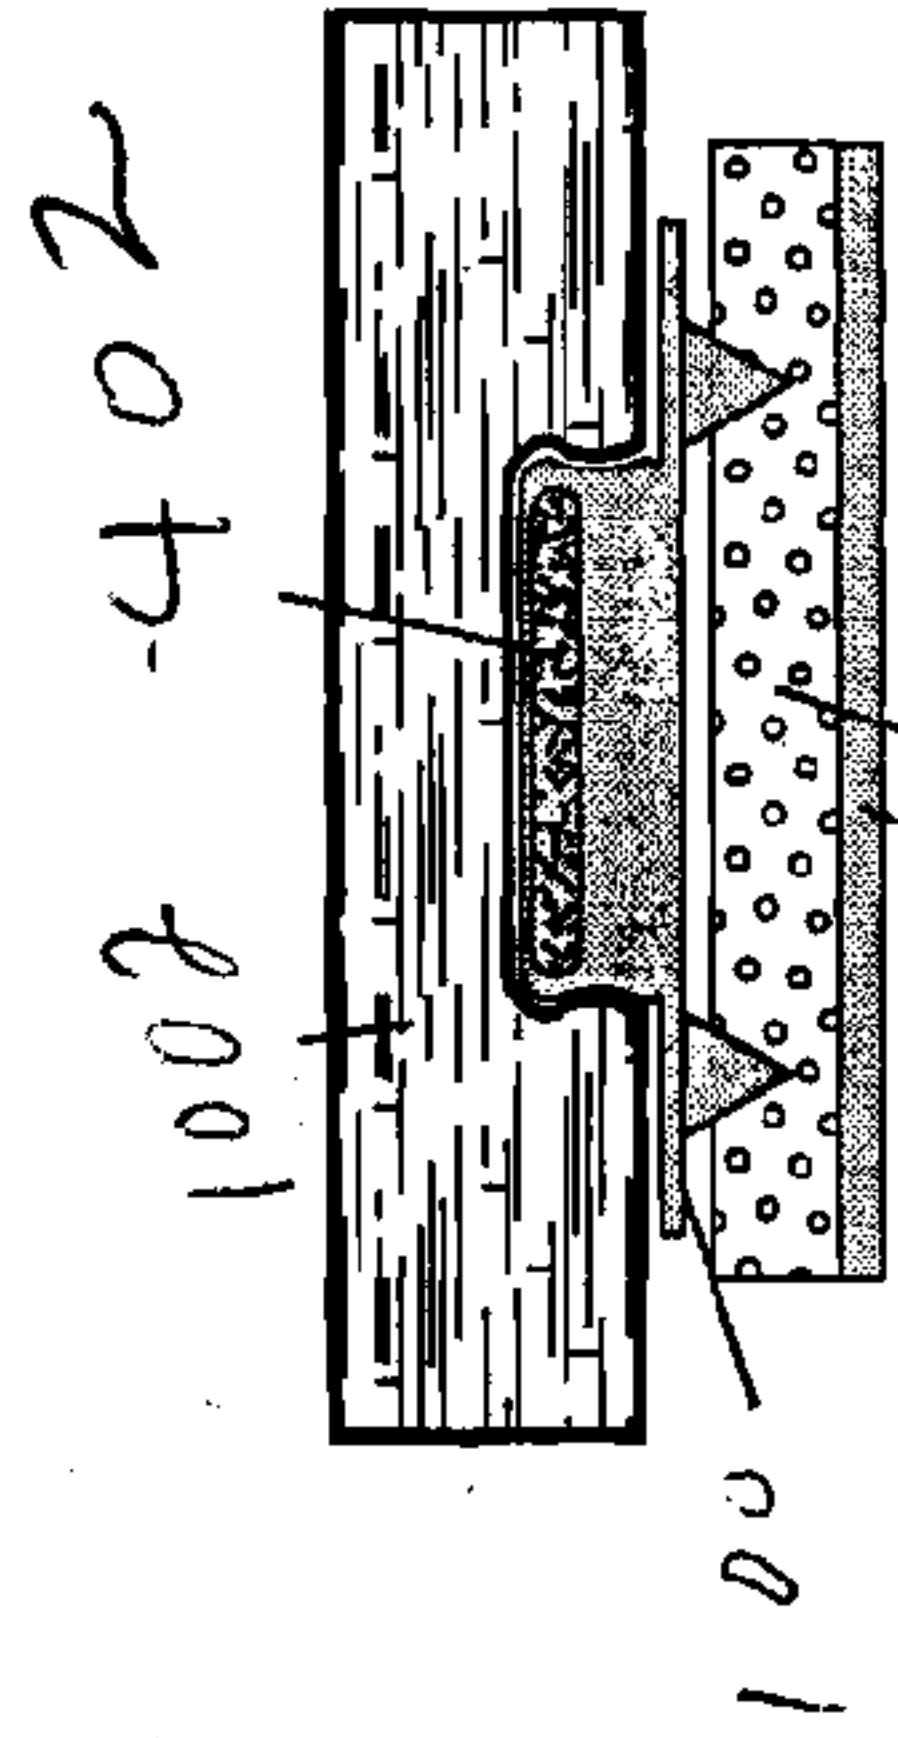


Fig. 10B

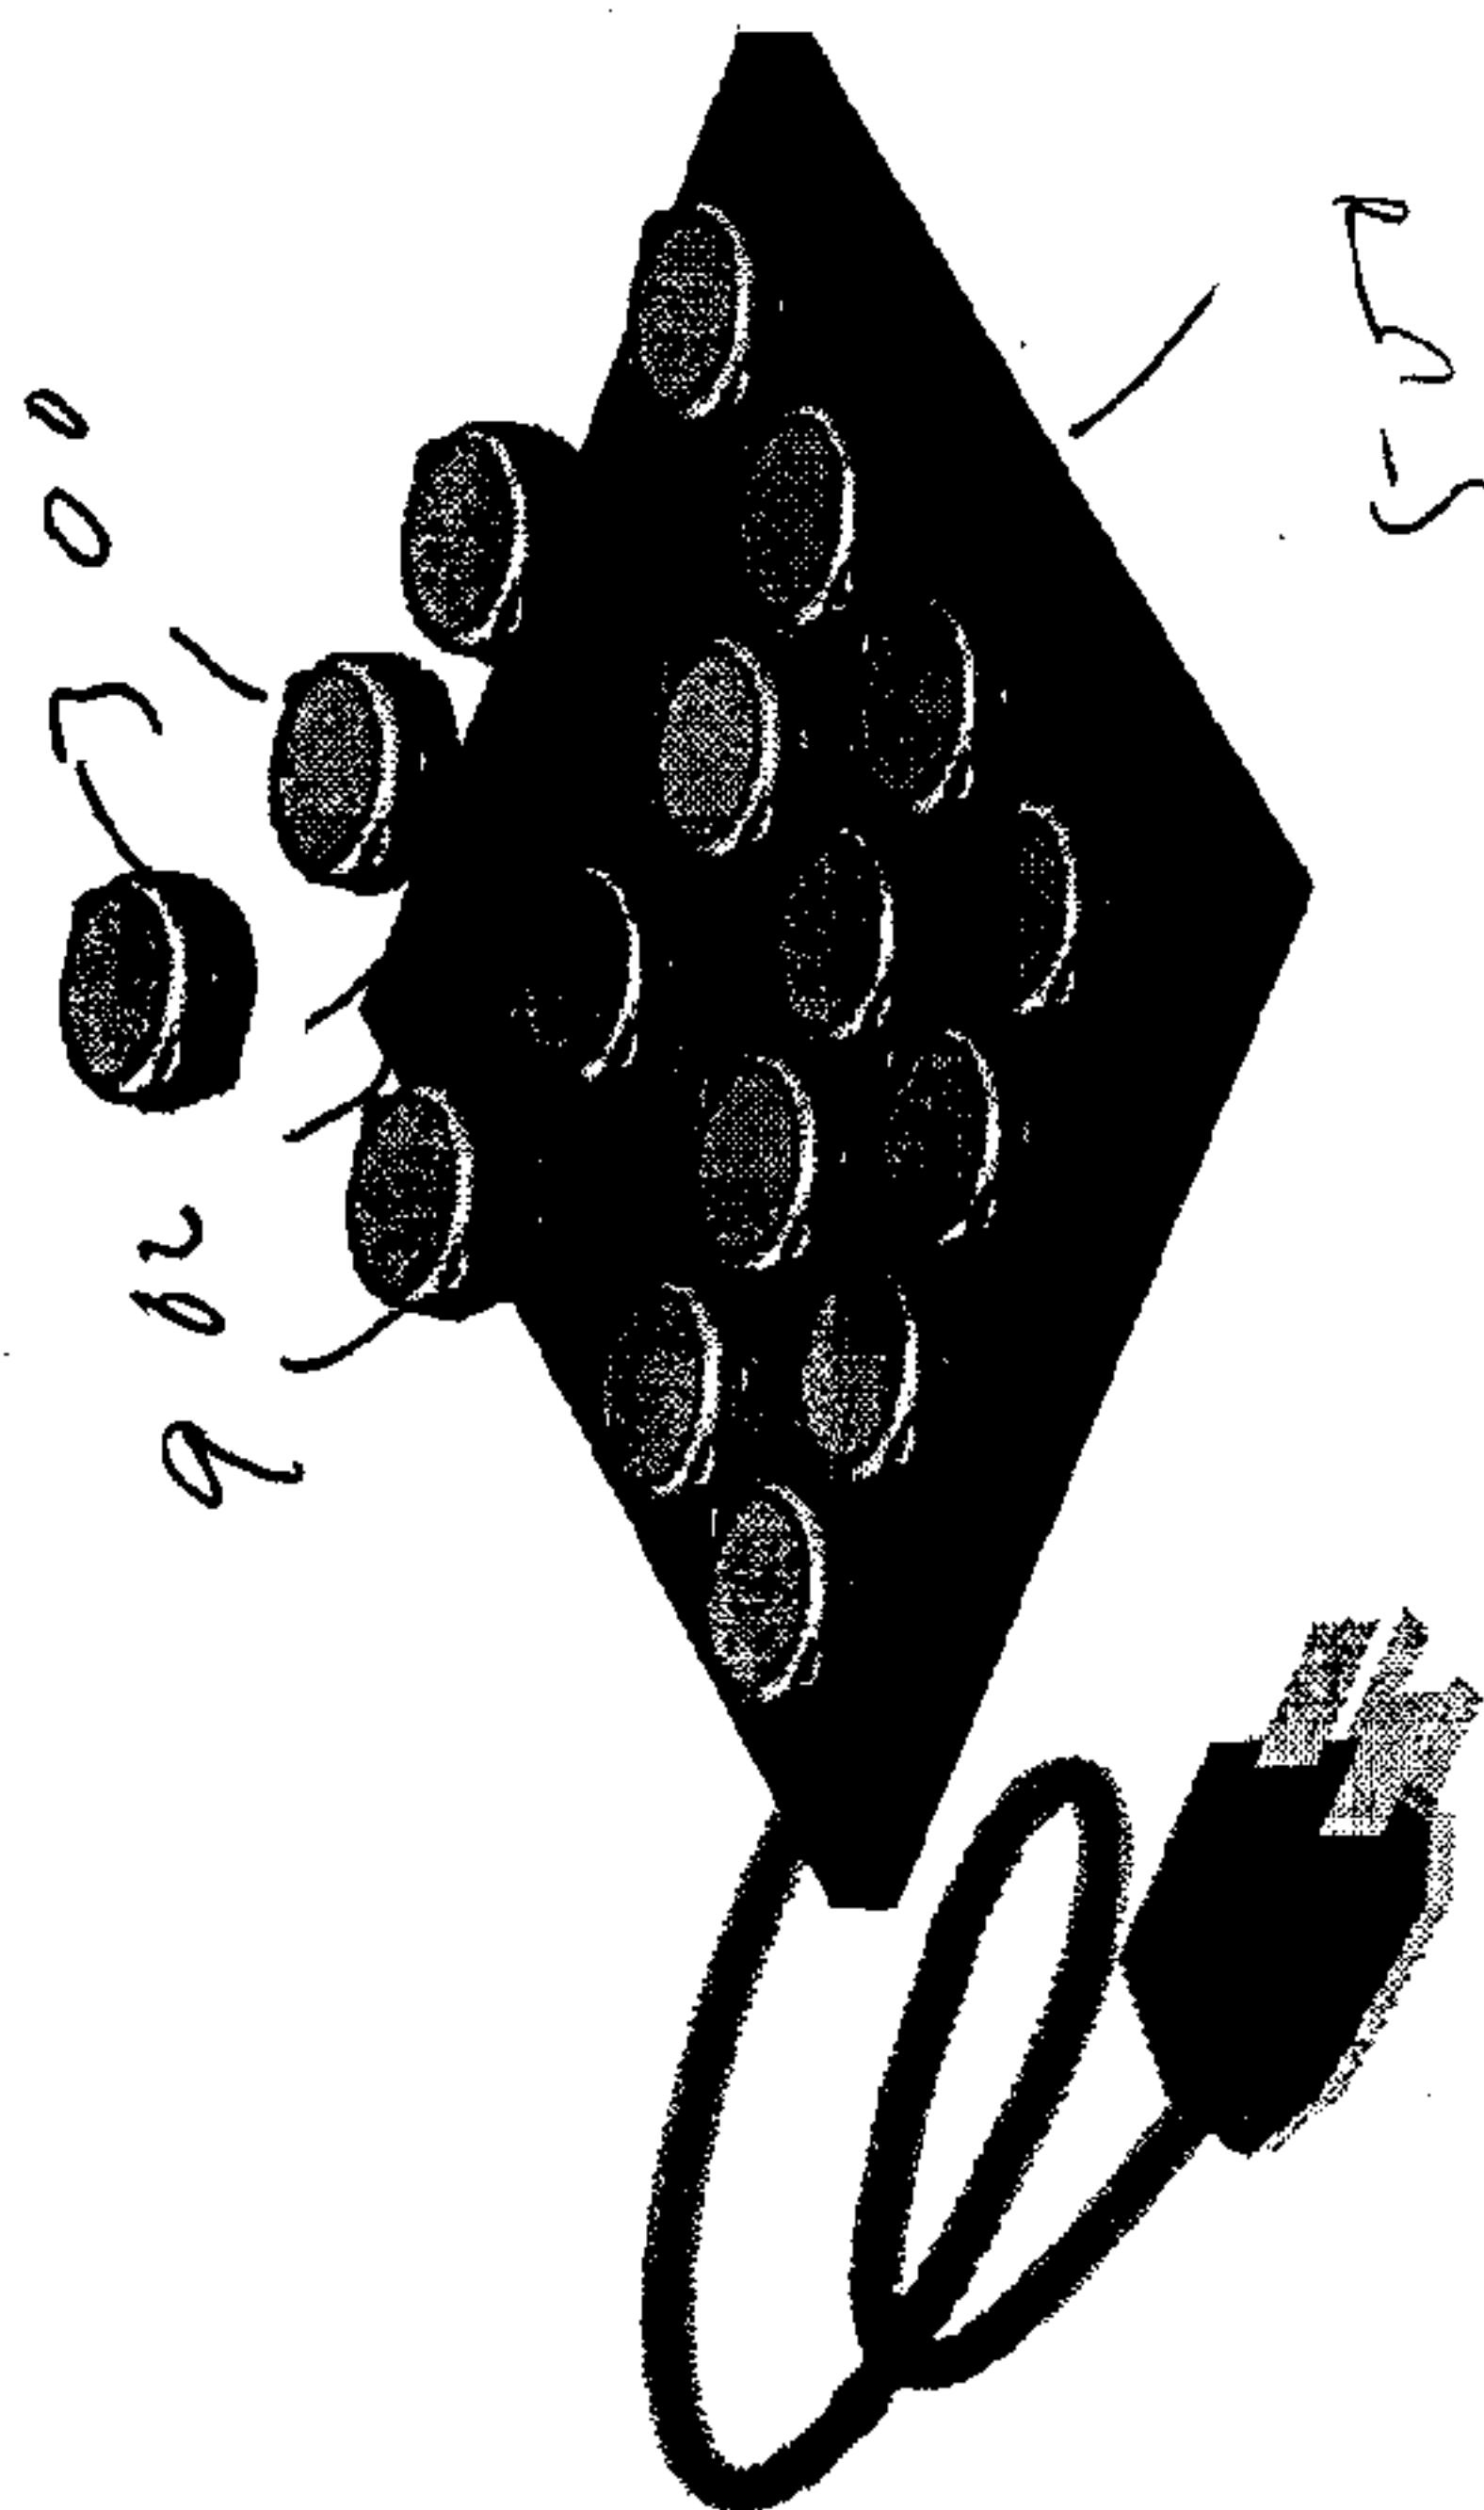


Fig. 9

Fig. 1

100
↓

