


(51) Int Cl.:
F16H 9/04 (2006.01)

(22) Date of filing: 30.01.2009

(74) Representative: **Pratt, David Martin et al**
Withers & Rogers LLP
Goldings House
2 Hays Lane
London SE1 2HW (GB)

(71) Applicant: **Yang, Tai-Her**
Si-Hu Town,
Dzan-Hwa (TW)

shift transmission pulley train as well as that a low shift transmission pulley train matching with an unidirectional transmission device is installed between the input shaft and the output shaft of the continuous variable transmission device.



Description**BACKGROUND OF THE INVENTION**

(a) Field of the invention

[0001] The operation schemes of continuous transmission for various known continuous variable transmission device of different shafts include:

[0002] The spacing between the variable spacing transmission V-belt grooves of driving and driven pulleys is modulated, whereby the operative belt transmission radial distance of driving pulley or driven pulley is changed to further change the transmission speed ratio between the driving pulley and the driven pulley;

[0003] The above said spacing modulation for variable spacing transmission V-belt grooves of driving or driven pulleys of the continuous variable transmission device is required to be driven by one or more than one kinds of axial driving forces including:

1. Through a variable centrifugal force generation mechanism by changes of the rotational speed of the input shaft to generate a variable axial driving force whereby to change the spacing of the transmission V-belt grooves of the driving pulley;

2. Through a variable centrifugal force generating mechanism by changes of the rotational speed of the output shaft to generate a variable axial driving force whereby to change the spacing of the transmission V-belt grooves of the driven pulley;

3. Through a variable axial driving force generating mechanism by changes of the output shaft torque to generate a variable axial driving force whereby to change the spacing of the transmission V-belt grooves of the driving pulley;

4. Through a variable axial driving force generating mechanism by changes of the output shaft torque to generate a variable axial driving force whereby to change the spacing of the transmission V-belt grooves of the driven pulley;

5. The driving or driven pulley is provided an axial pre-pressed spring, whereby the driving or driven pulley is pulled by the belt type transmission component to generate an axial driving force, whereby to change the variable spacing of the transmission V-belt grooves of both or either of the driving or driving pulley;

The above said 1~5 methods are passive operations of continuous variable transmission function.

6. A linear driving force actively generated manually, or by mechanical power, electromagnetic effect, hydraulically or pneumatically driven linear driving device; or a revolving kinetic energy generated by driving the electric motor, hydraulic motor or pneumatic motor is converted through a mechanical transmission device to an axial linear type driving force whereby to further change the spacing of variable spacing

transmission V-belt grooves of both or either of the driving pulley or driven pulley. Said method is the active operation of continuous variable transmission.

5 (b) Description of the prior art

[0004] Types of conventional continuous variable transmission devices of different input and output shafts structures are numerous including: rubber belt type, metal belt type, chain type, or electronic (ECVT) type, friction disk type or known continuous variable transmission device of different shafts type, etc.

SUMMARY OF THE INVENTION

[0005] The continuous variable transmission device with high and low shift transmission pulley trains is passively operated by an axial driving force generated by operating torque or rotational speed controlled manually or by axially pre-pressed springs on the driving and driven pulleys, or actively operated by manual, electric, mechanical, hydraulic or pneumatic powers and further referring to input preset operating modes, detected speeds and torques, etc. thereby to modulate and operate the speed ratio of the continuous variable transmission thereof.

[0006] Although the continuous variable transmission device of different shafts type is advantageous in convenient operation for its automatic speed ratio adjustment function according to the rotational speed change of the driving pulley input shaft and the size of loading torque at loading side, said continuous variable transmission device of different shafts type has the imperfections:

1. Due to low transmittable power, it is only suitable for middle to small power applications.
2. Transmission efficiency of the continuous variable transmission device of different shafts type is too low;
3. Durability enhancement is required.

[0007] The continuous variable transmission device with high and low shift transmission pulley trains has the following innovative functions:

1. A high shift transmission pulley train of fixed speed ratio are installed between the input shaft and the output shaft of the continuous variable transmission device in the same revolving direction and a clutching device is installed between the output shaft and the driven pulley of the high shift transmission pulley train, wherein if a deceleration type continuous variable transmission device is used to operate at minimum decelerating speed ratio or near minimum decelerating speed ratio status, or if an acceleration type continuous variable transmission device is used to operate at maximum accelerating speed ratio or near maximum accelerating speed ratio status, then the clutching device is operated to close when the

input shaft is rotated to or over setting rotational speed, whereby to connect the driven pulley of the high shift transmission pulley train and the output shaft;

2. A low shift transmission pulley train of fixed speed ratio matching and an unidirectional transmission device are installed between the input shaft and the output shaft of the continuous variable transmission device in the same revolving direction, wherein if a deceleration type continuous variable transmission device is used to operate at maximum decelerating speed ratio or near maximum decelerating speed ratio status, or if an acceleration type continuous variable transmission device is used to operate at minimum accelerating speed ratio or near minimum accelerating speed ratio status, then during high load operation, when the rotational speed of driving pulley of the low shift transmission pulley train is lowered to below that of the input shaft in the same revolving directions, revolving kinetic energy of the input shaft is through the unidirectional transmission device and the low shift transmission pulley train to drive the output shaft and further to drive the load, at said status, the transmission power originally transmitted through the continuous variable transmission device of different shafts type is changed to transmit through the low shift transmission pulley train for output.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008]

Fig. 1 is one of the embodiment schematic views of the invention constituted by the continuous variable transmission device of different shafts type as well as the high and low shift transmission pulley trains, wherein an radial unidirectional transmission device is installed between the input shaft and the driving pulley of the low shift transmission pulley train; and a clutching device is installed between the driven pulley of the high shift transmission pulley train and the output shaft which is driven by the driven pulley of the continuous variable transmission device of different shafts type.

Fig. 2 is the second embodiment schematic view of the invention constituted by the continuous variable transmission device of different shafts type as well as the high and low shift transmission pulley trains, wherein an radial unidirectional transmission device is installed between the input shaft and the driving pulley of the low shift transmission pulley train; an unidirectional transmission device is installed between the output shaft and the driven pulley of the continuous variable transmission device of different shafts type; and a clutching device is further installed between the driven pulley of the high shift transmission pulley train and the output shaft which is driven by the driven pulley of the continuous variable trans-

mission device of different shafts type.

Fig. 3 is the third embodiment schematic view of the invention constituted by the continuous variable transmission device of different shafts type as well as the high and low shift transmission pulley trains, wherein an radial unidirectional transmission device is installed between the input shaft and the driving pulley of the low shift transmission pulley train; an unidirectional transmission device is installed between the input shaft and the driving pulley of the continuous variable transmission device of different shafts type; and a clutching device is further installed between the driven pulley of the high shift transmission pulley train and the output shaft which is driven by the driven pulley of the continuous variable transmission device of different shafts type.

Fig. 4 is the fourth embodiment schematic view of the invention constituted by the continuous variable transmission device of different shafts type as well as the high and low shift transmission pulley trains, wherein an radial unidirectional transmission device is installed between the input shaft and the driving pulley of the low shift transmission pulley train; an torque limiting transmission device is installed between the output shaft and the driven pulley of the continuous variable transmission device of different shafts type; and a clutching device is further installed between the driven pulley of the high shift transmission pulley train and the output shaft which is driven by the driven pulley of the continuous variable transmission device of different shafts type.

Fig. 5 is the fifth embodiment schematic view of the invention constituted by the continuous variable transmission device of different shafts type as well as the high and low shift transmission pulley trains, wherein an radial unidirectional transmission device is installed between the input shaft and the driving pulley of the low shift transmission pulley train; a torque limiting transmission device is installed between the input shaft and the driving pulley of the continuous variable transmission device of different shafts type; and a clutching device is further installed between the driven pulley of the high shift transmission pulley train and the output shaft which is driven by the driven pulley of the continuous variable transmission device of different shafts type.

Fig. 6 is the sixth embodiment schematic view of the invention constituted by the continuous variable transmission device of different shafts type as well as the high and low shift transmission pulley trains, wherein an axial unidirectional transmission device is installed between the input shaft and the driving pulley of the low shift transmission pulley train; and a clutching device is further installed between the driven pulley of the high shift transmission pulley train and the output shaft which is driven by the driven pulley of the continuous variable transmission device of different shafts type.

55

Fig. 14 is the fourteenth embodiment schematic view of the invention constituted by the continuous variable transmission device of different shafts type as well as the high and low shift transmission pulley trains, wherein an unidirectional transmission device is installed between the input shaft and the driven pulley of the low shift transmission pulley train; an torque limiting transmission device is installed between the output shaft and the driven pulley of the continuous variable transmission device of different shafts type; and a clutching device is further installed between the driven pulley of the high shift transmission pulley train and the output shaft which is driven by the driven pulley of the continuous variable trans-

mission device of different shafts type.

Fig. 15 is the fifteenth embodiment schematic view of the invention constituted by the continuous variable transmission device of different shafts type as well as the high and low shift transmission pulley trains, wherein an unidirectional transmission device is installed between the input shaft and the driven pulley of the low shift transmission pulley train; an torque limiting transmission device is installed between the input shaft and the driving pulley of the continuous variable transmission device of different shafts type; and a clutching device is further installed between the driven pulley of the high shift transmission pulley train and the output shaft which is driven by the driven pulley of the continuous variable transmission device of different shafts type.

Fig. 16 is a structural schematic view showing that the high shift transmission pulley train or the low shift transmission pulley train of the invention is constituted by a driving chain pulley, a driven chain pulley and a transmission chain.

Fig. 17 is a structural schematic view showing that the high shift transmission pulley train or the low shift transmission pulley train is constituted by a driving pulley, a middle driven pulley and a pulley.

Fig. 18 is a structural schematic view showing that the high shift transmission pulley train or the low shift transmission pulley train is constituted by a smaller outer diameter transmission pulley and a larger outer diameter inner transmission pulley.

Fig. 19 is a structural schematic view showing that the high shift transmission pulley train or the low shift transmission pulley train is constituted by a driving belt pulley, a driven belt pulley and a transmission belt.

Fig. 20 is a structural schematic view of the invention showing that a speed change pulley train is installed between the input shaft and the driving pulley of the continuous variable transmission device of different shafts type.

Fig. 21 is a structural schematic view of the invention showing that a speed change pulley train is installed between the output shaft and the driven pulley of the continuous variable transmission device of different shafts type.

Fig. 22 is a structural schematic view of the invention showing that speed change pulley trains are installed between the input shaft and the driving pulley of the continuous variable transmission device of different shafts type and between the output shaft and the driven pulley of the continuous variable transmission device of different shafts type.

DESCRIPTION OF MAIN COMPONENT SYMBOLS

[0009]

100: Continuous variable transmission device of dif-

ferent shafts type

101: Input shaft

102: Low shift transmission pulley train

103: Output shaft

111, 211: Unidirectional transmission device

202: High shift transmission pulley train

212: Torque limiting clutching device

222: Clutching device

302, 402: Speed change pulley train

800: Driving control device

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0010] The continuous variable transmission device with high and low shift transmission pulley trains is passively operated by an axial driving force generated by operating torque or rotational speed controlled manually or by axially pre-pressed springs on the driving and driven pulleys, or actively operated by manual, electric, mechanical, hydraulic or pneumatic powers and further referring to input preset operating modes, detected speeds and torques, etc. thereby to modulate and operate the speed ratio of the continuous variable transmission thereof.

[0011] Although the continuous variable transmission device of different shafts type is advantageous in convenient operation for its automatic speed ratio adjustment function according to the rotational speed change of the driving pulley input shaft and the size of the loading torque at loading side, said continuous variable transmission device of different shafts type has the imperfections:

1. Due to low transmittable power, it is only suitable for middle to small power applications.
2. Transmission efficiency of the continuous variable transmission device of different shafts type is too low;
3. Durability enhancement is required.

[0012] The continuous variable transmission device with high and low shift transmission pulley trains has the following innovative functions:

1. A high shift transmission pulley train of fixed speed ratio is installed between the input shaft and the output shaft of the continuous variable transmission device in the same revolving direction and a clutching device is installed between the output shaft and the driven pulley of the high shift transmission pulley train, wherein if a deceleration type continuous variable transmission device is used to operate at minimum decelerating speed ratio or near minimum decelerating speed ratio status, or if an acceleration type continuous variable transmission device is used to operate at maximum accelerating speed ratio or near maximum accelerating speed ratio status, then the clutching device is operated to close when the input shaft is rotated to or over setting rotational

speed, whereby to connect the driven pulley of high shift transmission pulley train and the output shaft;
 2. A low shift transmission pulley train of fixed speed ratio and an unidirectional transmission device are installed between the input shaft and the output shaft of the continuous variable transmission device in the same revolving direction, wherein if a deceleration type continuous variable transmission device is used to operate at maximum decelerating speed ratio or near maximum decelerating speed ratio status, or if an acceleration type continuous variable transmission device is used to operate at minimum accelerating speed ratio or near minimum accelerating speed ratio status, then during high load operation, when the rotational speed of the driving pulley of the low shift transmission pulley train is lowered to below that of the input shaft in the same revolving directions, revolving kinetic energy of the input shaft is through the unidirectional transmission device and the low shift transmission pulley train to drive the output shaft and further to drive the load, at said status, the transmission power originally transmitted through the continuous variable transmission device of different shafts type is changed to transmit through the low shift transmission pulley train for output.

[0013] The continuous variable transmission device with high and low shift transmission pulley trains comprises:

[0014] As shown in Fig. 1, besides the relevant mechanisms in the conventional continuous variable transmission devices, the continuous variable transmission device with high and low shift transmission pulley trains is further mainly constituted by:

- A continuous variable transmission device of different shafts type 100: It is a continuous variable transmission device of different input and output shafts structure comprises at least one kind of rubber belt type, metal belt type, chain type, or electronic (ECVT) type, friction disk type continuous variable transmission devices, wherein transmission speed ratio thereof can be either passively automatically modulated by following torque or following rotational speed; or actively modulated by applying a linear driving force either generated by an externally powered linear driving device or by a revolving driving device via mechanical transmission device for conversion to change spacing between the transmission V-belt grooves of both or either of the driving and driven pulley.
- An input shaft 101: It is the rotating shaft to receive a revolving kinetic energy input, whereby said revolving kinetic energy is transmitted to the driving pulley of the continuous variable transmission device of different shafts type 100 and to the driving pulley of the high shift transmission pulley train 202 for further transmission to the input end of the unidirectional

al transmission device 111 which is connected with a low shift transmission pulley train 102;

- The high shift transmission pulley train 202: It comprises a driving pulley driven by the input shaft 101 and a driven pulley for driving the output shaft 103, wherein said driving pulley and driven pulley are transmitted in the same rotational directions, the transmission speed ratio thereof appears a high shift transmission function in accelerating transmission relative to the continuous variable transmission device of different shafts type 100, wherein the speed ratio relationship between the high shift transmission pulley train 202 and the continuous variable transmission device of different shafts type 100 is:

1. Speed ratio of the driving pulley to drive the driven pulley of the high shift transmission pulley train 202 $\geq$ speed ratio of the continuous variable transmission device of different shafts type 100 in high speed output;
2. Speed ratio of the continuous variable transmission device of different shafts type 100 in high speed output $>$ Speed ratio of the driving pulley to drive the driven pulley of the high shift transmission pulley train 202 $>$ speed ratio of the continuous variable transmission device of different shafts type 100 in low speed output;

- The low shift transmission pulley train 102: It comprises a driving pulley which is driven by the input shaft 101 and a driven pulley for driving the output shaft 103, wherein said driving pulley and driven pulley are transmitted in the same rotational direction, the transmission speed ratio thereof appears a low shift transmission in decelerating transmission relative to the continuous variable transmission device of different shafts type 100, and the speed ratio relationship between the low shift transmission pulley train 102 and the continuous variable transmission device of different shafts type 100 is:

1. Speed ratio of the driving pulley to drive the driven pulley of the low shift transmission pulley train 102 $\leq$ speed ratio of the continuous variable transmission device of different shafts type 100 in low speed output;
2. Speed ratio of the continuous variable transmission device of different shafts type 100 in low speed output $<$ Speed ratio of the driving pulley to drive the driven pulley of the low shift transmission pulley train 102 $<$ speed ratio of the continuous variable transmission device of different shafts type 100 in high speed output;

- An output shaft 103: it is the rotating shaft to supply revolving kinetic energy for driving the load, whereby the revolving kinetic energy is transmitted from the driven pulley of the continuous variable transmission

device of different shafts type 100, or transmitted from the driven pulley of the low shift transmission pulley train 102, or the revolving kinetic energy from the driven pulley of the high shift transmission pulley train is transmitted through the clutching device 222 to drive the load;

- An unidirectional transmission device 211: It is constituted by an unidirectional bearing, or an unidirectional clutch or a mechanism or device with unidirectional transmission function, etc. of radial or axial structures to be installed between the input shaft 103 and the driven pulley of the continuous variable transmission device of different shafts type 100 (as shown in Figs. 2, 7, 12), or installed between the driving pulley of the continuous variable transmission device of different shafts type 100 and the input shaft 101 (as shown in Figs. 3, 8, 13), wherein when the rotational speed of the driven pulley of the continuous variable transmission device of different shafts type 100 is higher than that of the output shaft 103 in the same revolving direction, the kinetic energy is transmitted through the driven pulley of the continuous variable transmission device of different shafts type 100 to drive the output shaft 103 for output. When the rotational speed of the output shaft 103 is raised to or over setting rotational speed, the clutching device 222 is closed to connect the driven pulley of the high shift transmission pulley train 202 and the output shaft 103, if the rotational speed of the output shaft 103 is higher than that of the driven pulley of the continuous variable transmission device of different shafts type 100, the unidirectional transmission device 211 is in no load operation. Further, if said unidirectional transmission device 211 is installed between the driving pulley of the continuous variable transmission device of different shafts type 100 and the input shaft 101 as shown in Figs. 3, 8, 13, when the rotational speed of the output shaft 103 is raised to or over setting rotating speed, the clutching device 222 is closed to connect the driven pulley 202 of the high shift transmission pulley train 202 and the output shaft 103, if the rotational speed of the driving pulley of the continuous variable transmission device of different shafts type 100 is higher than that of the input shaft 101 in the same revolving direction, said unidirectional transmission device 211 is also in no load operation. Herein, said unidirectional transmission device 211 can be selected to be installed or not to be installed.
- A torque limiting clutching device 212: It is constituted by a sliding type or clutching type torque limiting device in radial or axial direction for replacing unidirectional transmission device 211 to be installed between the driven pulley of the continuous variable transmission device of different shafts type 100 and the output shaft 103 (as shown in Figs. 4, 9, 14), or to be installed between the driving pulley of the con-

tinuous variable transmission device of different shafts type 100 and the input shaft 101 (as in Figs. 5, 10, 15), whereby when the rotational speed of the output shaft 103 is raised to or over setting speed, the clutching device 222 is closed, and when there is a rotational speed difference causing torque difference to exceed its setting value between the output shaft 103 and the driven pulley of the continuous variable transmission device of different shafts type 100, said torque limiting clutching device 212 is slid or released; wherein said torque limiting clutching device 212 can be selected to be installed or not to be installed.

- The unidirectional transmission device 111: it is parallel connected with low shift transmission pulley train 102 and is constituted by a radial type unidirectional transmission device as indicated by applications shown in Figs. 1~5; or it can be constituted by an axial type unidirectional transmission device as indicated by applications shown in Figs. 6~10; including the constitution by an unidirectional bearing with unidirectional transmission function, and an unidirectional clutch or an unidirectional transmission mechanism or device, wherein said unidirectional transmission device 111 can be optionally installed as needed between the input shaft 101 and the driving pulley of the low shift transmission pulley train 102, or installed as needed between the driven pulley of the low shift transmission pulley train 102 and the output shaft 103 as shown in Figs. 11~15;
- The clutching device 222: It is optionally selected as needed to be constituted by 1) passively operated centrifugal type clutches by centrifugal force or torque operated type passive clutches, or 2) clutches actively operated by manual or mechanical power, or driven by electromagnetic or hydraulic or pneumatic pressure to be actively randomly controlled manually or controlled by a built-in or externally installed rotational speed detector device or torque detector device, whereby the detected signals of the rotational speed or the rotating torque are processed by the driving control device 800 to actively control the clutching device 222 for releasing or closing operations. The clutching device 222 is for installing between the driven pulley of the high shift transmission pulley train 202 and the output shaft 103, wherein it can be an independent structure, or to integrate with a high shift transmission pulley train, or to integrate with a continuous variable transmission device of different shafts type 100, or a high shift transmission pulley train 202, a continuous variable transmission device of different shafts type 100 and a clutching device 222 can be integrated, thereby to close for kinetic energy transmission or to release for cutting off kinetic energy transmission.
- A driving control device 800: It is installed according

to characteristics of selected continuous variable transmission device of different shafts type 100 and clutching device 222. Said driving control device is provided with a driving power source including electric power supply unit, hydraulic oil pressure supply unit, or pneumatic pressure supply unit as well as relevant electric power control unit, hydraulic oil pressure control unit, or pneumatic pressure control unit to control the speed ratio of the continuous variable transmission device of different shafts type 100 or the closing or releasing operating function of the clutching device 222;

If the continuous variable transmission device of different shafts type 100 is selectively passively operated by torque following transmission speed ratio modulating structure or by rotating speed following speed ratio modulating structure, or a centrifugal type clutching device or a torque operated type passive clutching device 222 is also further used for passive controlled operation, said driving control device 800 can be not be installed; If an active controlled type clutching device is selected for the clutching device 222, or an actively operated continuous variable transmission device requiring an external power driving source for speed ratio modulation is selected for continuous variable transmission device of different shafts type 100, then a driving control device 800 shall be installed to actively control the speed ratio of the continuous variable transmission device of different shafts type 100 which requires an external power driving source for speed ratio modulation, or to control the active operating type clutching device 222 for closing or releasing functions whereof.

[0015] The continuous variable transmission device with high and low shift transmission pulley trains comprising above said main structures, wherein its constitution and operating functions include the following:

1. The input shaft 101 of the continuous variable transmission device of different shafts type 100 is additionally installed with a driving pulley of the high shift transmission pulley train 202, and a clutching device 222 is installed between a driven pulley of the high shift transmission pulley train 202 and an output shaft 103 which is driven by the driven pulley of the continuous variable transmission device of different shafts type 100; and
2. An unidirectional transmission device 211 is optionally installed as needed between the output shaft 103 and the driven pulley of the continuous variable transmission device of different shafts type 100, or between the driving pulley of the continuous variable transmission device of different shafts type 100 and the input shaft 101, wherein the transmission direction of said unidirectional transmission device 211 shall allow that when the output shaft 103 is rotated higher than that of the driven pulley of the continuous variable transmission device of different shafts type

100 in the same revolving directions, or the rotational speed of the driving pulley of the continuous variable transmission device of different shafts type 100 is higher than that of the input shaft 101 in the same revolving direction, said unidirectional transmission device 211 is at no load operation, while the revolving kinetic energy is transmitted by the driven pulley of the high shift transmission pulley train 202 via the clutching device 222 to drive the output shaft 103 and further to drive the load; or

3. A torque limiting clutching device 212 is optionally installed as needed between the output shaft 103 and the driven pulley of the continuous variable transmission device of different shafts type 100, or between the driving pulley of the continuous variable transmission device of different shafts type 100 and the input shaft 101, whereby when the output shaft 103 is rotated faster than the driven pulley of the continuous variable transmission device of different shafts type 100 in the same revolving directions, or when the rotational speed of the driving pulley of the continuous variable transmission device of different shafts type 100 is higher than that of the input shaft 101 in the same revolving directions, said torque limiting clutching device 212 is slid or released, while the revolving kinetic energy is transmitted by the driven pulley of the high shift transmission pulley train 202 via the clutching device 222 to drive the output shaft 103 and further to drive the load;

4. The transmission direction of said unidirectional transmission device 111 in connection with the low shift transmission pulley train 102 shall allow that when the input shaft 101 is rotated faster than the driving pulley of the low shift transmission pulley train 102 in the same revolving directions, the revolving kinetic energy is transmitted to the driving pulley of the low shift transmission pulley train 102; contrarily when the rotational speed of the input shaft 101 is lower than that of the driving pulley of the low shift transmission pulley train 102 in the same revolving directions, said unidirectional transmission device 111 is at no load operation; or when the rotational speed of the driven pulley of the low shift transmission pulley train 102 is higher than that of the output shaft 103, said input shaft 101 is driven to rotate, or contrarily when the rotational speed of the output shaft 103 is lower than the driven pulley of the low shift transmission pulley train 102 in the same revolving directions, said unidirectional transmission device 111 is at no load operation.

[0016] Operating functions of said continuous variable transmission device with high and low shift transmission pulley trains include:

1. For said continuous variable transmission device of different shafts type 100, if a deceleration type continuous variable transmission device is used to

operate at minimum decelerating speed ratio or near minimum decelerating speed ratio status, or an acceleration type continuous variable transmission device is used to operate at maximum accelerating speed ratio or near maximum accelerating speed ratio, then when the output shaft 103 is rotated to or over setting rotational speed, the clutching device 222 is closed to connect the driven pulley of the high shift transmission pulley train 202 and the output shaft 103, whereby the rotational speed of the output shaft 103 is driven by the driving pulley of the high shift transmission pulley train 202 via the clutching device 222 to appear higher than or equal to that of the driven pulley of the continuous variable transmission device of different shafts type 100 to further drive the load;

At said status, it is **characterized in that** the power is transmitted by the continuous variable transmission device of different shafts type 100, via the high shift transmission pulley 202 and the clutching device 222 to drive the output shaft 103 and further to drive the load;

2. When the output shaft 103 is rotated to below setting rotational speed, said clutching device 222 is released, then the revolving kinetic energy from the input shaft 101 is through the continuous variable transmission device of different shafts type 100 to drive the output shaft 103 and further to drive the load;

3. During low speed and high load operation, said clutching device 222 is released, wherein for said continuous variable transmission device of different shafts type 100, if a deceleration type continuous variable transmission device is used to operate at maximum decelerating speed ratio or near maximum decelerating speed ratio status, or an acceleration type continuous variable transmission device is used to operate at minimum accelerating speed ratio or near minimum accelerating speed ratio status, whereby when the rotational speed of the driving pulley of the low shift transmission pulley train 102 is lower than that of the input shaft 101 in the same revolving directions, the revolving kinetic energy from the input shaft 101 is through the unidirectional transmission device 111 and the low shift transmission pulley train 102 to drive the output shaft 103 and further to drive the load, at said status, the power originally transmitted by the continuous variable transmission device of different shafts type 100 is changed to be transmitted by the low shift transmission pulley train 102 to drive the output shaft 103, while during lower load operation, the kinetic energy is transmitted by the continuous variable transmission device of different shafts type 100;

4. If an unidirectional transmission device 111 is installed between the driven pulley of the low shift transmission pulley train 102 and the output shaft 103, during higher load operation, if a deceleration

type continuous variable transmission device is used to operate at maximum decelerating speed ratio or near maximum decelerating speed ratio status, or an acceleration type continuous variable transmission device is used to operate at minimum accelerating speed ratio or near minimum accelerating speed ratio status, whereby when the rotational speed of the driven pulley of the low shift transmission pulley train 102 is changed to higher than that of the output shaft 103 in the same revolving directions, the revolving kinetic energy is transmitted through the low shift transmission train 102 and the unidirectional transmission device 111 to drive the output shaft 103 and further to drive the load, at said status, the power originally transmitted by the continuous variable transmission device of different shafts type 100 is changed to be transmitted by the low shift transmission pulley train 102 to drive the output shaft 103, while during lower load operation, the kinetic energy is transmitted through the continuous variable transmission device of different shafts type 100 to drive the output shaft 103;

[0017] Said continuous variable transmission device with high and low shift transmission pulley trains as described in Figs. 1~15, wherein in practical applications, the unidirectional transmission devices 111 or 211, the torque limiting clutching devices 212 can be optionally mixed for use. Locations to install the unidirectional transmission device 111 or 211 or locations to install the torque limiting clutching devices 212 can be 1) All locations selectively installed with the unidirectional transmission device 111 or 211 or 2) All locations selectively installed with the torque limiting clutching device 212, or 3) Partial locations selectively installed with the unidirectional transmission device 111 or 211 while other partial locations selectively installed with the torque limiting clutching device 212.

[0018] Said high shift transmission pulley train 202 and said low shift transmission pulley train 102 of the continuous variable transmission device with high and low shift transmission pulley trains can be optionally constituted as needed by the following:

1. It is constituted by a driving chain pulley, a driven chain pulley, and an attached transmission chain, wherein Fig. 16 is a structural schematic view showing that the high shift transmission pulley train 202 or the low shift transmission pulley train 102 of the invention is constituted by a driving chain pulley, a driven chain pulley and an attached transmission chain; or

2. It is constituted by a driving pulley, a middle driven pulley and a driven pulley, wherein said driving pulley, middle driven pulley and driven pulley include constitutions by gears or friction pulleys. Fig. 17 is a structural schematic view showing that the high shift transmission pulley train 202 or the low shift trans-

mission pulley train 102 is constituted by a driving pulley, a middle driven pulley and a driven pulley; or 3. It is constituted by an inner gear train or an inner friction pulley train comprising a smaller outer diameter transmission pulley and a larger outer diameter inner transmission pulley. Fig. 18 is a structural schematic view showing that the high shift transmission pulley train 202 or the low shift transmission pulley train 102 is constituted by a smaller outer diameter transmission pulley and a larger outer diameter inner transmission pulley; or

4. It is constituted by a driving belt pulley, a driven belt pulley and an attached transmission belt such as a canvas belt, a steel belt, or a chain belt. Fig. 19 is a structural schematic view showing that the high shift transmission pulley train 202 or the low shift transmission pulley train 102 is constituted by a driving belt pulley, a driven belt pulley and a transmission belt.

[0019] For sake of efficiency, when diameters of the driving pulley and the driven pulley are made more similar to each other to ensure a better efficiency in the continuous variable transmission of different shafts type 100 of said continuous variable transmission device with high and low shift transmission pulley trains, a middle transmission pulley for accelerating speed ratio or decelerating speed ratio can be installed to satisfy the needs for accelerating speed ratio or decelerating speed ratio in order to ensure a better transmission efficiency, wherein said middle transmission pulley includes:

1. A speed change pulley train 302 is further installed between the input shaft 101 and the driving pulley of the continuous variable transmission device of different shafts type 100 to change the total speed ratio of the input shaft 101 and the output shaft 103 and is matched to required revolving direction. Fig. 20 is a structural schematic view of the invention showing that a speed change pulley train is installed between the input shaft 101 and the driving pulley of the continuous variable transmission device of different shafts type 100; or
2. A speed change pulley train 402 is further installed between the output shaft 103 and the driven pulley of the continuous variable transmission device of different shafts type 100 to change the total speed ratio of the input shaft 101 and the output shaft 103 and is matched to required revolving direction. Fig. 21 is a structural schematic view of the invention showing that a speed change pulley train is installed between the output shaft 103 and the driven pulley of the continuous variable transmission device of different shafts type 100; or
3. The speed change pulley trains 302, 402 are simultaneously installed between the input shaft 101 and the driving pulley of the continuous variable transmission device of different shafts type 100 and

between the output shaft 103 and the driven pulley of the continuous variable transmission device of different shafts type 100 to change the total speed ratio of the input shaft 101 through continuous variable transmission device of different shafts type 100 to drive the output shaft 103 and are matched to required revolving direction. Fig. 22 is a structural schematic view of the invention showing that speed change pulley trains are installed between the input shaft 101 and the driving pulley of the continuous variable transmission device of different shafts type 100 and between the output shaft 103 and the driven pulley of the continuous variable transmission device of different shafts type 100;

[0020] The low shift transmission pulley train of said continuous variable transmission device with high and low shift transmission pulley trains can be selected according to application requirements to include the following:

1. To be constituted by a single stage low shift transmission pulley train of fixed speed ratio;
2. To be constituted by a multi-stage type variable speed ratio low shift variable transmission pulley train of manual shift or automatic transmission.

[0021] For said continuous variable transmission device with high and low shift transmission pulley trains, input methods for supplying revolving kinetic energy to the input shaft 101 can be selected based on application requirements to include the following:

1. The input shaft 101 is for receiving direct revolving power source input from revolving power source such as engine, motor or generator or input from flywheel, wind power fan blades, gas or liquid turbines, or manual power, etc. ;
2. The revolving power sources as said in item 1 supplied to the input shaft 101 for output is first controlled by a clutching device before providing revolving kinetic energy output;
3. The revolving power sources as said in item 1 supplied to the input shaft 101 for output is further through a fixed speed change transmission device, a stepped or stepless speed change transmission device in manual shift or automatic transmission, or a fluid transmission device, or an electromagnetic eddy current transmission device to provide revolving kinetic energy output;
4. The revolving power sources as said in item 1 supplied to the input shaft 101 for output is further through a clutching device and a fixed speed change transmission device, a stepped or stepless speed change transmission device of manual shift or automatic transmission, or a fluid transmission device, or an electromagnetic eddy current transmission device to provide revolving kinetic energy output.

[0022] The revolving kinetic energy output of the output shaft 103 of said continuous variable transmission high and low shift transmission pulley trains can be selected according to application requirements to include the following:

1. The revolving kinetic energy output from the output shaft 103 is directly used to drive the load;
2. The revolving kinetic energy output from the output shaft 103 is through a clutching device to further drive the load;
3. The revolving kinetic energy from the output shaft 103 is through a speed change transmission device with fixed speed ratio, or a stepless or stepped speed change transmission device of manual shift or automatic transmission, or a fluid transmission device, or electromagnetic eddy current transmission device to further drive the load;
4. The revolving kinetic energy output from the output shaft 103 is through a clutching device and a stepless or stepped speed change device with fixed speed ratio or of manual shift or automatic transmission, or a fluid transmission device, or an electromagnetic eddy current transmission device to further drive the load.

[0023] The high shift transmission pulley train of said continuous variable transmission device with high and low shift transmission pulley trains can be selected according to application requirements to include the following:

1. To be constituted by a single stage high shift transmission pulley train of fixed speed ratio;
2. To be constituted by a multi-stage type variable speed ratio high shift variable transmission pulley train of manual shift or automatic transmission.

[0024] For said continuous variable transmission device with high and low shift transmission pulley trains, input methods for supplying revolving kinetic energy to the input shaft 101 can be selected based on application requirements to include the following:

1. The input shaft 101 is for receiving direct revolving power source input from revolving power source such as engine, motor or generator or input from flywheel, wind power fan blades, gas or liquid turbines, or manual power, etc. ;
2. The revolving power sources as said in item 1 supplied to the input shaft 101 for output is first controlled by a clutching device before providing revolving kinetic energy output;
3. The revolving power sources as said in item 1 supplied to the input shaft 101 for output is further through a speed change transmission device with fixed speed ratio, a stepped or stepless speed change transmission device of manual shift or auto-

matic transmission, or a fluid transmission device, or an electromagnetic eddy current transmission device to provide revolving kinetic energy output;

4. The revolving power sources as said in item 1 supplied to the input shaft 101 for output is further through a clutching device and a speed change transmission device with fixed speed ratio, a stepped or stepless speed change transmission device of manual shift or automatic transmission, or a fluid transmission device, or an electromagnetic eddy current transmission device to provide revolving kinetic energy output.

[0025] The revolving kinetic energy output of the output shaft 103 of said continuous variable transmission device with high and low shift transmission pulley trains can be selected according to application requirements to include the following:

1. The revolving kinetic energy output from the output shaft 103 is directly used to drive the load;
2. The revolving kinetic energy output from the output shaft 103 is through a clutching device to further drive the load;
3. The revolving kinetic energy from the output shaft 103 is through a speed change transmission device with fixed speed ratio, or a stepless or stepped speed change transmission device of manual shift or automatic transmission, or a fluid transmission device, or electromagnetic eddy current transmission device to further drive the load;
4. The revolving kinetic energy output from the output shaft 103 is through a clutching device and a stepless or stepped speed change device with fixed speed ratio or of manual shift or automatic transmission, or a fluid transmission device, or an electromagnetic eddy current transmission device to further drive the load.

[0026] In the continuous variable transmission device with high and low shift transmission pulley trains, the practical applied structures of said continuous variable transmission device of different shafts type 100 and said low shift transmission pulley train 102 and said high shift transmission pulley train 202 can be selectively made to be independently separated mechanical devices and combined afterwards for transmission or made to an integral structure or made to a structure of a common integrated mechanical device and a common integrated casing.

[0027] As summarized from above descriptions, said continuous variable transmission device with high and low shift transmission pulley trains is **characterized in that** said continuous variable transmission device of different shafts type 100 is installed with a high shift transmission pulley train 202 to control the clutching device 222 to close when the output shaft 103 is in high speed rotation, whereby the transmission function is carried out

by said high shift transmission pulley train 202 to drive the load via the output shaft 103, while a low shift transmission pulley train 102 is further installed so that in low speed loading, the load is driven by said low shift transmission pulley train 102 in order to elongate the service life of said continuous variable transmission device with high and low shift transmission pulley trains and to promote the transmission efficiency.

[0028] The present invention provides a continuous variable transmission device, comprising:

high and low shift transmission pulley trains.

[0029] Preferably, the continuous variable transmission device has different shafts type (100): It is a continuous variable transmission device of different input and output shafts structure comprises at least one kind of rubber belt type, metal belt type, chain type, or electronic (ECVT) type, friction disk type continuous variable transmission devices, wherein transmission speed ratio thereof can be either passively automatically modulated by following torque or following rotational speed; or actively modulated by applying a linear driving force either generated by an externally powered linear driving device or by a revolving driving device via mechanical transmission device for conversion to change spacing between the transmission V-belt grooves of both or either of the driving and driven pulley.

[0030] Advantageously, the input shaft (101) is the rotating shaft to receive a revolving kinetic energy input, whereby said revolving kinetic energy is transmitted to the driving pulley of the continuous variable transmission device of different shafts type (100) and to the driving pulley of the high shift transmission pulley train (202) for further transmission to the input end of the unidirectional transmission device (111) which is connected with a low shift transmission pulley train (102).

[0031] Preferably, the high shift transmission pulley train (202) comprises a driving pulley driven by the input shaft (101) and a driven pulley for driving the output shaft (103), wherein said driving pulley and driven pulley are transmitted in the same rotational directions, the transmission speed ratio thereof appears a high shift transmission function in accelerating transmission relative to the continuous variable transmission device of different shafts type (100), wherein the speed ratio relationship between the high shift transmission pulley train (202) and the continuous variable transmission device of different shafts type (100) is:

- 1) Speed ratio of the driving pulley to drive the driven pulley of the high shift transmission pulley train (202) $\geq$ speed ratio of the continuous variable transmission device of different shafts type (100) in high speed output;
- 2) Speed ratio of the continuous variable transmission device of different shafts type (100) in high speed output $>$ Speed ratio of the driving pulley to

drive the driven pulley of the high shift transmission pulley train (202) $>$ speed ratio of the continuous variable transmission device of different shafts type (100) in low speed output.

[0032] Advantageously, the low shift transmission pulley train (102) comprises a driving pulley which is driven by the input shaft (101) and a driven pulley for driving the output shaft (103), wherein said driving pulley and driven pulley are transmitted in the same rotational direction, the transmission speed ratio thereof appears a low shift transmission in decelerating transmission relative to the continuous variable transmission device of different shafts type (100), and the speed ratio relationship between the low shift transmission pulley train (102) and the continuous variable transmission device of different shafts type (100) is:

- 1) Speed ratio of the driving pulley to drive the driven pulley of the low shift transmission pulley train (102) $\leq$ speed ratio of the continuous variable transmission device of different shafts type (100) in low speed output;
- 2) Speed ratio of the continuous variable transmission device of different shafts type (100) in low speed output $<$ Speed ratio of the driving pulley to drive the driven pulley of the low shift transmission pulley train (102) $<$ speed ratio of the continuous variable transmission device of different shafts type (100) in high speed output.

[0033] Preferably, the output shaft (103) is the rotating shaft to supply revolving kinetic energy for driving the load, whereby the revolving kinetic energy is transmitted from the driven pulley of the continuous variable transmission device of different shafts type (100), or transmitted from the driven pulley of the low shift transmission pulley train (102), or the revolving kinetic energy from the driven pulley of the high shift transmission pulley train is transmitted through the clutching device (222) to drive the load.

[0034] Advantageously, a unidirectional transmission device (211) is constituted by a unidirectional bearing, or a unidirectional clutch or a mechanism or device with unidirectional transmission function of radial or axial structures to be installed between the input shaft (103) and the driven pulley of the continuous variable transmission device of different shafts type (100), or installed between the driving pulley of the continuous variable transmission device of different shafts type (100) and the input shaft (101), wherein when the rotational speed of the driven pulley of the continuous variable transmission device of different shafts type (100) is higher than that of the output shaft (103) in the same revolving direction, the kinetic energy is transmitted through the driven pulley of the continuous variable transmission device of different shafts type (100) to drive the output shaft (103) for output; when the rotational speed of the

output shaft (103) is raised to or over setting rotational speed, the clutching device (222) is closed to connect the driven pulley of the high shift transmission pulley train (202) and the output shaft (103), if the rotational speed of the output shaft (103) is higher than that of the driven pulley of the continuous variable transmission device of different shafts type (100), the unidirectional transmission device (211) is in no load operation; further, if said unidirectional transmission device (211) is installed between the driving pulley of the continuous variable transmission device of different shafts type (100) and the input shaft (101), when the rotational speed of the output shaft (103) is raised to or over setting rotating speed, the clutching device (222) is closed to connect the driven pulley (202) of the high shift transmission pulley train (202) and the output shaft (103), if the rotational speed of the driving pulley of the continuous variable transmission device of different shafts type (100) is higher than that of the input shaft (101) in the same revolving direction, said unidirectional transmission device (211) is also in no load operation; herein, said unidirectional transmission device (211) can be selected to be installed or not to be installed.

[0035] Preferably, a torque limiting clutching device (212) is constituted by a sliding type or clutching type torque limiting device in radial or axial direction for replacing unidirectional transmission device (211) to be installed between the driven pulley of the continuous variable transmission device of different shafts type (100) and the output shaft (103), or to be installed between the driving pulley of the continuous variable transmission device of different shafts type (100) and the input shaft (101), whereby when the rotational speed of the output shaft (103) is raised to or over setting speed, the clutching device (222) is closed, and when there is a rotational speed difference causing torque difference to exceed its setting value between the output shaft (103) and the driven pulley of the continuous variable transmission device of different shafts type (100), or between the input shaft (101) and the driving pulley of the continuous variable transmission device of different shafts type 100, said torque limiting clutching device (212) is slid or released; wherein said torque limiting clutching device (212) can be selected to be installed or not to be installed.

[0036] Advantageously, the unidirectional transmission device (111) is parallel connected with low shift transmission pulley train (102) and is constituted by a radial type unidirectional transmission device, or it can be constituted by an axial type unidirectional transmission device, including the constitution by an unidirectional bearing with unidirectional transmission function, and an unidirectional clutch or an unidirectional transmission mechanism or device, wherein said unidirectional transmission device (111) can be optionally installed as needed between the input shaft (101) and the driving pulley of the low shift transmission pulley train (102), or installed as needed between the driven pulley of the low shift transmission pulley train (102) and the output shaft (103).

[0037] Preferably, the clutching device (222) is optionally selected as needed to be constituted by 1) passively operated centrifugal type clutches by centrifugal force or torque operated type passive clutches, or 2) clutches actively operated by manual or mechanical power, or driven by electromagnetic or hydraulic or pneumatic pressure to be actively randomly controlled manually or controlled by a built-in or externally installed rotational speed detector device or torque detector device, whereby the detected signals of the rotational speed or the rotating torque are processed by the driving control device (800) to actively control the clutching device (222) for releasing or closing operations.

[0038] Advantageously, the clutching device (222) is for installing between the driven pulley of the high shift transmission pulley train (202) and the output shaft (103), wherein it can be an independent structure, or to integrate with a high shift transmission pulley train, or to integrate with a continuous variable transmission device of different shafts type (100), or a high shift transmission pulley train (202), a continuous variable transmission device of different shafts type (100) and a clutching device (222) can be integrated, thereby to close for kinetic energy transmission or to release for cutting off kinetic energy transmission.

[0039] Preferably, a driving control device (800) is installed according to characteristics of selected continuous variable transmission device of different shafts type (100) and clutching device (222); said driving control device is provided with a driving power source including electric power supply unit, hydraulic oil pressure supply unit, or pneumatic pressure supply unit as well as relevant electric power control unit, hydraulic oil pressure control unit, or pneumatic pressure control unit to control the speed ratio of the continuous variable transmission device of different shafts type (100) or the closing or releasing operating function of the clutching device (222).

[0040] The transmission device may include one or more than one constitution and operating functions:

1) The input shaft (101) of the continuous variable transmission device of different shafts type (100) is additionally installed with a driving pulley of the high shift transmission pulley train (202), and a clutching device (222) is installed between a driven pulley of the high shift transmission pulley train (202) and an output shaft (103) which is driven by the driven pulley of the continuous variable transmission device of different shafts type (100);

2) An unidirectional transmission device (211) is optionally installed as needed between the output shaft (103) and the driven pulley of the continuous variable transmission device of different shafts type (100), or between the driving pulley of the continuous variable transmission device of different shafts type (100) and the input shaft (101), wherein the transmission direction of said unidirectional transmission device (211) shall allow that when the output shaft (103) is

rotated higher than that of the driven pulley of the continuous variable transmission device of different shafts type (100) in the same revolving directions, or the rotational speed of the driving pulley of the continuous variable transmission device of different shafts type (100) is higher than that of the input shaft (101) in the same revolving direction, said unidirectional transmission device (211) is at no load operation, while the revolving kinetic energy is transmitted by the driven pulley of the high shift transmission pulley train (202) via the clutching device (222) to drive the output shaft (103) and further to drive the load;

3) A torque limiting clutching device (212) is optionally installed as needed between the output shaft (103) and the driven pulley of the continuous variable transmission device of different shafts type (100), or between the driving pulley of the continuous variable transmission device of different shafts type (100) and the input shaft (101), whereby when the output shaft (103) is rotated faster than the driven pulley of the continuous variable transmission device of different shafts type (100) in the same revolving directions, or when the rotational speed of the driving pulley of the continuous variable transmission device of different shafts type (100) is higher than that of the input shaft (101) in the same revolving directions, said torque limiting clutching device (212) is slid or released, while the revolving kinetic energy is transmitted by the driven pulley of the high shift transmission pulley train (202) via the clutching device (222) to drive the output shaft 103 and further to drive the load.

[0041] The transmission direction of said unidirectional transmission device (111) may be in connection with the low shift transmission pulley train (102) shall allow that when the input shaft (101) is rotated faster than the driving pulley of the low shift transmission pulley train (102) in the same revolving directions, the revolving kinetic energy is transmitted to the driving pulley of the low shift transmission pulley train (102); contrarily when the rotational speed of the input shaft (101) is lower than that of the driving pulley of the low shift transmission pulley train (102) in the same revolving directions, said unidirectional transmission device (111) is at no load operation; or when the rotational speed of the driven pulley of the low shift transmission pulley train (102) is higher than that of the output shaft (103), said input shaft (101) is driven to rotate, or contrarily when the rotational speed of the output shaft (103) is lower than the driven pulley of the low shift transmission pulley train (102) in the same revolving directions, said unidirectional transmission device (111) is at no load operation.

[0042] The transmission device may include one or more than one operating functions:

1) For said continuous variable transmission device

of different shafts type (100), if a deceleration type continuous variable transmission device is used to operate at minimum decelerating speed ratio or near minimum decelerating speed ratio status, or an acceleration type continuous variable transmission device is used to operate at maximum accelerating speed ratio or near maximum accelerating speed ratio, then when the output shaft (103) is rotated to or over setting rotational speed, the clutching device (222) is closed to connect the driven pulley of the high shift transmission pulley train (202) and the output shaft (103), whereby the rotational speed of the output shaft (103) is driven by the driving pulley of the high shift transmission pulley train (202) via the clutching device (222) to appear higher than or equal to that of the driven pulley of the continuous variable transmission device of different shafts type (100) to further drive the load;

At said status, it is **characterized in that** the power is transmitted by the continuous variable transmission device of different shafts type (100), via the high shift transmission pulley (202) and the clutching device (222) to drive the output shaft (103) and further to drive the load;

2) When the output shaft (103) is rotated to below setting rotational speed, said clutching device (222) is released, then the revolving kinetic energy from the input shaft (101) is through the continuous variable transmission device of different shafts type (100) to drive the output shaft (103) and further to drive the load;

3) During low speed and high load operation, said clutching device (222) is released, wherein for said continuous variable transmission device of different shafts type (100), if a deceleration type continuous variable transmission device is used to operate at maximum decelerating speed ratio or near maximum decelerating speed ratio status, or an acceleration type continuous variable transmission device is used to operate at minimum accelerating speed ratio or near minimum accelerating speed ratio status, whereby when the rotational speed of the driving pulley of the low shift transmission pulley train (102) is lower than that of the input shaft (101) in the same revolving directions, the revolving kinetic energy from the input shaft (101) is through the unidirectional transmission device (111) and the low shift transmission pulley train (102) to drive the output shaft (103) and further to drive the load, at said status, the power originally transmitted by the continuous variable transmission device of different shafts type (100) is changed to be transmitted by the low shift transmission pulley train (102) to drive the output shaft (103), while during lower load operation, the kinetic energy is transmitted by the continuous variable transmission device of different shafts type (100);

4) If an unidirectional transmission device (111) is

installed between the driven pulley of the low shift transmission pulley train (102) and the output shaft (103), during higher load operation, if a deceleration type continuous variable transmission device is used to operate at maximum decelerating speed ratio or near maximum decelerating speed ratio status, or an acceleration type continuous variable transmission device is used to operate at minimum accelerating speed ratio or near minimum accelerating speed ratio status, whereby when the rotational speed of the driven pulley of the low shift transmission pulley train (102) is changed to higher than that of the output shaft (103) in the same revolving directions, the revolving kinetic energy is transmitted through the low shift transmission train (102) and the unidirectional transmission device (111) to drive the output shaft (103) and further to drive the load, at said status, the power originally transmitted by the continuous variable transmission device of different shafts type (100) is changed to be transmitted by the low shift transmission pulley train (102) to drive the output shaft (103), while during lower load operation, the kinetic energy is transmitted through the continuous variable transmission device of different shafts type (100) to drive the output shaft (103).

[0043] The unidirectional transmission devices (111) or (211), and the torque limiting clutching devices (212) may be optionally mixed for use; locations to install the unidirectional transmission device (111) or (211) or locations to install the torque limiting clutching devices (212) can be 1) All locations selectively installed with the unidirectional transmission device (111) or (211); or 2) All locations selectively installed with the torque limiting clutching device (212); or 3) Partial locations selectively installed with the unidirectional transmission device (111) or (211) while other partial locations selectively installed with the torque limiting clutching device (212).

[0044] The high shift transmission pulley train (202) and the low shift transmission pulley train (102) may be optionally constituted as needed by one or more than one following structures:

- 1) It is constituted by a driving chain pulley, a driven chain pulley, and an attached transmission chain;
- 2) It is constituted by a driving pulley, a middle driven pulley and a driven pulley, wherein said driving pulley, middle driven pulley and driven pulley include constitutions by gears or friction pulleys;
- 3) It is constituted by an inner gear train or an inner friction pulley train comprising a smaller outer diameter transmission pulley and a larger outer diameter inner transmission pulley;
- 4) It is constituted by a driving belt pulley, a driven belt pulley and an attached transmission belt such as a canvas belt, a steel belt, or a chain belt.

[0045] For the sake of efficiency, when diameters of

the driving pulley and the driven pulley are made more similar to each other to ensure a better efficiency in the continuous variable transmission of different shafts type (100), a middle transmission pulley for accelerating speed ratio or decelerating speed ratio may be installed to satisfy the needs for accelerating speed ratio or decelerating speed ratio in order to ensure a better transmission efficiency, wherein said middle transmission pulley includes following one or more than one additionally installation methods, includes:

- 1) A speed change pulley train (302) is further installed between the input shaft (101) and the driving pulley of the continuous variable transmission device of different shafts type (100) to change the total speed ratio of the input shaft (101) and the output shaft (103) and is matched to required revolving direction;
- 2) A speed change pulley train (402) is further installed between the output shaft (103) and the driven pulley of the continuous variable transmission device of different shafts type (100) to change the total speed ratio of the input shaft (101) and the output shaft (103) and is matched to required revolving direction;
- 3) The speed change pulley trains (302, 402) are simultaneously installed between the input shaft (101) and the driving pulley of the continuous variable transmission device of different shafts type (100) and between the output shaft (103) and the driven pulley of the continuous variable transmission device of different shafts type (100) to change the total speed ratio of the input shaft (101) through continuous variable transmission device of different shafts type (100) to drive the output shaft (103) and are matched to required revolving direction.

[0046] The low shift transmission pulley train may be selected according to application requirements to include one or more than one following constitution methods:

- 1) To be constituted by a single stage low shift transmission pulley train of fixed speed ratio;
- 2) To be constituted by a multi-stage type variable speed ratio low shift variable transmission pulley train of manual shift or automatic transmission.

[0047] The input methods for supplying revolving kinetic energy to the input shaft (101) may be selected based on application requirements to include the one or more than one following methods:

- 1) The input shaft (101) is for receiving direct revolving power source input from revolving power source such as engine, motor or generator or input from flywheel, wind power fan blades, gas or liquid turbines, or manual power;
- 2) The revolving power sources as said in item 1)

supplied to the input shaft (101) for output is first controlled by a clutching device before providing revolving kinetic energy output;

3) The revolving power sources as said in item 1) supplied to the input shaft (101) for output is further through a fixed speed change transmission device, a stepped or stepless speed change transmission device in manual shift or automatic transmission, or a fluid transmission device, or an electromagnetic eddy current transmission device to provide revolving kinetic energy output;

4) The revolving power sources as said in item 1) supplied to the input shaft (101) for output is further through a clutching device and a fixed speed change transmission device, a stepped or stepless speed change transmission device of manual shift or automatic transmission, or a fluid transmission device, or an electromagnetic eddy current transmission device to provide revolving kinetic energy output.

[0048] The revolving kinetic energy output of the output shaft (103) can be selected according to application requirements to include one or more than one following output methods:

1) The revolving kinetic energy output from the output shaft (103) is directly used to drive the load;

2) The revolving kinetic energy output from the output shaft (103) is through a clutching device to further drive the load;

3) The revolving kinetic energy from the output shaft (103) is through a speed change transmission device with fixed speed ratio, or a stepless or stepped speed change transmission device of manual shift or automatic transmission, or a fluid transmission device, or electromagnetic eddy current transmission device to further drive the load;

4) The revolving kinetic energy output from the output shaft (103) is through a clutching device and a stepless or stepped speed change device with fixed speed ratio or of manual shift or automatic transmission, or a fluid transmission device, or an electromagnetic eddy current transmission device to further drive the load.

[0049] The high shift transmission pulley train may be selected according to application requirements to include one or more than one following constitution methods:

1) To be constituted by a single stage high shift transmission pulley train of fixed speed ratio;

2) To be constituted by a multi-stage type variable speed ratio high shift variable transmission pulley train of manual shift or automatic transmission.

[0050] The input methods for supplying revolving kinetic energy to the input shaft (101) may be selected based on application requirements to include one or more

than one following constitution methods:

1) The input shaft (101) is for receiving direct revolving power source input from revolving power source such as engine, motor or generator or input from flywheel, wind power fan blades, gas or liquid turbines, or manual power;

2) The revolving power sources as said in item 1) supplied to the input shaft (101) for output is first controlled by a clutching device before providing revolving kinetic energy output;

3) The revolving power sources as said in item 1) supplied to the input shaft (101) for output is further through a speed change transmission device with fixed speed ratio, a stepped or stepless speed change transmission device of manual shift or automatic transmission, or a fluid transmission device, or an electromagnetic eddy current transmission device to provide revolving kinetic energy output;

4) The revolving power sources as said in item 1) supplied to the input shaft (101) for output is further through a clutching device and a speed change transmission device with fixed speed ratio, a stepped or stepless speed change transmission device of manual shift or automatic transmission, or a fluid transmission device, or an electromagnetic eddy current transmission device to provide revolving kinetic energy output.

[0051] The revolving kinetic energy output of the output shaft (103) may be selected according to application requirements to include one or more than one following constitution methods:

1) The revolving kinetic energy output from the output shaft (103) is directly used to drive the load;

2) The revolving kinetic energy output from the output shaft (103) is through a clutching device to further drive the load;

3) The revolving kinetic energy from the output shaft (103) is through a speed change transmission device with fixed speed ratio, or a stepless or stepped speed change transmission device of manual shift or automatic transmission, or a fluid transmission device, or electromagnetic eddy current transmission device to further drive the load;

4) The revolving kinetic energy output from the output shaft (103) is through a clutching device and a stepless or stepped speed change device with fixed speed ratio or of manual shift or automatic transmission, or a fluid transmission device, or an electromagnetic eddy current transmission device to further drive the load.

[0052] The practical applied structures of said continuous variable transmission device of different shafts type (100) and said low shift transmission pulley train (102) and said high shift transmission pulley train (202) may

be selectively made to be independently separated mechanical devices and combined afterwards for transmission or made to an integral structure or made to a structure of a common integrated mechanical device and a common integrated casing.

[0053] A high shift transmission pulley train of fixed speed ratio may be installed between the input shaft and the output shaft of the continuous variable transmission device in the same revolving direction and a clutching device is installed between the output shaft and the driven pulley of the high shift transmission pulley train, wherein if a deceleration type continuous variable transmission device is used to operate at minimum decelerating speed ratio or near minimum decelerating speed ratio status, or if an acceleration type continuous variable transmission device is used to operate at maximum accelerating speed ratio or near maximum accelerating speed ratio status, then the clutching device is operated to close when the input shaft is rotated to or over setting rotational speed, whereby to connect the driven pulley of high shift transmission pulley train and the output shaft.

[0054] A low shift transmission pulley train of fixed speed ratio and an unidirectional transmission device may be installed between the input shaft and the output shaft of the continuous variable transmission device in the same revolving direction, wherein if a deceleration type continuous variable transmission device is used to operate at maximum decelerating speed ratio or near maximum decelerating speed ratio status, or if an acceleration type continuous variable transmission device is used to operate at minimum accelerating speed ratio or near minimum accelerating speed ratio status, then during high load operation, when the rotational speed of the driving pulley of the low shift transmission pulley train is lowered to below that of the input shaft in the same revolving directions, revolving kinetic energy of the input shaft is through the unidirectional transmission device and the low shift transmission pulley train to drive the output shaft and further to drive the load, at said status, the transmission power originally transmitted through the continuous variable transmission device of different shafts type is changed to transmit through the low shift transmission pulley train for output.

Claims

1. A continuously-variable transmission device, comprising:

an input shaft;
 an output shaft;
 a high shift transmission pulley train installed between the input shaft and the output shaft;
 a clutching device, installed between the output shaft and a driven pulley of the high shift transmission pulley train;
 a low shift transmission pulley train; and

a unidirectional transmission device, installed between the input shaft and the output shaft.

2. A continuously-variable transmission device according to claim 1, wherein the input and output shafts have different structures; and wherein the transmission device comprises a friction disk, the type of which is chosen from the following group: rubber belt type, metal belt type, chain type and electronic (ECVT) type; and wherein the transmission speed ratio of the transmission device can be either passively automatically modulated by following torque or following rotational speed; or actively modulated by applying a linear driving force either generated by an externally powered linear driving device or by a revolving driving device via mechanical transmission device for conversion to change spacing between the transmission V-belt grooves of both or either of the driving and driven pulley.
3. A continuously-variable transmission device according to claim 1, wherein the input shaft (101) is arranged to receive a kinetic energy input, said kinetic energy being transmitted to the driving pulley of the continuously-variable transmission device and to the driving pulley of the high shift transmission pulley train (202) for further transmission to the input end of a unidirectional transmission device (111) which is connected with a low shift transmission pulley train (102).
4. A continuously-variable transmission device according to any one of the preceding claims, wherein the high shift transmission pulley train (202) comprises a driving pulley driven by the input shaft (101) and a driven pulley for driving the output shaft (103), wherein said driving pulley and driven pulley are transmitted in the same rotational directions; wherein the transmission speed ratio thereof appears a high shift transmission function in accelerating transmission relative to the continuously-variable transmission device of different shafts type (100); and wherein the speed ratio relationship between the high shift transmission pulley train (202) and the continuously-variable transmission device is:

- 1) Speed ratio of the driving pulley to drive the driven pulley of the high shift transmission pulley train (202) $\square$ speed ratio of the continuously-variable transmission device of different shafts type (100) in high speed output;
- 2) Speed ratio of the continuously-variable transmission device of different shafts type (100) in high speed output $>$ Speed ratio of the driving pulley to drive the driven pulley of the high shift transmission pulley train (202) $>$ speed ratio of the continuously-variable transmission

device of different shafts type (100) in low speed output.

5. A continuously-variable transmission device according to any one of the preceding claims, wherein the low shift transmission pulley train (102) comprises a driving pulley which is driven by the input shaft (101) and a driven pulley for driving the output shaft (103), wherein said driving pulley and driven pulley are transmitted in the same rotational direction; wherein the transmission speed ratio of the transmission device appears a low shift transmission in decelerating transmission relative to the continuously-variable transmission device of different shafts type (100); and wherein the speed ratio relationship between the low shift transmission pulley train (102) and the continuously-variable transmission device is:

1) Speed ratio of the driving pulley to drive the driven pulley of the low shift transmission pulley train (102) $\leq$ speed ratio of the continuously-variable transmission device of different shafts type (100) in low speed output;

2) Speed ratio of the continuously-variable transmission device of different shafts type (100) in low speed output $<$ Speed ratio of the driving pulley to drive the driven pulley of the low shift transmission pulley train (102) $<$ speed ratio of the continuously-variable transmission device of different shafts type (100) in high speed output.

6. A continuously-variable transmission device according to any one of the preceding claims, wherein the output shaft (103) is arranged to supply kinetic energy for driving the load, whereby the kinetic energy is transmitted from the driven pulley of the continuously-variable transmission device, or transmitted from the driven pulley of the low shift transmission pulley train (102), or the kinetic energy from the driven pulley of the high shift transmission pulley train is transmitted through the clutching device (222) to drive the load.
7. A continuously-variable transmission device according to any one of the preceding claims, wherein a unidirectional transmission device (211) is constituted by a unidirectional bearing, a unidirectional clutch, or a mechanism or device with a unidirectional transmission function, the unidirectional transmission device being installed between the input shaft (103) and the driven pulley of the continuously-variable transmission device, or installed between the driving pulley of the continuously-variable transmission device and the input shaft (101); wherein, when the rotational speed of the driven pulley of the continuously-variable transmission device is higher than that of the output shaft (103), the kinetic energy is

transmitted through the driven pulley of the continuously-variable transmission device of different shafts type (100) to drive the output shaft (103) for output.

8. A continuously-variable transmission device according to any one of the preceding claims, wherein, when the rotational speed of the output shaft (103) is increased to or above a predetermined rotational speed, the clutching device (222) is closed, connecting the driven pulley of the high shift transmission pulley train (202) and the output shaft (103), and, if the rotational speed of the output shaft (103) is higher than that of the driven pulley of the continuously-variable transmission device, the unidirectional transmission device (211) is in a no load operation.
9. A continuously-variable transmission device according to any one of the preceding claims, wherein if the unidirectional transmission device (211) is installed between the driving pulley of the continuous variable transmission device and the input shaft (101), when the rotational speed of the output shaft (103) is increased to or above a predetermined rotating speed, the clutching device (222) is closed, connecting the driven pulley (202) of the high shift transmission pulley train (202) and the output shaft (103), and, if the rotational speed of the driving pulley of the continuous variable transmission device is higher than that of the input shaft (101), said unidirectional transmission device (211) is in a no load operation.
10. A continuously-variable transmission device according to any one of the preceding claims, wherein the torque limiting clutching device (212) is constituted by a sliding type or clutching type torque limiting device and is capable of replacing the unidirectional transmission device (211) between the driven pulley of the continuously-variable transmission device and the output shaft (103), or between the driving pulley of the continuously-variable transmission device and the input shaft (101), whereby, when the rotational speed of the output shaft (103) is increased to or above a predetermined speed, the clutching device (222) is closed, and, when there is a rotational speed difference causing torque difference to exceed its predetermined value between the output shaft (103) and the driven pulley of the continuously-variable transmission device, or between the input shaft (101) and the driving pulley of the continuously-variable transmission device, said torque limiting clutching device (212) is slid or released.
11. A continuously-variable transmission device according to any one of the preceding claims, wherein the unidirectional transmission device (111) is parallel connected with low shift transmission pulley train (102) and is constituted by a radial type unidirectional

transmission device, or it can be constituted by an axial type unidirectional transmission device, including the constitution by an unidirectional bearing with unidirectional transmission function, and an unidirectional clutch or an unidirectional transmission mechanism or device, wherein said unidirectional transmission device (111) can be optionally installed as needed between the input shaft (101) and the driving pulley of the low shift transmission pulley train (102), or installed as needed between the driven pulley of the low shift transmission pulley train (102) and the output shaft (103).

12. A continuously-variable transmission device according to any one of the preceding claims, wherein the clutching device (222) is optionally selected as needed to be constituted by 1) passively operated centrifugal type clutches by centrifugal force or torque operated type passive clutches, or 2) clutches actively operated by manual or mechanical power, or driven by electromagnetic or hydraulic or pneumatic pressure to be actively randomly controlled manually or controlled by a built-in or externally installed rotational speed detector device or torque detector device, whereby the detected signals of the rotational speed or the rotating torque are processed by the driving control device (800) to actively control the clutching device (222) for releasing or closing operations; the clutching device (222) is for installing between the driven pulley of the high shift transmission pulley train (202) and the output shaft (103), wherein it can be an independent structure, or to integrate with a high shift transmission pulley train, or to integrate with a continuously-variable transmission device, or a high shift transmission pulley train (202), a continuously-variable transmission device and a clutching device (222) can be integrated, thereby to close for kinetic energy transmission or to release for cutting off kinetic energy transmission.

13. A continuously-variable transmission device according to any one of the preceding claims, wherein a driving control device (800) is installed according to characteristics of selected continuously-variable transmission device of different shafts type (100) and clutching device (222); said driving control device is provided with a driving power source including electric power supply unit, hydraulic oil pressure supply unit, or pneumatic pressure supply unit as well as relevant electric power control unit, hydraulic oil pressure control unit, or pneumatic pressure control unit to control the speed ratio of the continuously-variable transmission device or the closing or releasing operating function of the clutching device (222).

14. A continuously-variable transmission device according to any one of the preceding claims, wherein, if the continuously-variable transmission device of dif-

ferent shafts type 100 is selectively passively operated by torque following transmission speed ratio modulating structure or by rotating speed following speed ratio modulating structure, or a centrifugal type clutching device or a torque operated type passive clutching device 222 is also further used for passive controlled operation, said driving control device 800 can be not be installed.

15. A continuously-variable transmission device according to any one of the preceding claims, wherein, if an active controlled type clutching device is selected for the clutching device (222), or an actively operated continuously-variable transmission device requiring an external power driving source for speed ratio modulation is selected for continuously-variable transmission device of different shafts type (100), then a driving control device (800) shall be installed to actively control the speed ratio of the continuously-variable transmission device of different shafts type (100) which requires an external power driving source for speed ratio modulation, or to control the active operating type clutching device (222) for closing or releasing functions whereof.

Fig. 1

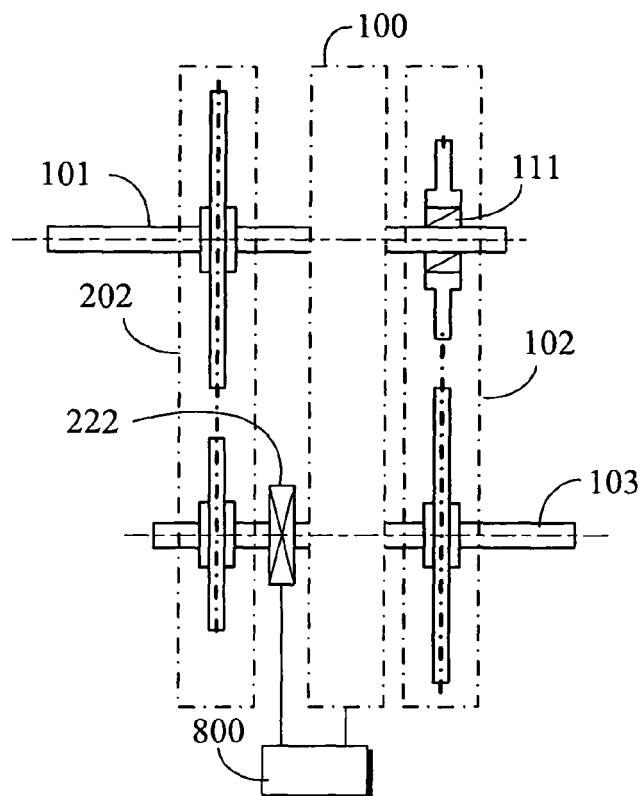
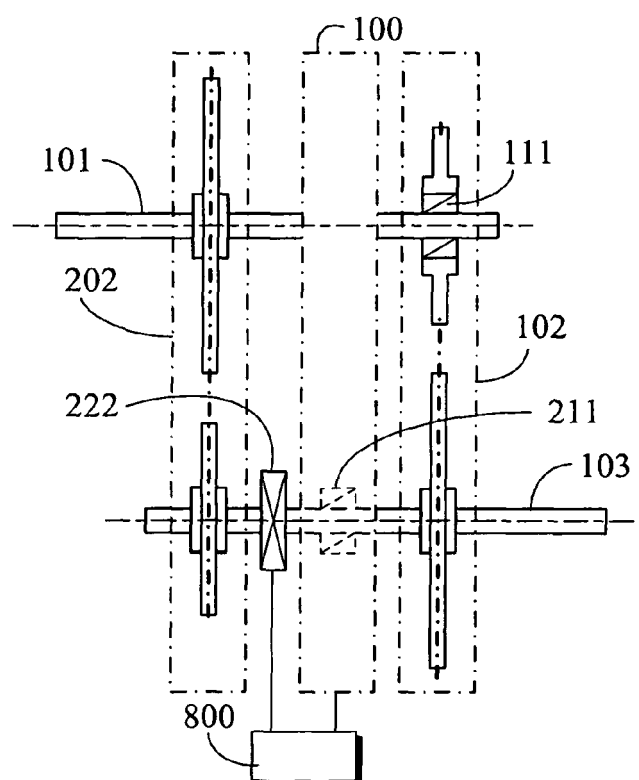
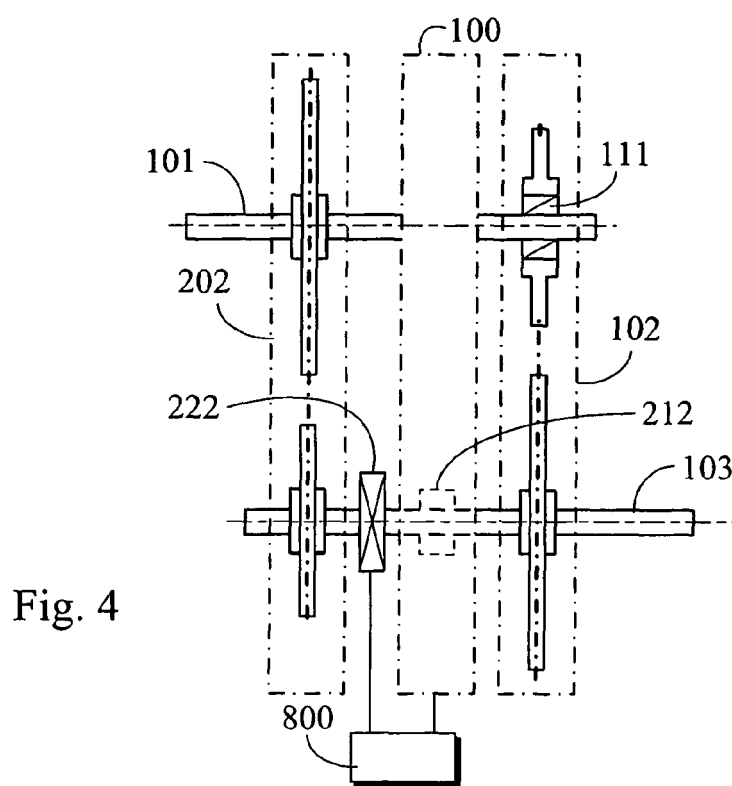
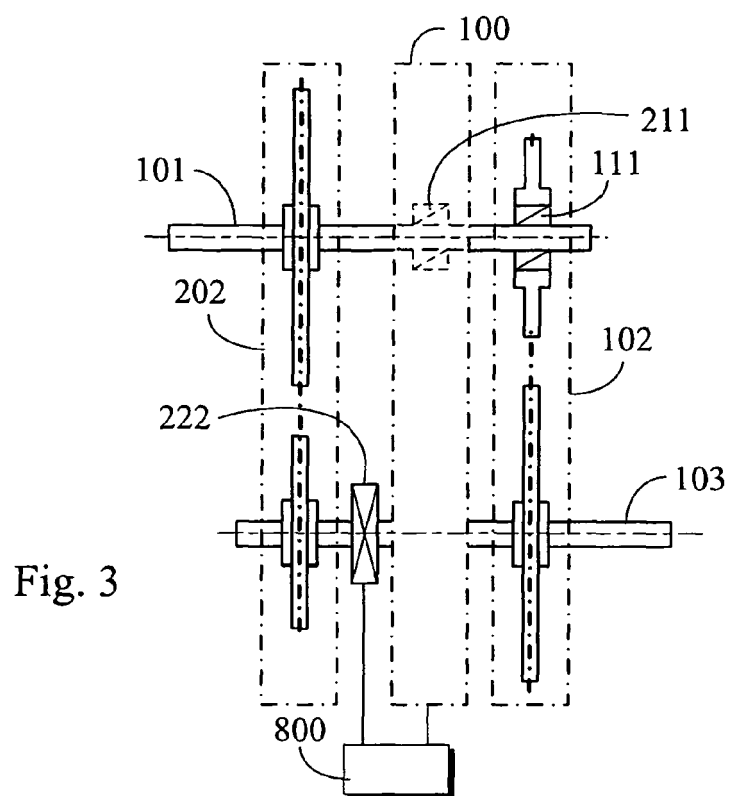
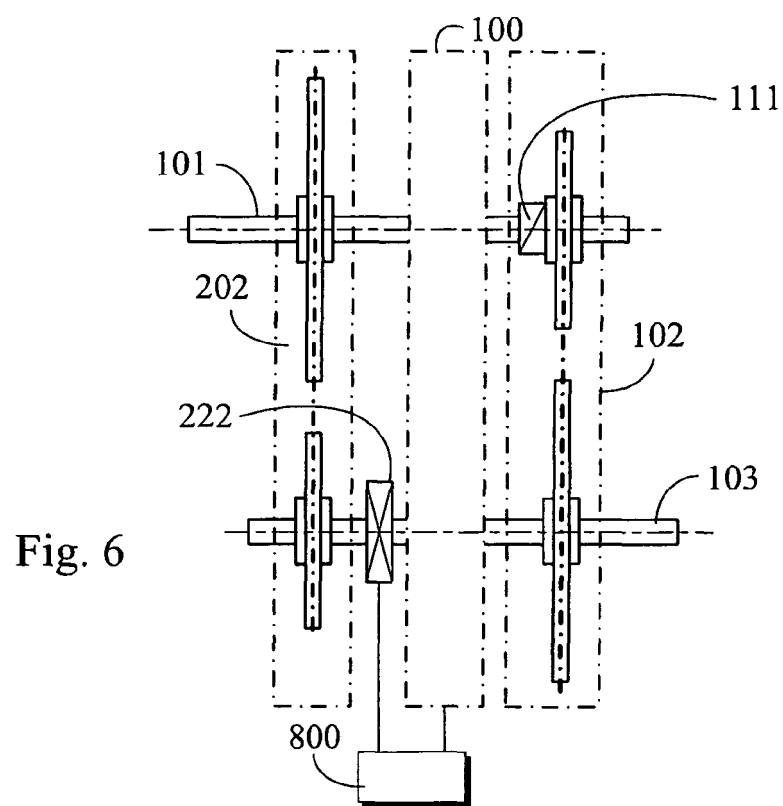
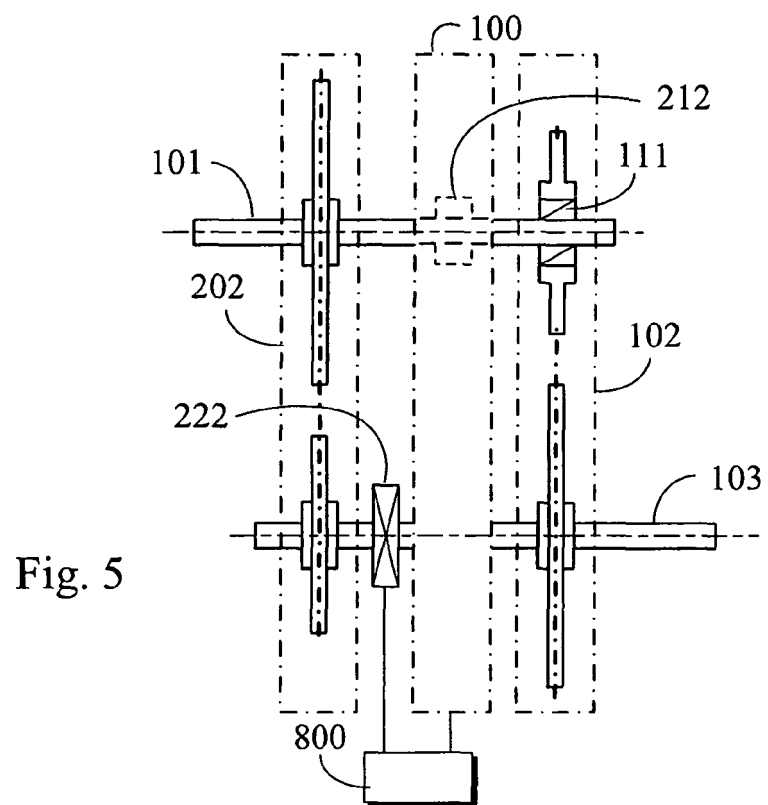


Fig. 2







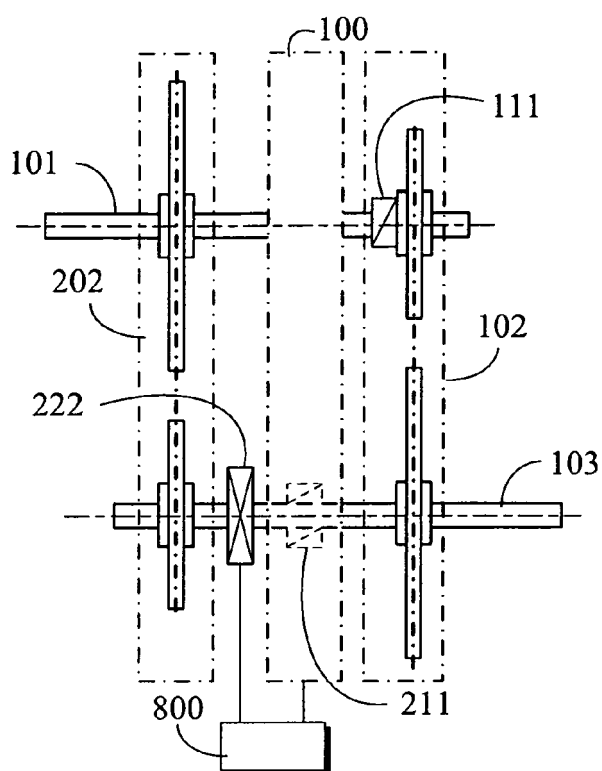


Fig. 7

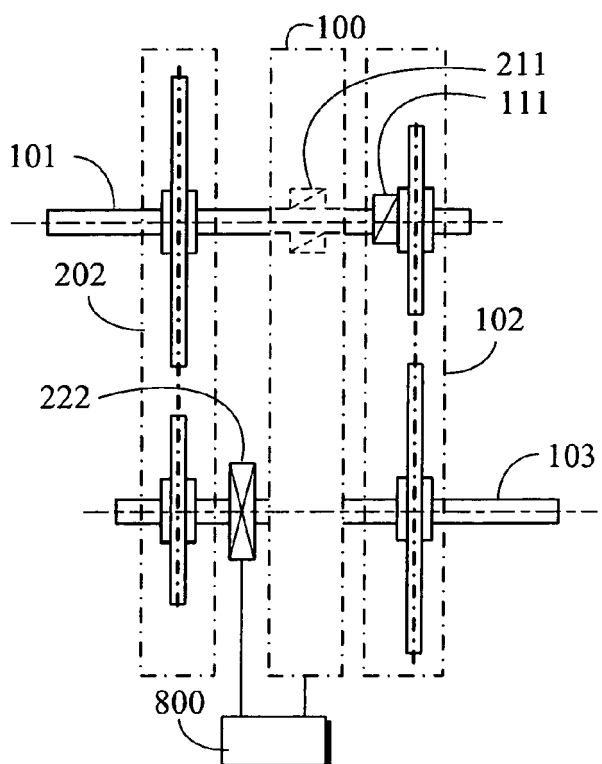


Fig. 8

Fig. 9

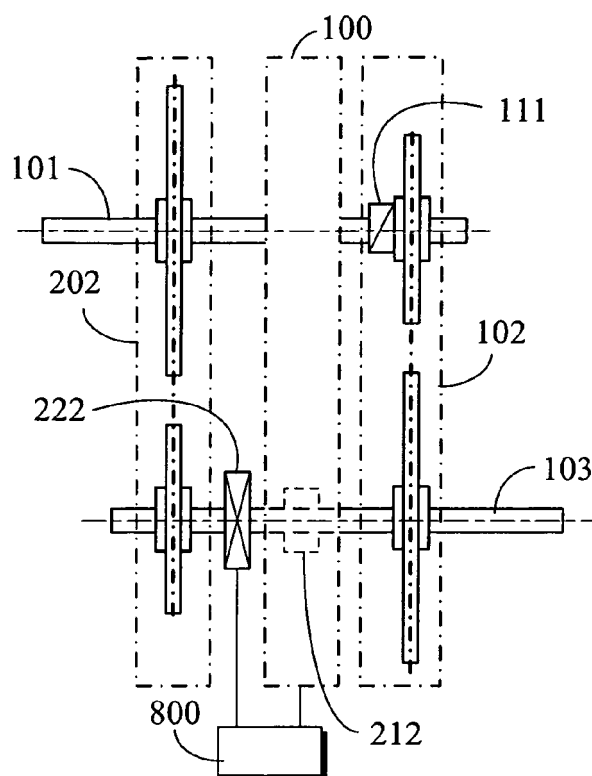
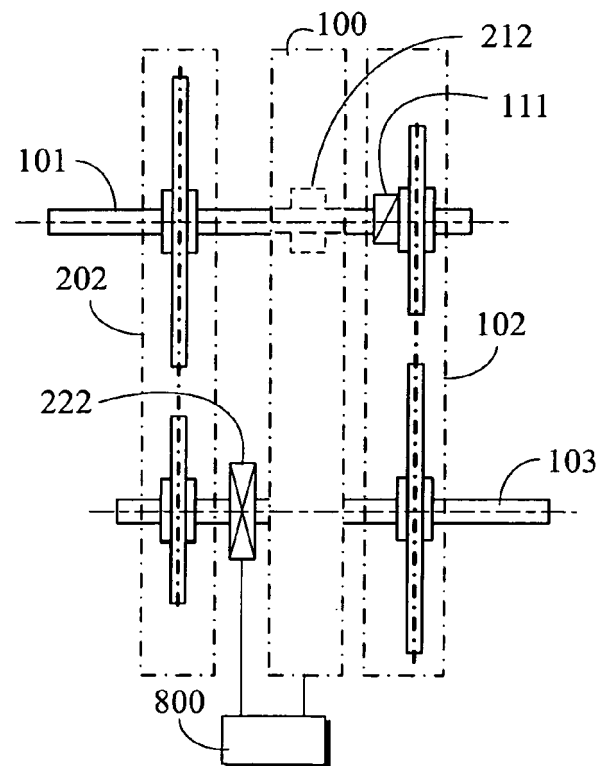


Fig. 10



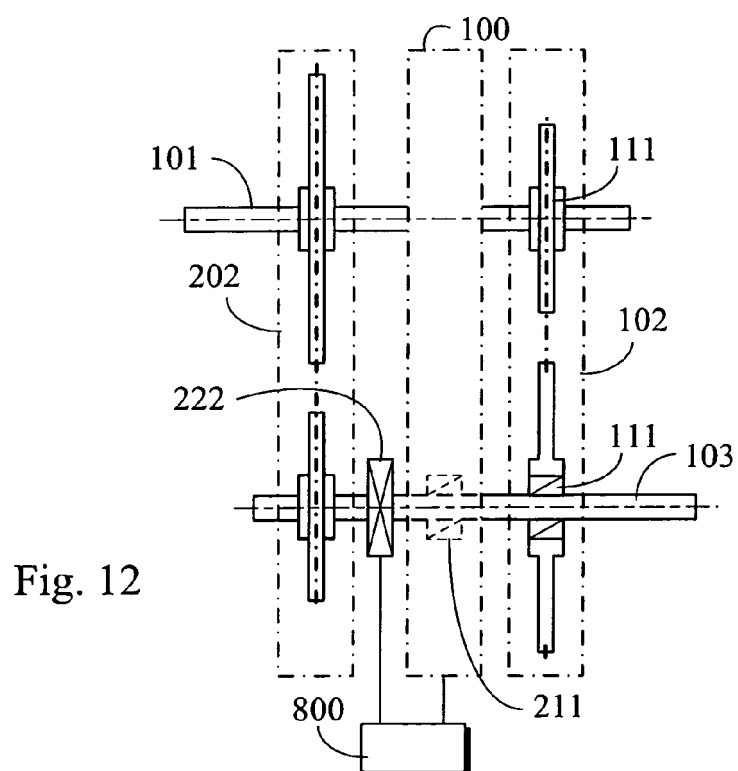
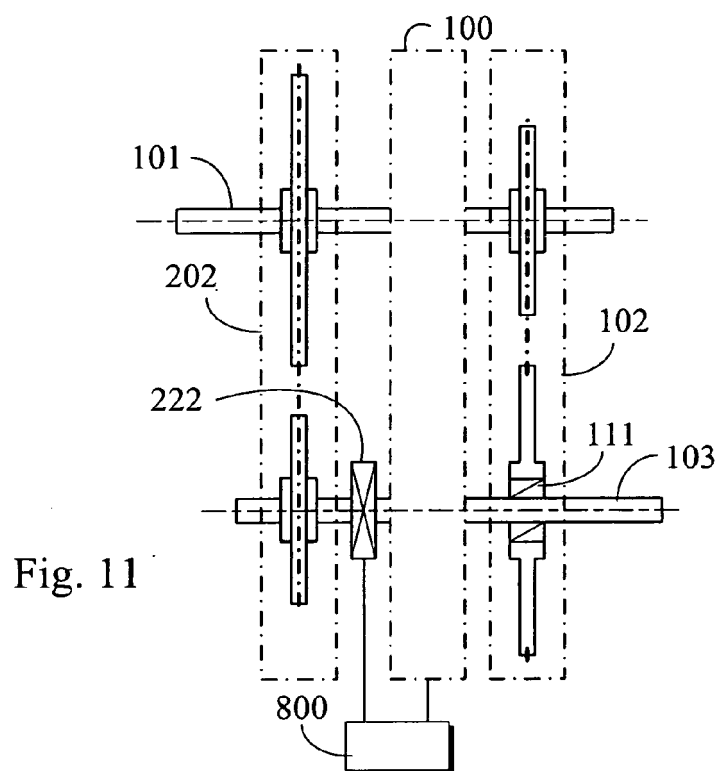


Fig. 13

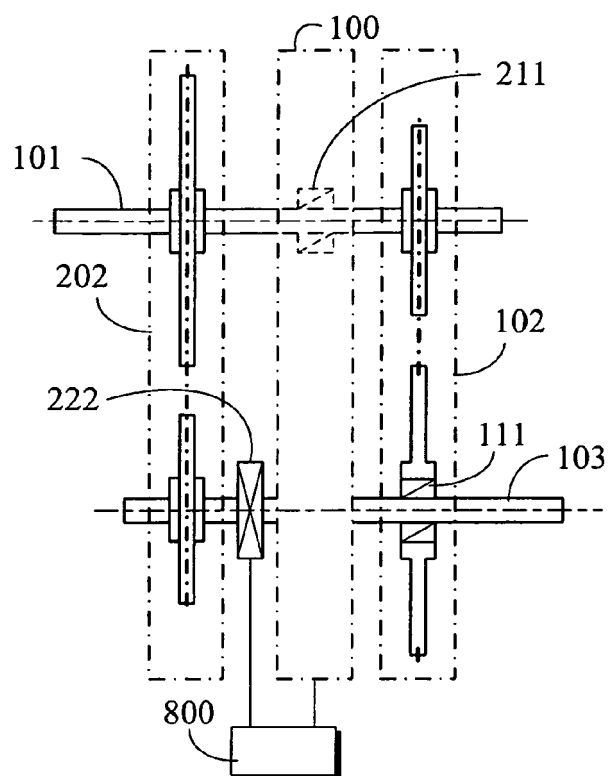
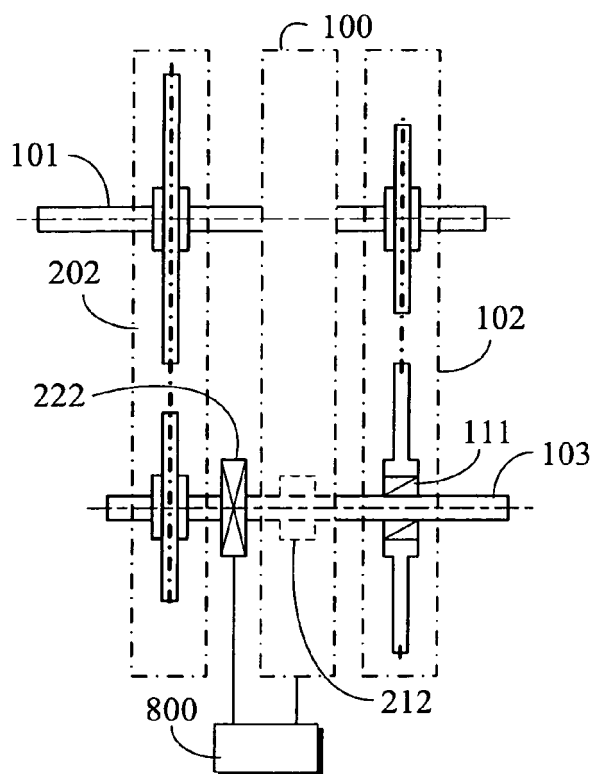
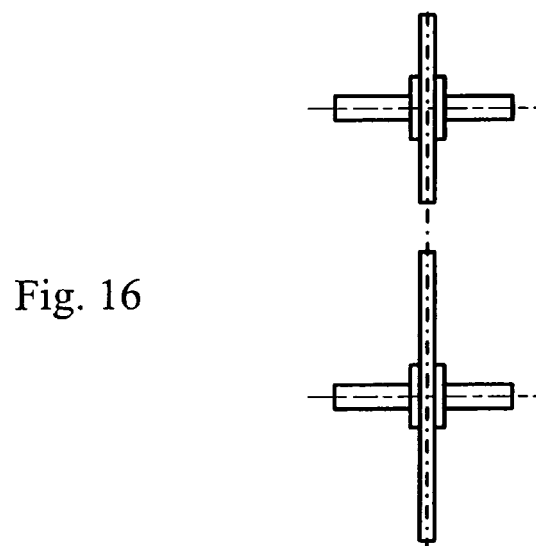
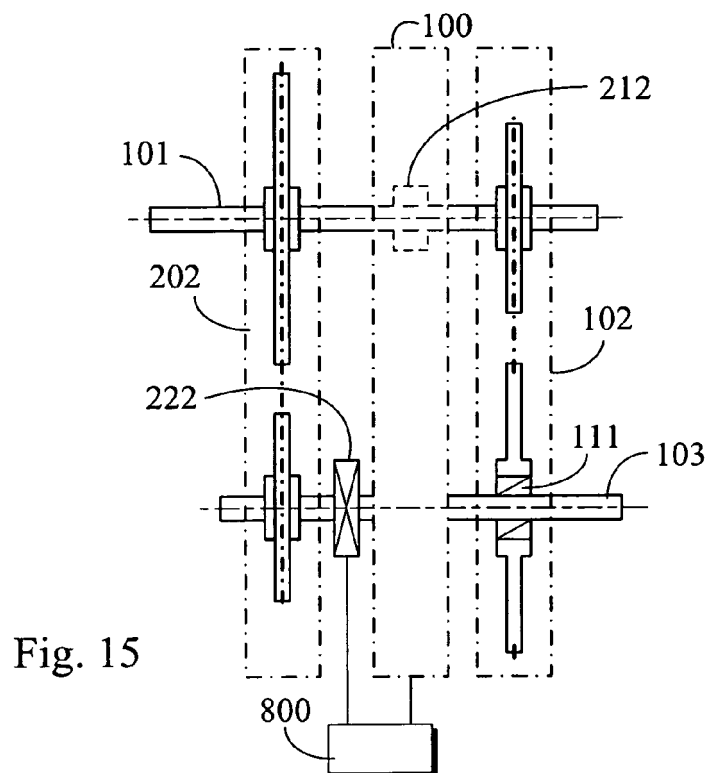


Fig. 14





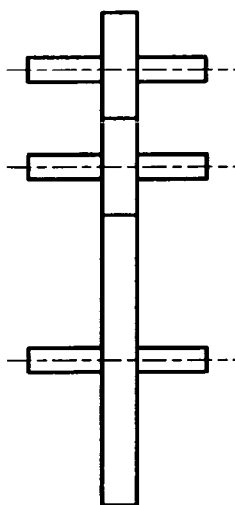


Fig. 17

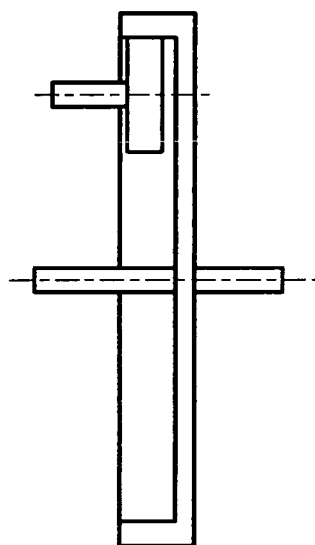


Fig. 18

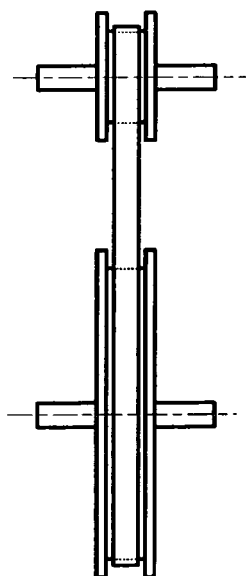


Fig. 19

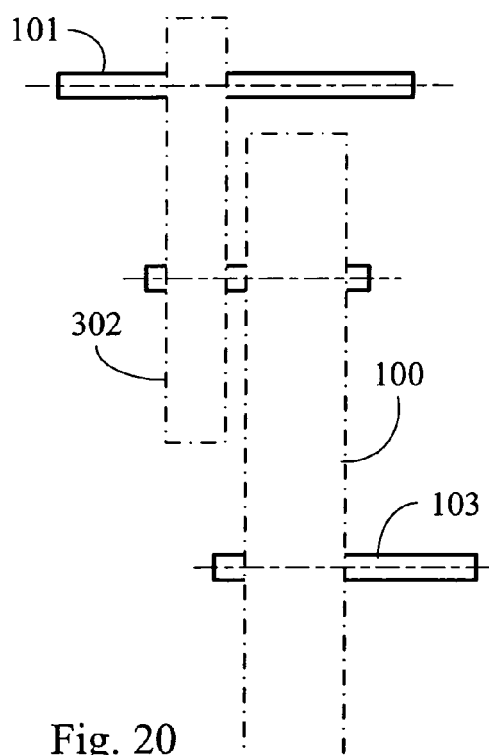


Fig. 20

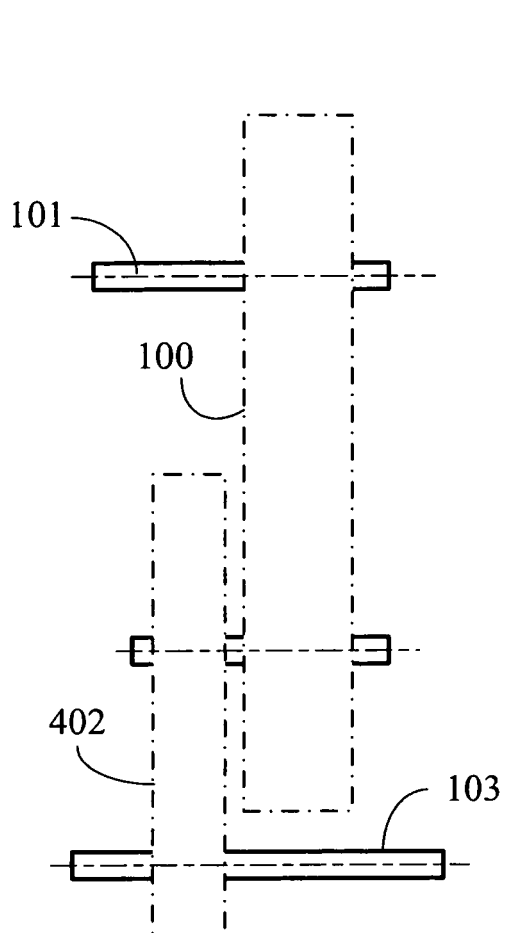


Fig. 21

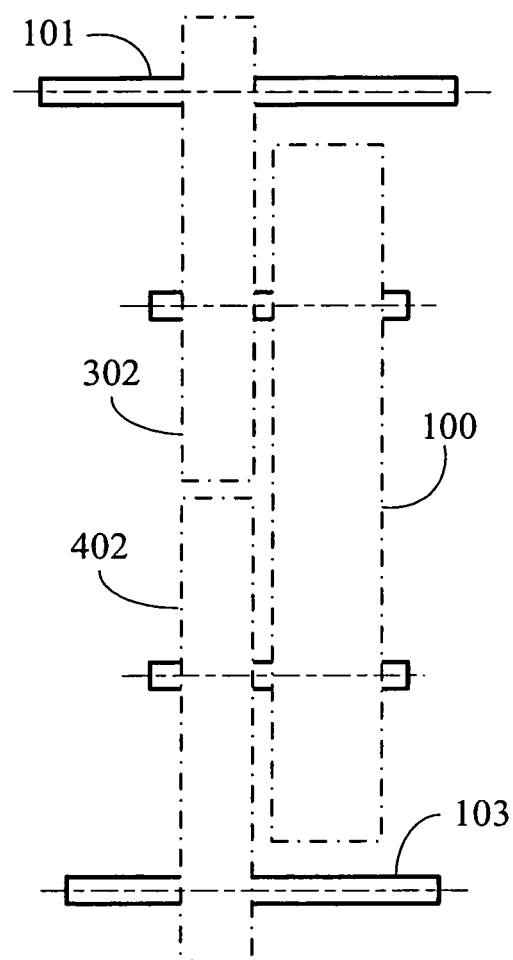


Fig. 22