



(22) Date de dépôt/Filing Date: 1999/10/18

(41) Mise à la disp. pub./Open to Public Insp.: 2000/05/20

(45) Date de délivrance/Issue Date: 2006/10/17

(30) Priorité/Priority: 1998/11/20 (US09/196,709)

(51) Cl.Int./Int.Cl. *H04N 5/262* (2006.01),
H04N 7/24 (2006.01), *H04N 7/26* (2006.01),
H04N 7/50 (2006.01)


(72) Inventeurs/Inventors:
LUTHRA, AJAY, US;
KELLEY, KEITH J., US;
WANG, LIMIN, US

(73) Propriétaire/Owner:
GENERAL INSTRUMENT CORPORATION, US

(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : INSERTION DE DONNEES VIDEO DANS DES TRAINS DE SEQUENCES VIDEO RAFRAICHIS
PROGRESSIVEMENT

(54) Title: SPLICING OF VIDEO DATA IN PROGRESSIVELY REFRESHED VIDEO STREAMS

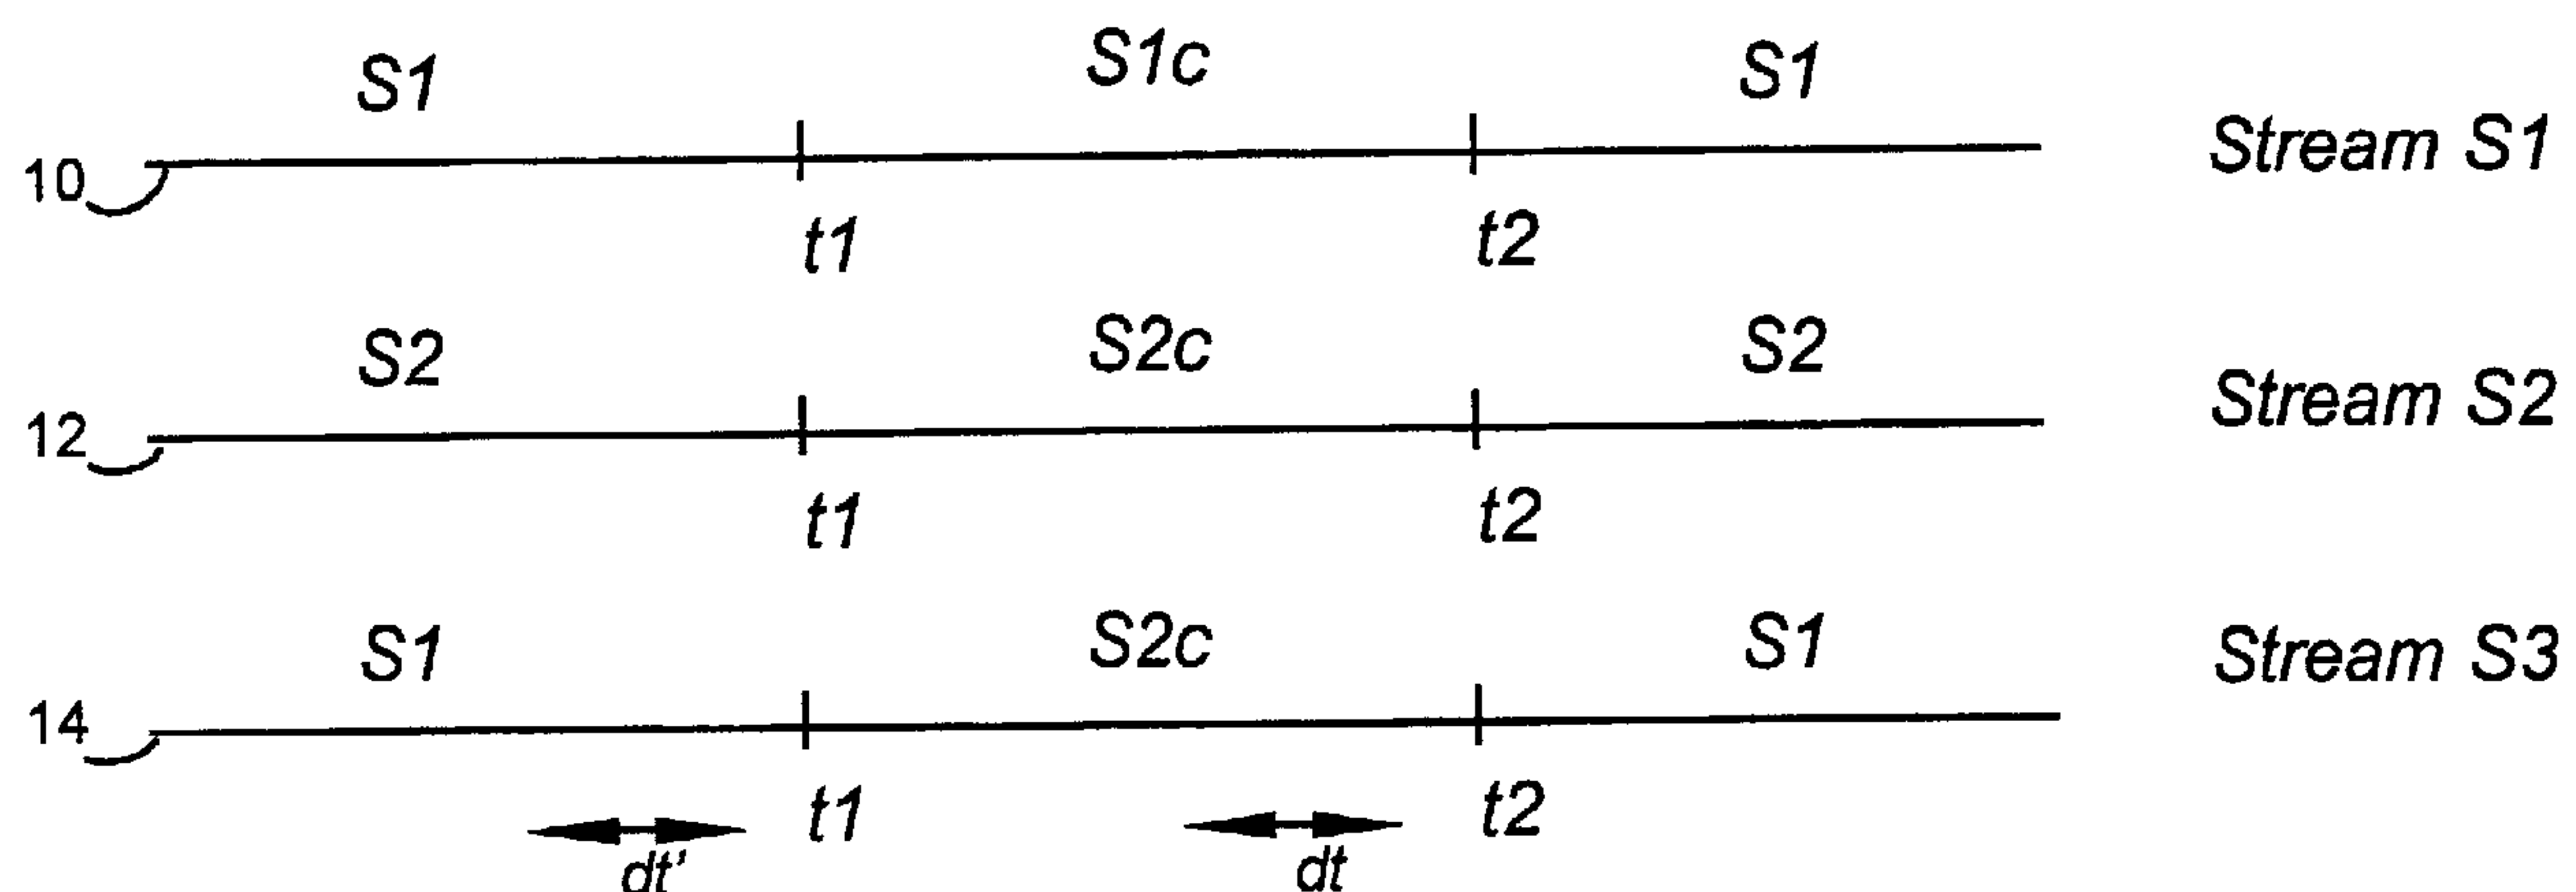

(57) **Abrégé/Abstract:**

A method is provided for replacing compressed video from a first source with video from a second source at a predefined insertion point in a video data stream. If the video from the second source is progressively refreshed video, it is decompressed sufficiently prior to the insertion point to enable the recovery and recompression of a first video frame (in encoding order) from the second source to be inserted at the insertion point. The recovered first video frame is then recompressed as an intra-coded (I) frame. The insertion of the video from the second source is then commenced at the insertion point using the I frame. The insertion point can, for example, indicate the commencement of a commercial break in the video stream, in which case the second source provides a commercial for insertion into the commercial break. Where the commercial is stored in memory, it can be stored with the first frame thereof (in encoding order) as an I frame.

ABSTRACT

A method is provided for replacing compressed video from a first source with video from a second source at a predefined insertion point in a video data stream. If the video from the second source is progressively refreshed video, it is decompressed sufficiently prior to the insertion point to enable the recovery and recompression of a first video frame (in encoding order) from the second source to be inserted at the insertion point. The recovered first video frame is then recompressed as an intra-coded (I) frame. The insertion of the video from the second source is then commenced at the insertion point using the I frame. The insertion point can, for example, indicate the commencement of a commercial break in the video stream, in which case the second source provides a commercial for insertion into the commercial break. Where the commercial is stored in memory, it can be stored with the first frame thereof (in encoding order) as an I frame.

SPLICING OF VIDEO DATA IN PROGRESSIVELY REFRESHED VIDEO STREAMS

5 The present invention relates to digital
television, and more particularly to a method for
video insertion or stream switching in progressively
refreshed video streams.

10 Commercial insertion, promo insertion, studio
routing, camera switching, tape editing, and the
like are basic operations in television production
and broadcasting. In present day analog systems,
switching takes place in the vertical interval of
the video signal. With the advent of digital
television as implemented, for example, in the
15 Motion Picture Experts Group (MPEG) standards,
switching or "splicing" with compressed bitstreams
is very complicated. In order to facilitate such
operations, the MPEG-2 standard defines "splice
points" where point signals (e.g., a commercial) can
20 be substituted for another signal (e.g., a main
program) in a video stream.

 The Society of Motion Picture and Television
Engineers (SMPTE) is currently working on a draft

standard for splicing MPEG-2 transport streams.
See, for example, Proposed SMPTE Standard
PT20.02/010 "Splice Points for MPEG-2 Transport
Streams", Second Draft, July 1997 .

5

There are various reasons why splicing MPEG
video is more difficult than switching uncompressed
video. In order to explain this, it is necessary to
understand some basics about the MPEG transport
10 stream. MPEG gets much of its compression
capability by sending only the changes between
different video frames. A first type of frame,
known as a prediction or "P" frame, is used by the
decoder to predict the frame from a previous "P"
15 frame or from an intra-coded "I" frame in the video
stream. The stream merely carries "fine tuning"
information to correct errors from an approximate
prediction. An I frame is compressed without motion
prediction. Thus, a full frame can be reconstructed
20 from an I frame without reference to any other
frame. In this manner, errors in the prior frame
predictions will be eliminated once an I frame
arrives and is decoded.

Bidirectional "B" frames are like P frames,
25 except that the prediction is made not only from the
previous I or P frame, but also from the next one.
For purposes of splicing, this means that while it
is possible to leave an old stream after any P or I

frame, it is not possible to leave the stream after a B frame since that would cut off the backward prediction reference frame for that B frame. From the point of view of the bitstream, this means that a first video stream may only be left after a P or I frame and all of the B frames (if any) that immediately follow it have passed.

Matters are further complicated when the compressed MPEG bitstream is progressively refreshed. In progressively refreshed streams, such as taught in commonly assigned US patent 5,057,916 to Krause et al. entitled "Method and Apparatus for Refreshing Motion Compensated Sequential Video Images," sequential video images are refreshed one region at a time. A different region in each of the plurality of video images is communicated without compression during a refresh cycle. In this manner, an image area defined by the region is progressively refreshed by the non-compressed regions during the refresh cycle. Compression of video images may be controlled to prevent data contained in regions not yet refreshed during a current refresh cycle from corrupting data contained in regions that have been refreshed during the current refresh cycle.

For commercial insertion or switching purposes, compressed video from a first source is replaced with compressed video from a second source at a predefined insertion point in the video data stream.

If the video from either or both of the first and second source is progressively refreshed, then progressive refresh related artifacts will appear at one or both of the boundaries between the first and second source video.

It would be advantageous to provide a method for providing splicing of progressively refreshed video streams that minimizes noticeable artifacts. The present invention provides such a method.

In accordance with the present invention, a method is provided for replacing compressed video from a first source with compressed video from a second source , e.g., at a predefined insertion point in a video data stream. A determination is made as to whether the video from the second source is progressively refreshed video. The determination can be a real time determination (e.g., based on testing the second source) or can result from a *priori* knowledge of the second source. If the video from the second source is progressively refreshed, then it is decompressed sufficiently prior in time to the replacement of the first source video to enable the recovery and recompression of a first replacement video frame from said second source before replacement commences. It is noted that for purposes of present disclosure, the "first replacement video frame" is the first frame in encoding order of the replacement video stream, which may differ from the display order, as well known in the art.

The recovered first video frame is recompressed as an intra-coded (I) frame. Then, insertion of the video from the second source is commenced (e.g., at the predefined insertion point) using the I frame. Since the I frame comprises all of the information

necessary to reconstruct a full frame of data and is not progressively refreshed, it enables a clean switch to be made from the video data from the first source to the video data from the second source.

5 The insertion point can, for example, indicate the commencement of a commercial break in the video stream. In this instance, the second source provides a commercial for insertion into the commercial break. At the conclusion of the
10 commercial break, video from the first source recommences at a second insertion point in the data stream. As with the first splice, it is necessary to determine if the video from the first source is progressively refreshed video. If so, that video is
15 decompressed sufficiently prior to the second insertion point to enable the recovery and recompression of a first video frame (in encoding order) from the first source to be inserted at the second insertion point. The recovered first video
20 frame from the first source is then recompressed to produce an I frame. Insertion of the video from the first source at the second insertion point commences using the I frame produced from the first source.

 A method is also provided for replacing
25 compressed video from a first source with substitute progressively refreshed compressed video (e.g., at a predefined insertion point) in a video data stream. The substitute video (e.g., a commercial) is stored

with a first frame thereof encoded as an intra-coded (I) frame. The insertion of the substitute video is commenced (e.g., at the predefined insertion point) using the I frame as the first inserted frame. When
5 the compressed video from the first source is progressively refreshed and is to be recommenced at a second insertion point in the data stream following the first insertion point (e.g., at the end of a commercial break) the video from the first
10 source must be processed to prevent progressive refresh related artifacts. In particular, the video from the first source is decompressed sufficiently prior to the second insertion point to enable the recovery and recompression of a first video frame
15 from the first source to be inserted at the second insertion point. The recovered first video frame from the first source is recompressed to produce an I-frame. Insertion of the video from the first source is commenced at the second insertion point
20 using the I frame produced from the first source.

FIG. 1 is a diagram illustrating first and second data streams S1, S2, respectively, together with a third data stream S3 comprising stream S1 into which a portion of stream S2 has been inserted; and

FIG. 2 is a diagram illustrating a data stream S4 created by switching from data stream S1 to data stream S2.

The present invention provides a method for inserting commercials or other video segments into progressively refreshed bitstreams and for switching from one bitstream to another when any of the
5 bitstreams is progressively refreshed.

FIG. 1 illustrates a first compressed digital video stream 10 (stream S1). The video stream 10 has a first insertion point t1 at which a commercial break commences. The commercial break terminates at
10 insertion point t2. It is noted that the insertion points may or may not comprise predetermined points in the video stream. Since it is more typical to insert a video segment such as a commercial at a predefined time, it is expected that predetermined
15 insertion points will more often be used with the present invention. However, the use of predetermined insertion points is not required in accordance with the invention. For example, a local television studio may desire to insert a local
20 segment into a main video stream at an arbitrary time, in which case the invention may be implemented without using a predetermined insertion point for the replacement of the main video with the replacement video.

25 As indicated in FIG. 1, a commercial or other video segment S1c is inserted in the commercial break defined by insertion points t1 and t2. In

particular, the inserted video S1c commences at insertion point t1 and terminates at insertion point t2, where the main video program carried by S1 restarts at the termination of the commercial break.

5 A similar video stream 12 (stream S2) comprises a main program S2 into which a commercial S2c is inserted. It is noted that the commercials S1c and S2c may be part of the streams S1 and S2, respectively, in which case they need not be
10 separately inserted into the main stream. However, in the event that the commercials (or other video segments that are inserted) are stand alone video segments, they must be inserted into the main stream at the appropriate insertion point t1 and terminated
15 at the insertion point t2 when the main stream recommences.

Video stream 14 (stream S3) represents a classic case of video splicing, in which part of stream S1 is replaced by S2c. As indicated above,
20 S2c can be part of stream S2 or may be a stand alone commercial or other stand alone video segment. If S1 and/or S2 are progressively refreshed video data streams, then progressive refresh related artifacts will occur at one or both the boundaries of S1 and
25 S2c. Such refresh related artifacts can last as long as one second or more, depending upon the refresh rate. Thus, when a commercial is switched in and out one would see the artifacts every time

the switch is made. To prevent such artifacts while switching the commercial into a main data stream (i.e., splicing out of the main stream and cutting the commercial in), the commercial can be compressed in I, P, B frame mode. However, when the commercial is over and the progressively refreshed main stream is switched back in, the progressive refresh artifacts will still occur. It is noted that the video frames in the stream illustrated in FIG. 1 are in encoding order, which is different from the frame display order. When the frames are encoding order, the first frame of the switched-in segment will be an I frame.

For purposes of the present disclosure, the terms "frame" and "video frame" are used in a generic sense to mean a portion of a video signal or stream from which other portions are reconstructed using, for example, an I-frame, P-frame or B-frame. Thus, although typically a "frame" will be a "full" video frame, it is not intended to limit the meaning thereof to a full video frame for purposes of the present disclosure, since implementations may exist or be developed wherein, e.g., subframe, field, subfield, or other processing is used. With respect to processing of video on a field level instead of a frame level, it should be appreciated that I-fields, P-fields and B-fields may be used. In such cases, these fields are equivalent to and are intended to

be covered by the broad terms "frame" and "video frame" as used in the frame processing of video signals.

5 The present invention overcomes the problem of
progressive refresh related artifacts by commencing
processing of a frame to be inserted prior to the
insertion time. First, the video to be inserted is
decompressed sufficiently prior to the insertion
point to enable the recovery and recompression of a
10 first frame to be inserted. As noted above, the
"first frame to be inserted" is the first frame in
the encoding order and not necessarily the first
frame in the display order. Once this frame has
been decompressed, it is recompressed as an intra-
15 coded (I) frame. Such intra-coded frames are able
to be reconstructed without referring to any other
frame, and therefore are not subject to progressive
refresh. After the recovered first frame is
recompressed as an I frame, it is used as the first
20 frame inserted at the insertion point.

 As a first example, S1 may be a progressively
refreshed compressed video stream whereas S2 is not
progressively refreshed. If a sequence is not
progressively refreshed then it is I-frame
25 refreshed. In this case, progressive refresh
artifacts will occur in switching from S2 to S1, but
not while going from S1 to S2. Therefore, a switch
can be made from S1 to S2 in order to insert S2c in

a conventional manner as is done for I-frame refreshed cases. However, the technique of the present invention must be used to avoid progressive refresh artifacts when switching back from S2c to S1.

In accordance with the invention, when S2c is inserted, decoding of S1 commences at some time dt earlier than the insertion point t_2 . In other words, decoding of S1 will commence at time $(t_2 - dt)$. Upon recovery of a first frame (in encoding order) of S1 to be inserted at the termination of S2c, this frame or "picture" is recompressed as all intra-coded blocks, and the recompressed picture is inserted commencing at insertion point t_2 . The remainder of stream S1 can be the same as the original stream.

In another example, both S1 and S2 are progressively refreshed. In this case, when switching from stream S1 to video segment S2c, decoding of S2c commences at some time dt' earlier than insertion t_1 , i.e., at $(t_1 - dt')$. A recovered first frame (in encoding order) of S2c is recompressed as all I blocks. This first frame is inserted as the first frame of the video segment S2c at insertion point t_1 . No special processing is required for the remainder of video segment S2c. When switching back from S2c to S1, the same technique used in the previous example is followed;

i.e., the first frame (in encoding order) of stream S1 to be inserted at insertion point t2 is recovered and recompressed as all I blocks for insertion at t2.

5 FIG. 2 illustrates a special case referred to as "switching." In this case, a switch from one stream (e.g., a feed from a first camera) to another stream (e.g., a feed from a second camera) is made. As illustrated in FIG. 2, stream 16 (stream S4) is
10 created by switching S1 to stream S2 at insertion point (or "switching point") t1. In the event that S1 is progressively refreshed but S2 is not, no special processing is required. However, in the
15 case where S2 is progressively refreshed (regardless of whether S1 is progressively refreshed) decoding of S1 will be commenced at a time dt prior to the switching point t1 so that a first frame thereof (in encoding order) can be recompressed as an I frame for use as the first frame when the streams are
20 switched at switching point t1.

 The times dt and dt' are established by knowing how many frames it takes to complete the progressive refresh of a picture. For example, if the
25 progressive refresh is completed within fifteen frames, dt and dt' will be a period of time at least equivalent to fifteen frame times, and more typically will be greater than this (e.g., thirty frames) to be certain that enough time is provided

to decode and recompress the necessary first frame of the inserted video portion.

5 It should now be appreciated that the present invention avoids progressive refresh artifacts by starting to decode a main stream, which is progressively refreshed, several frames before an inserted video portion (e.g., a commercial) is over. At the time when the commercial is over, the decoded picture (e.g., P picture) of the main stream is
10 captured and recompressed as an I frame. The main stream is then switched-in commencing with that I frame. The rest of the frames in the main stream can be progressively refreshed frames. It is noted that there may still be some artifacts due to the
15 fact that the I frame is not the true reference frame used to encode the main stream. However, such artifacts are generally significantly less objectionable than the progressive refresh artifacts that would otherwise occur.

20 In addition, it is also possible to store the commercial or other inserted video segment such that only the first frame of the segment is an I frame and the rest of the frames are progressively refreshed. In this manner, a progressively
25 refreshed commercial can be used without detrimental progressive refreshed artifacts at the time the commercial is switched in to the video stream.

Although the invention has been described in connection with various specific embodiments, it should be appreciated that numerous adaptations and modifications may be made thereto without departing from the scope of the invention as set forth in the claims.

What is claimed is:

1. A method for replacing compressed video from a first source with compressed video from a second source in a video data stream, comprising the steps of:

determining if the video from said second source is progressively refreshed video, and if so:

(a) decompressing the video from said second source sufficiently prior to the replacement of the first source video to enable the recovery of a first replacement video frame from said second source before replacement commences;

(b) recompressing the recovered first replacement video frame as an intra-coded (I) frame; and

(c) commencing the replacement of the first source video with the second source video using said I frame.

2. A method in accordance with claim 1 wherein the replacement of the first source video

with the second source video commences with the insertion of said I frame at a predefined insertion point in said video data stream.

3. A method in accordance with claim 2 wherein said insertion point indicates the commencement of a commercial break in said video stream, and said second source provides a commercial for insertion into said commercial break.

4. A method in accordance with claim 3 wherein at the conclusion of said commercial break, video from said first source recommences at a second insertion point in said data stream, comprising the further steps of:

determining if the video from said first source is progressively refreshed video, and if so:

(a) decompressing the video from said first source sufficiently prior to said second insertion point to enable the recovery of a first video frame from said first source to be inserted at said second insertion point;

(b) recompressing the recovered first video frame from said first source to produce an intra-coded (I) frame; and

(c) commencing the insertion of the video from said first source at said second insertion point using the I frame produced from said first source.

5. A method for replacing video from a first source with substitute progressively refreshed compressed video in a video data stream, comprising the steps of:

storing the substitute video with a first frame thereof encoded as an intra-coded (I) frame; and

commencing the insertion of the substitute video into said video data stream using said I frame as the first inserted frame.

6. A method in accordance with claim 5 wherein the insertion of the substitute video commences with the insertion of said I frame at a

predefined insertion point in said video data stream.

7. A method in accordance with claim 6 wherein the compressed video from said first source is progressively refreshed and is to be recommenced at a second insertion point in said data stream following said first insertion point, said method comprising the further steps of:

(a) decompressing the video from said first source sufficiently prior to said second insertion point to enable the recovery and recompression of a first video frame from said first source to be inserted at said second insertion point;

(b) recompressing the recovered first video frame from said first source to produce an intra-coded (I) frame; and

(c) commencing the insertion of the video from said first source at said second insertion point using the I frame produced from said first source.

8. A method in accordance with claim 7 wherein said first and second insertion points define a commercial break in said video stream, and said substitute video is a commercial for insertion into said commercial break.

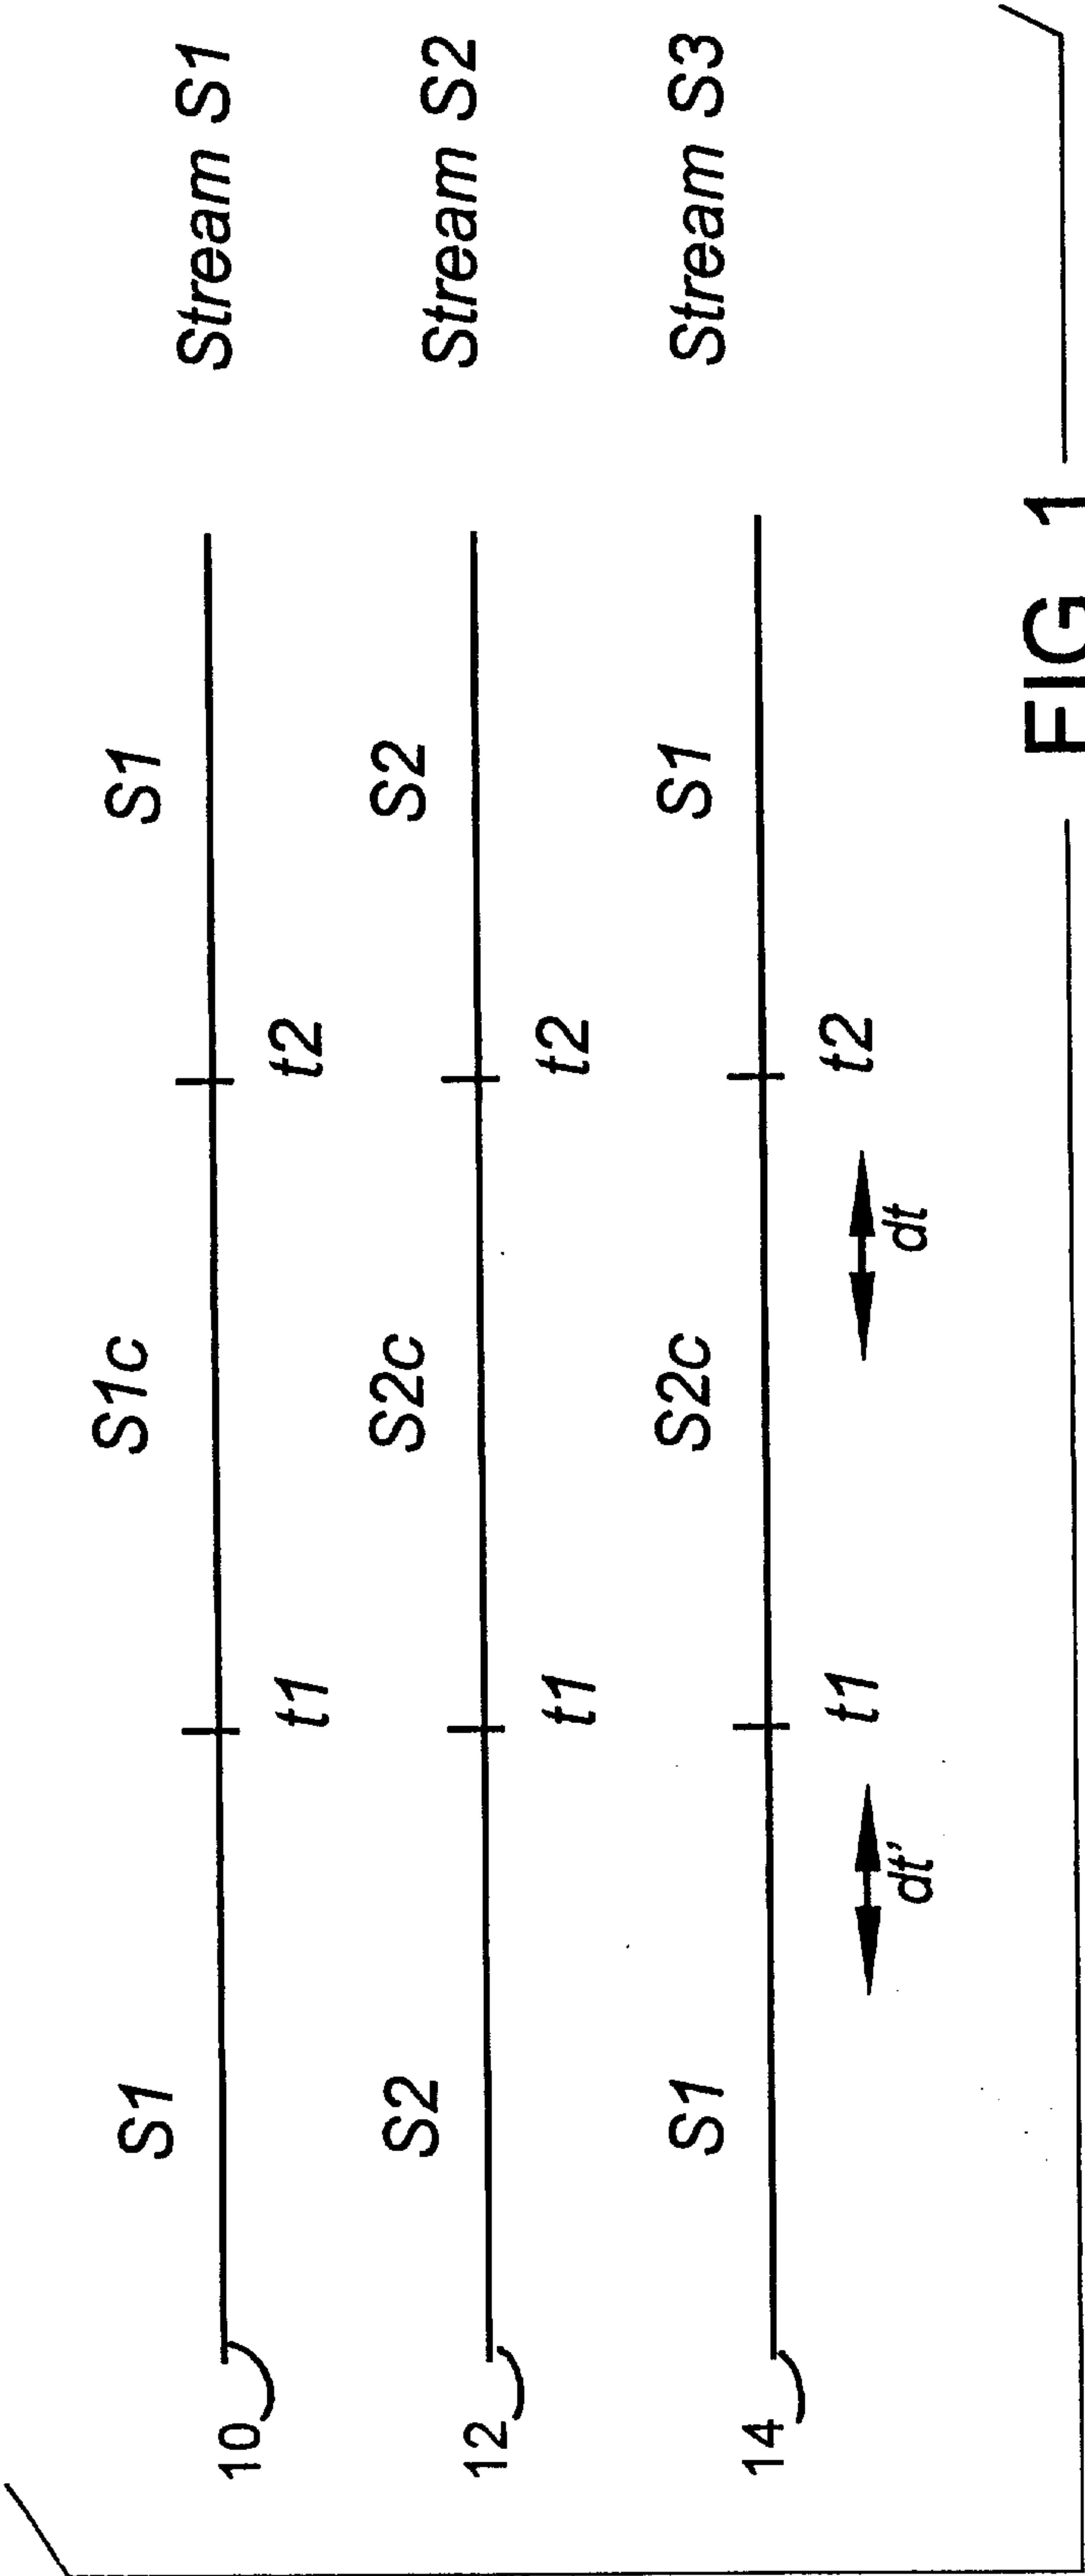


FIG. 1

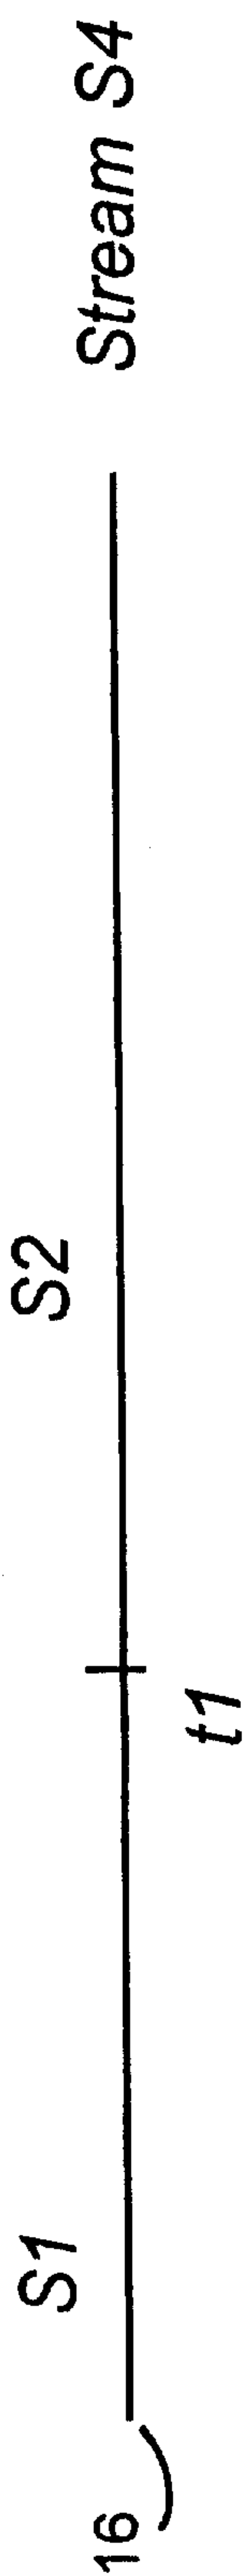


FIG. 2

