




- (51) International Patent Classification:
H05H 1/54 (2006.01) *B64G 1/40* (2006.01)
- (21) International Application Number:
PCT/US2024/032785
- (22) International Filing Date:
06 June 2024 (06.06.2024)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
18/332,533 09 June 2023 (09.06.2023) US
- (71) Applicant: **CU AEROSPACE, LLC** [US/US]; 3001 Newmark Drive, Champaign, Illinois 61822 (US).
- (72) Inventors: **BURTON, Rodney**; 3001 Newmark Drive, Champaign, Illinois 61822 (US). **CARROLL, David**; 3001 Newmark Drive, Champaign, Illinois 61822 (US). **ZIMMERMAN, Joseph**; 3001 Newmark Drive, Champaign, Illinois 61822 (US).
- (74) Agent: **SACHAROFF, Adam**; Much Shelist, PC, 191 N Wacker Drive, Suite 1800, Chicago, Illinois 60606 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: MAGNETOPLASMADYNAMIC THRUSTER WITH REVERSE POLARITY AND TAILORED MASS FLUX

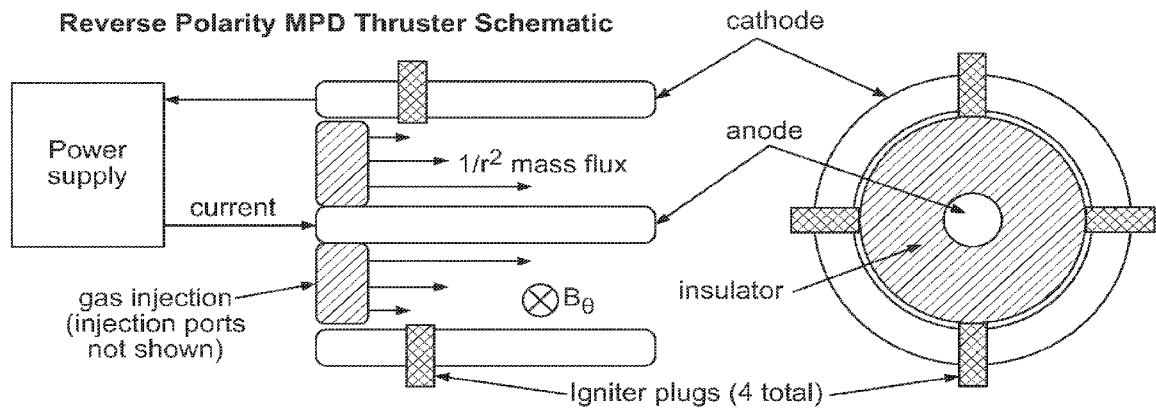

Reverse polarity self-field magnetoplasmadynamic thruster with $1/r^2$ mass flux distribution

FIG. 1

(57) Abstract: The MPD thruster improvements described here apply to coaxial gas-fed quasisteady self-field devices without auxiliary magnetic fields. The geometry of the MPD thruster is coaxial, consisting of a tubular outer electrode and a cylindrical center electrode, separated by an electrical insulator.



Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Magnetoplasmadynamic Thruster with Reverse Polarity and Tailored Mass Flux

CROSS REFERENCE TO RELATED APPLICATIONS

[1] The present application claims priority to US Provisional Application 18/332,533 filed June 9, 2023. The prior application is incorporated in its entirety by reference.

BACKGROUND OF THE INVENTION

[2] The invention consists of improvements to a plasma accelerator employed as a space propulsion thruster for spacecraft called a Magnetoplasmadynamic (MPD) thruster, first discovered by in 1964. The MPD was first flown in the Space Shuttle in 1996. Several versions of the MPD thruster exist, depending on the operation (pulsed or steady state), the power level (kilowatt or megawatt), the magnetic field (applied by coils or permanent magnets or self-created by the thruster current), the propellant phase (solid, gel, liquid or gas), and the propellant species. Typical propellants are helium, argon, xenon, nitrogen, lithium, ammonia, water, and polytetrafluoroethylene (Teflon).

BRIEF DESCRIPTION OF THE FIGURES

[3] Fig. 1 is a schematic diagram of a geometry of the MPD thruster showing a reverse polarity self-field magnetoplasmadynamic thruster with $1/r^2$ mass flux distribution.

[4] Fig. 2 shows a five-section Rayleigh Line pulse forming network (PFN), the load and capacitor currents.

DETAILED DESCRIPTION OF THE INVENTION

[5] The geometry of the MPD thruster (Fig. 1) is coaxial, consisting of a tubular outer electrode and a cylindrical center electrode, separated by an electrical insulator. For gas-fed MPD thrusters the gas is most conveniently fed through passageways called injection ports in the insulator, although feeding gas through the insulator is not a requirement. Once the propellant is flowing between the electrodes, it is ionized by the electrical current flowing between the electrodes, and is then accelerated to achieve thrust.

[6] The MPD thruster creates thrust by accelerating the propellant to high velocity in two ways. The primary method is electromagnetic, using the $\vec{j} \times \vec{B}$ force generated by the interaction of the thruster current density \vec{j} [amperes/m²] with a perpendicular component of the magnetic field \vec{B} . The secondary acceleration method, normally less than 10% of the thrust, is electrothermal, achieved by resistively heating the propellant plasma to high temperature and high thermal velocity, allowing the propellant to expand to high velocity into the space vacuum.

[7] The omnivorous propellant nature of the MPD thruster has been well characterized. MPD performance has been measured for a large number of propellants including Ar, H₂, N₂, CH₄, NH₃, and Li. An efficiency of 38% has been measured with N₂ propellant at $U_e = 40$ km/s. Because favorable results have been achieved with a wide variety of molecular species it is strongly anticipated that this electromagnetic (EM) plasma thruster will operate effectively on mixtures such as the N₂/O₂ air mixture characteristic of the thermosphere.

[8] The MPD thruster can be compared to the Gas-Fed Pulsed Plasma Thruster (GFPPPT). GFPPPT operation can display two fundamental acceleration modes called detonation and deflagration, by analogy with the two similar modes for chemical combustion. In Mode I (a short pulse, large mass bit

detonation mode) the discharge forms a moving magnetohydrodynamic shock-like current sheet and the impulse bit is dependent on the mass bit. In Mode II (a short pulse, small mass bit, deflagration mode) the discharge forms a stationary electromagnetic acceleration region and the impulse bit is independent of the mass bit. Deflagration mode is the desired operating mode for the MPD thruster, since the exhaust velocity varies inversely with the mass bit and therefore can be controlled. In addition, the deflagration mode avoids inefficient shock heating of the accelerated gas that results in wasteful thermal losses in the exhaust plume. A fundamental understanding of the basic breakdown process (i.e., discharge initiation, DI) mechanisms in GFPPT has been obtained from a series of experimental and theoretical studies. It was found that DI in GFPPTs, as initiated by several types of spark igniter plugs, can occur through a Townsend breakdown or a streamer breakdown, where the latter is more advantageous for GFPPT performance as it is faster and leads to higher conductivity. Rules for ensuring the occurrence of the latter were derived and verified. While the MPD thruster shares similarities with the GFPPT in terms of deflagration mode and the initial breakdown process, it is distinguished by operating in steady state or by having a much longer current pulse, by achieving constant current and discharge conditions (called steady or quasisteady operation), and the tailoring of the distribution of the injected mass flux.

[9] The present invention first provides for radial tailoring of the propellant mass flux in a novel way. The self-field MPD thruster is predominantly a coaxial electromagnetic device, which means that the current in the device creates an accelerating magnetic pressure. Due to the geometry and the predominantly radial flow of current between the electrodes, the self-magnetic field B_θ , which is in the azimuthal (theta) direction (Fig. 1), decreases with increasing radius away from the centerline as $1/r$, and the magnetic pressure $B^2/2\mu_0$ varies as $1/r^2$. For example, if the radius of the cathode is ten times

that of the anode, the magnetic pressure at the outer cathode surface is only 1% ($1/10^2$) that at the inner anode surface.

[10] Part one of this invention is to conform to the $1/r^2$ variation in the magnetic pressure and to provide a similar $1/r^2$ variation in the injected mass flux. By providing a $1/r^2$ variation in mass distribution the supersonic discharge flow is made more uniform and the thruster efficiency is increased. In practice, the $1/r^2$ variation is provided by gas injection ports (Fig. 1) designed to inject more mass close to the central electrode and less mass at large radius, creating a reasonable approximation to a $1/r^2$ variation in mass flux.

[11] Part two of this invention relates to electrode polarity. Historically, the MPD thruster was derived from the electrothermal arcjet, a coaxial device with an outer anode, a central cathode, and propellant injected into the annular gap between the two electrodes. Although hundreds of scientific papers, book chapters, and graduate degree theses have been written about the MPD thruster, none of these publications have discussed experimental or theoretical operation of the MPD thruster with reverse polarity. Reverse polarity simply means that the central electrode is the anode and outer electrode is the cathode, with the current flowing in the positive radial direction from anode to cathode.

[12] Figure 1 displays the primary components of the reverse polarity MPD thruster: current feed, gas injection, igniter plugs, cathode, insulator, anode and azimuthal magnetic field. The device shown is a class of MPD thruster called quasisteady self-field. Without auxiliary magnets, a strong self-magnetic field is created by operating the thruster current at tens of kiloamperes. Because this level of current requires a power level of megawatts to the thruster, and because no practical space-based power supply can supply this power for more than milliseconds, the propellant gas is injected during

the pulse by fast-acting valves (not shown in Fig. 1) feeding gas injection ports with a $1/r^2$ mass distribution pattern. With a constant total mass flow rate during a pulse, and by operating the MPDT at constant current during a pulse, as can be provided by a capacitive pulse forming network (PFN), the mode of operation is said to be quasisteady.

[13] Operating the MPD thruster in reverse polarity with a central anode has the following advantages:

[14] Igniter plugs operate by generating clouds of negatively charged electrons which are attracted to the positively charged anode, and in so doing creates a conductive plasma by passing through and ionizing the injected propellant gas. The best location for the plugs to extend their life is in the outer electrode, far from the highly intense central region of the current discharge. Mounting igniter plugs in the outer electrode has been successful in achieving long life in a Teflon thruster called PPT-11 and in a second Teflon thruster called the Fiber-fed Pulsed Plasma Thruster (FPPT). With a central cathode device the plug would have to be mounted in the cathode, which would shorten plug life considerably.

[15] Coaxial electric thrusters find it convenient, and safe, to connect the outer electrode to electrical ground. With a central anode at high voltage the igniters are mounted in the grounded outer electrode, simplifying the mounting and electrical circuit for the plugs.

[16] A central anode improves the plasma ion flow out of the thruster. As a gas particle is ionized it attains a positive charge, and is accelerated in the direction of the positive electric field. With a central anode the positive electric field between the electrodes is directed radially outward, away from the central anode. A newly created ion will therefore be accelerated away from the electrode and will continue unimpeded out of the thruster. With a central cathode, however, ions created close to the

cathode surface are attracted to the cathode by the electric field, will collide with the surface, and do not contribute their momentum to thrust.

[17] The MPD thruster operated at high current can develop terminal voltage oscillations accompanied by erosion of the anode. These oscillations and erosion are mitigated by providing extra ions near the anode, and this is accomplished directly with a central anode operating in the region of highest mass flux due to the $1/r^2$ mass flux distribution.

[18] The thruster impedance of 10-20 milliohms requires 1-2 MW of power at 5-10 kA, supplied by a pulse forming network (PFN), a lumped network of capacitors and inductances with an impedance matching that of the discharge to transfer the stored energy in a single unidirectional pulse. PFNs are a well-understood technology first used with EM plasma accelerators in the 1960s. A typical PFN impedance-matched to the thruster requires a bank voltage of 400 V to generate a discharge current of 10 kA. Under these quasi-steady conditions with no current reversal, the duration of the current pulse is given by $t_p = Q/I = 2CZ_p$, where Q is the stored charge on the bank, C is the total bank capacitance, and Z_p is the impedance of the PFN in ohms.

[19] The MPD thruster does not require a switch, because the thruster electrodes are vacuum-insulated during the PFN charging phase. It is possible to initiate the current pulse in several ways: through Paschen breakdown by air injection into the electrode gap, by igniter plugs in the thruster cathode that generate electrons, or by inductive or laser methods. CUA has developed igniter plugs for the FPPT thruster with an estimated lifetime of $>10^7$ pulses (3.0 years at 0.1 Hz) based upon erosion data, and multiple plugs can be used to extend system life.

[20] A PFN circuit diagram for a "Rayleigh Line" PFN with $N = 5$ sections is shown in Fig. 2.

Capacitive sections C_n are connected by an inductance L_n , chosen so that the impedance $Z_p = \sqrt{L_n/C_n}$

matches the thruster impedance Z , determined experimentally. The pulse length is then $t_p = 2N\sqrt{L_n C_n}$, and t_p is several 100 microseconds depending on U_e . The number of sections N is typically $5 < N < 10$. The capacitors are chosen for high reliability and are charged to ~80% of rated voltage to meet system life requirements.

[21] CUA has successfully operated the FPPT with multi-layer ceramic (MLC) capacitors for 32 joule pulses at 20 kA, with a mounted specific energy of 45 J/kg and a tested life by CUA of $>10^9$ pulses. Because use of the MLC capacitors for this MPD PFN would require $>10^4$ units, other capacitor types such as film and oil-filled capacitors are being evaluated to reliably provide the hundreds or thousands of joules required in the MPD PFN. For example, a derated NWL, Inc. 120 μ F, 500 V film capacitor would require approximately only 50 units to store 500 J at the same specific energy.

We claim:

1. An electromagnetic plasma accelerator used as a space thruster operating in a gaseous propellant-injected steady or quasisteady pulse mode comprising:

a cylindrical discharge chamber of length sufficient to contain the discharge, formed by a central metal anode with a high positive voltage, a cylindrical outer cathode at a lower voltage than the anode coaxial with the central electrode, the chamber being closed at one end by an electrical insulator and being open at the opposite end to allow the accelerated propellant to exit at high velocity to create thrust, such that the primary direction of current is radially outward.

2. The plasma accelerator of Claim 1 wherein a magnitude of the current is sufficiently high that the azimuthal magnetic B field created by the radial current combines with the radial current to accelerate the plasma created by the current predominantly by electromagnetic forces in the predominantly axial direction with a smaller component in the outward radial direction.

3. The plasma accelerator of Claim 2, wherein the gas is fed axially through ports in the electrical insulator or in the coaxial electrodes with a radial distribution of mass flux that approximates the inverse square of the radius $1/r^2$.

4. The plasma accelerator of Claim 3, wherein the propellant is a monatomic gas such as helium, argon or xenon, a diatomic gas such as hydrogen, nitrogen, or oxygen, a polyatomic gas such as ammonia or sulfur dioxide, a hydrofluorocarbon gas such as tetrafluoroethane (R134) or

hexafluoropropane (R236fa), an evaporated metal gas such as lithium, an evaporated polymer gas such as polytetrafluoroethylene (Teflon) or any mixture of these categories of gases.

5. The plasma accelerator of Claim 4, wherein the discharge is initiated by one or more igniter plugs located in the coaxial cathode which when high positive voltage is created on the anode and the igniter is pulsed to create a plasma at the tip of the plug, the electrons from the plasma then are accelerated in the radial electric field between the anode and cathode such that the electrons gain enough energy to ionize the injected propellant and create an initial conducting path for high current to flow from the anode to the cathode.

6. The plasma accelerator of Claim 5, wherein the central anode is tapered so that the smallest diameter is closest to the exit of the discharge chamber and the coaxial cathode may be flared so that the maximum diameter is at the exit of the discharge chamber.

7. An electromagnetic accelerator fed by a cold gas propellant and operating in a steady or quasisteady pulse mode at a sufficient level of power that a large fraction of the injected cold gas is dissociated into atoms and ionized into ions and electrons by the current to create a fully ionized or nearly fully ionized plasma inside the cylindrical discharge chamber.

8. The electromagnetic accelerator of Claim 7 wherein a magnitude of the current is sufficiently high that the azimuthal magnetic B field created by the radial current combines with the radial current


to accelerate the plasma created by the current predominantly by electromagnetic forces in the predominantly axial direction with a smaller component in the outward radial direction.

9. The electromagnetic accelerator of Claim 8, wherein the gas is fed axially through ports in the electrical insulator or in the coaxial electrodes with a radial distribution of mass flux that approximates the inverse square of the radius $1/r^2$.

10. The electromagnetic accelerator of Claim 9, wherein the propellant is a monatomic gas such as helium, argon or xenon, a diatomic gas such as hydrogen, nitrogen, or oxygen, a polyatomic gas such as ammonia or sulfur dioxide, a hydrofluorocarbon gas such as tetrafluoroethane (R134) or hexafluoropropane (R236fa), an evaporated metal gas such as lithium, an evaporated polymer gas such as polytetrafluoroethylene (Teflon) or any mixture of these categories of gases.


11. The electromagnetic accelerator of Claim 10, wherein the discharge is initiated by one or more igniter plugs located in the coaxial cathode which when high positive voltage is created on the anode and the igniter is pulsed to create a plasma at the tip of the plug, the electrons from the plasma then are accelerated in the radial electric field between the anode and cathode such that the electrons gain enough energy to ionize the injected propellant and create an initial conducting path for high current to flow from the anode to the cathode.

12. The electromagnetic accelerator of Claim 11, wherein the central anode is tapered so that the smallest diameter is closest to the exit of the discharge chamber and the coaxial cathode may be flared so that the maximum diameter is at the exit of the discharge chamber.

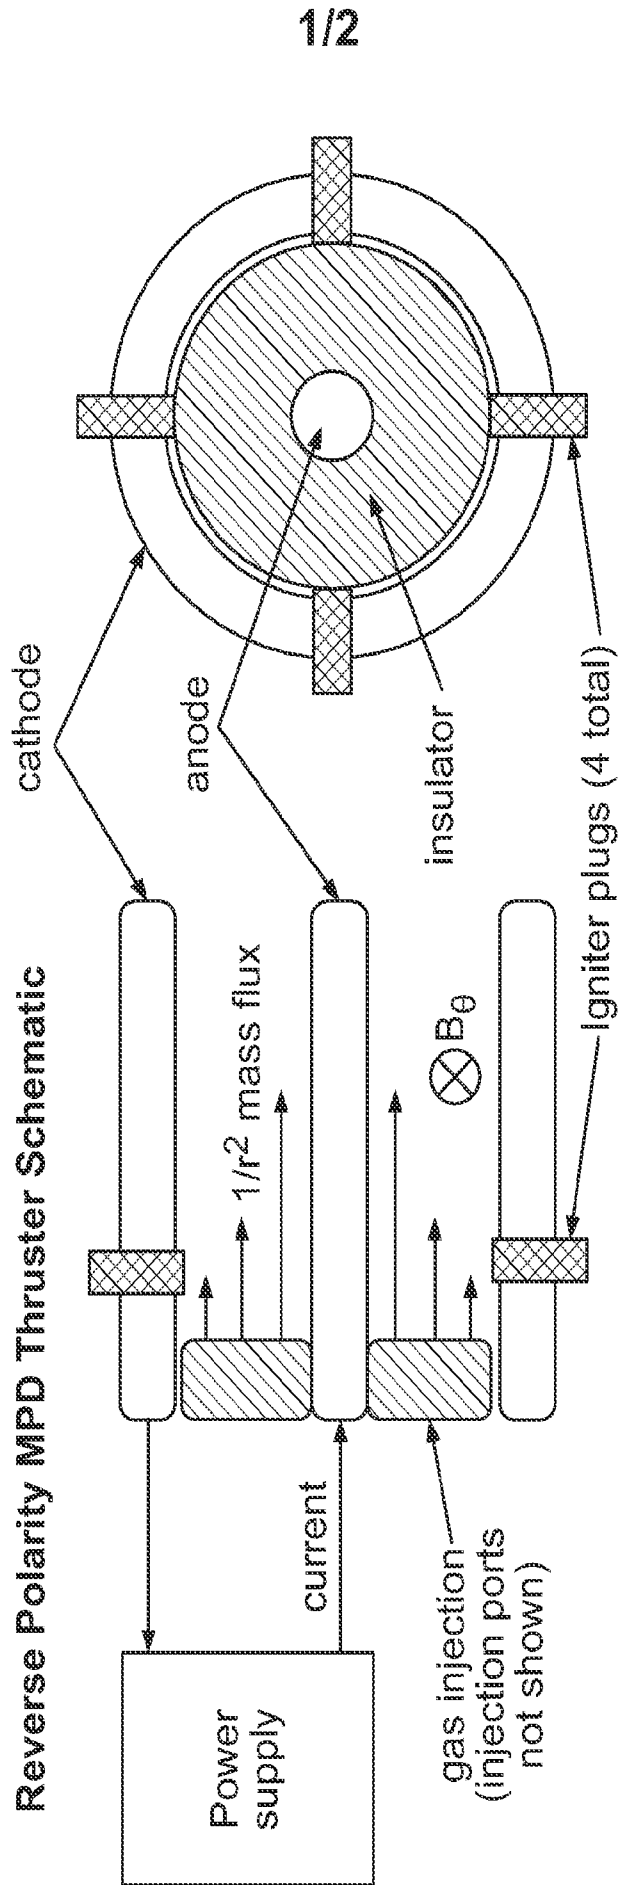

Reverse polarity self-field magnetoplasmadynamic thruster with 1/r² mass flux distribution

FIG. 1

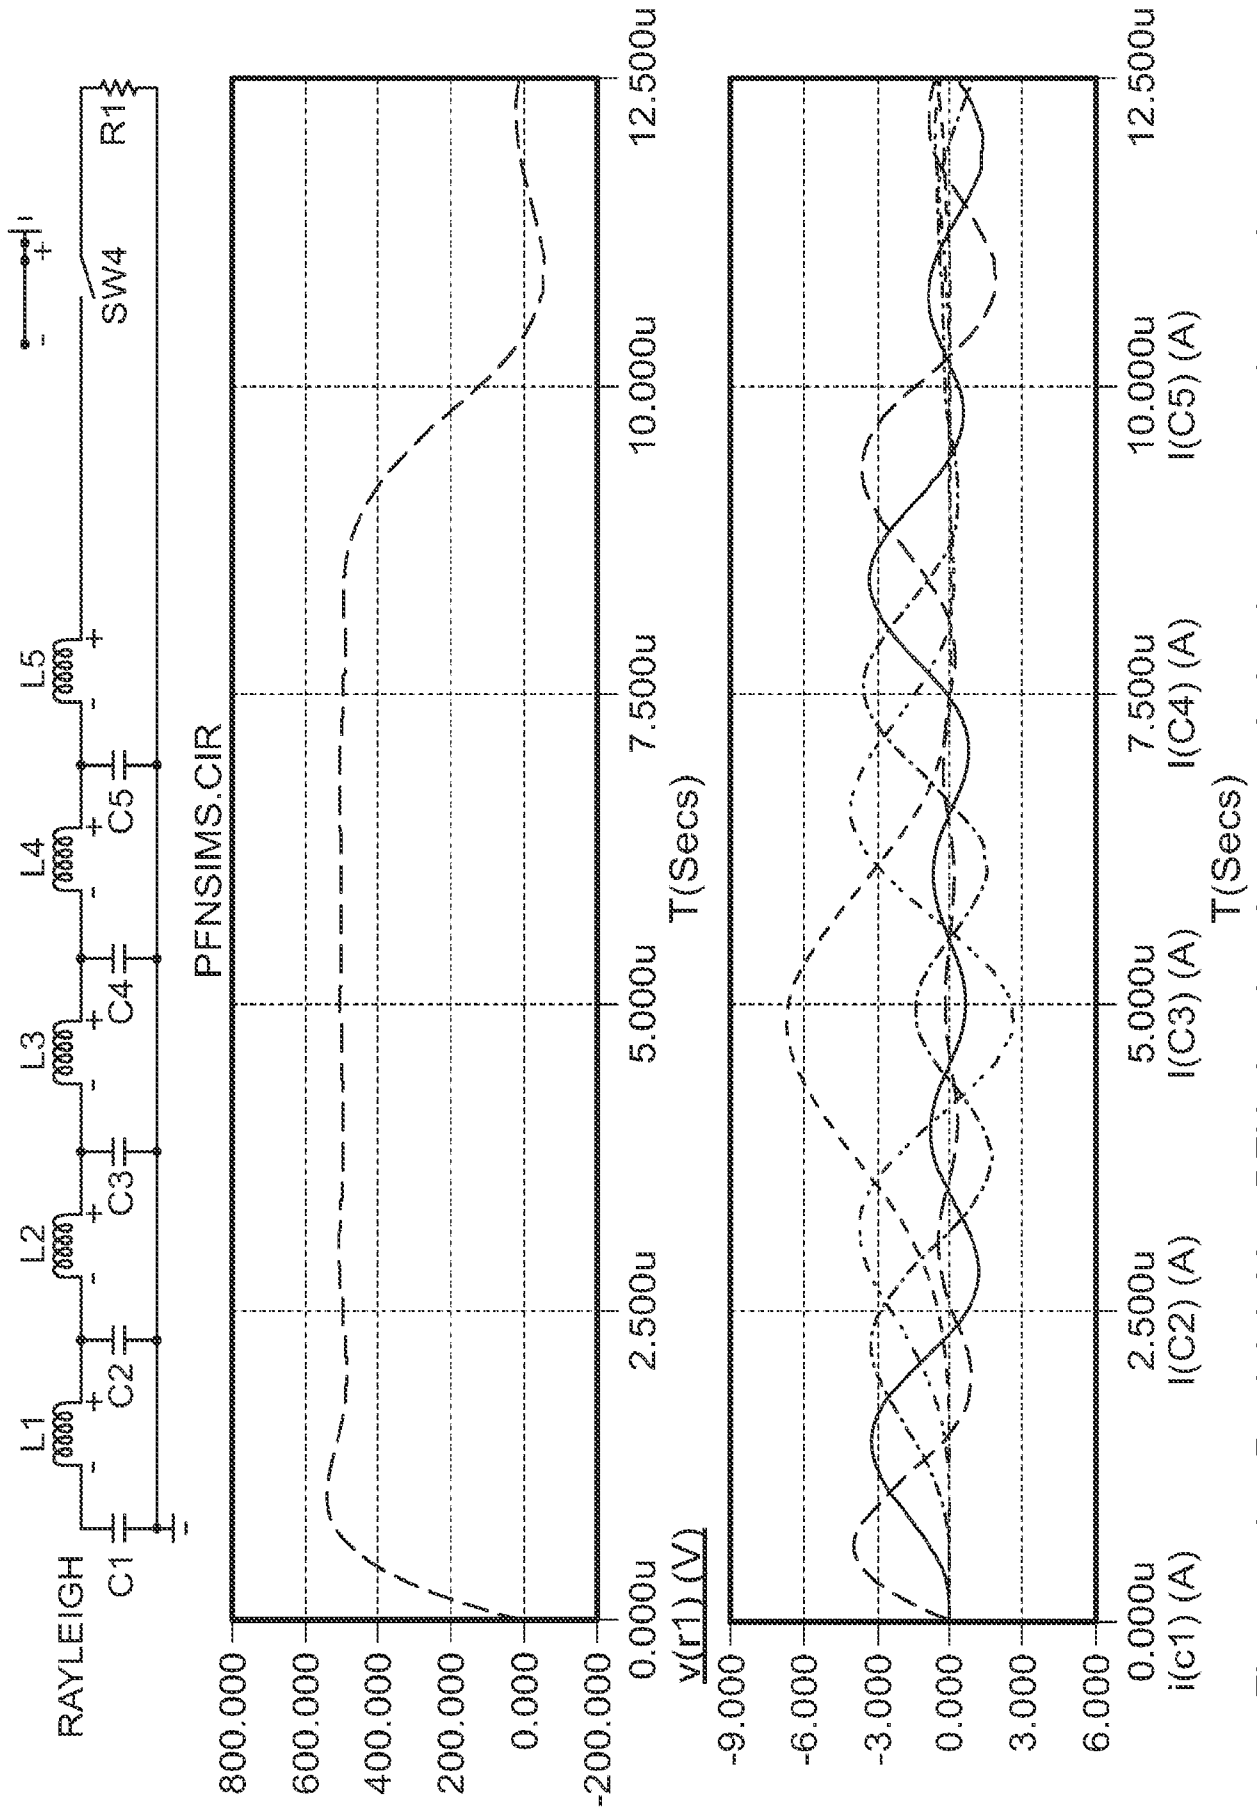

Five-section Rayleigh Line PFN showing the network, load current, and capacitor currents. FIG. 2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2024/032785

A. CLASSIFICATION OF SUBJECT MATTER H05H 1/54(2006.01)i; B64G 1/40(2006.01)i		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) H05H 1/54(2006.01); B64G 1/40(2006.01); C23F 1/00(2006.01); F03H 1/00(2006.01)		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Korean utility models and applications for utility models Japanese utility models and applications for utility models		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) eKOMPASS(KIPO internal) & Keywords: plasma, accelerator, cylindrical, discharge, chamber, cathode, anode		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2020-0032777 A1 (CU AEROSPACE, LLC) 30 January 2020 (2020-01-30) paragraphs [0053]-[0157]; claim 1; and figures 2A-30A	1-12
A	US 2016-0290324 A1 (THE UNITED STATES OF AMERICA AS REPRESENTED BY THE SECRETARY OF THE NAVY) 06 October 2016 (2016-10-06) claim 1; and figures 1-2	1-12
A	US 2006-0289117 A1 (ANDREAS GRASSAUER et al.) 28 December 2006 (2006-12-28) paragraphs [0065]-[0068]; and figures 2a-2b	1-12
A	KR 10-2023-0054131 A (KOREA ATOMIC ENERGY RESEARCH INSTITUTE) 24 April 2023 (2023-04-24) claims 1-2; and figures 1-2	1-12
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "D" document cited by the applicant in the international application "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 02 October 2024		Date of mailing of the international search report 02 October 2024
Name and mailing address of the ISA/KR Korean Intellectual Property Office 189 Cheongsa-ro, Seo-gu, Daejeon 35208, Republic of Korea Facsimile No. +82-42-481-8578		Authorized officer LEE, Kang Ha Telephone No. +82-42-481-5687

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/US2024/032785

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	2020-0032777	A1	30 January 2020	CA	3103014	A1	19 December 2019
				EP	3807533	A1	21 April 2021
				EP	3807533	B1	24 April 2024
				US	10570892	B2	25 February 2020
				US	11242844	B2	08 February 2022
				US	2020-0025183	A1	23 January 2020
				US	2022-0106944	A1	07 April 2022
				WO	2019-241489	A1	19 December 2019

US	2016-0290324	A1	06 October 2016	US	10047731	B2	14 August 2018

US	2006-0289117	A1	28 December 2006	AT	468590	T	15 June 2010
				AT	502984	A1	15 June 2007
				AT	502984	B1	15 September 2008
				AT	E468590	T1	15 June 2010
				AU	2004-273099	A1	24 March 2005
				AU	2004-273099	B2	24 September 2009
				CA	2538827	A1	24 March 2005
				EP	1671333	A1	21 June 2006
				EP	1671333	B1	19 May 2010
				IL	174274	A0	09 February 2008
				IL	174274	B	30 December 2010
				JP	2007-506016	A	15 March 2007
				KR	10-2007-0019954	A	16 February 2007
				NO	20061648	A	11 April 2006
				NO	20061648	L	11 April 2006
				NZ	546592	A	28 September 2007
				US	7482597	B2	27 January 2009
				WO	2005-027142	A1	24 March 2005
ZA	200603012	A	25 April 2007				

KR	10-2023-0054131	A	24 April 2023	KR	10-2599029	B1	06 November 2023

US	2023-0413414	A1	21 December 2023	None			
