



(86) Date de dépôt PCT/PCT Filing Date: 2011/09/24
 (87) Date publication PCT/PCT Publication Date: 2012/03/29
 (85) Entrée phase nationale/National Entry: 2013/03/19
 (86) N° demande PCT/PCT Application No.: SE 2011/000166
 (87) N° publication PCT/PCT Publication No.: 2012/039661
 (30) Priorité/Priority: 2010/09/24 (SE1000954-6)

(51) Cl.Int./Int.Cl. *B65D 90/02* (2006.01),
E04B 1/348 (2006.01)
 (71) Demandeur/Applicant:
CESIUM HOLDING AB, SE
 (72) Inventeur/Inventor:
GUSTAVSSON, JACK, SE
 (74) Agent: EQUINOX

(54) Titre : PROCÉDE DE FABRICATION D'ELEMENT DELIMITE RENFORCE ET UN TEL ELEMENT
 (54) Title: METHOD OF PRODUCING AN ENFORCED DELIMITED ELEMENT AND SUCH AN ELEMENT

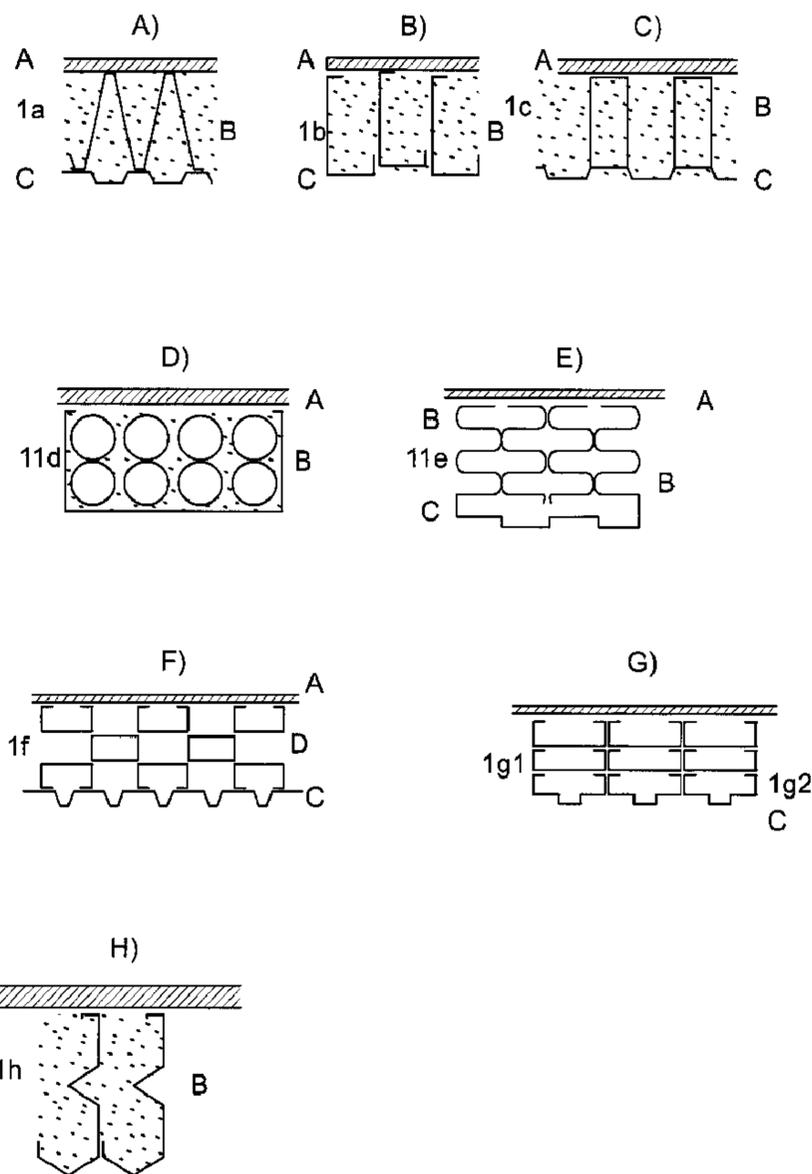


Fig. 1

(57) Abrégé/Abstract:

The present invention relates to a method of producing an enforced composite surface delimited element such as a wall, a ceiling or a roof. The invention also relates to a surface delimited element of metal or a composite material for e.g. a container, i.e. a



(57) **Abrégé(suite)/Abstract(continued):**

surface delimited element such as a wall, a door, a ceiling or a roof. The method is characterized in that profile elements, preferably of metal and having a length within the interval 200 - 250 cm, a width within the interval 15 - 35 cm, and a depth within the interval 18 - 40 cm are connected side by side constituting cell modules having passing through cell elements, that a substance or a material is added to said modules to bring completing properties to said construction element and that said cell modules are provided with an inner and/or outer completely covering layer at the same time adding strength to said surface delimited element. The surface delimited element is characterized in a series of cell modules constituting of profile elements forming intermediate cells, wherein each cell module has a width of at least 30 cm and a depth of at least 18 cm and which cell modules are internally attached to perform said surface delimited element, wherein material bridges forming part of the profile elements is of metal or of some other material and to its extension corresponding to the depth of the elements and extending essentially normal to the front side of the elements towards the back or inside of said elements.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
29 March 2012 (29.03.2012)(10) International Publication Number
WO 2012/039661 A1

(51) International Patent Classification:

B65D 90/02 (2006.01) **E04B 1/348** (2006.01)

(21) International Application Number:

PCT/SE2011/000166

(22) International Filing Date:

24 September 2011 (24.09.2011)

(25) Filing Language:

Swedish

(26) Publication Language:

English

(30) Priority Data:

1000954-6 24 September 2010 (24.09.2010) SE

(71) Applicant (for all designated States except US): **CE-SIUM HOLDING AB** [SE/SE]; Sågmogatan 21, S-641 34 Katrineholm (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **GUSTAVSSON, Jack** [SE/SE]; Sågmogatan 21, S-641 34 Katrineholm (SE).(74) Agent: **ERIKSSON PATENT AB**; Box 50, S-641 21 Katrineholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD OF PRODUCING AN ENFORCED DELIMITED ELEMENT AND SUCH AN ELEMENT.

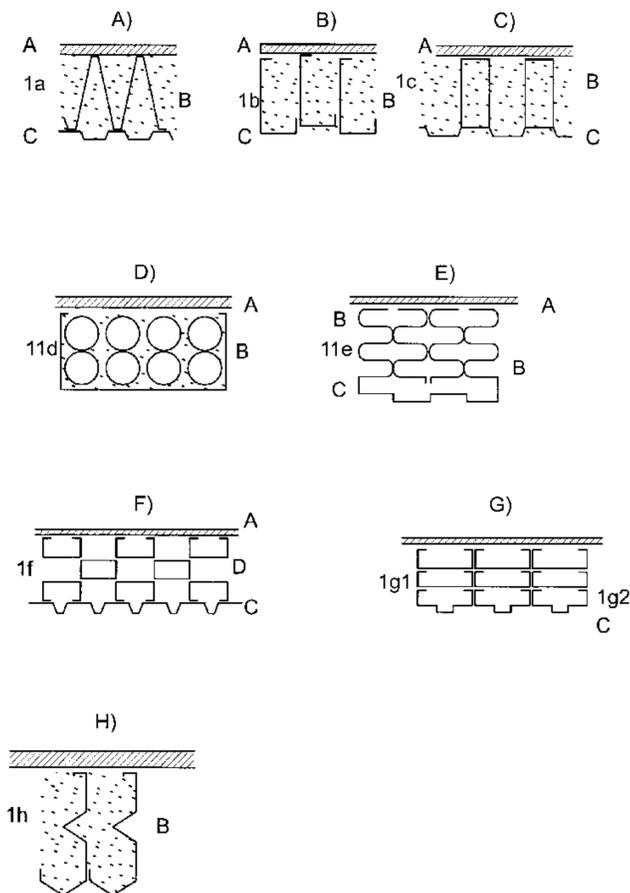


Fig. 1

(57) Abstract: The present invention relates to a method of producing an enforced composite surface delimited element such as a wall, a ceiling or a roof. The invention also relates to a surface delimited element of metal or a composite material for e.g. a container, i.e. a surface delimited element such as a wall, a door, a ceiling or a roof. The method is characterized in that profile elements, preferably of metal and having a length within the interval 200 - 250 cm, a width within the interval 15 - 35 cm, and a depth within the interval 18 - 40 cm are connected side by side constituting cell modules having passing through cell elements, that a substance or a material is added to said modules to bring completing properties to said construction element and that said cell modules are provided with an inner and/or outer completely covering layer at the same time adding strength to said surface delimited element. The surface delimited element is characterized in a series of cell modules constituting of profile elements forming intermediate cells, wherein each cell module has a width of at least 30 cm and a depth of at least 18 cm and which cell modules are internally attached to perform said surface delimited element, wherein material bridges forming part of the profile elements is of metal or of some other material and to its extension corresponding to the depth of the elements and extending essentially normal to the front side of the elements towards the back or inside of said elements.

Method of producing an enforced delimited element and such an element

The present invention relates to a method of producing an enforced composite surface delimitating element, such as a wall, floor or a ceiling preferably of a container, and an element manufactured according to said method.

In all mechanical constructions there are a need of strength and durability. One must construct and build for the intended purpose and chose different materials in different shapes and constellations and understand how these interact to achieve the intended purpose. For several reasons it is important to choose materials and to shape these such that the final weight of the basic construction body can be kept low without losing strength.

One purpose of the present invention is to obtain an enforced composite surface delimited element advantageously used in a container. Preferably the element are made up of several metallic profiles, which are connected into cell modules, which in turn are brought together to form surface delimitating elements.

In each cell module substance or material can be added according to need to give the construction element the properties needed such as insulation or properties withstanding burglar attacks.

The invention will be described in connection to a so called sea container, which is a container to be transported tight upon deck and upon each other onboard on container ships. More than eight containers are stacked upon each other and are internally locked and to the deck of the ship.

These stapled and tighten containers have to withstand impressive stresses during transportation over the oceans. A giant wave braking in over the side of a container ship will create tremendous stresses on both the tights and on the containers. It happens now and then that ships lose part of their container load when passing rough weather. Of course there are other circumstances where the present invention advantageously can be used. One such use is as mobile fuel depot where fuel is stored in one section of the container and the pump equipment is in an other section. Also here it is important to obtain a high degree of security, i.e. the enforced surface delimited elements will advantageously form the floor, the walls and the ceiling of the container.

The main purpose of the present invention is to obtain a method to manufacture a combined construction element forming part in e.g. a container, which element will withstand high dynamic stresses especially such stresses which can exist on an open sea and weather exposure placement and when tightening the containers upon each other on a ship deck.

An other object is to obtain a multi purpose construction element allowing the building of constructions with certain desired properties, such as shock proof and with a high resistance towards burglars.

Yet another purpose is to obtain a construction element using extruded cell modules of metal or of composite materials, which cell modules are internally connected.

The objects mentioned above will be obtained by a method and a construction element having the characterizing clauses mentioned in the claims.

By arranging the cell element with an essential depth extension and being internally connected, they will be very strong and withstand torsion stresses and outer stresses and thus protecting the container against deformation but also protecting the content of the container. It is of outmost importance that an outer stress or load onto the container will not cause any essential or long lasting deformation when carried on board upon deck. A deformation of the container will weaken the attachments to other containers and to the deck and can break the attachments to other containers or internally, i.e. the containers will be loosen and/or broken into pieces.

The invention will now be described in connection to embodiments shown in the accompanying drawings, where;

Fig. 1 A is a section of a first element according to the invention,

Fig. 1 B is a section of a second element according to the invention,

Fig. 1 C is a section of a third element according the invention,

Fig. 1 D is a section of a fourth element according the invention,

Fig. 1 E is a section of a fifth element according the invention,

Fig. 1 F is a section of a sixth element according the invention,

Fig. 1 G is a section of a seventh element according the invention, and where

Fig. 1 H is a section of an element with an inner or outer surface cover.

In fig. 1A is shown a first embodiment where V shaped profile parts 1a have been connected and attached between an outer and an inner wall A and B resp. to form a surface delimited element. In this embodiment the attachment between the profile parts 1a takes place via the wall C here in the form of an angled profiled sheet. The cell element B is formed between the profile parts.

In fig. 1 B L-formed profile parts 1b is shown being internally connected without the use of an inner wall, i.e. the profile are connected directly through welding. In this connection it shall be said that the L formed profile parts 1b have different heights and that elements with higher heights are connected with an element having a lower height. In this way an angle profiled inner surface is obtained.

In fig 1 C is shown how U- shaped profile parts 1c are connected and attached between an outer and an inner wall A and C respectively. Here the profile parts 1c are not interconnected but are attached only to the outer and inner walls and forming a space between them constituting the cell element B.

In fig. 1D an example of an extruded profile part 1d is shown which part having eight channels/openings surrounded of a homogenous material. These channels/openings are forming the cell element B. Several profile parts 1D are connected to form a profile element of a desired size.

By extruding the profile part 1d of aluminium light construction elements are created the completing properties of which to a great extent depend on the materials being filled into the cell elements.

In fig. 1E profile parts 1e with a double S-shape are shown and which are connected both internally and between an outer and an inner wall. The internal connection can be by welding. This construction will give a very strong and resilient construction element by itself, i.e. without filling the cell element B. If these cell elements B are filled with an expanded material both strength and insulation properties are enhanced.

In fig. 1F are shown outer and inner U shaped profile parts 1f being connected using interlaying hollow joist elements D having a rectangular cross section. From this cell modules with different cell elements are made where the interconnected joist elements D at the same time forming distance means. It can be noticed here that the outer and the inner profile parts 1f are shown directed towards opposite directions, i.e. with their openings outwards and inwards respectively. The internal connection can also here take place by welding.

In fig. 1G two types of profile parts 1g₁ and 1g₂ are shown where the outer profile parts 1g₁ are attached to a plate and where the inner profile parts 1g₂ at the same time having an outer angle iron in such a way that the surface will not be smooth.

In fig. 1 H profile parts 1h having a bent cross section which has been connected both internally and against a wall. The cell elements being formed hereby will also have a bent cross section. This embodiment will give a bigger adjacent surface between the cell elements. The internal connection will take place by welding. In this shape of the construction element the cell elements are created by the angle profiles of metal which also may act as enforcement in the case the cell elements are filled with concrete.

Thus in the above different embodiments of cell elements are shown and created which in one hand can be empty or filled with cellular plastic materials, leca, super hard ceramic balls, expanded polyurethane, rock wool, glass wool, concrete, fibre concrete, foamed concrete or foamed aluminium. The walls can be plates of gypsum, plywood, steel plates (profiled or smooth), sheets of aluminium or wooden plates. In all the above described embodiments the inside and the outside can alter positions. When there is a need to have a smooth outside this will be possible according to the invention without losing the properties of the enforced surface delimited element.

The invention shall not be restricted to the above shown embodiments but modifications may be done within the scope of the following claims.

CLAIMS

1. Method of producing an enforced composite surface delimited element such as a wall, a ceiling or a roof, **characterized in** that profile elements, preferably of metal and having a length within the interval 200 – 250 cm, a width within the interval 15 – 35 cm, and a depth within the interval 18 – 40 cm are connected side by side constituting cell modules having passing through cell elements, that a substance or a material is added to said modules to bring completing properties to said construction element and that said cell modules are provided with an inner and/or outer completely covering layer at the same time adding strength to said surface delimited element.
2. Surface delimited element of metal or a composite material for e.g. a container, i.e. a surface delimited element such as a wall, a door, a ceiling or a roof, and manufactured according to the method in claim 1, **characterized in** a series of cell modules constituting of profile elements forming intermediate cells, wherein each cell module has a width of at least 30 cm and a depth of at least 18 cm and which cell modules are internally attached to perform said surface delimited element, wherein material bridges forming part of the profile elements is of metal or of some other material and to its extension corresponding to the depth of the elements and extending essentially normal to the front side of the elements towards the back or inside of said elements.
3. Element according to claim 2, **characterized in** that the profile elements have a V-, a U-, a L-, or a S-shape.
4. Element according to claim 2, **characterized in** that the profile elements are extruded and constitute a hollow profile joist.
5. Element according to claim 2, **characterized in** that the cells formed between the profile elements are filled with one or several materials, such as cellular plastic, leca balls, cermets balls, foamed polyurethane, rock wool, glass wool, concrete, foamed concrete and/or foamed aluminium.
6. Element according to claim 2, **characterized in** that the inner or outer side of the element is a gypsum layer, plywood, a steel or aluminium plate, and/or a wooden panel.
7. Element according to claim 2, **characterized in** that the outer side of the element has longitudinal ribs being formed by the end side of the profile elements and diverting a stress being directed towards said elements.

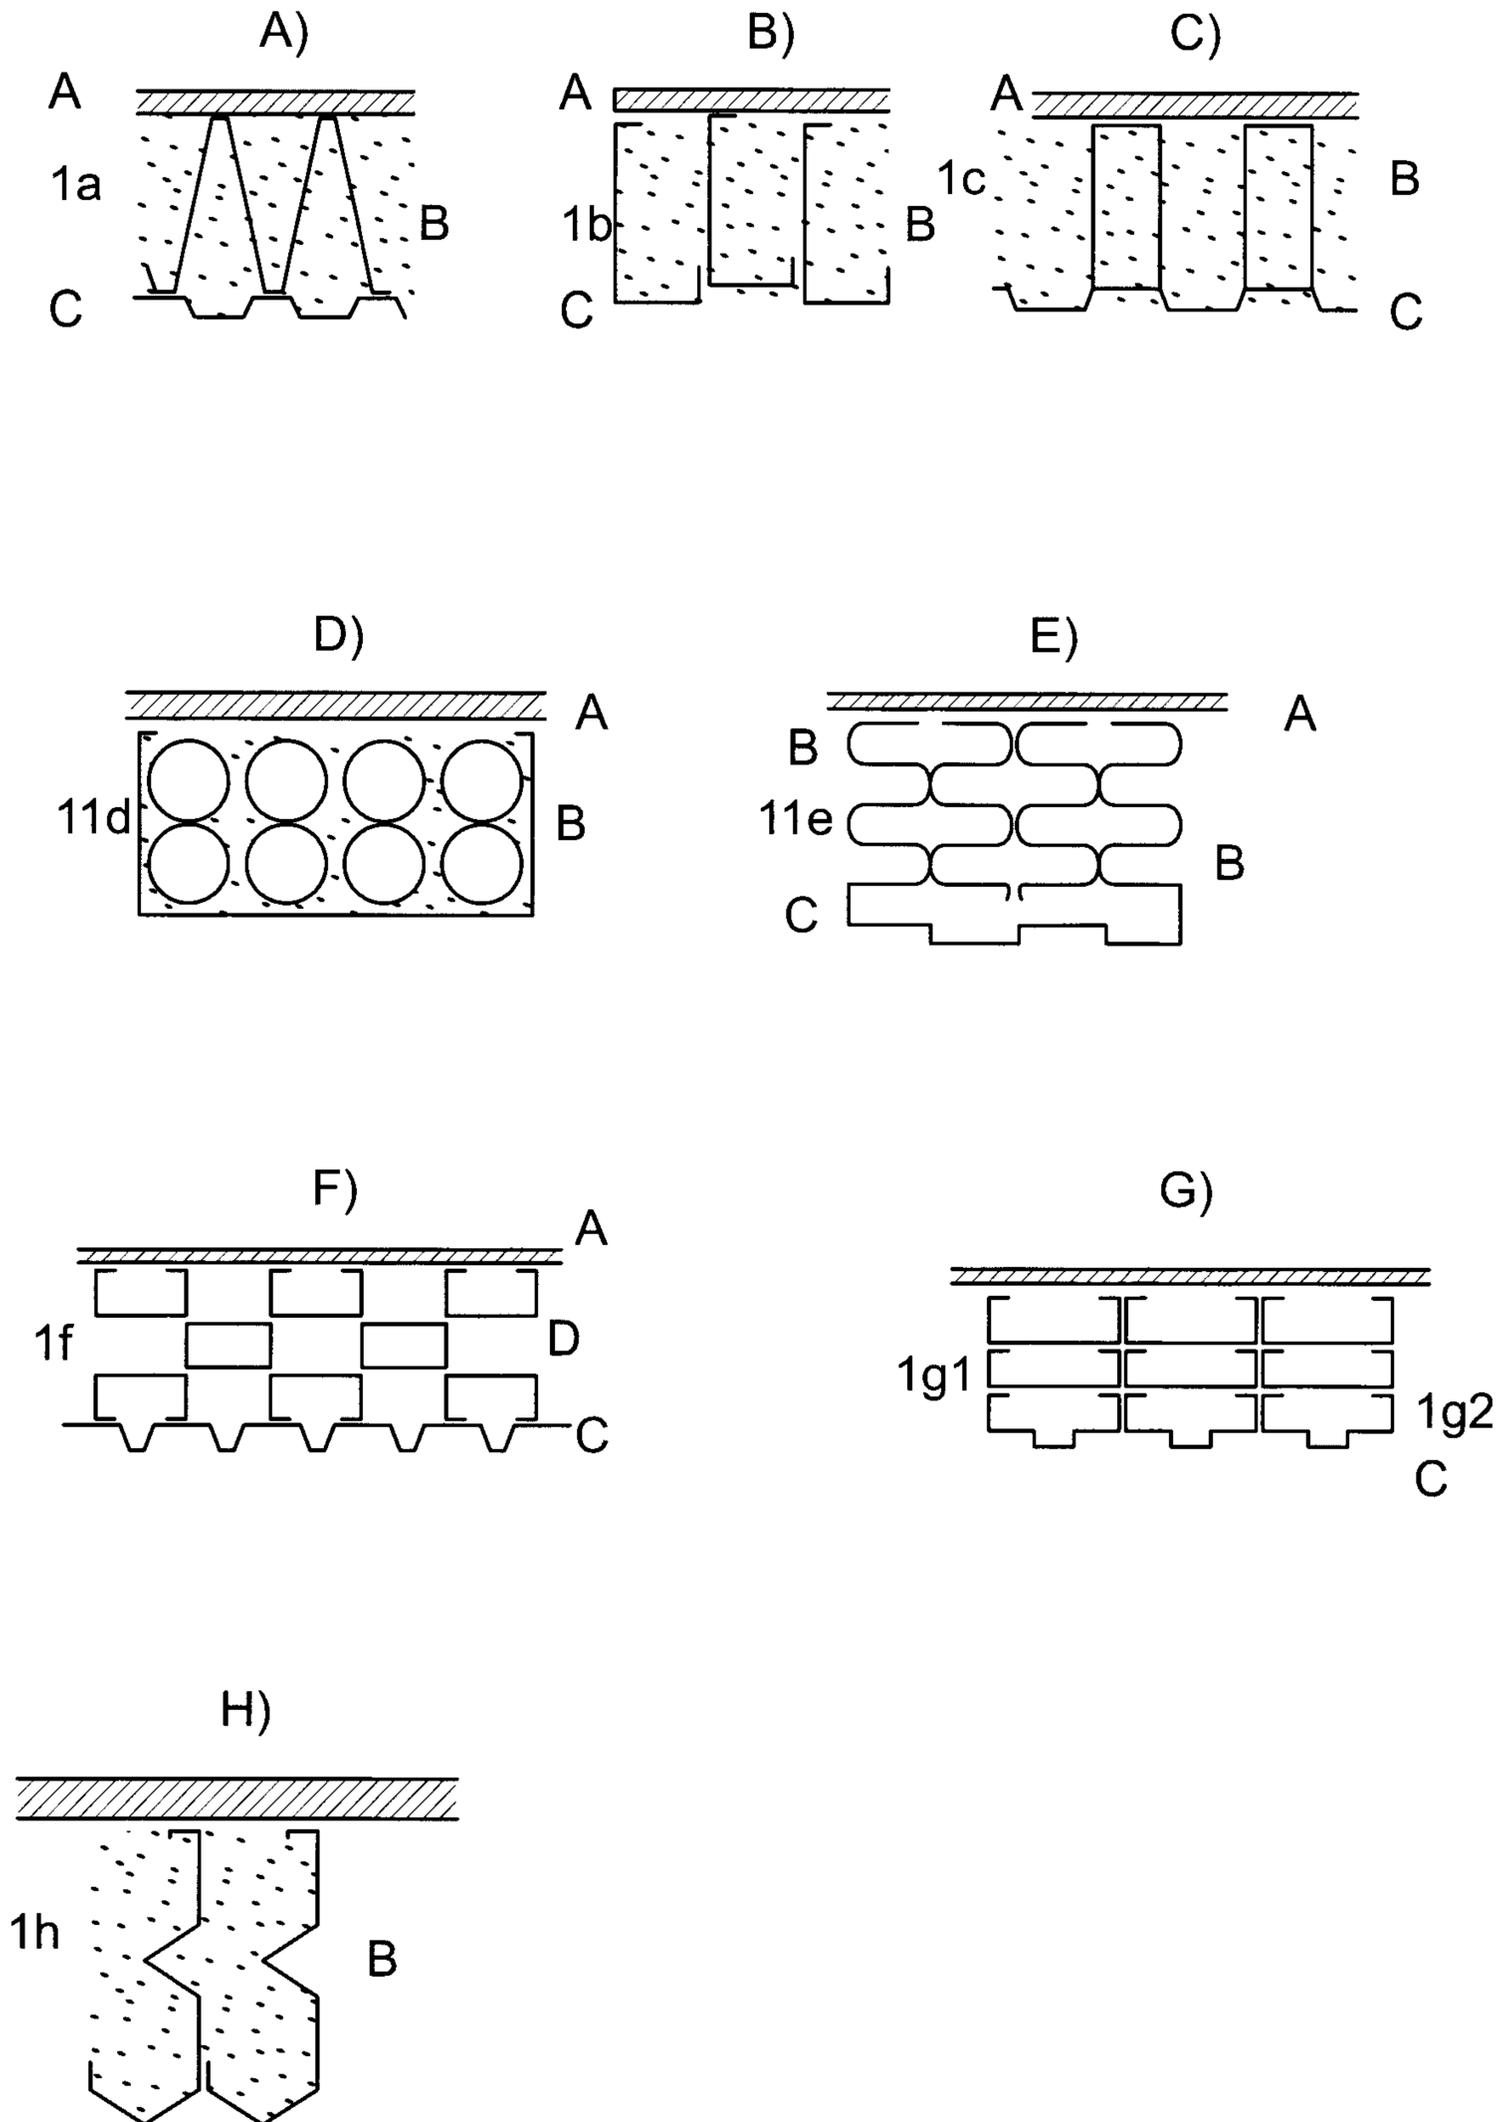


Fig. 1

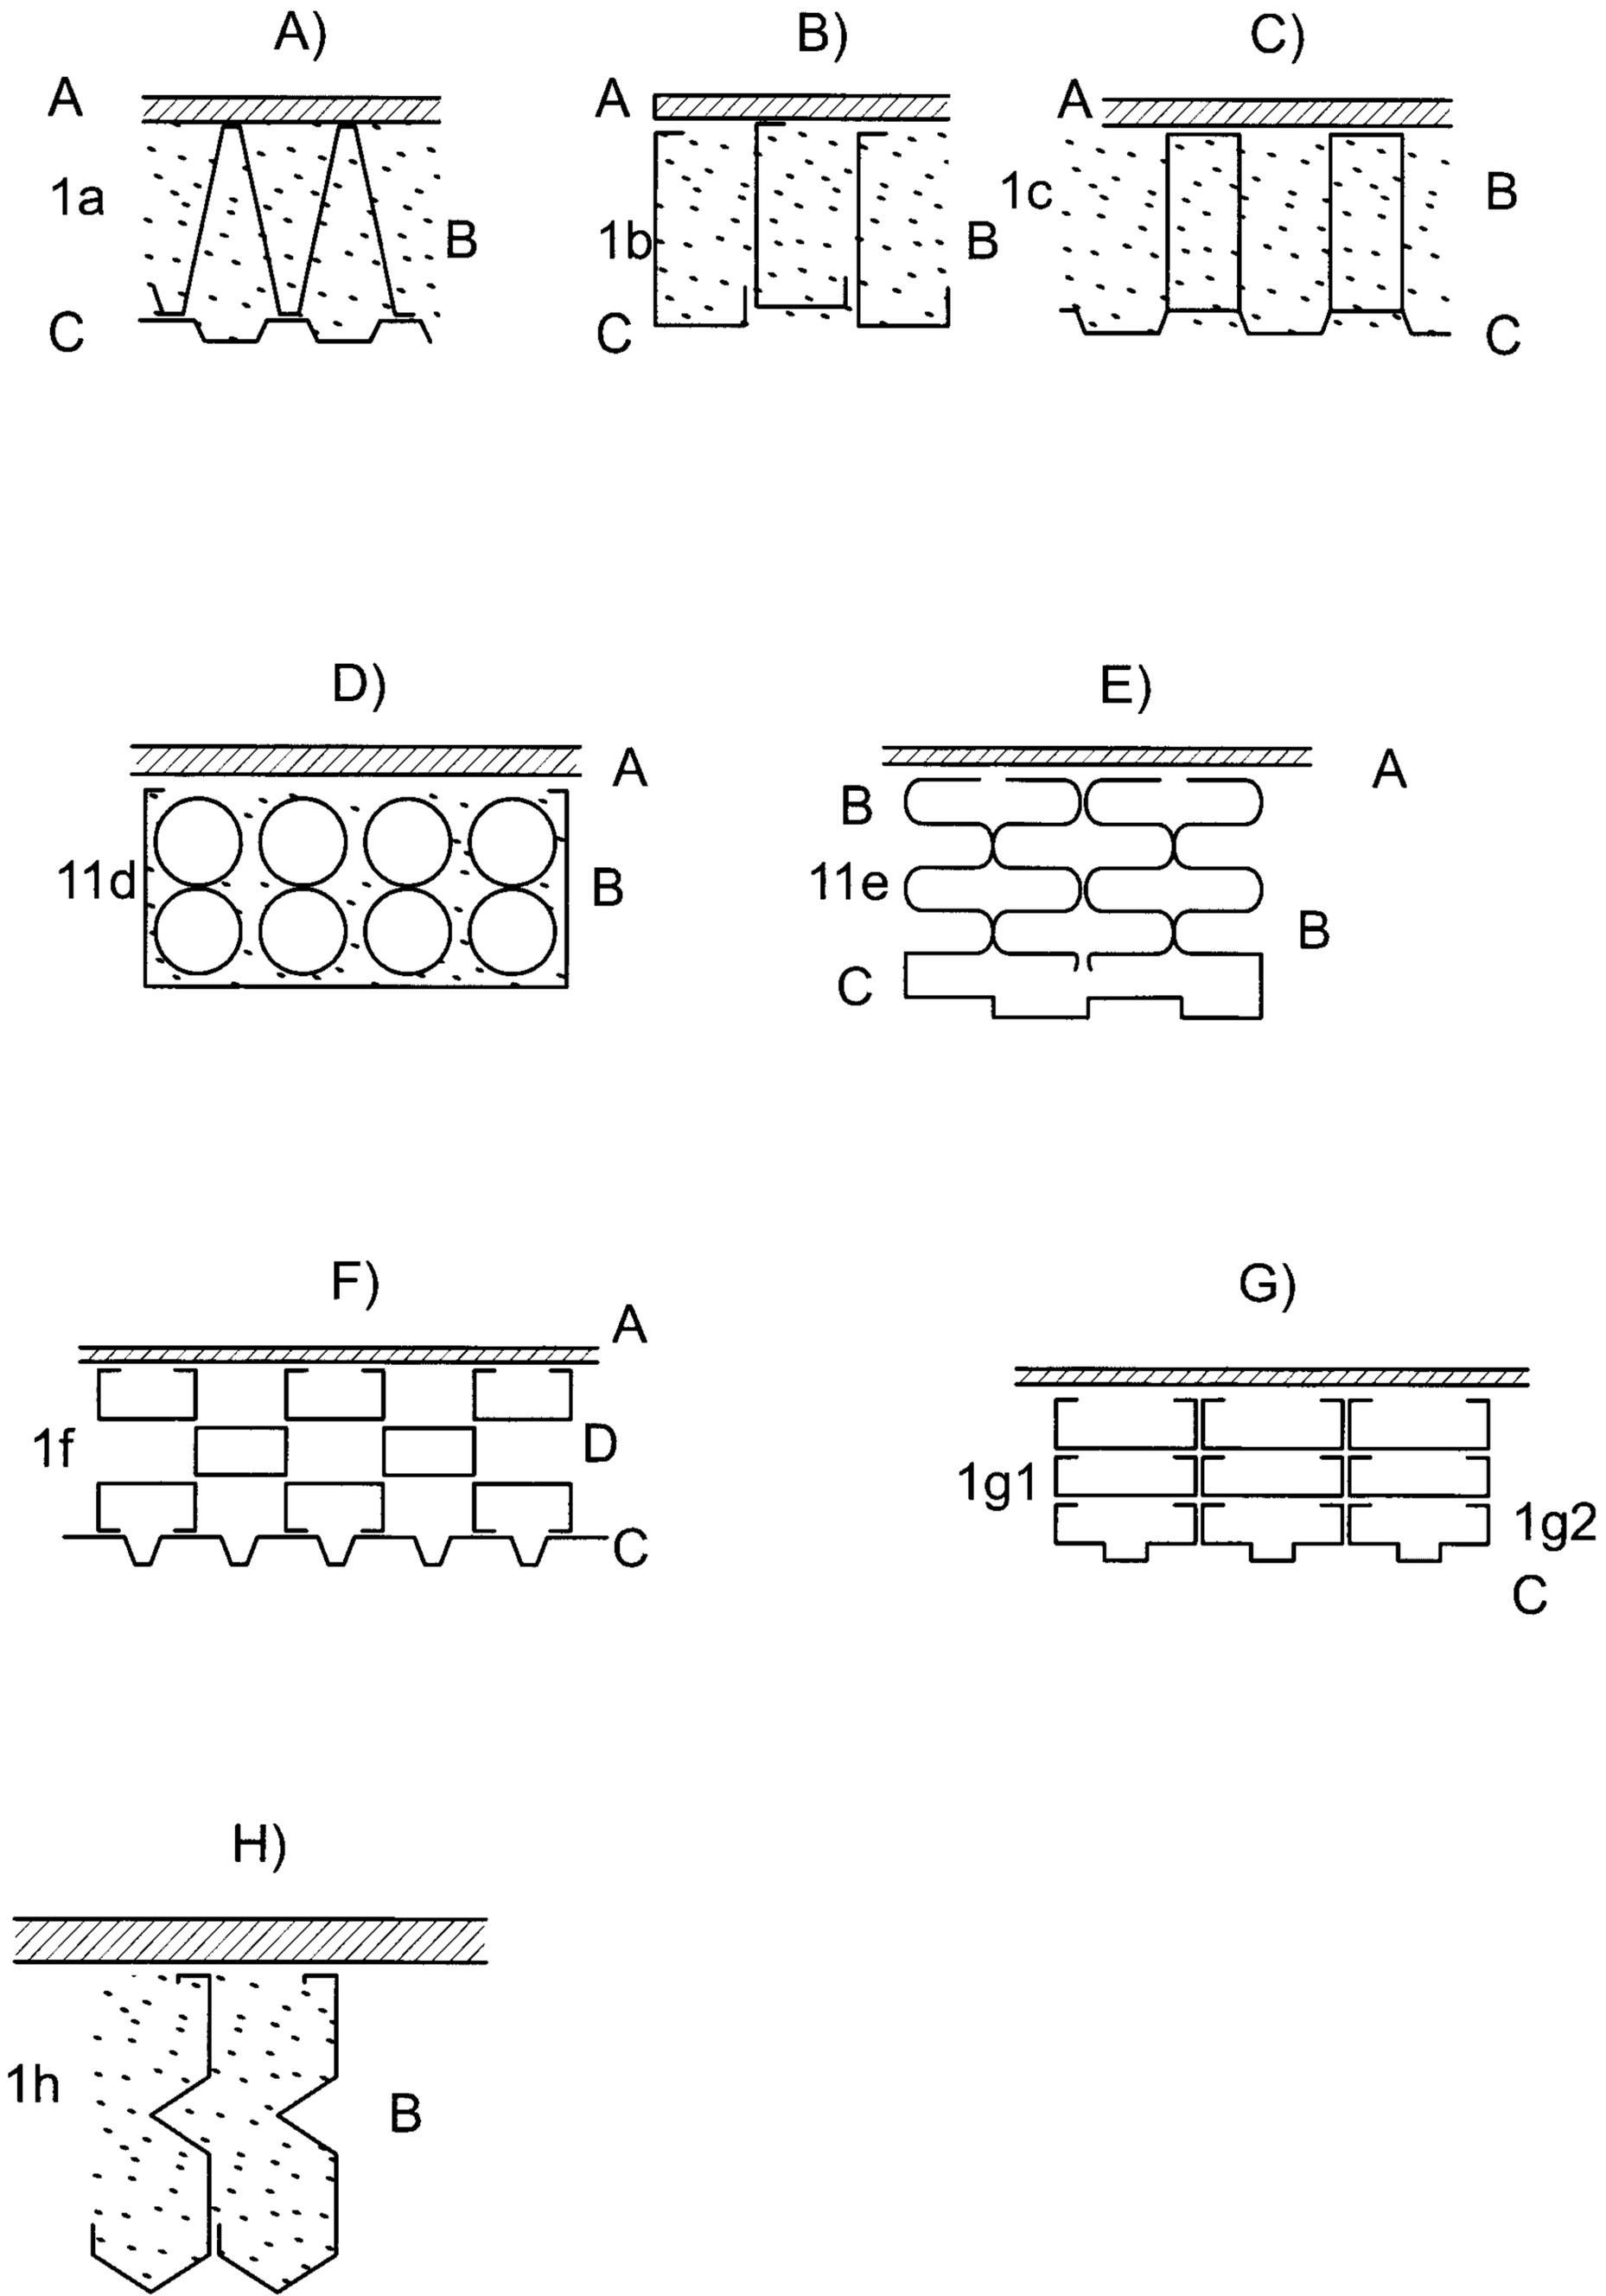


Fig. 1