



US00RE47697E

(19) **United States**
(12) **Reissued Patent**
Masarwa

(10) **Patent Number:** **US RE47,697 E**
(45) **Date of Reissued Patent:** **Nov. 5, 2019**

- (54) **IRRIGATION PIPE**
- (71) Applicant: **Netafim, Ltd.**, Tel Aviv (IL)
- (72) Inventor: **Abed Masarwa**, Taibe (IL)
- (73) Assignee: **Netafim, Ltd**, Tel Aviv (IL)
- (21) Appl. No.: **15/642,464**
- (22) Filed: **Jul. 6, 2017**

3,490,791 A	1/1970	Mitchell	
3,777,987 A *	12/1973	Allport	A01G 25/06 239/542
3,850,203 A	11/1974	Shobert	138/125
3,858,618 A	1/1975	Kaufman	138/149
3,863,960 A	2/1975	Andersson	
4,000,620 A	1/1977	Burge	
4,139,159 A *	2/1979	Inoue	A01C 23/04 156/252
4,190,206 A *	2/1980	Atkinson et al.	239/271
4,228,824 A *	10/1980	Evans et al.	138/119

(Continued)

Related U.S. Patent Documents

Reissue of:

- (64) Patent No.: **7,886,775**
- Issued: **Feb. 15, 2011**
- Appl. No.: **11/783,608**
- Filed: **Apr. 10, 2007**

FOREIGN PATENT DOCUMENTS

AU	14194	5/1969
DE	26 26 217	12/1977

(Continued)

OTHER PUBLICATIONS

K. Berns et al., "Six-legged Robot Actuated by Fluidic Muscles." Computer Science Research Center, Karlsruhe, Germany.

(Continued)

Primary Examiner — Glenn K Dawson

(74) *Attorney, Agent, or Firm* — Womble Bone Dickinson (US) LLP

- (51) **Int. Cl.**
F16L 11/00 (2006.01)
F16L 11/02 (2006.01)
B05B 1/20 (2006.01)
E03B 1/00 (2006.01)
- (52) **U.S. Cl.**
CPC **F16L 11/02** (2013.01); **B05B 1/20** (2013.01); **E03B 1/00** (2013.01)

- (58) **Field of Classification Search**
None
See application file for complete search history.

(57) **ABSTRACT**



An irrigation pipe formed from a sheet that is rolled into a tube about a longitudinal axis of the sheet. The pipe has a watertight layer and a fabric layer. The fabric layer comprises a first fiber arrangement including first main fibers having a first orientation and a second fiber arrangement including second main fibers having a second orientation. The first and second orientations are transverse relative to each other and to the longitudinal axis when viewed in the sheet before it is rolled.

53 Claims, 5 Drawing Sheets

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,143,351 A	6/1915	Benson	
1,741,491 A *	12/1929	Ansell	B29D 23/001 138/126
2,595,408 A	5/1952	Quest	
2,763,991 A	9/1956	Kennon	
2,776,169 A	1/1957	Aschenbrenner	

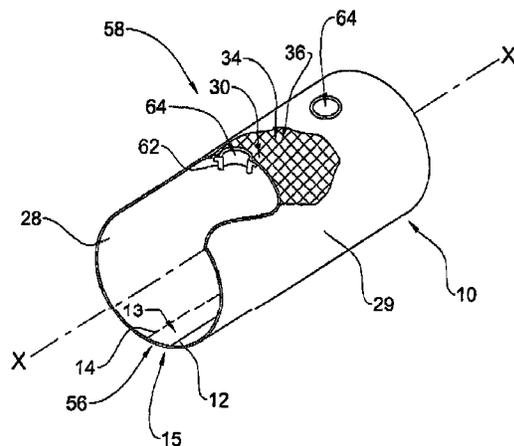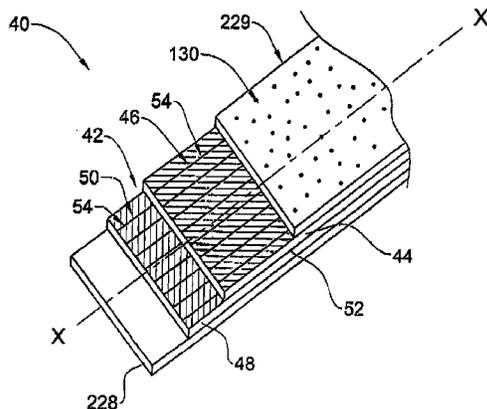

(56)

References Cited

U.S. PATENT DOCUMENTS

4,308,896 A 1/1982 Davis 138/126
 4,577,997 A * 3/1986 Lehto A01G 25/06
 4,626,130 A * 12/1986 Chapin A01G 25/02
 4,684,556 A * 8/1987 Ohtsuga B29C 63/0021
 4,718,608 A * 1/1988 Mehoudar 239/542
 4,948,295 A 8/1990 Pramsoler 239/542
 4,989,643 A * 2/1991 Walton F16L 11/085
 5,271,433 A * 12/1993 Schwert F16L 55/1656
 5,560,654 A * 10/1996 Cobb, Jr. F16L 11/12
 6,045,884 A * 4/2000 Hess et al. 428/36.1
 6,065,321 A 5/2000 Kosch et al.
 6,217,975 B1 4/2001 Daton-Lovett
 6,508,276 B2 * 1/2003 Radlinger F16L 11/02
 6,588,456 B2 * 7/2003 Jeong B29C 53/50
 6,779,563 B2 * 8/2004 Schwert D04C 1/02
 6,932,116 B2 * 8/2005 Smith F16L 55/1651
 7,588,201 B2 * 9/2009 Masarwa A01G 25/02
 8,672,240 B2 * 3/2014 Masarwa A01G 25/02
 2002/0104902 A1 8/2002 Eckstein et al. 138/124

2003/0201345 A1 * 10/2003 Jeong 239/542
 2004/0037647 A1 * 2/2004 Yonat A01G 25/06
 2005/0109414 A1 * 5/2005 Jeong 138/123
 2005/0194469 A1 9/2005 Masarwa et al. A01G 25/02
 2006/0103131 A1 5/2006 Masarwa et al. A01G 25/02
 2006/0281379 A1 12/2006 Haas et al. 442/36
 2007/0074776 A1 * 4/2007 Masarwa et al. F16L 9/17
 2007/0277893 A1 12/2007 Belford A01G 25/023
 2013/0312862 A1 * 11/2013 Kalman B32B 1/08
 2016/0010785 A1 * 1/2016 Arnold F16L 55/175

FOREIGN PATENT DOCUMENTS

EP 0 284 570 A1 9/1988
 FR 2027029 A1 9/1970
 FR 2551834 A1 3/1985
 GB 1 326 037 8/1973
 GB 2187622 A 9/1987
 IT 191399 10/1985
 KR 10-0317060 1/2002
 KR 20-2002-0009419 3/2002

OTHER PUBLICATIONS

International Search Report No. PCT/IL2008/000271, dated Sep. 17, 2008.

* cited by examiner

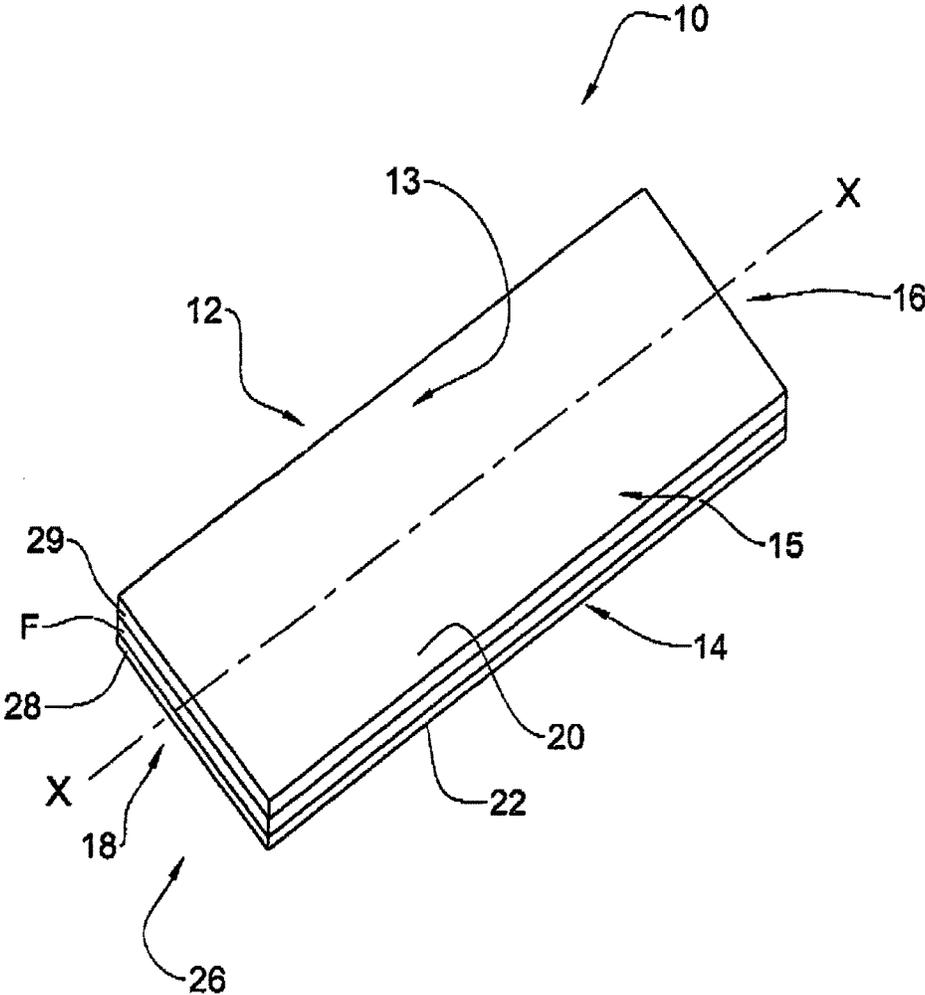


FIG. 1

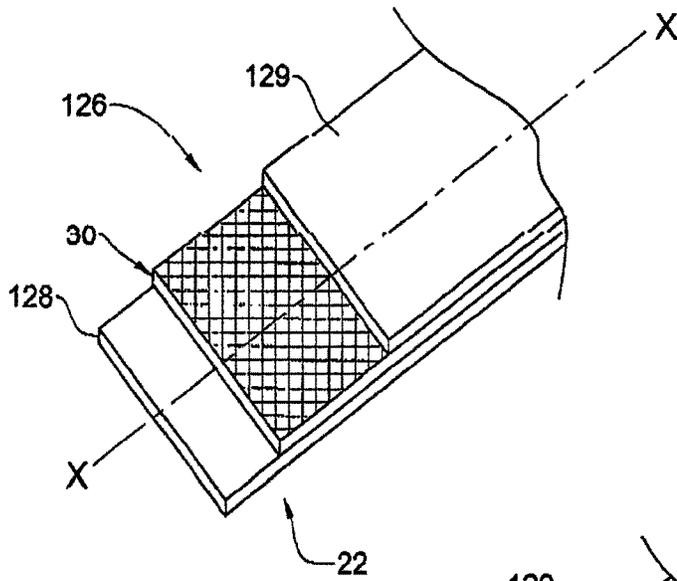


FIG. 2A

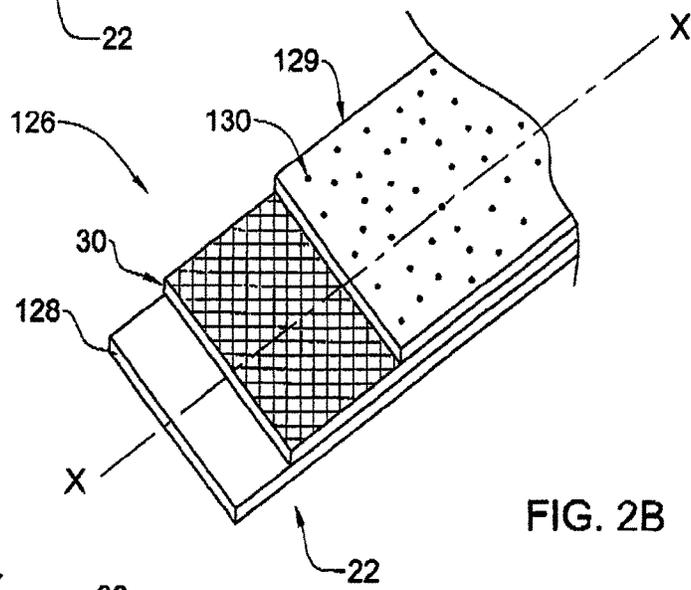


FIG. 2B

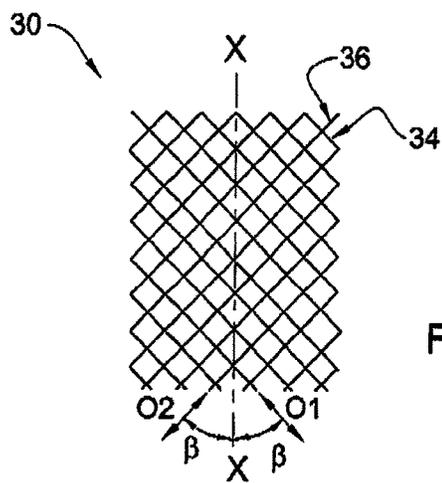
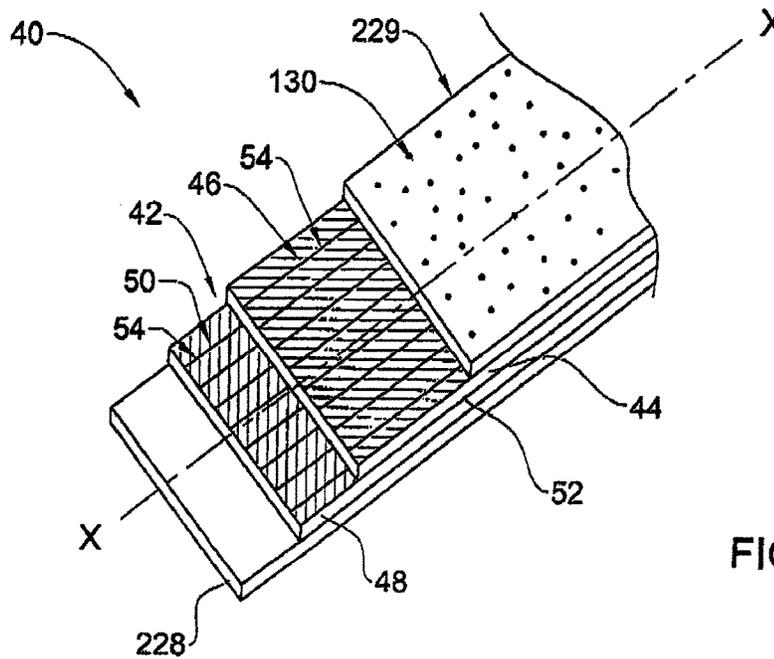
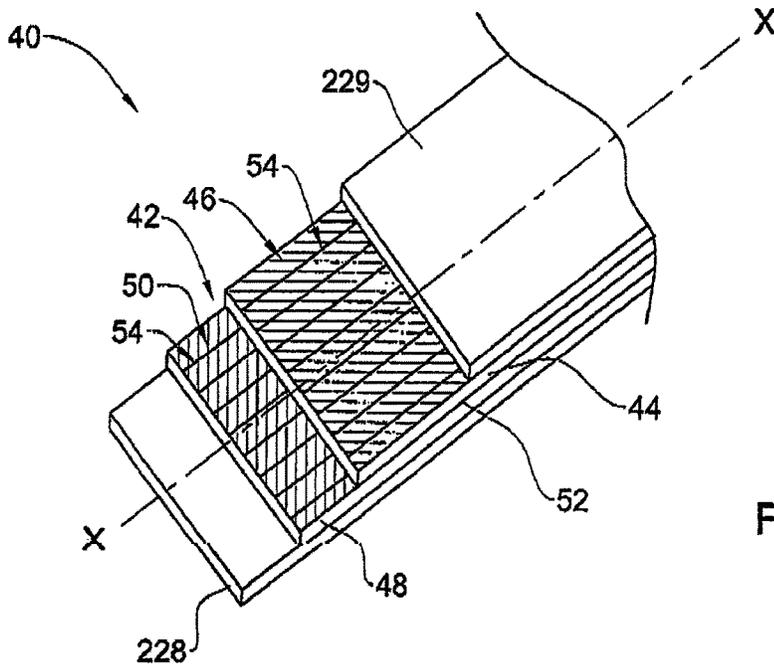


FIG. 3



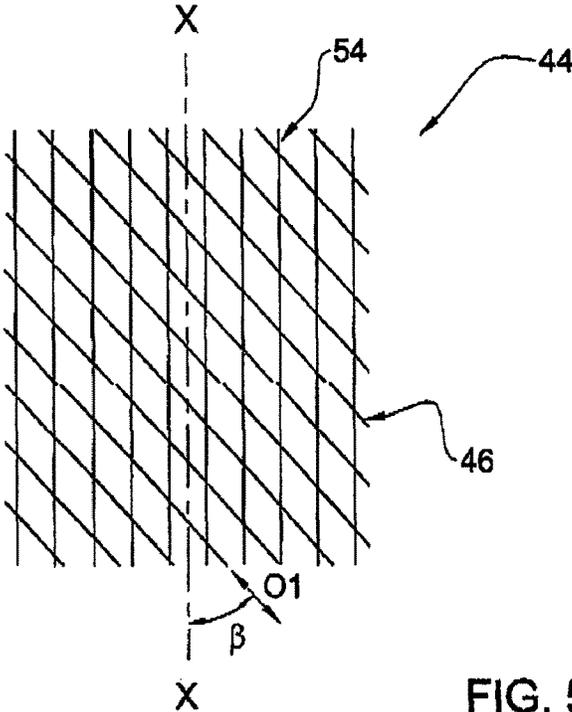


FIG. 5

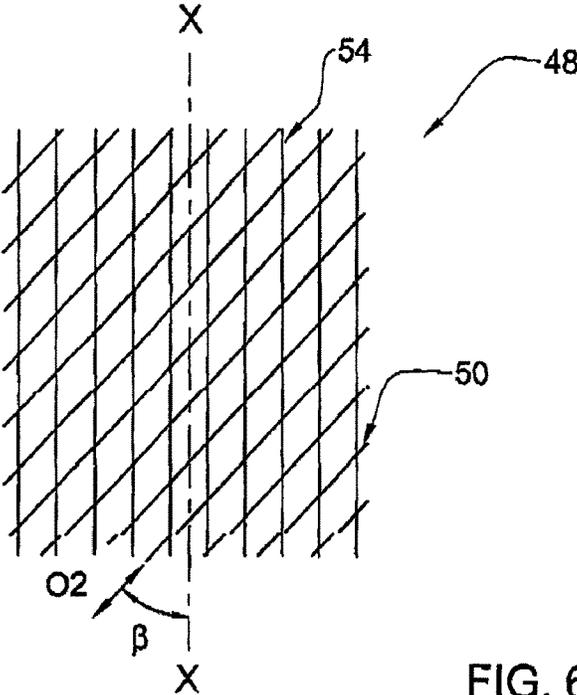


FIG. 6

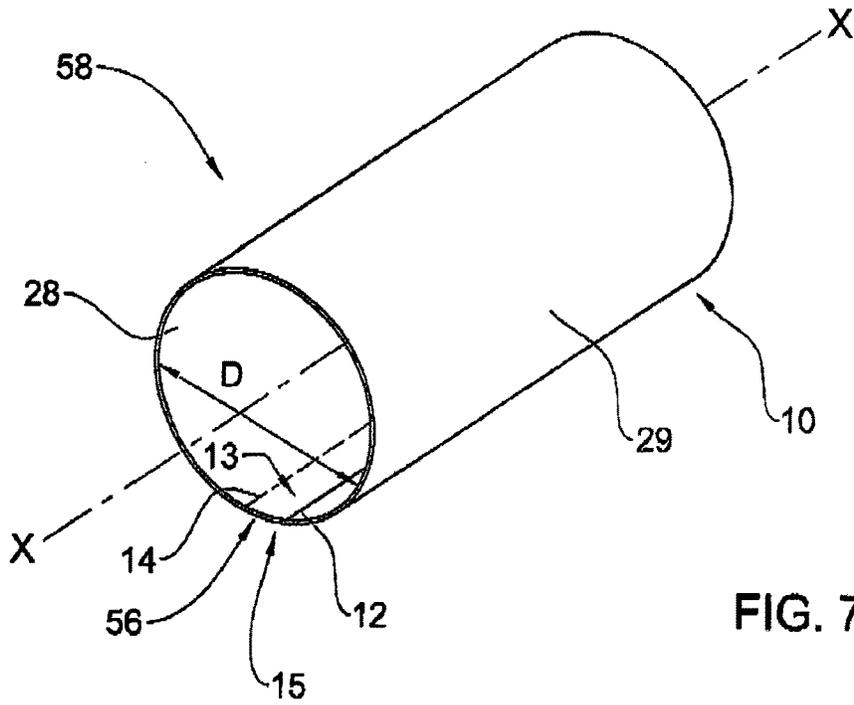


FIG. 7

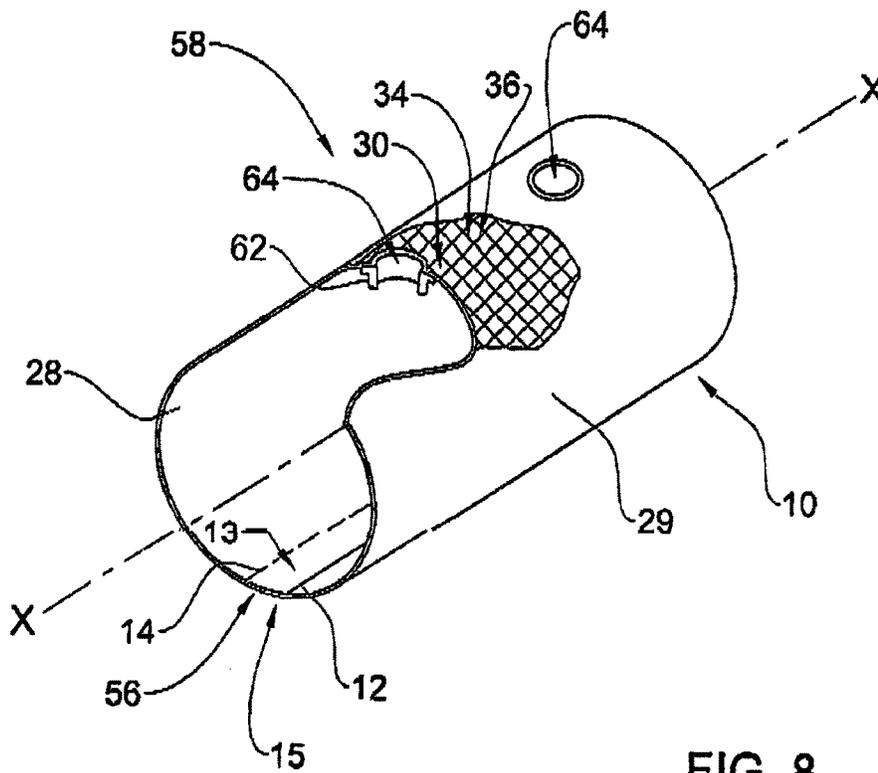


FIG. 8

IRRIGATION PIPE

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue; a claim printed with strikethrough indicates that the claim was canceled, disclaimed, or held invalid by a prior post-patent action or proceeding.

FIELD OF THE INVENTION

This invention relates to an irrigation pipe, and more specifically to multilayer irrigation pipes comprising at least a water-tight layer and a fabric layer.

BACKGROUND OF THE INVENTION

Multilayer pipes having fabric layers are known to be used in irrigation systems. Such layers are known to be formed, for example, by braiding fibers in a tubular form or by weaving fibers to form a substantially flat sheet having two opposite longitudinal ends and bending the sheet into a tubular form and bonding the opposite longitudinal ends to each other. In the latter case the fabric layer comprises weft and warp fibers, respectively aligned along the unbent sheet's longitudinal axis and a transverse axis substantially perpendicular thereto.

SUMMARY OF THE INVENTION

During experimentation, inventors of the present invention have found that orientation of the main or structural fibers in a fabric layer of irrigation pipes influence the extent of its elongation along a longitudinal axis thereof due to pressure caused by fluid passing therethrough. Even a small percentage of elongation for a long irrigation pipe may result in a significant elongation length causing detrimental effects to an irrigation system to which such elongated pipe belongs. This is particularly relevant for pipes which are part of a field irrigation system, where it is desired that a pipe remain in a predisposed location in order to provide fluid to designated crops. Additionally, pipe elongation may cause undue pressure on the connection points between the elongated pipe and pipes it is connected to, potentially weakening or causing disengagement thereof. Moreover, elongation of the pipe may result in a snaking or zigzag shape of the pipe at a portion thereof, caused by the frictional interaction of the elongated portion of the pipe with the surface upon which it rests, thereby adversely affecting fluid flow therein.

For the purposes of the specification and the claims, main or structural fibers are defined as the primary load bearing fibers of a fabric layer to which they belong, and therefore constitute the main structural elements thereof. Auxiliary fibers of a fabric layer are defined as fibers primarily designed to hold main fibers with which they are associated in their orientation.

Thus, in accordance with one aspect of the present invention there is provided an irrigation pipe formed from a sheet that is rolled into a tube about a longitudinal axis of the sheet, the sheet comprising a watertight layer and a fabric layer, the fabric layer comprising a first fiber arrangement including first main fibers having a first orientation and a second fiber arrangement including second main fibers having a second orientation, wherein the first and second

orientations are transverse relative to each other and to the longitudinal, axis when viewed in the sheet before it is rolled.

In accordance with another aspect of the present invention there is provided an irrigation pipe formed from a sheet that is rolled into a tube about a longitudinal axis of the sheet, the sheet comprising a watertight layer and a fabric layer, the fabric layer comprising a first fabric sub-layer and a second fabric sub-layer bonded to each other, the first fabric sub-layer having a first fiber arrangement including first main fibers having a first orientation, the second fabric sub-layer having a second fiber arrangement including second main fibers having a second orientation, the first and second orientations being transverse relative to each other and to the longitudinal axis when viewed in the sheet before it is rolled.

In accordance with yet another aspect of the present invention there is provided an irrigation pipe comprising a water tight inner layer, an outer layer and a fabric layer therebetween, the outer layer being formed with gaps that permit passage of fluid therethrough from the fabric layer.

A pipe according to any one of the above aspects of the invention may comprise a plurality of apertures formed therein at locations spaced apart along the longitudinal axis of the pipe.

BRIEF DESCRIPTION OF THE DRAWINGS

In order to understand the invention and to see how it may be carried out in practice, embodiments will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

FIG. 1 is a perspective top view of a multilayer sheet;

FIG. 2A is a schematic exploded view of a layer composition, that may be used in the sheet in FIG. 1, in accordance with one embodiment of the present invention;

FIG. 2B is a schematic exploded view of a layer composition that may be used in the sheet in FIG. 1, in accordance with another embodiment of the present invention;

FIG. 3 is an enlarged schematic top view of a fabric layer of the layer composition shown in FIGS. 2A and 2B;

FIG. 4A is a schematic exploded view of a layer composition including layers and sub-layers that may be used in the sheet shown in FIG. 1, in accordance with yet another embodiment of the present invention;

FIG. 4B is a schematic exploded view of a layer composition including layers and sub-layers that may be used in the sheet shown in FIG. 1, in accordance with even yet another embodiment of the present invention;

FIG. 5 is an enlarged schematic top view of one of fabric sub-layers of the layer composition shown in FIGS. 4A and 4B;

FIG. 6 is an enlarged schematic top view of another one of fabric sub-layers of the layer composition in FIGS. 4A and 4B;

FIG. 7 is a schematic perspective view of the multilayer sheet in FIG. 1, formed to make a pipe; and

FIG. 8 is a schematic perspective view of the pipe shown in FIG. 7, with apertures formed therein and an irrigation element attached thereto at one of the apertures.

DETAILED DESCRIPTION OF EMBODIMENTS

Referring now to the drawings wherein like reference characters designate like or corresponding parts throughout several views, there is shown in FIG. 1, a multilayer sheet generally designated as 10.

The sheet **10** is of a generally rectangular shape in a top view and comprises a first longitudinal edge **12**, a second longitudinal edge **14**, a first lateral edge **16**, a second lateral edge **18**, a top surface **20** extending between the edges (**12,14,16,18**), an opposing bottom surface **22** extending between the edges (**12,14,16,18**) and a central longitudinal axis X. The sheet **10** further comprises a layer composition generally designated as **26**, having a bottom layer **28**, a top layer **29** and a fabric layer designated as F sandwiched therebetween. The bottom layer **28** includes the bottom surface **22** at a bottom end thereof, the top layer includes the top surface **20** at a top end thereof and the longitudinal edges (**12,14,16,18**) extend along the layers (**28, 29, F**) to bound the layer composition at its circumference. A first longitudinal end **13** of the sheet **10** is defined adjacent the first longitudinal edge **12** and a second longitudinal end **15** of the sheet **10** is defined adjacent the second longitudinal edge **14**.

In FIGS. **2A, 2B** and **3**, a first example of a layer composition, generally designated as **126**, that may constitute the layer composition **26** of the multilayer sheet **10**, is shown. The layer composition **126** has a layer **128** constituting the bottom layer **28** of the sheet **10** or a sub-layer thereof, a layer **129** constituting the top layer **29** of the sheet **10** or a sub-layer thereof, and a fabric layer **30** constituting the fabric layer F of the sheet **10** or a sub-layer thereof. The layer **128** is a watertight polymeric layer film or coating which serves to prevent fluid from passing therethrough (FIGS. **2A, 2B**). Layer **128** may be made of materials such as Polyethylene, Polypropylene, COC, TPO, PVC, TPE. Optionally, the polymeric layer **128** is made by Metallocene polymerization.

Layer **129** may be generally similar to layer **128** (FIG. **2A**). Or optionally, layer **129** may include materials such as in layer **128** with the addition of gaps **130** (FIG. **2B**) formed therein, through which the fabric layer **30** may be in fluid breathable communication with the top surface **20** of the sheet **10**. However, as seen in FIG. **2B**, bottom layer **128** is devoid of such gaps.

Referring to FIG. **3**, the fabric layer **30** comprises a first fiber arrangement **34** including first main fibers having a first orientation indicated by the arrow designated as O1, and a second fiber arrangement **36** including second main fibers having a second orientation indicated by the arrow designated as O2. The first and second orientations are transversely orientated to each other and to the longitudinal axis X of the sheet **10** when viewed in the sheet before it is rolled into a pipe. The main fibers are made of a polyolefin or a polyolefin composition and the first and second fiber arrangements (**34, 36**) are optionally inter-woven. Each one of the transversely orientated first and second orientations (O1, O2) forms an acute bias angle β with the longitudinal axis X when measured in the sheet before it is rolled into a pipe. Optionally, the bias angle β is between 20° and 70° and preferably between 45° and 65° . It is noted that polyolefin is a relatively cheap material which may be easily recycled.

In FIGS. **4A, 4B, 5** and **6**, a further example of a layer composition, generally designated as **40**, that may constitute the layer composition **26** of the multilayer sheet **10**, is shown. The layer composition **40** is shown to comprise a layer **228** constituting the bottom layer **28** of the sheet **10** or a sub-layer thereof, layer **229** constituting the top layer **29** of the sheet **10** or a sub-layer thereof, and a fabric layer **42** constituting the fabric layer F of the sheet **10** or a sub-layer thereof.

The layer **228** is a water-tight polymeric layer film or coating which serves to prevent fluid from passing through (FIGS. **4A, 4B**). Layer **228** may be made of mate-

rials such as Polyethylene, Polypropylene, COC, TPO, PVC, TPE. Optionally, the polymeric layer **228** is made by Metallocene polymerization.

Layer **229** may be generally similar to layer **228** (FIG. **4A**). Or optionally, layer **229** may include materials such as in layer **228** with the addition of gaps **130** (FIG. **4B**) formed therein, through which the fabric layer **42** may be in fluid breathable communication with the top surface **20** of the sheet **10**.

The fabric layer **42** comprises a first fabric sub-layer **44** (FIG. **5**) having a first fiber arrangement **46**, and a second fabric sub-layer **48** (FIG. **6**) having a second fiber arrangement **50**. The first fiber arrangement **46** comprises first main fibers in a first orientation, indicated by the arrow designated as O1. The second fiber arrangement **50** comprises second main fibers in a second orientation indicated by the arrow designated as O2. The main fibers are made of a polyolefin or a polyolefin composition and the first and second fabric sub-layers (**44, 48**) are bonded to each other. Optionally, a layer **52** is located between the first and second fabric sub-layers (**44, 48**) to form the bonding. Layer **52** may be made of materials such as in layer **228**.

As seen in FIGS. **5** and **6**, each one of the transversely orientated first and second orientations (O1, O2) forms an acute bias angle β with the longitudinal axis X when measured in the sheet before it is rolled into a pipe. And in each fabric sub-layer **44, 48**, all fibers that are transverse to the longitudinal axis X have the same orientation. Thus, in the first fabric sub-layer **44**, all fibers that are transverse to the longitudinal axis X have the same first orientation O1. Similarly, in the second fabric sub-layer **48**, all fibers that are transverse to the longitudinal axis X have the same second orientation O2. Optionally, the bias angle β is between 20° and 70° and preferably between 45° and 65° . In addition it is seen that both the first and second fabric sub-layers (**44, 48**) optionally comprise a plurality of auxiliary longitudinal fibers **54** made of a polyolefin. These fibers **54** function, inter alia, to respectively hold the first and second main fibers in their orientations in the sheet **10** during production of the sheet **10**.

Attention is drawn to FIG. **7**. Regardless of whether the sheet **10** comprises the layer composition **126** or **40**, to form a pipe **58** the sheet **10** is bent, rolled or folded about the axis X into a tubular form, having a diameter D such that the bottom layer **28** constitutes an inner layer thereof and the top layer **29** constitutes an outer layer thereof. A water-tight seam **56** of the pipe **58** is formed by overlapping and bonding at least portions of the first and second longitudinal ends **13, 15** of the sheet **10**. Optionally, the seam **56** of the pipe **58** is formed by bonding the first longitudinal edge **12** to the second longitudinal edge **14** (not shown).

It is noted that that in the pipe **58**, the seam **56** forms a support for each main, fiber at both its ends (**12, 14**) which increases the load bearing ability of each main fiber. Additionally it is noted that the pipe **58** is of a lay-flat type which when not in use under fluid pressure and/or when rolled on a reel may have a shape of a generally flat strip (not shown).

By way of an example, in an irrigation pipe **58** having either one of the layer compositions **126** or **40**, optionally, the material of the inner layer **28** includes Low Density Polyethylene (LDPE), the material of the outer layer **29** includes Low Density Polyethylene (LDPE), High density Polyethylene (HDPE) and COC and the material of the fibers of the fabric layer F includes Linear Low Density Polyethylene (LLDPE) and High density Polyethylene

5

(HDPE). The irrigation pipe **58** may have a diameter of 410 mm $\geq D \geq 8$ mm and may hold an internal fluid pressure in the pipe of up to 7 bars.

The inventors performed studies of the efficiency of a pipe in accordance with the example noted above at different diameters and at different internal fluid pressures. The studies show that per unit length, a pipe **58** having an angle β of substantially 55° (i.e. $55^\circ \pm 2^\circ$) exhibits less axial elongation in relation to a similar pipe with an angle β other than substantially 55° . However, in some embodiments β has a value less than or equal to 70° . In some embodiments, β has a value greater than or equal to 20° . In some embodiments, β has a value greater than or equal to 20° and less than or equal to 70° . In some embodiments β has a value less than or equal to 65° . In some embodiments, β has a value greater than or equal to 45° . In some embodiments, β has a value greater than or equal to 45° and less than or equal to 65° .

Attention is now drawn to the FIG. 8. In this figure, the pipe **58** comprises the layer composition **126** and a portion of the fabric layer **30** is shown. The pipe **58** may have apertures **64** formed at longitudinally spaced apart locations along the sheet **10**, and may have connectors **62** attached to the pipe adjacent these apertures. Each aperture **61** opens out to the top surface **20** and to the bottom surface **22** of the sheet **10**.

As seen, each main fiber (**34**, **36**), due to its biased angle β in relation to the axis X, may be cut by the apertures **64** not more than once as opposed to a pipe having main fibers extending, inter alia, axially along the axis X (not shown) wherein the axial main fibers in the vicinity of the apertures may be cut several times. As a result, a pipe **58** with apertures **64** and main fibers at a biased angle β will incur less damage to its load bearing ability than a pipe having main fibers extending, inter alia, along the axis X.

Notably, the pipe **58** may have any number of irrigation elements attached thereto, for example, drip emitters, sprinklers, anti-rip valves, drippers, or pressure regulators may be installed using any known and appropriate method, such as heat-welding, bonding, molding etc. In addition, the apertures **64** may be small apertures which are appropriate for drip irrigation.

While the inner layer **28** of the pipe **58** is a water-tight layer, the introduction of apertures **64** or irrigation elements as described above may cause openings (not shown) through which fluid may enter the fabric layer (**30**, **42**). The irrigation pipe **58** having the breathable outer layer **129** or **229** will allow such fluid to exit the pipe and not accumulate within the fabric layer (**30**, **42**). This reduces damage that may occur to the sheet **10** of pipe **38** if fluid is remained trapped therein.

Those skilled in the art to which the invention pertains will readily appreciate that numerous changes, variations and modifications can be made without departing from the scope of the invention mutatis mutandis.

The invention claimed is:

1. An irrigation pipe formed from a sheet that is rolled into a tube about a longitudinal axis of the sheet, the sheet comprising a watertight layer and a fabric layer, the fabric layer comprising a first fiber arrangement including first main fibers having a first orientation and a second fiber arrangement including second main fibers having a second orientation, wherein the first and second orientations are transverse relative to each other and to the longitudinal axis when viewed in the sheet before it is rolled wherein:

the fabric layer comprises a first fabric sub-layer and a second fabric sub-layer, the first fabric sub-layer com-

6

prises the first fiber arrangement and the second fabric sub-layer comprises the second fiber arrangement; and the first fabric sub-layer comprises auxiliary fibers extending along the longitudinal axis and the second fabric sub-layer comprises auxiliary fibers extending along the longitudinal axis.

2. An irrigation pipe according to claim 1, wherein the fibers are made of a polyolefin.

3. An irrigation pipe according to claim 1, wherein the pipe is a lay flat pipe.

4. An irrigation pipe according to claim 1, wherein the first and second fiber arrangements are inter-woven.

5. An irrigation pipe according to claim 1, wherein the first and second orientations each form an acute angle β in relation to the longitudinal axis when measured in the sheet before it is rolled.

6. An irrigation pipe according to claim 5, wherein β has a value less than or equal to 70° .

7. An irrigation pipe according to claim 5, wherein β has a value greater than or equal to 20° .

8. An irrigation pipe according to claim 6, wherein β has a value greater than or equal to 20° .

9. An irrigation pipe according to claim 5, wherein β has a value less than or equal to 65° .

10. An irrigation pipe according to claim 5, wherein β has a value greater than or equal to 45° .

11. An irrigation pipe according to claim 9, wherein β has a value greater than or equal to 45° .

12. An irrigation pipe according to claim 5, wherein β has a value substantially equal to 55° .

13. An irrigation pipe according to claim 1, wherein the sheet is formed with at least one aperture and an irrigation element is attached to the sheet at the at least one aperture.

14. An irrigation pipe formed from a sheet that is rolled into a tube about a longitudinal axis of the sheet, the sheet comprising a watertight layer and a fabric layer, the fabric layer comprising a first fabric sub-layer and a second fabric sub-layer attached to each other, the first fabric sub-layer having a first fiber arrangement comprising first main fibers having a first orientation, the second fabric sub-layer having a second fiber arrangement comprising second main fibers having a second orientation, the first and second orientations being transverse relative to each other and to the longitudinal axis when viewed in the sheet before it is rolled; wherein:

the first fabric sub-layer comprises auxiliary fibers extending along the longitudinal axis; and
the second fabric sub-layer comprises auxiliary fibers extending along the longitudinal axis.

15. An irrigation pipe according to claim 14, wherein the sheet is formed with at least one aperture and an irrigation element is attached to the sheet at the at least one aperture.

16. An irrigation pipe comprising a [water tight] *watertight* inner layer, an outer layer and a fabric layer therebetween, the outer layer being formed with gaps that permit passage of fluid therethrough from the fabric layer, *the watertight inner layer being devoid of gaps.*

17. An irrigation pipe according to claim 16, being formed from a sheet that is rolled into a tube about a longitudinal axis of the sheet, the sheet comprising the inner, outer and fabric layers and at least one aperture that is formed there-through.

18. An irrigation pipe according to claim 16, wherein the outer layer is in the form of a coating on the fabric layer.

19. An irrigation pipe according to claim 16, wherein the fabric layer is made of a material comprising a polyolefin.

20. An irrigation pipe according to claim 16, wherein: the fabric layer comprises a first fabric sub-layer and a second fabric sub-layer attached to each other; the first fabric sub-layer has a first fiber arrangement including first main fibers having a first orientation; the second fabric sub-layer has a second fiber arrangement including second main fibers having a second orientation;

the first and second orientations are transverse relative to each other and to [said] a longitudinal axis of the pipe.

21. An irrigation pipe according to claim 20, further comprising:

a layer located between the first fabric sub-layer and the second fabric sub-layer and bonding the first fabric sub-layer to the second fabric sub-layer.

22. An irrigation pipe according to claim 20, wherein: the first fabric sub-layer comprises auxiliary fibers extending along the longitudinal axis; and the second fabric sub-layer comprises auxiliary fibers extending along the longitudinal axis.

23. An irrigation pipe according to claim 14, further comprising:

a layer located between the first fabric sub-layer and the second fabric sub-layer and bonding the first fabric sub-layer to the second fabric sub-layer.

[24. An irrigation pipe according to claim 14, wherein: the first fabric sub-layer comprises auxiliary fibers extending along the longitudinal axis; and the second fabric sub-layer comprises auxiliary fibers extending along the longitudinal axis.]

25. The irrigation pipe according to claim 14, further comprising an irrigation element attached to an outer surface of the irrigation pipe.

26. The irrigation pipe according to claim 16, further comprising:

a plurality of apertures formed at longitudinally spaced apart locations along the pipe; and connectors attached to the pipe at the apertures.

27. The irrigation pipe according to claim 26, wherein the fabric layer and the outer layer both are made from a material comprising a polyolefin.

28. The irrigation pipe according to claim 27, wherein the fabric layer and the outer layer both include high density polyethylene (HDPE).

29. The irrigation pipe according to claim 26, wherein the outer layer is in the form of a coating on the fabric layer.

30. The irrigation pipe according to claim 26, wherein the pipe is a lay flat pipe.

31. The irrigation pipe according to claim 26, wherein the outer layer is in the form of a coating on the fabric layer.

32. The irrigation pipe according to claim 26, wherein the fabric layer comprises:

first and second fabric sub-layers, and a layer located between, and bonding together, the first and second fabric sub-layers.

33. The irrigation pipe according to claim 26, wherein the pipe is formed from a sheet that is rolled into a tube about a longitudinal axis of the sheet, the sheet comprising the watertight layer, the fabric layer and the outer layer.

34. The irrigation pipe according to claim 33, wherein the irrigation pipe comprises a seam formed by overlapping first and second longitudinal ends of the sheet and bonding at least portions of the longitudinal ends of the sheet.

35. The irrigation pipe according to claim 33, wherein the irrigation pipe comprises a seam formed by bonding a first longitudinal edge of the sheet to a second longitudinal edge of the sheet.

36. The irrigation pipe according to claim 33, wherein: the fabric layer comprises a first fabric sub-layer and a second fabric sub-layer attached to each other, the first fabric sub-layer having a first fiber arrangement comprising first main fibers having a first orientation, the second fabric sub-layer having a second fiber arrangement comprising second main fibers having a second orientation.

37. The irrigation pipe according to claim 36, further comprising:

a layer located between the first fabric sub-layer and the second fabric sub-layer and bonding the first fabric sub-layer to the second fabric sub-layer.

38. The irrigation pipe according to claim 36, wherein the connectors are heat-welded, bonded, or molded to the pipe.

39. An irrigation pipe comprising:

a watertight inner layer, an outer layer and a fabric layer therebetween, the outer layer being formed with gaps that permit passage of fluid therethrough from the fabric layer, the watertight inner layer being devoid of gaps;

a plurality of apertures formed at longitudinally spaced apart locations along the pipe; and

connectors attached to the pipe at the apertures; wherein: the pipe is a lay flat pipe; and

each of the inner, outer and fabric layers is made of a material comprising a polyolefin.

40. The irrigation pipe according to claim 39, wherein the outer layer is in the form of a coating on the fabric layer.

41. The irrigation pipe according to claim 39, wherein the fabric layer comprises:

first and second fabric sub-layers, and

a layer located between, and bonding together, the first and second fabric sub-layers.

42. The irrigation pipe according to claim 39, wherein the connectors are heat-welded, bonded, or molded to the pipe.

43. The irrigation pipe according to claim 39, wherein the connectors are molded to the pipe.

44. An irrigation pipe comprising:

a watertight inner layer, an outer layer and a fabric layer therebetween, the outer layer being formed with gaps that permit passage of fluid therethrough from the fabric layer, the watertight inner layer being devoid of gaps;

a plurality of apertures formed at longitudinally spaced apart locations along the pipe; and

connectors molded to the pipe at the apertures; wherein: the pipe is a lay flat pipe.

45. The irrigation pipe of claim 44, wherein each of the inner, outer and fabric layers is made of a material comprising a polyolefin.

46. The irrigation pipe of claim 44, wherein the outer layer is breathable and configured to allow fluid to exit the pipe and not accumulate within the fabric layer.

47. An irrigation pipe comprising:

a watertight inner layer, an outer layer and a fabric layer therebetween, the outer layer being formed with gaps that permit passage of fluid therethrough from the fabric layer, the watertight inner layer being devoid of gaps; and

irrigation elements attached to the pipe at longitudinally spaced apart locations along the pipe; wherein: the pipe is a lay flat pipe.

48. The irrigation pipe of claim 47, wherein the irrigation elements are heat-welded, bonded, or molded to the pipe.

49. The irrigation pipe of claim 47, wherein each of the inner, outer and fabric layers is made of a material comprising a polyolefin.

50. The irrigation pipe of claim 47, wherein the outer layer is breathable and configured to allow fluid to exit the pipe and not accumulate within the fabric layer.

51. The irrigation pipe of claim 50, further comprising: a plurality of apertures formed at longitudinally spaced apart locations along the pipe; and connectors attached to the pipe at the apertures.

52. An irrigation pipe formed from a sheet that is rolled into a tube about a longitudinal axis of the sheet, the sheet comprising a watertight layer and a fabric layer, the fabric layer comprising a first fabric sub-layer and a second fabric sub-layer attached to each other, the first fabric sub-layer having a first fiber arrangement comprising first main fibers having a first orientation, the second fabric sub-layer having a second fiber arrangement comprising second main fibers

having a second orientation, the first and second orientations being transverse relative to each other and to the longitudinal axis when viewed in the sheet before it is rolled; wherein:

5 in the first fabric sub-layer, all fibers that are transverse to the longitudinal axis have said first orientation; and in the second fabric sub-layer, all fibers that are transverse to the longitudinal axis have said second orientation.

10 53. The irrigation pipe according to claim 52, wherein: the first fabric sub-layer comprises auxiliary fibers extending along the longitudinal axis; and the second fabric sub-layer comprises auxiliary fibers extending along the longitudinal axis.

15 54. The irrigation pipe according to claim 52, further comprising an irrigation element attached to an outer surface of the irrigation pipe.

* * * * *