



(86) Date de dépôt PCT/PCT Filing Date: 2010/01/21
 (87) Date publication PCT/PCT Publication Date: 2010/07/29
 (45) Date de délivrance/Issue Date: 2018/02/27
 (85) Entrée phase nationale/National Entry: 2011/07/04
 (86) N° demande PCT/PCT Application No.: EP 2010/050689
 (87) N° publication PCT/PCT Publication No.: 2010/084156
 (30) Priorité/Priority: 2009/01/21 (LU91 517)


(51) Cl.Int./Int.Cl. *C21B 5/00* (2006.01),
B02C 23/30 (2006.01), *B02C 23/34* (2006.01),
C10B 57/10 (2006.01), *F26B 21/10* (2006.01)

(72) Inventeurs/Inventors:
 GOEDERT, PAUL, LU;
 MAYER, MARKUS, DE;
 STAMATAKIS, GEORGES, LU;
 CAUWENBERGHS, BERNARD, LU

(73) Propriétaire/Owner:
 PAUL WURTH S.A., LU

(74) Agent: GOWLING WLG (CANADA) LLP

(54) Titre : PROCÉDE DE PRODUCTION DE CHARBON PULVERISE
 (54) Title: METHOD FOR PRODUCING PULVERIZED COAL

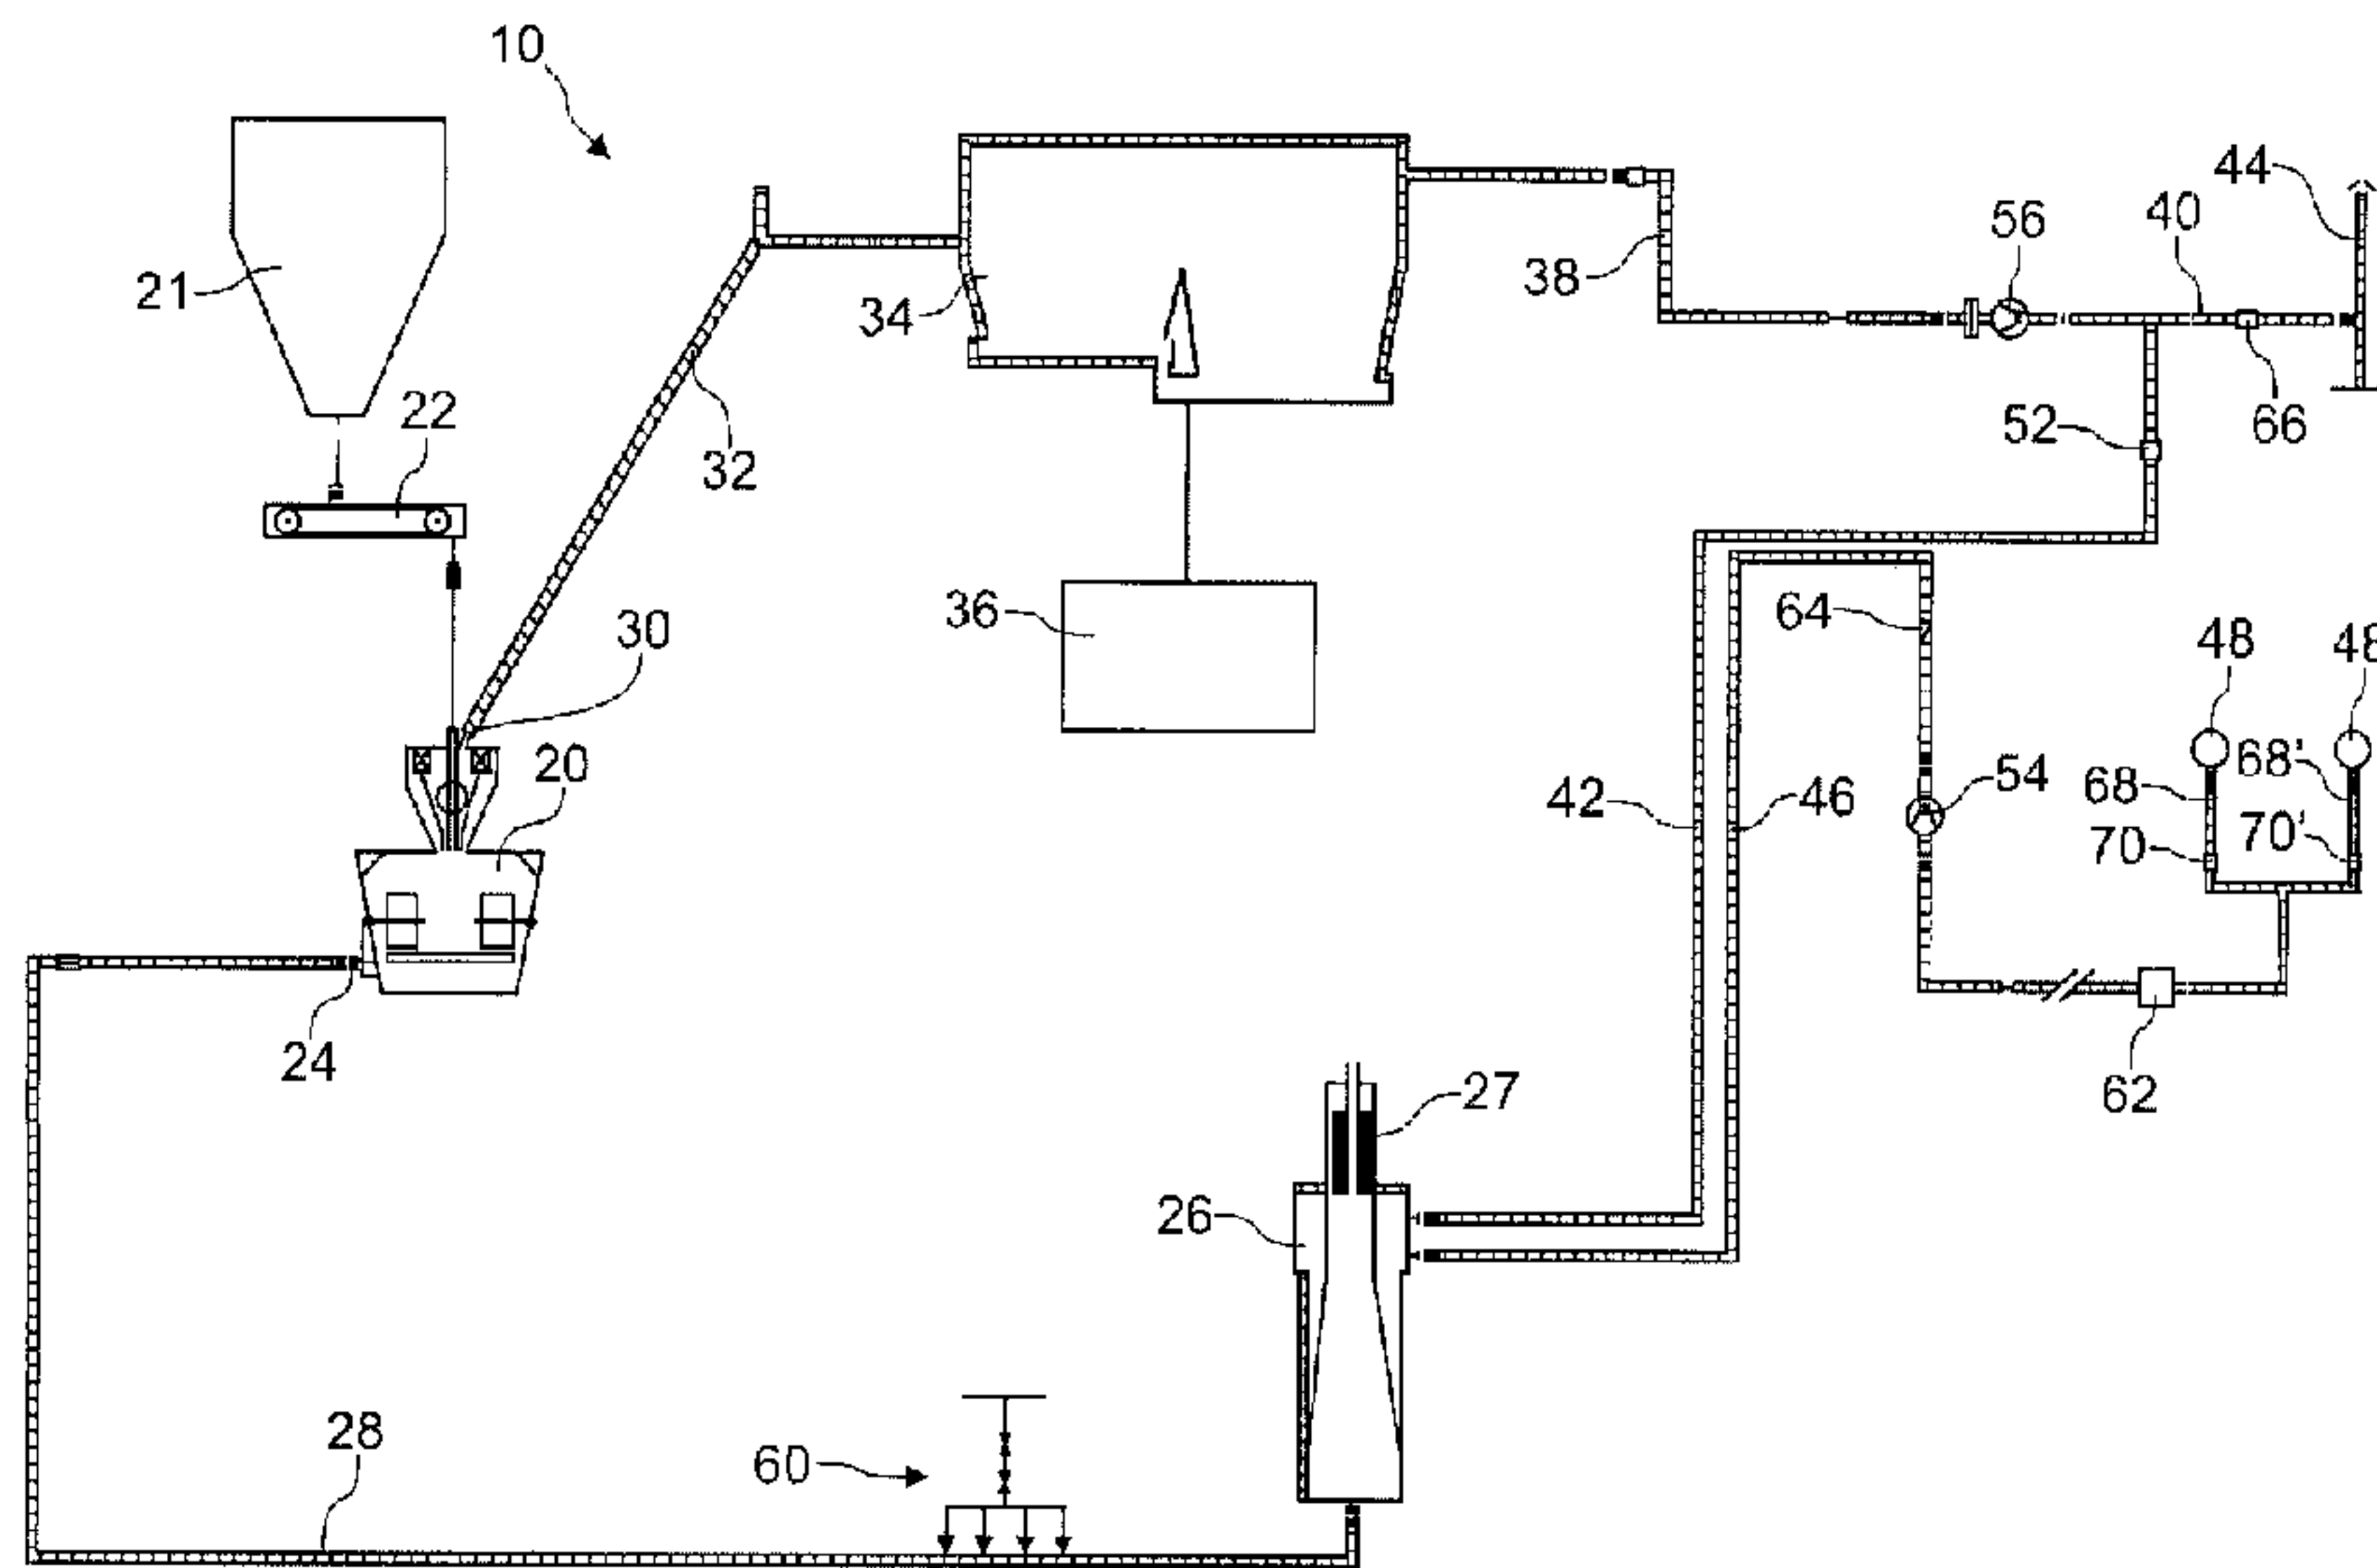

(57) **Abrégé/Abstract:**

A method for producing pulverized coal comprising the steps of providing a drying gas heated to a predefined temperature in a hot gas generator (26); feeding the heated drying gas into a pulverizer (20); introducing raw coal into the pulverizer (20), the pulverizer (20) grinding the raw coal into pulverized coal; collecting a mixture of drying gas and pulverized coal from the pulverizer (20) and feeding the mixture to a filter (34), the filter (34) separating the dried pulverized coal from the drying gas; collecting the dried pulverized coal for further use and feeding the drying gas from the filter (34) to an exhaust line (38); and collecting the drying gas exiting said filter (34) and feeding part of said collected drying gas to a recirculation line (42) for feeding recirculation drying gas to said hot gas generator (26). According to an important aspect of the present invention, the step of providing the drying gas comprises feeding a variable flow rate of hot stove waste gas to the hot gas generator (26) through a hot stove waste gas line (46) so as to maximize the amount of hot stove waste gas used as drying gas. A pressure of the drying gas at a pulverizer gas inlet (24) is controlled by regulating a flow rate of the hot stove waste gas through the hot stove waste gas line (46).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
29 July 2010 (29.07.2010)(10) International Publication Number
WO 2010/084156 A1

(51) International Patent Classification:

C21B 5/00 (2006.01) *B02C 23/34* (2006.01)
F26B 21/10 (2006.01) *C10B 57/10* (2006.01)
B02C 23/30 (2006.01)

(21) International Application Number:

PCT/EP2010/050689

(22) International Filing Date:

21 January 2010 (21.01.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

91 517 21 January 2009 (21.01.2009) LU

(71) Applicant (for all designated States except US): **PAUL WURTH S.A.** [LU/LU]; 32, rue d'Alsace, L-1122 Luxembourg (LU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GOEDERT, Paul** [LU/LU]; 18 rue Lodève, L-5651 Mondorf-les-Bains (LU). **MAYER, Markus** [DE/DE]; Bonner-Strasse 36, 54294 Trier (DE). **STAMATAKIS, Georges** [BE/LU]; 13 rue de Lenningen, L-5411 Canach (LU). **CAUWENBERGHS, Bernard** [BE/LU]; 29, route de Capellen, L-8279 Holzem (LU).(74) Agent: **OFFICE FREYLINGER**; B.P. 48, L-8001 Strassen (LU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: METHOD FOR PRODUCING PULVERIZED COAL

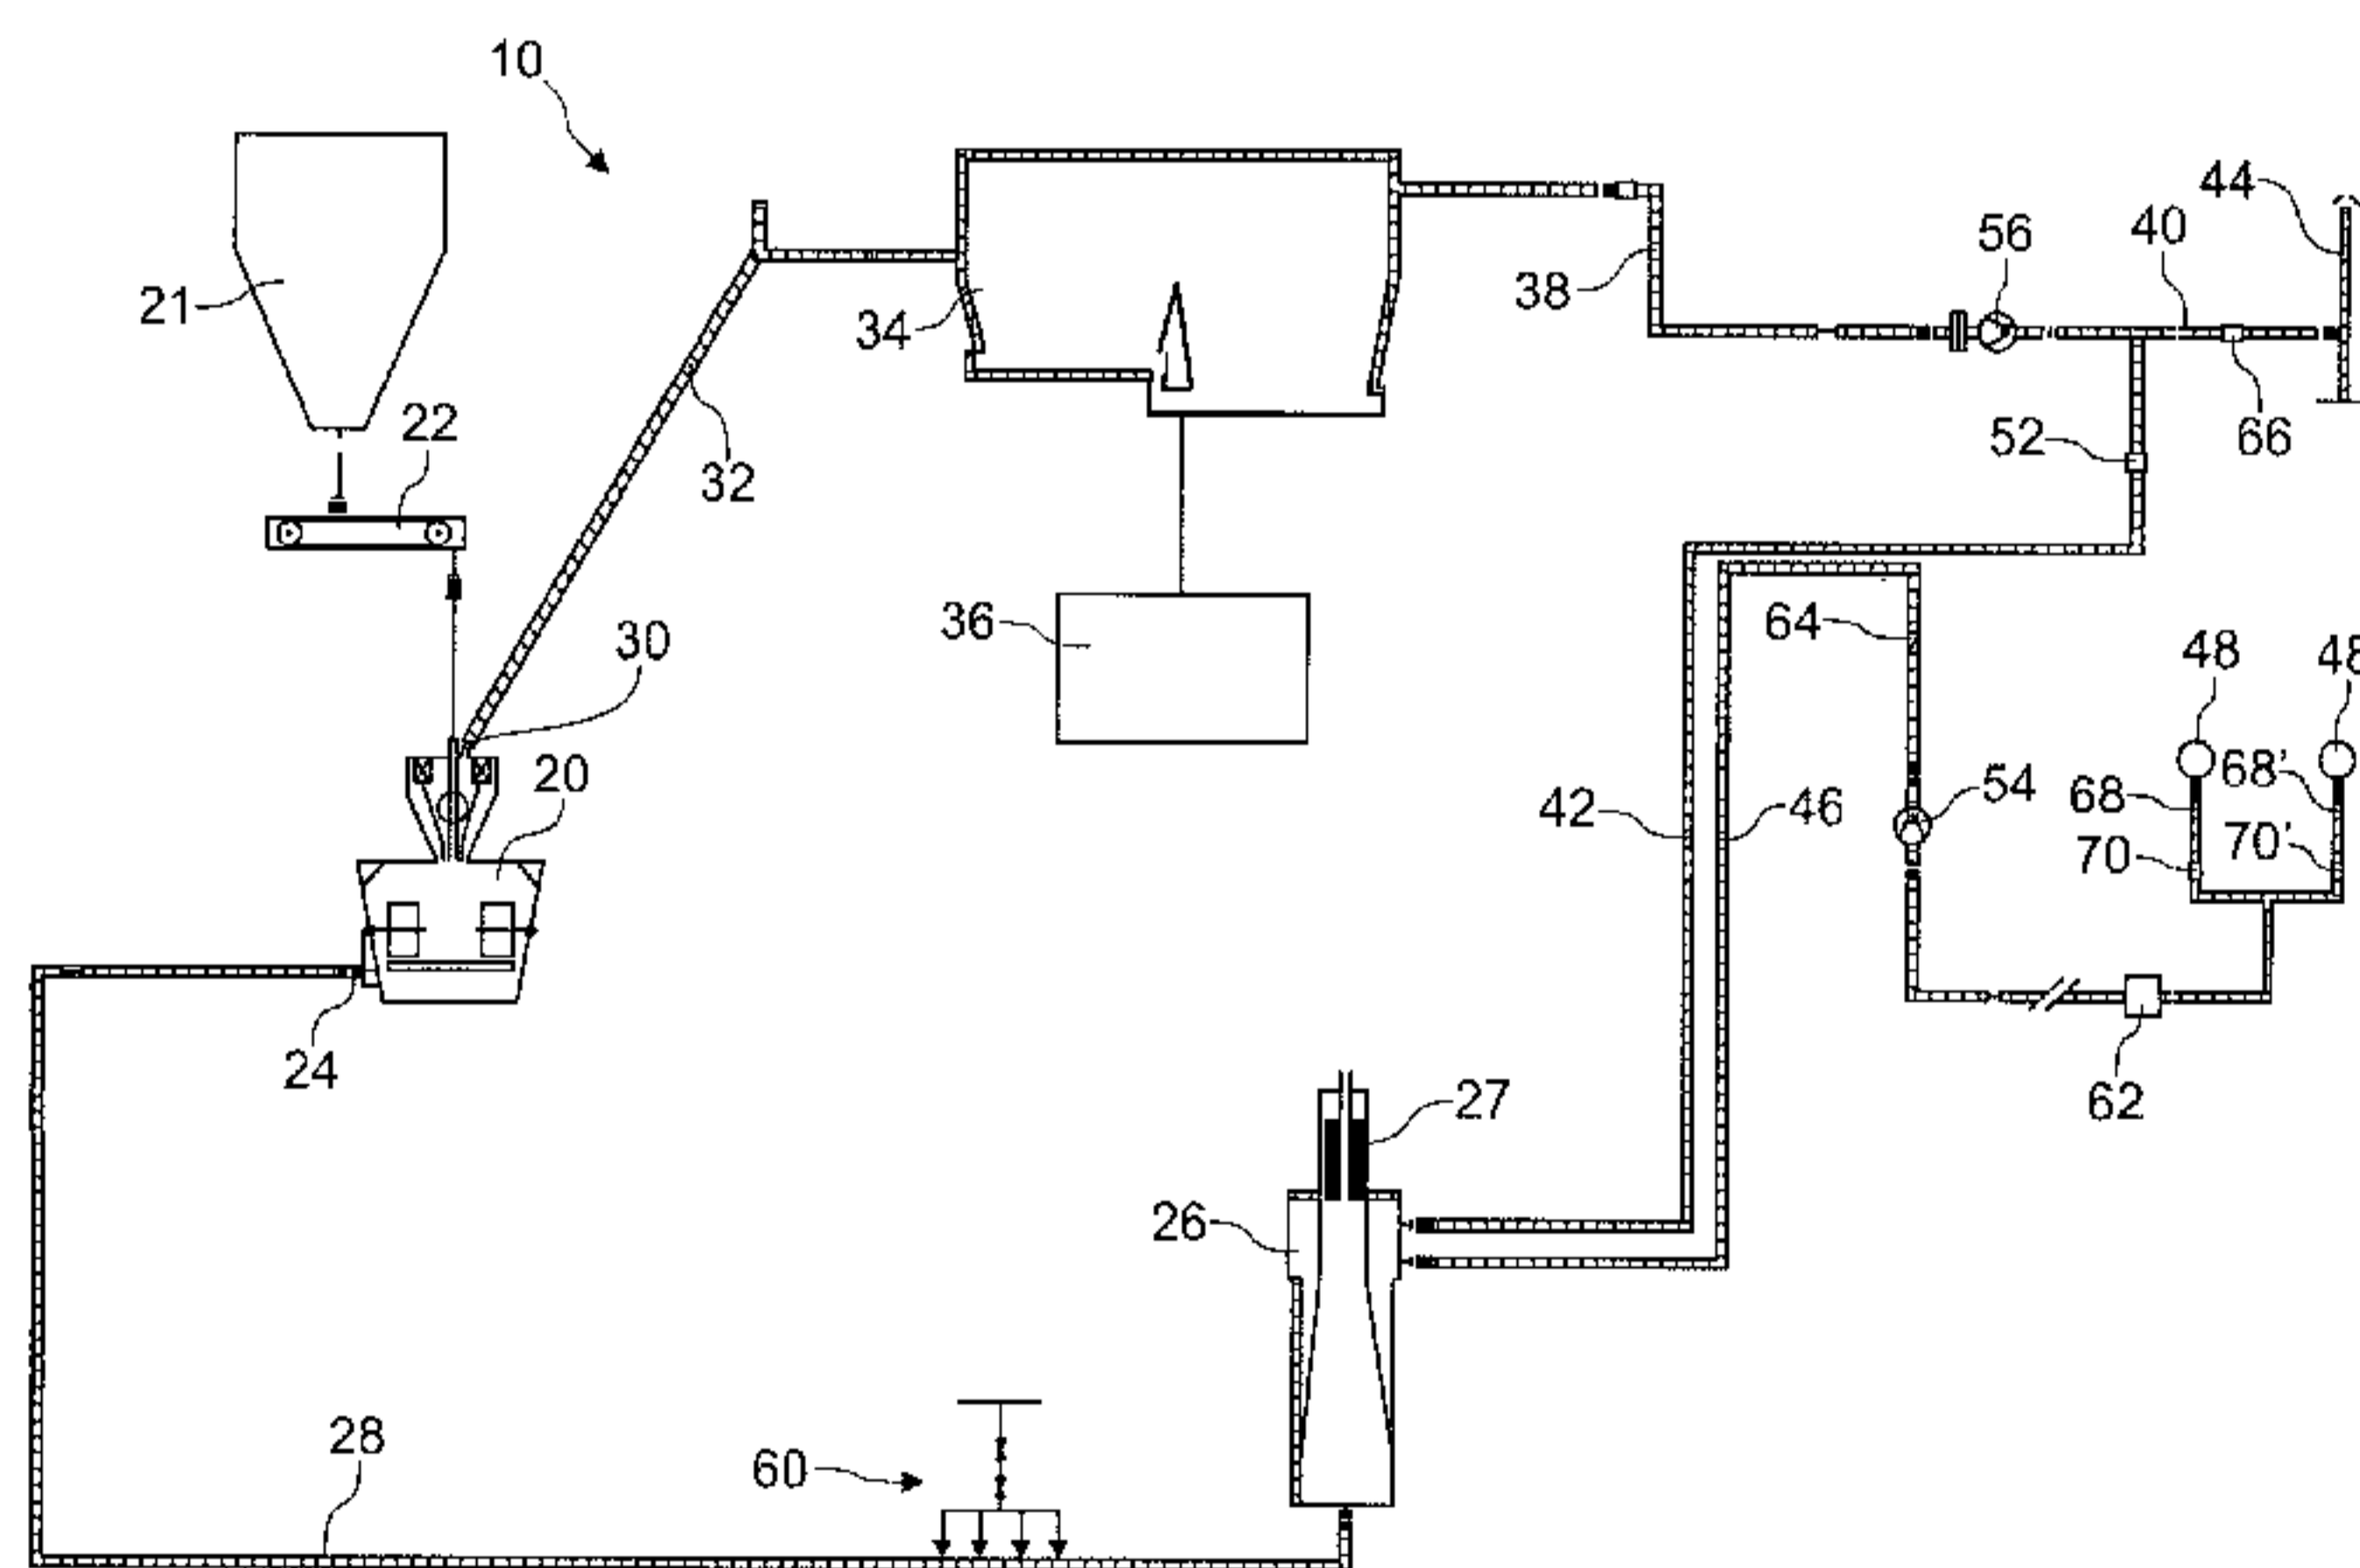


Fig. 1

(57) Abstract: A method for producing pulverized coal comprising the steps of providing a drying gas heated to a predefined temperature in a hot gas generator (26); feeding the heated drying gas into a pulverizer (20); introducing raw coal into the pulverizer (20), the pulverizer (20) grinding the raw coal into pulverized coal; collecting a mixture of drying gas and pulverized coal from the pulverizer (20) and feeding the mixture to a filter (34), the filter (34) separating the dried pulverized coal from the drying gas; collecting the dried pulverized coal for further use and feeding the drying gas from the filter (34) to an exhaust line (38); and collecting the drying gas exiting said filter (34) and feeding part of said collected drying gas to a recirculation line (42) for feeding recirculation drying gas to said hot gas generator (26). According to an important aspect of the present invention, the step of providing the drying gas comprises feeding a variable flow rate of hot stove waste gas to the hot gas generator (26) through a hot stove waste gas line (46) so as to maximize the amount of hot stove waste gas used as drying gas. A pressure of the drying gas at a pulverizer gas inlet (24) is controlled by regulating a flow rate of the hot stove waste gas through the hot stove waste gas line (46).

WO 2010/084156 A1

WO 2010/084156 A1 

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Method for producing pulverized coal

TECHNICAL FIELD

The present invention generally relates to a method for the production of pulverized coal, in particular for use in the metallurgical industry.

BACKGROUND ART

In the metallurgical industry, pulverized coal is generally injected as combustible into blast furnaces. It is important, in order to ensure good functioning of the blast furnace, that the pulverized coal is of good quality, i.e. that the pulverized coal has the right particle size distribution and the lowest humidity level. The pulverized coal is generally produced in a grinding and drying installation, wherein raw coal is ground, dried and classified before the resulting pulverized coal is fed to a storage bin before being injected into a blast furnace. The water contained in the freshly ground coal is spontaneously evaporated with carrying out the mixture by a stream of hot drying gas from the pulverizer into a filter. Inside the filter, the pulverized coal is separated from the drying gas stream and fed to the storage bin. Part of the drying gas is recirculated and mixed with combustion waste gas inside a hot gas generator before it is reintroduced into the pulverizer. The remaining portion of the drying gas is evacuated via an evacuation line leading to a stack.

The recirculation of drying gas allows operating the circuit on a self-inert basis and having a suitable temperature of the drying gas at the pulverizer gas inlet of about 300°C. The recirculation of drying gas however also has its drawbacks; these are a high dew point of the drying gas and high fuel gas consumption for the combustion inside the hot gas generator.

It has been suggested to use waste gas from a hot stove plant as drying gas in the grinding and drying installation. Waste gas exiting such a hot stove plant generally has a temperature of about 100 to 350°C, depending on the

operation of the hot stove plant. This hot stove waste gas is sucked by a fan at the stove off-gas collector and conveyed to the grinding and drying installation. More particularly, the hot stove waste gas is fed into the recirculation line and mixed with recirculation drying gas and combustion waste gas of the hot gas generator. The hot stove waste gas is added at a fixed flow rate to the circuit. The fixed flow rate of hot stove waste gas has to be sufficiently low, such that a certain flow rate of recirculation drying gas is always used. This is indeed necessary to be able to control the pressure of the drying gas at the pulverizer gas inlet. Also, the composition of hot stove waste gas may present undesired peaks of CO and O₂. It must therefore be possible to shut-off the supply of hot stove waste gas and switch to a conventional operating mode wherein only recirculation drying gas is mixed with the combustion waste gas inside the hot gas generator. In order to regulate the pressure of the drying gas at the pulverizer gas inlet, a control damper in the evacuation line is operated in such a way as to adjust the pressure distribution inside the grinding and drying circuit.

The main disadvantage of this system is that the hot stove waste gas is added to the circuit at a fixed flow rate and that, therefore, hot stove waste gas cannot be used in a more energetically efficient way.

OBJECT OF THE INVENTION

The object of the present invention is to provide an improved method for producing pulverized coal, which does not present the drawbacks of the prior art methods. This object is achieved by a method as described below.

GENERAL DESCRIPTION OF THE INVENTION

To achieve this object, the present invention proposes a method for producing pulverized coal, the method comprising the steps of:

- providing a drying gas heated to a predefined temperature in a hot gas generator;

- feeding the heated drying gas into a pulverizer;
- introducing raw coal into the pulverizer, the pulverizer grinding the raw coal into pulverized coal;
- 5 - collecting a mixture of drying gas and pulverized coal from the pulverizer and feeding the mixture to a filter, the filter separating the dried pulverized coal from the drying gas;
- collecting the dried pulverized coal for further use and feeding the drying gas from the filter to an exhaust line; and
- 10 - collecting the drying gas exiting said filter and feeding part of said collected drying gas to a recirculation line for feeding recirculation drying gas to said hot gas generator.

According to an important aspect of the present invention, the step of providing the drying gas comprises feeding a variable flow rate of hot stove waste gas to the hot gas generator through a hot stove waste gas line, said
15 flow rate of hot stove waste gas being chosen so as to maximize the amount of hot stove waste gas used as drying gas; and a pressure of the drying gas at a pulverizer gas inlet is controlled by regulating a flow rate of the hot stove waste gas through the hot stove waste gas line.

By using a variable flow rate of hot stove waste gas, the use of hot stove
20 waste gas can be increased if allowed by the operating conditions. This is in contrast to prior art methods, wherein a fixed flow rate of hot stove waste gas is used and wherein such flow rate must be sufficiently low, such that a certain flow rate of recirculation drying gas is always used to control the pressure of the drying gas.

25 By increasing the flow rate of hot stove waste gas, the necessity to use the hot gas generator to further heat the drying gas can be reduced. Considerable savings can therefore be made by reducing the fuel gas consumption for the combustion inside the hot gas generator.

Preferably, the flow rate of the hot stove waste gas is regulated by means

of a hot stove waste gas fan arranged in the hot stove waste gas line. The total flow rate of the drying gas may be regulated by means of a main fan arranged in the exhaust line.

It should be noted that the term "fan" in the context of the present invention is to be understood as any fan allowing modifying the volume flow rate of gas through the fan. Such a fan may e.g. be a fan with a variable frequency motor or a fan with a fixed frequency motor having a damper arranged upstream or downstream of the fan.

A recirculation line is provided for feeding drying gas from the exhaust line to the hot gas generator, allowing the grinding and drying installation to be operated in various operating modes.

The method according to the present invention preferably comprises a hot stove waste gas operating mode, wherein:

- the recirculation line is shut-off; such that no recirculation drying gas is fed to the hot gas generator;
- the hot stove waste gas line is open, such that only hot stove waste gas is fed at a variable flow rate to the hot gas generator;
- the pressure of the drying gas at the pulverizer gas inlet is controlled by setting a flow rate of the drying gas in the exhaust line and by regulating the flow rate of the hot stove waste gas through the hot stove waste gas line.

Most of the energy necessary to evaporate the humidity of the coal after grinding is provided by the hot stove waste gas, the rest of that energy being provided by the hot gas generator. By closing the recirculation line, the use of hot stove waste gas can be maximized, thereby reducing to a minimum the necessity to use the hot gas generator to further heat the drying gas. Considerable savings can therefore be made by reducing the fuel gas consumption for the combustion inside the hot gas generator. It may happen that the hot stove waste gas is sufficiently hot that no further heating by means

of the hot gas generator is necessary. It may even be necessary to cool down the resulting drying gas, using e.g. a water injection system, to bring the drying gas to the desired temperature at the pulverizer gas inlet.

The method according to the present invention preferably further
5 comprises a first intermediate operating mode, wherein:

- the recirculation line is open, such that recirculation drying gas is fed at a variable flow rate to the hot gas generator;
- the hot stove waste gas line is open, such that hot stove waste gas is fed at a variable flow rate to the hot gas generator;
- 10 - the pressure of the drying gas at the pulverizer gas inlet is controlled by setting a flow rate of the drying gas in the exhaust line and by regulating the flow rate of the hot stove waste gas through the hot stove waste gas line.

Recirculation drying gas is mixed with the hot stove waste gas to form the
15 drying gas. By controlling the mixture of the two gases, the composition of the drying gas can be adjusted. If e.g. the CO or O₂ concentration of the hot stove waste gas is too high, the amount of recirculation drying gas is increased by reducing the flow rate of hot stove waste gas, thereby reducing CO or O₂ concentration in the resulting drying gas.

20 The method according to the present invention preferably further comprises a second intermediate operating mode, wherein:

- the recirculation line is open, such that recirculation drying gas is fed at a variable flow rate to the hot gas generator;
- the hot stove waste gas line is open, such that hot stove waste gas is fed at
25 a fixed flow rate to the hot gas generator;
- the pressure of the drying gas at the pulverizer gas inlet is controlled by setting a flow rate of the drying gas through the exhaust line and by regulating the position of a control damper arranged in an evacuation line.

Recirculation drying gas is mixed with the hot stove waste gas to form the drying gas. By controlling the mixture of the two gases, the composition of the drying gas can be adjusted. If e.g. the CO or O₂ concentration of the hot stove waste gas is too high, the amount of recirculation drying gas is increased by
5 reducing the flow rate of hot stove waste gas, thereby reducing CO or O₂ concentration in the resulting drying gas.

The method according to the present invention preferably further comprises a conventional operating mode, wherein:

- 10 - the recirculation line is open, such that recirculation drying gas is fed at a variable flow rate to the hot gas generator;
- the hot stove waste gas line is shut-off, such that no hot stove waste gas is fed to the hot gas generator;
- 15 - the pressure of the drying gas at the pulverizer gas inlet is controlled by setting a flow rate of the drying gas through the exhaust line and by regulating the position of a control damper in an evacuation line.

The CO or O₂ concentration of the hot stove waste gas may be so high that it cannot be compensated by the addition of recirculation drying gas. In this case, the method is operated in a conventional mode wherein only recirculation drying gas is used. Also, the conventional mode allows operating the grinding
20 and drying installation even if no hot stove waste gas is available, e.g. in case of a shut-down of the hot stove plants.

The method may switch from the hot stove waste gas operating mode to the first intermediate operating mode if the hot stove waste gas has a concentration of a predetermined component above a first concentration
25 threshold and/or if the hot stove waste gas has a temperature below a first temperature threshold.

The method may switch from the first intermediate operating mode to the second intermediate operating mode if the hot stove waste gas has a concentration of a predetermined component above a second concentration

threshold and/or if the hot stove waste gas has a temperature below a second temperature threshold.

The method may switch from the second intermediate operating mode to the conventional operating mode if a predetermined time has elapsed since the
5 second intermediate operating mode was initiated.

The method may switch from the conventional operating mode to the hot stove waste gas operating mode at the start-up of the grinding and drying installation; or if hot stove waste gas becomes available; or if the hot stove waste gas has a concentration of a predetermined component below a third
10 concentration threshold and/or if the hot stove waste gas has a temperature above a third temperature threshold.

The method may switch, from any operating mode, to the conventional mode if no hot stove waste gas is available, e.g. in case of a shutdown of the hot stoves plant. Although the method preferably switches directly to the
15 conventional mode, it should not be excluded that the method may switch to the conventional mode via an intermediate mode.

The method may switch, from any operating mode, to the conventional mode if it is determined that the concentration of a predetermined component varies at a rate above a predetermined rate threshold. If sudden peaks in CO
20 or O₂ concentration occur in the hot stove waste gas, the system can operate in the conventional mode, thereby avoiding feeding drying gas with too high CO or O₂ concentration through the grinding and drying installation. Although the method preferably switches directly to the conventional mode, it should not be excluded that the method may switch to the conventional mode via an
25 intermediate mode.

Advantageously, the concentration of a predetermined component in the hot stove waste gas is monitored by means of a gas analyzer arranged in the hot stove waste gas line. Advantageously, the temperature of the hot stove waste gas is monitored by means of a temperature sensor arranged in the hot
30 stove waste gas line.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be more apparent from the following description of one not limiting embodiment with reference to the attached drawing, wherein Fig.1 shows a schematic representation of a grinding and drying installation used for carrying out the method according to the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

5 Figure 1 shows a grinding and drying installation for producing pulverized coal using the method according to the present invention.

Such a grinding and drying installation 10 comprises a pulverizer 20 into which raw coal is fed from a raw coal storage bin 21 via a conveyor 22. In the pulverizer 20, the raw coal is crushed between internal mobile pieces (not
10 shown) or any other conventional grinding means into a fine powder. At the same time, a hot drying gas is fed through the pulverizer 20 to dry the pulverized coal. The drying gas enters the pulverizer 20 through a pulverizer gas inlet 24. Upstream of the pulverizer 20, the grinding and drying installation 10 comprises a hot gas generator 26 in which a drying gas can be heated to a
15 predefined temperature. Such a hot gas generator 26 is powered by a burner 27, such as e.g. a multiple lance burner. The heated drying gas is carried from the hot gas generator 26 to the pulverizer 20 via a conduit 28. As the heated drying gas passes through the pulverizer 20, from the pulverizer gas inlet 24 to a pulverizer outlet 30, pulverized coal is entrained. A mixture of pulverized coal and drying gas is carried from the pulverizer 20, via a conduit 32, to a filter 34,
20 where the pulverized coal is again removed from the drying gas and fed to a pulverized coal storage bin 36, ready for further use. The drying gas exiting the filter 34 is fed to an exhaust line 38 splitting into an evacuation line 40 and a recirculation line 42. The evacuation line 40 may be used to feed drying gas
25 from the exhaust line 38 to a stack 44 for evacuating the drying gas, whereas the recirculation line 42 may be used to feed recirculation drying gas from the exhaust line 38 back to the hot gas generator 26.

The grinding and drying installation 10 further comprises a hot stove waste gas line 46 for feeding waste gas to the hot gas generator 26 from a secondary source. Such waste gas is generally hot stove waste gas recovered from one or more hot stove plants 48, 48'.

5 In operation, hot stove waste gas is fed to the hot gas generator 26 through the hot stove waste gas line 46 and is brought to a predefined temperature in the hot gas generator 26 and fed, as drying gas, through the pulverizer 20. The temperature of the drying gas is reduced in the pulverizer 20 as the heat from the drying gas is used to dry the pulverized coal. The level of
10 humidity of the raw coal determines the temperature loss of the drying gas. In order to prevent damage to the filter 34, the temperature of the mixture of pulverized coal and drying gas exiting the pulverizer 20, hereafter referred to as the exit temperature, is monitored, e.g. by means of a temperature sensor (not shown).

15 In a hot stove waste gas operation mode, a preferred operation mode of the present invention, the recirculation line 42 is shut-off using a recirculation damper 52 arranged in the recirculation line 42 and all of the drying gas is provided by the hot stove waste gas fed into the installation through the hot stove waste gas line 46. The hot stove waste gas is blown into the installation
20 with the help of a hot stove waste gas fan 54 arranged in the hot stove waste gas line 46. A main fan 56 is arranged in the exhaust line 38 for regulating the gas flow rate through the pulverizer 20. Operation of the main fan 56 is controlled in such a way that the gas flow rate through the pulverizer 20 is essentially constant. The pressure of the drying gas at the pulverizer gas inlet
25 24 of the pulverizer 20 is controlled by regulating the flow rate through the hot stove waste gas fan 54.

The temperature at the pulverizer outlet 30 is generally controlled by the output power of the burner 27 of the hot gas generator 26.

30 As the hot stove waste gas is subject to temperature variations, caused by the operation of the hot stove plant, such temperature variations need to be

balanced. If the exit temperature decreases, more heat has to be supplied by the hot gas generator 26 and if the exit temperature increases, less heat has to be supplied by the hot gas generator 26. If the heat supplied by the hot gas generator 26 has reached a minimum and the exit temperature is still too high,
5 the drying gas can be cooled by means of a water injection system 60 arranged downstream of the hot gas generator.

Such a water injection system 60 may also be used to improve the response time of the heating process. Indeed, the increase and decrease of heat generated by the hot gas generator 26 is relatively slow. The response
10 time, which is of particular importance during a startup phase of the installation, may be improved by overheating the drying gas in the hot gas generator 26 and subsequently cooling it to the desired temperature by means of the water injection system 60. If the exit temperature suddenly drops well below the desired exit temperature, generally when introduction of raw coal into the
15 pulverizer 20 begins, the temperature of the drying gas fed to the pulverizer 20 can be quickly adapted so as to keep the desired exit temperature essentially stable.

The composition of the hot stove waste gas may present undesired peaks of CO and O₂. The hot stove waste gas line 46 comprises a gas analyzer 62 for
20 determining the CO and/or O₂ content of the hot stove waste gas. The method according to the present invention preferably comprises monitoring the CO and/or O₂ content of the hot stove waste gas and, should a predetermined threshold be reached, the method switches to other operating modes, e.g. in order to avoid feeding drying gas with too high CO or O₂ concentration through
25 the grinding and drying installation.

The method switches from the hot stove waste gas operating mode to a first intermediate operating mode e.g. if the hot stove waste gas has a concentration of a predetermined component above a first concentration threshold and/or if the hot stove waste gas has a temperature below a first
30 temperature threshold. The switchover may comprise opening of the

recirculation damper 52 to a fixed position so as to obtain recirculation of drying gas. The position of a control damper 66 in the evacuation line 40 may also be altered. The operating point of the hot stove waste gas fan 54 is modified to reduce the flow rate of the hot stove waste gas through the hot stove waste gas line 46 in such a way as to keep the pressure of the drying gas at the pulverizer inlet 24 constant. The position of the hot stove waste gas damper 64 may also be modified. Finally, the heat output of the hot gas generator 26 is increased in order to compensate for the heat loss due to the reduction in hot stove waste gas.

10 The method switches from the first intermediate operating mode to a second intermediate operating mode e.g. if the hot stove waste gas has a concentration of a predetermined component above a second concentration threshold and/or if the hot stove waste gas has a temperature below a second temperature threshold. The switchover may comprise adapting the positions of the recirculation damper 52 and the control damper 66. The flow rate of the hot stove waste gas is set to a fixed flow rate by the hot stove waste gas fan 54. The position of the hot stove waste gas damper 64 may also be modified. Furthermore control of the drying gas pressure at the pulverizer gas inlet is no longer carried out by the hot stove waste gas fan 54, but by the control damper 20 66.

The method switches from the second intermediate operating mode to a conventional operating mode if a predetermined time has elapsed since the second intermediate operating mode was initiated. This switchover may comprise stopping the hot stove waste gas fan 54 and closing the hot stove waste gas damper 64, thereby shutting off the hot stove waste gas line 46. The position of the recirculation damper 52 may also be modified. Finally, the heat output of the hot gas generator 26 is increased in order to compensate for the heat loss due to the shutting off the hot stove waste gas line 46.

The method switches from the conventional operating mode back to the hot stove waste gas operating mode at the start-up of the grinding and drying

installation; or if hot stove waste gas becomes available; or if the hot stove waste gas has a concentration of a predetermined component below a third concentration threshold and/or if the hot stove waste gas has a temperature above a third temperature threshold. Such a switchover may comprise starting
5 the hot stove waste gas fan 54 and opening the hot stove waste gas damper 64; closing the recirculation damper 52 and adapting the control damper 66. Control of the drying gas pressure at the pulverizer gas inlet is again carried out by the hot stove waste gas fan 54 and not by the control damper 66. Also, the heat output of the hot gas generator 26 is reduced in order to compensate
10 for the increase in hot stove waste gas fed to the hot gas generator 26.

The method switches from the hot stove waste gas operating mode to the conventional operating mode e.g. if no hot stove waste gas is available or if the available hot stove waste gas is unusable. Hot stove waste gas may not be available e.g. in case of a shutdown of the hot stove plant. Hot stove waste gas
15 may be unusable e.g. in case of sudden peaks in the concentration of CO or O₂ in the hot stove waste gas.

It should also be noted that, generally, at least one hot stove plant 48 is necessary for providing a grinding and drying installation 10 with hot stove waste gas. Two or more hot stove plants 48, 48' may be connected to the hot
20 stove waste gas line 46 via conduits 68, 68', each comprising a hot stove plant damper 70, 70'. The operation of the hot stove plant dampers 70, 70' can be used to control the hot stove waste gas temperature or to control the CO or O₂ concentration in the hot stove waste gas or to isolate one hot stove plant generating hot stove waste gas out of the acceptable range (e.g. temperature
25 too low or CO or O₂ concentration too high).

REFERENCE SIGNS

10	grinding and drying installation	42	recirculation line
20	pulverizer	44	stack
22	conveyor	46	hot stove waste gas line
24	pulverizer gas inlet	48	hot stove plant
26	hot gas generator	52	recirculation damper
27	burner	54	hot stove waste gas fan
28	conduit	56	main fan
30	pulverizer outlet	60	water injection system
32	conduit	62	gas analyzer
34	filter	64	hot stove waste gas damper
36	pulverized coal storage bin	66	control damper
38	exhaust line	68	conduit
40	evacuation line	70	hot stove plant damper

Claims

1. Method for producing pulverized coal, the method comprising the steps of:
 - providing a drying gas heated to a predefined temperature in a hot gas generator;
 - feeding the heated drying gas into a pulverizer;
 - 5 - introducing raw coal into the pulverizer, the pulverizer grinding the raw coal into pulverized coal;
 - collecting a mixture of said drying gas and said pulverized coal from the pulverizer and feeding the mixture to a filter, the filter separating a dried pulverized coal from the drying gas;
 - 10 - collecting the dried pulverized coal for further use and feeding the drying gas from the filter to an exhaust line;
 - collecting the drying gas exiting said filter and feeding part of said collected drying gas to a recirculation line for feeding recirculation drying gas to said hot gas generator
- 15 **characterized in that**

said step of providing said drying gas comprises feeding a variable flow rate of hot stove waste gas to said hot gas generator through a hot stove waste gas line so as to maximize the amount of hot stove waste gas used as said drying gas; and

- 20 a pressure of said heated drying gas at a pulverizer gas inlet is controlled by regulating a flow rate of said hot stove waste gas through said hot stove waste gas line.
 2. Method according to claim 1, wherein said flow rate of said hot stove waste gas is regulated by means of a hot stove waste gas fan arranged in said hot stove waste gas line.
 - 25
 3. Method according to claim 1 or 2, wherein a flow rate of said drying gas is

regulated by means of a main fan arranged in said exhaust line.

4. Method according to any one of claims 1 to 3, wherein said method comprises a hot stove waste gas operating mode, wherein:
 - 5 - said recirculation line is shut-off; such that none of the recirculation drying gas is fed to said hot gas generator;
 - said hot stove waste gas line is open, such that only said hot stove waste gas is fed at a variable flow rate to said hot gas generator;
 - said pressure of said heated drying gas at said pulverizer gas inlet is controlled by setting a flow rate of said drying gas in said exhaust line
10 and by regulating said flow rate of said hot stove waste gas through said hot stove waste gas line.
5. Method according to any one of claims 1 to 3, wherein said method comprises a first intermediate operating mode, wherein:
 - 15 - said recirculation line is open, such that said recirculation drying gas is fed at a variable flow rate to said hot gas generator;
 - said hot stove waste gas line is open, such that said hot stove waste gas is fed at a variable flow rate to said hot gas generator;
 - said pressure of said heated drying gas at said pulverizer gas inlet is controlled by setting a flow rate of said drying gas in said exhaust line
20 and by regulating said flow rate of said hot stove waste gas through said hot stove waste gas line.
6. Method according to any one of claims 1 to 3, wherein said method comprises a second intermediate operating mode, wherein:
 - 25 - said recirculation line is open, such that said recirculation drying gas is fed at a variable flow rate to said hot gas generator;
 - said hot stove waste gas line is open, such that said hot stove waste gas is fed at a fixed flow rate to said hot gas generator;
 - said pressure of said heated drying gas at said pulverizer gas inlet is controlled by setting a flow rate of said drying gas through said exhaust

line and by regulating the position of a control damper arranged in an evacuation line.

7. Method according to any one of claims 1 to 3, wherein said method comprises a conventional operating mode, wherein:
 - 5 - said recirculation line is open, such that said recirculation drying gas is fed at a variable flow rate to said hot gas generator;
 - said hot stove waste gas line is shut-off, such that none of said hot stove waste gas is fed to said hot gas generator;
 - said pressure of said heated drying gas at said pulverizer gas inlet is
10 controlled by setting a flow rate of said drying gas through said exhaust line and by regulating a position of a control damper arranged in an evacuation line.
8. Method according to claim 4 or 5, wherein said method switches from said hot stove waste gas operating mode to said first intermediate operating
15 mode if said hot stove waste gas has a concentration of a predetermined gas component above a first concentration threshold and/or if said hot stove waste gas has a temperature below a first temperature threshold.
9. Method according to claim 5 or 6, wherein said method switches from said first intermediate operating mode to said second intermediate operating
20 mode if said hot stove waste gas has a concentration of a predetermined gas component above a second concentration threshold and/or if said hot stove waste gas has a temperature below a second temperature threshold.
10. Method according to claim 6 or 7, wherein said method switches from said second intermediate operating mode to said conventional operating mode if
25 a predetermined time has elapsed since said second intermediate operating mode was initiated.
11. Method according to claim 4 or 7, wherein said method switches from said conventional operating mode to said hot stove waste gas operating mode:
 - at a start-up of the grinding and drying installation; or

- if said hot stove waste gas becomes available; or
 - if said hot stove waste gas has a concentration of a predetermined gas component below a third concentration threshold and/or if said hot stove waste gas has a temperature above a third temperature threshold.
- 5 12. Method according to any one of claims 4 to 7, wherein said method switches to said conventional operating mode if no hot stove waste gas is available.
13. Method according to any one of claims 4 to 7, wherein said method switches to said conventional operating mode if it is determined that a concentration of a predetermined gas component varies at a rate above a predetermined
- 10 rate threshold.
14. Method according to any one of claims 9 to 13, wherein said concentration of said predetermined component in said hot stove waste gas is monitored by means of a gas analyzer arranged in said hot stove waste gas line and/or said temperature of said hot stove waste gas is monitored by means of a
- 15 temperature sensor arranged in said hot stove waste gas line.

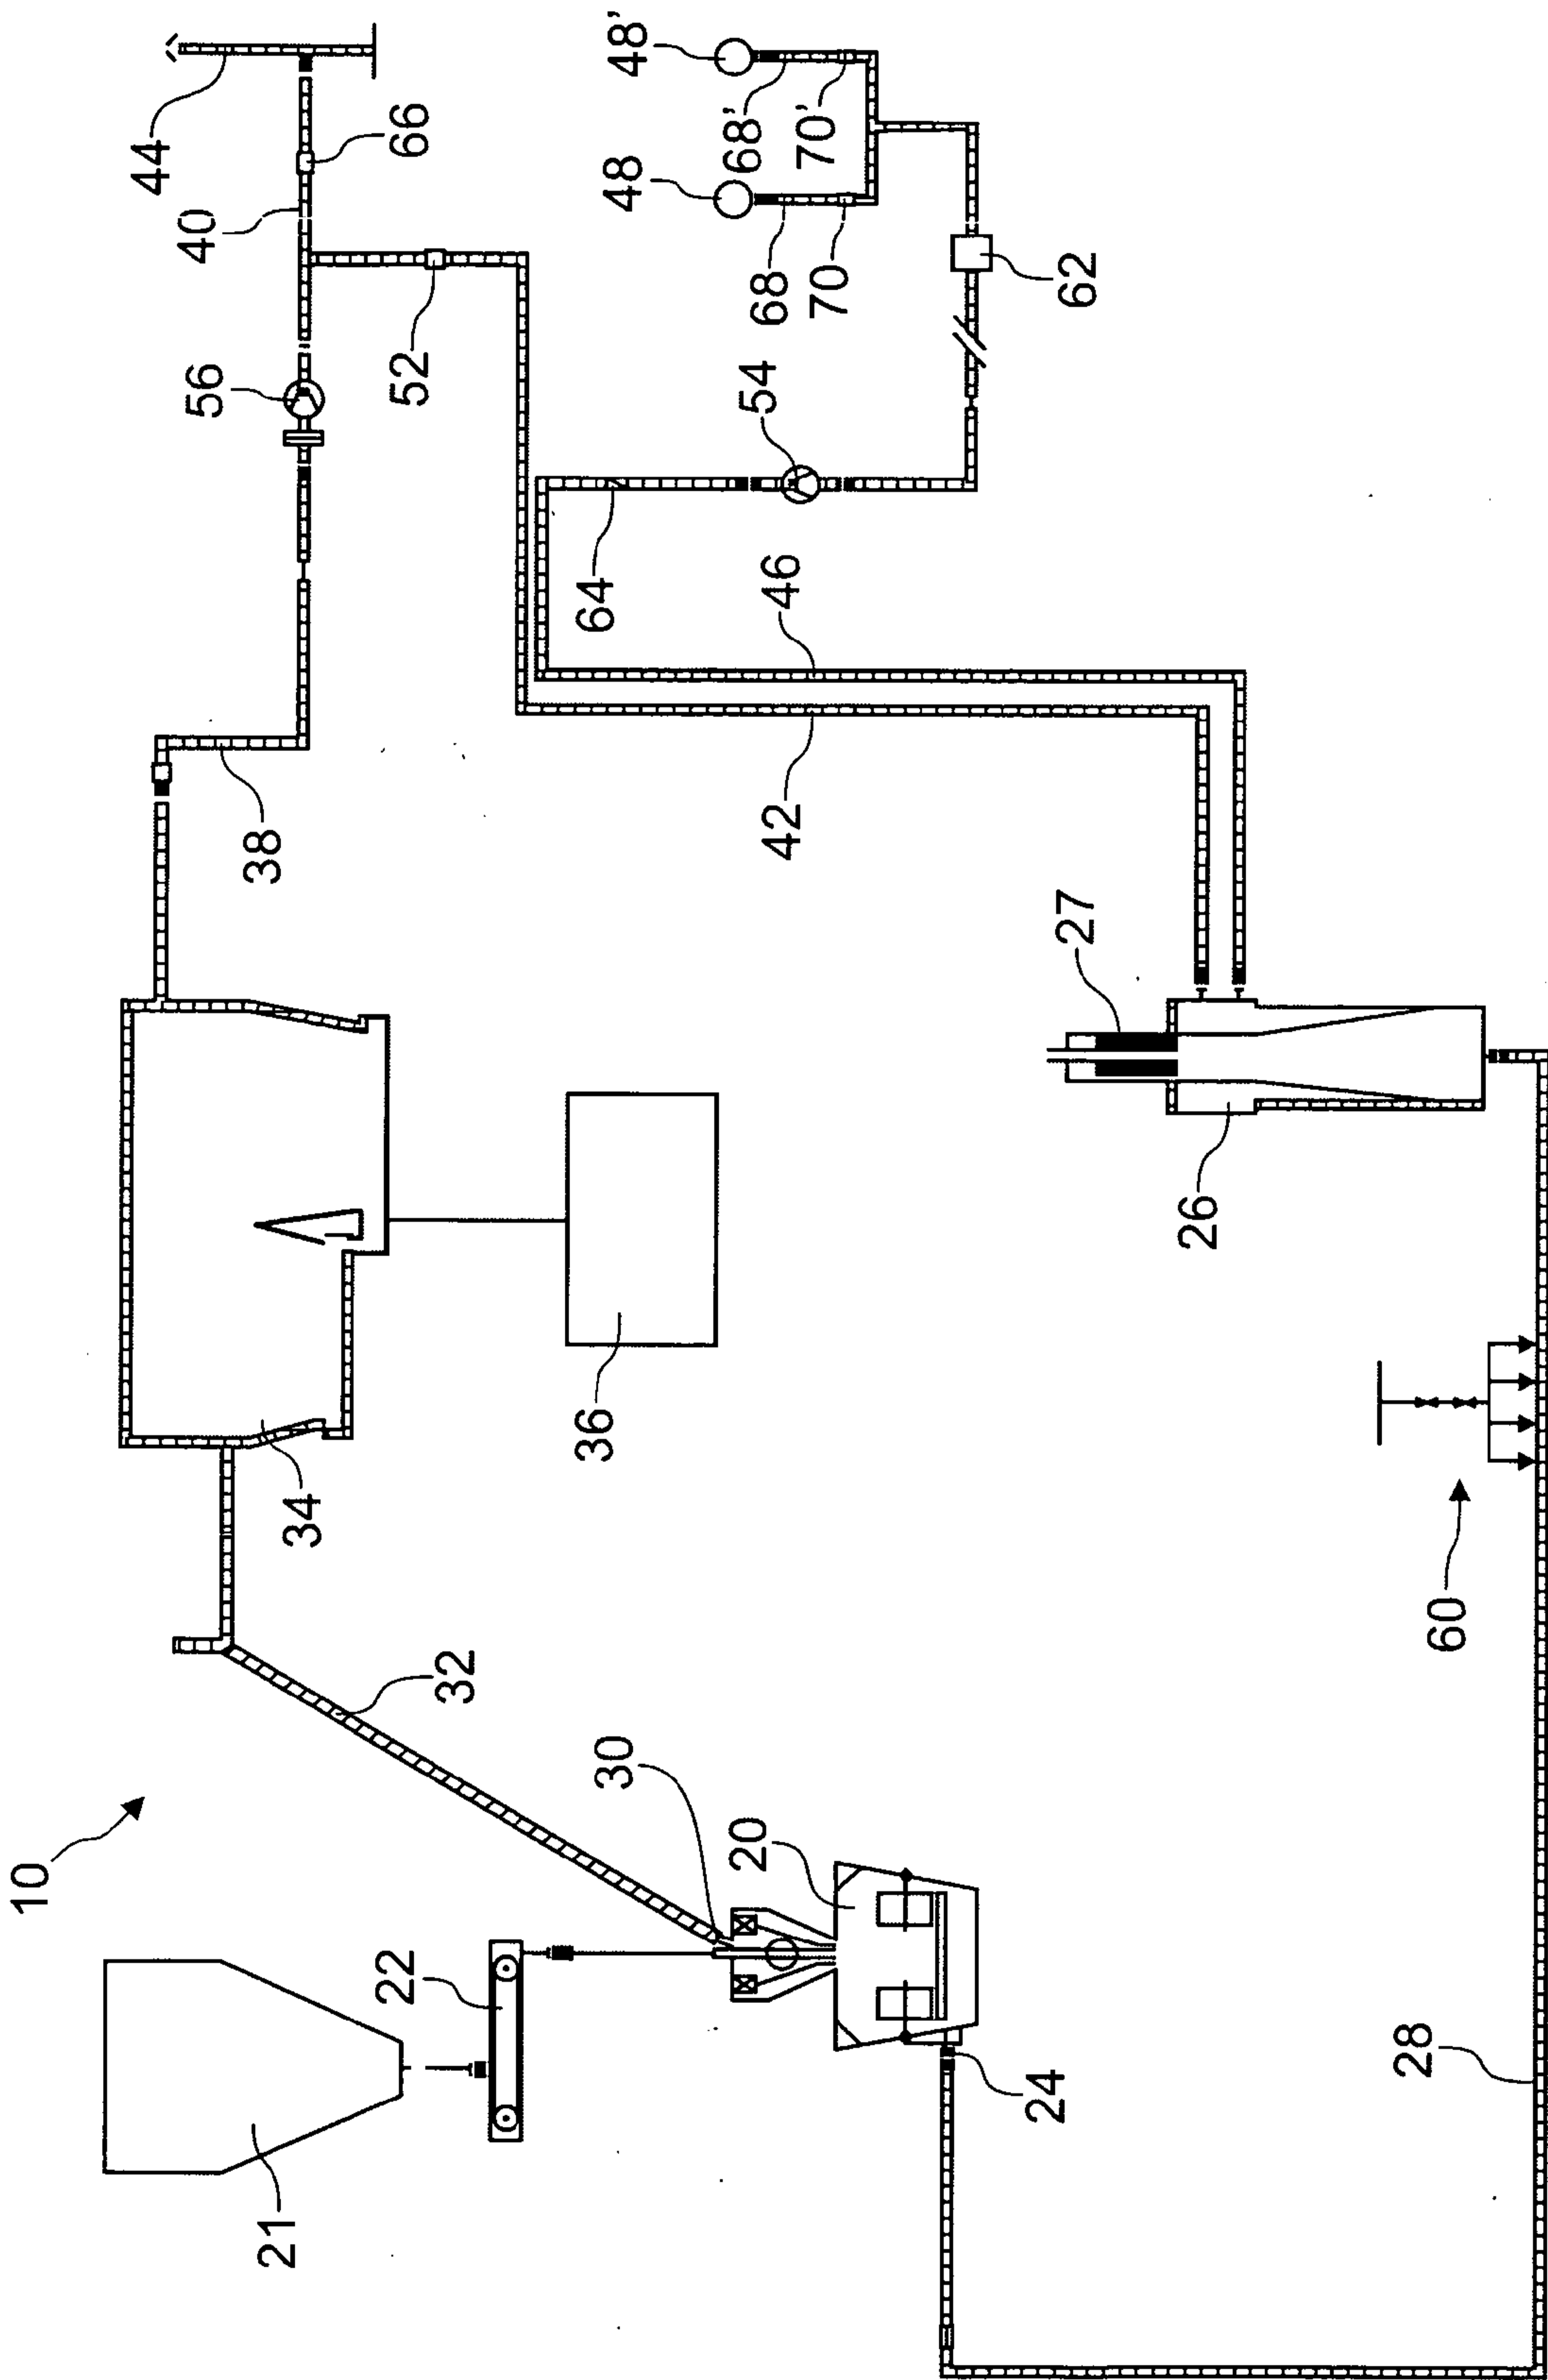


Fig. 1

