



HU000031880T2

(19) **HU**(11) Lajstromszám: **E 031 880**(13) **T2****MAGYARORSZÁG****Szellemi Tulajdon Nemzeti Hivatala**

EURÓPAI SZABADALOM SZÖVEGÉNEK FORDÍTÁSA

(21) Magyar ügyszám: **E 11 803936**(22) A bejelentés napja: **2011. 07. 05.**

(96) Az európai bejelentés bejelentési száma:

EP 20110803936

(97) Az európai bejelentés közzétételi adatai:

EP 2590791 A2 **2012. 01. 12.**

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 2590791 B1 **2016. 11. 09.**(51) Int. Cl.: **B29C 33/12** (2006.01)**B29C 45/14** (2006.01)**B29C 45/16** (2006.01)**B29D 22/00** (2006.01)**B32B 7/02** (2006.01)**B65D 81/26** (2006.01)

(86) A nemzetközi (PCT) bejelentési szám:

PCT/US 11/001178

(87) A nemzetközi közzétételi szám:

WO 12005761

(30) Elsőbbségi adatok:

399265 P**2010. 07. 09.****US**

(72) Feltaláló(k):

URUSHIDANI, Yukihiro, Webster Groves, MO 63119 (US)**KUROSAKI, Kazuhiro, Tokyo 100-8115 (JP)****TAI, Shinji, Pasadena, TX 77507 (US)****NAKAYA, Masakazu, Pasadena, TX 77507 (US)**

(73) Jogosult(ak):

Nestec S.A., 1800 Vevey (CH)**Kuraray Co., Ltd., Tokyo 100-8115 (JP)**

(74) Képviselő:

Danubia Szabadalmi és Jogi Iroda Kft.,**Budapest**

(54)

Címkézett tartályok és eljárás címkézett tartályok előállítására

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 2 590 791 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
09.11.2016 Bulletin 2016/45

(51) Int Cl.:
B29C 33/12 (2006.01) **B29C 45/14** (2006.01)
B29C 45/16 (2006.01) **B29D 22/00** (2006.01)
B32B 7/02 (2006.01) **B65D 81/26** (2006.01)

(21) Application number: **11803936.1**

(86) International application number:
PCT/US2011/001178

(22) Date of filing: **05.07.2011**

(87) International publication number:
WO 2012/005761 (12.01.2012 Gazette 2012/02)

(54) **LABELED CONTAINERS AND PROCESSES FOR PRODUCING LABELED CONTAINERS**

GEKENNZEICHNETE BEHÄLTER UND HERSTELLUNGSVERFAHREN FÜR GEKENNZEICHNETE
BEHÄLTER

RÉCIPIENTS ÉTIQUETÉS ET PROCÉDÉS DE PRODUCTION DE RÉCIPIENTS ÉTIQUETÉS

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

- **TAI, Shinji**
Pasadena, TX 77507 (US)
- **NAKAYA, Masakazu**
Pasadena, TX 77507 (US)

(30) Priority: **09.07.2010 US 399265 P**

(74) Representative: **Rupp, Christian et al**
Mitscherlich PartmbB
Patent- und Rechtsanwälte
Sonnenstraße 33
80331 München (DE)

(43) Date of publication of application:
15.05.2013 Bulletin 2013/20

(73) Proprietors:

- **Nestec S.A.**
1800 Vevey (CH)
- **Kuraray Co., Ltd.**
Tokyo 100-8115 (JP)

(56) References cited:
EP-A1- 1 950 251 WO-A1-2009/007453
JP-A- H11 226 997 JP-A- 2002 120 848
JP-A- 2004 155 483 US-A1- 2003 067 099
US-A1- 2005 079 306 US-A1- 2007 243 351
US-A1- 2008 069 990 US-A1- 2009 061 061
US-A1- 2009 169 902 US-A1- 2010 047 496
US-B1- 6 524 672

(72) Inventors:

- **URUSHIDANI, Yukihiro**
Webster Groves, MO 63119 (US)
- **KUROSAKI, Kazuhiro**
Tokyo 100-8115 (JP)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 590 791 B1

Description

CROSS REFERENCE TO RELATED APPLICATIONS

5 **[0001]** This application claims priority to U.S. Provisional Application Serial No. 61/399265 filed July 09, 2010, the disclosure of which is incorporated herein by this reference.

BACKGROUND OF THE INVENTION

10 Field of the Invention

[0002] The invention relates generally to labeled containers and particularly to in-mold labeled containers and processes for producing in-mold labeled containers that limit the transmission of oxygen into the containers.

15 Description of Related Art

[0003] Methods for attaching labels to containers, including plastic containers, are known in the art. For example, methods for applying adhesive agents onto the rear surface of labels and then adhering the labels onto plastic containers are known to skilled artisans. Also, in-mold labeled (IML) methods have been used for attaching labels to containers. For example, US20100001010A1 discloses an in-mold labeled container and molding process for making the container. US5604006 discloses an in-molding label process that works by adhering a label to a thermoplastic substrate in a mold cavity and injecting molten thermoplastic resin to press the label and recess it into the thermoplastic substrate. US4913643 discloses a plastic mold useful for in-mold labeling. In typical IML processes, a label is placed in a mold and then plastic is injected into the mold. The result is a plastic container with an integrated label. Plastic containers produced using IML methods can be used for a variety of purposes, e.g., a container for various foods, beverages, and the like.

[0004] For example, US 2008/0069990 A1 refers to an injection moulded article comprising an HDPE having a density of greater than 930 kg/m³ and at least one in mould label.

[0005] Further, WO 2009/007453A1 refers to a packaging article for containing and holding food products, which article comprises barrier means for limiting permeability of oxygen through the article and into the one or more chambers, where the packaging article comprises oxygen scavenging means, which oxygen scavenging means together with a second plastic material is mould into a cavity in a first plastic material forming walls, bottom(s) and lid(s) of the packaging article, which first plastic material is suitable for contact with food products. Further, a method is shown of manufacturing a packaging finished in one injection moulding cycle comprising three process steps: - A barrier film with or without decoration is placed in the mould. - A first plastic material suitable for contact with food products is injected into the closed mould where the barrier film is placed. The mould is partly filled in this step. - A second plastic material containing an oxygen scavenger is injected into the mould until the mould is filled, whereby the oxygen scavenger is surrounded by the first plastic material suitable for contact with food products.

[0006] Further, US 2009/0169902A1 refers to an oxygen-absorbing resin composition containing a thermoplastic resin having carbon-carbon double bonds substantially only in the main chain and a transition metal salt, and the oxygen absorption amount of 1 mol of carbon-carbon double bond of the thermoplastic resin being 1.6 mols or more.

[0007] Further, JP 2004155483 refers to a plastic container laminated during the molding so that an in-mold label formed of lamination materials consisting of at least a transparent resin layer, a vapor-deposited thin film layer of silicon oxide, aluminum oxide, magnesium oxide, or mixtures thereof, an oriented film layer, an oxygen absorption layer consisting of mixtures with 30-70 wt.% oxygen absorbent mainly consisting of ion powder blended with 70-30 wt.% thermoplastic resin, and a thermoplastic resin layer forms an inner surface of a main resin layer of the container and the transparent resin layer of the in-mold label forms the main resin layer side. The entire inner surface of the container is covered by the in-mold label, and the innermost surface of the container is formed of the thermoplastic resin layer.

[0008] In addition, JP 2002120848 refers to a plastic container, wherein the plastic container has recesses in the surface thereof, a label having a gas barrier resin layer and an oxygen-absorbing resin layer, which is provided inside the gas barrier resin layer, is stuck on the container so as to cover at least the entire portions of the recesses formed in the surface of the container.

[0009] Further, US 2009/0061061 A1 refers to a multilayer film having an active oxygen barrier multilayer core comprising at least one of 1) an active oxygen barrier layer is sandwiched between two passive oxygen barrier layers, or 2) a passive oxygen barrier layer is sandwiched between two active oxygen barrier layers. Further, the active barrier layer can comprise a composition that is a blend of a thermoplastic resin having carbon-carbon double bonds substantially in its main chain, a transition metal salt, and an oxygen barrier polymer. Further, the active barrier layer may also include a compatibilizer. The passive oxygen barrier layers help to maintain the oxygen barrier properties of the multilayer film after the oxygen absorbing capacity of the active barrier layer has been exhausted.

[0010] In addition, US 2005/0079306 A1 refers to a thermoplastic resin composition containing an oxygen-absorbing agent, wherein a resin matrix of the thermoplastic resin composition is substantially non-compatible and is composed of a blend of thermoplastic resins or elastomers, and the non-compatible thermoplastic resins and elastomers are present as a non-uniformly distributed structure in the resin matrix. The packaging container or cap suppresses the lowering of flavor retention incident to the dissolving out of the oxygen absorbing agent or its oxidation product even after retorting sterilization. The preservability of the contents and flavor retention can be achieved for a long period of time. Further, the oxygen absorbing speed can be increased.

[0011] Some foods and other articles need to be isolated in a container so that they do not interact with oxygen in the environment. One way to prevent such an interaction is to include an oxygen barrier in the container design. For example, Japanese Registered Utility Model No. 3024995 discloses a container wherein a label having an oxygen barrier property is bonded to a container outer wall. US7608340 discloses a container containing a layer that includes an oxygen absorbing resin containing an ethylene vinyl alcohol copolymer (EVOH) and an oxygen absorbent. Similarly, US7588157 discloses an IML container wherein a label having a barrier layer including EVOH is used to give an oxygen barrier property to the label. In addition, many products need to be packaged in a container that can be retorted during the manufacturing process.

[0012] However, the labels currently used to produce IML containers are relatively thin because the oxygen barrier layer cannot be thick if made using available methods. As a result, the oxygen barrier property of such IML containers is insufficient for keeping oxygen out of the container. Furthermore, the oxygen barrier property of these labels is adversely affected by humidity and relatively high temperatures. As a result, known IML containers made using these labels cannot be used when the products must be retorted. There is, therefore, need for new IML containers that have good oxygen barrier properties and that can be retorted if needed.

SUMMARY OF THE INVENTION

[0013] It is, therefore, an object of the invention is to provide processes for producing in-mold labeled containers that have an oxygen barrier.

[0014] In is another object of the invention to provide in-mold labeled containers that have an oxygen barrier.

[0015] In is a further object of the invention to provide in-mold labeled containers that that have an oxygen barrier and that are retortable.

[0016] One or more of these or other objects can be achieved using novel processes for producing in-mold labeled containers. Such processes comprise setting a multilayered label having an oxygen barrier layer into a mold and injecting a melted resin suitable for forming a container into the mold. The process forms a container with an oxygen barrier layer. In preferred embodiments, the multilayered label has at least an oxygen absorbing resin layer containing ethylene-vinyl alcohol copolymer and an oxygen absorbent.

[0017] Other and further objects, features, and advantages of the present invention will be readily apparent to those skilled in the art.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018]

FIG. 1 illustrates an embodiment of the invention and shows the structure of barrier IML label having an oxygen scavenger.

FIG. 2 illustrates a known shrink wrap label used on containers.

FIG. 3 illustrates a known in-mold label.

DETAILED DESCRIPTION OF THE INVENTION

Definitions

[0019] The term "multilayered label having (or comprising) (at least) an oxygen absorbing resin layer" refers to label having plural layers at least one of which is an oxygen absorbing resin layer. This label further includes thereon an indicium or indicia such as writing, letters symbols, designs, markings, etc. viewable on the label itself, and preferably viewable when incorporated in the in-mold labeled container. Such indicium or indicia can be conferred by printing ink, etc. When the indicium or indicia is not present the construct is referred to as a "multilayered sheet having at least an oxygen absorbing resin layer."

[0020] The term "layer" refers to a single, discreet, thickness of a material that is compositionally unique as compared to any material(s) adjacent thereto (*i.e.*, in contact therewith) and/or separately applied/formed, or can refer to, essentially,

a series of sub-layers in successive contact with one another that, together, may provide a particular function. In the description that follows both usages of the term "layer" appear.

The Invention In one aspect, the invention provides an in-mold labeled container comprising:

a multilayered label comprising an oxygen absorbing resin layer and a resin container body, wherein the multilayered label covers all or part of an outer surface or an inner surface of the container, wherein the oxygen absorbing resin layer is a sublayer in a multilayered oxygen barrier layer, the multilayered oxygen barrier layer further comprising at least one oxygen barrier resin sublayer, wherein the total thickness of one or more optional layers layered outside the multilayered oxygen barrier layer is represented by X and the total thickness of the container is represented by Y, the ratio of X/Y is from about 0.01 to about 0.25.

[0021] In another aspect the invention provides a process for producing an in-mold labeled container comprising: setting a multilayered label having an oxygen barrier layer into a mold and adjacent to the mold body; and injecting a melted resin into the mold leaving the label between the mold body and the melted resin, thereby forming the container, wherein the total thickness of one or more optional layers layered outside the oxygen barrier layer is represented by X and the total thickness of the container is represented by Y, the ratio of X/Y is from about 0.01 to about 0.25.

[0022] Further embodiments of the present invention are described in the dependent claims.

[0023] FIG. 2 and FIG. 3, when compared to FIG. 1, illustrate the differences between known labels and containers and the labels and containers of the invention. The label in FIG. 2 is typically used with non-retorted containers for products such as beverages. Container structures of this type are shown in FIG. 3. Generally, these labels do not completely encircle the container. Further, the IML with this construction does not have the strength to withstand retorting. In contrast, the container of the invention is retortable.

[0024] In one embodiment, the IML structure shown in FIG. 1 is pre-printed. Then, to produce a container of the invention, the pre-printed IML label is placed in a mold. The polypropylene body is then formed in the same mold in such a way that the container body is completely encircled (sides and bottom) by the IML which is fused onto it. A cross-sectional drawing showing the container and IML layers are seen in FIG 1. The double layer of EVOH together with the container body construction imparts the strength required to withstand retorting. The oxygen scavenging layer and light barrier due to the inks in the IML allows the product to be stable to oxidation through its shelf-life. After the container with the IML is formed, it is then filled, sealed, and retorted as described herein. The difference is that the label is now part of the container; there are no issues with labels not staying in position on the container.

[0025] Thus, according to the invention, processes are provided for producing in-mold labeled containers having excellent oxygen barrier properties, preferably containers that can be retorted.

[0026] In another aspect, the invention provides in-mold labeled containers produced by processes of the invention.

[0027] The processes and containers of the invention limit amount of oxygen that enters into the container in a given period. Such limiting prevents oxygen from degrading the contents of the container and extends the shelf life of the product.

[0028] The invention is not limited to the particular methodology, protocols, and reagents described herein because they may vary. Further, the terminology used herein is for the purpose of describing particular embodiments only and is not intended to limit the scope of the present invention.

[0029] As used herein, ranges are used herein in shorthand, so as to avoid having to list and describe each and every value within the range. Any appropriate value within the range can be selected, where appropriate, as the upper value, lower value, or the terminus of the range.

[0030] Unless defined otherwise, all technical and scientific terms and any acronyms used herein have the same meanings as commonly understood by one of ordinary skill in the art in the field of the invention. Although any compositions, methods, articles of manufacture, or other means or materials similar or equivalent to those described herein can be used in the practice of the present invention, the preferred compositions, methods, articles of manufacture, or other means or materials are described herein.

[0031] All patents, patent applications, publications, and other references cited or referred to herein are incorporated herein by reference to the extent allowed by law. The discussion of those references is intended merely to summarize the assertions made therein. No admission is made that any such patents, patent applications, publications or references, or any portion thereof, are relevant prior art for the present invention and the right to challenge the accuracy and pertinence of such patents, patent applications, publications, and other references is specifically reserved.

EXAMPLES

[0032] The invention is further illustrated by the following examples, although it will be understood that the examples are included merely for purposes of illustration and are not intended to limit the scope of the invention unless otherwise specifically indicated.

Example 1

Preparation of Polyoctenylene

[0033] A three-necked flask equipped with a stirrer and a thermostat was purged with dry nitrogen. 624 parts by weight of heptane wherein 110 parts by weight of cis-cyclooctene and 0.187 part by weight of cis-4-octene were dissolved were put into the three-necked flask. Next, 0.0424 part by weight of [1,3-bis(2,4,6-trimethylphenyl)-2-imidazolidinylidene] dichloro(phenylmethylene)(tricyclohexylphosphine)ruthenium was dissolved into 3 parts by weight of toluene to prepare a catalytic liquid. This catalytic liquid was rapidly put into the three-necked flask, and the solution was stirred at 55°C to conduct a ring-opening metathesis polymerization. After 1 hour, the reaction liquid was analyzed by means of a gas chromatograph (GC-14B, manufactured by Shimadzu Corp.; column: G-100 manufactured by Chemicals Evaluation and Research Institute, Japan). As a result, it was verified that cis-cyclooctene was lost. Next, 1.08 parts by weight of ethyl vinyl ether were put into the three-necked flask, and further the mixed liquid was stirred for 10 minutes.

[0034] 200 parts by weight of water were added to the resultant reaction liquid, and the mixed liquid was stirred at 40°C for 30 minutes. Next, the liquid was allowed to stand still at 40°C for 1 hour so as to be separated into liquid phases. The water phase was then removed. 100 parts by weight of water were again added to the remaining liquid, and the mixed liquid was stirred at 45°C for 30 minutes. Next, the liquid was allowed to stand still at 40°C for 1 hour to be separated into liquid phases. The water phase was then removed. Next, heptane was distilled off from the remaining liquid under reduced pressure. A vacuum drier was used to dry the resultant solid at 1 Pa and 100°C for 6 hours, so as to yield 102.1 parts by weight of a polymer having a weight-average molecular weight (MW) of 14200 wherein the proportion of oligomers each having a molecular weight of 1000 or less was 9.2% (yield: 92%). In this polymer (poly-octenylene), the ratio of carbon-carbon double bonds in its side chains to all of its carbon-carbon double bonds was 0%.

[0035] The resultant polymer was crushed into pieces of 1 mm square, and the pieces were put into a separable flask equipped with a stirrer, a reflux condenser tube and a thermostat. Next, 300 parts by weight of acetone were put into the separable flask, and the mixture was stirred at 40°C for 3 hours. Acetone was then removed by decantation. 300 parts by weight of acetone were again put into the separable flask, and the mixture was stirred at 40°C for 3 hours. Acetone was then removed by decantation. The remaining fragment of acetone was distilled off under reduced pressure. A vacuum drier was used to dry the resultant solid at 1 Pa and 100°C for 6 hours, so as to yield 99 parts by weight of polyoctenylene having a weight-average molecular weight (Mw) of 150000 and a number-average molecular weight of 37000 wherein the proportion of oligomers each having a molecular weight of 1000 or less was 3.1%.

Example 2

Preparation of Styrene-Isoprene-Styrene Triblock Copolymer

[0036] 600 parts by volume of cyclohexane, 0.16 part by volume of N,N,N',N'-tetramethylethylenediamine (TMEDA) and 0.094 part by volume of n-butyllithium as an initiator were charged into a stirring type autoclave clarified with dry nitrogen. The temperature was raised to 50°C, and then 4.25 parts by volume of a styrene monomer were fed thereinto so as to conduct polymerization for 1.5 hours. Next, the temperature was lowered to 30°C, and then 120 parts by volume of isoprene were fed thereinto so as to conduct polymerization for 2.5 hours. Furthermore, the temperature was again raised to 50°C, and then 4.25 parts by volume of a styrene monomer were fed thereinto so as to conduct polymerization for 1.5 hours.

[0037] To the resultant reaction liquid were added 2-tert-butyl-6-(3-tert-butyl-2-hydroxy-5-methylbenzyl)-4-methylphenyl acrylate, and pentaerythritol tetrakis(3-laurylthiopropionate) as antioxidants, the amount of each of which was 0.15 part by weight for 100 parts by weight of the used styrene and isoprene. The reaction liquid was poured into methanol to precipitate a product. This was separated and dried to yield a styrene/isoprene/styrene triblock copolymer to which the antioxidants were added.

[0038] The number-average molecular weight of the resultant triblock copolymer was 85000, and the molecular weight of the styrene blocks in the copolymer was 8500. The styrene content by percentage therein was 14% by mole, and the ratio of carbon-carbon double bonds in its side chains to all of its carbon-carbon double bonds was 55%. The content of the carbon-carbon double bonds in the resultant triblock copolymer was 0.014 eq/g. The melt flow rate was 7.7 g/10 minutes. The resin contained 0.12% by weight of 2-tert-butyl-6-(3-tert-butyl-2-hydroxy-5-methylbenzyl)-4-methylphenyl acrylate, and 0.12% by weight of pentaerythritol tetrakis(3-laurylthiopropionate).

Example 3

Preparation of Label

[0039] 96 parts by weight of EVOH having an ethylene content by percentage of 27% by mole, a saponification degree of 99.8%, and a MFR of 4.0 g/10 minutes (at 210°C under a load of 2160 g) as EVOH (a-1), 4 parts by weight of the polyoctenylene yielded in Example 1, and 0.2121 part by weight of cobalt (II) stearate (the metallic-cobalt-converted amount: 200 ppm) were charged into a twin-screw extruder (LABO PLASTOMIL MODEL 15C300, manufactured by Toyo Positive electrode Seisaku-Sho, Ltd.) having a diameter of 25 mm. The components were extruded at 210°C under the screw rotation number of 100 rpm and at the extruded-resin amount of 4 kg/hour to yield oxygen absorbing resin composition pellets.

[0040] Next, the resultant oxygen absorbing resin composition pellets, polypropylene (PP) (NOVATEC EA7A, manufactured by Japan Polypropylene Corp.), and an adhesive resin (AD) (Admer QF500, manufactured by Mitsui Chemicals, Inc.) were separately melted and kneaded in individual extruders, and a coextruder was used to prepare, at an extruding temperature of 220°C, a multilayered label composed of 5 layers classified into 3 kinds (PP layer/AD layer/oxygen barrier layer (oxygen absorbing resin layer)/AD layer/PP layer, the thicknesses of which were 40 μm, 10 μm, 20 μm, 10 μm, and 40 μm, respectively).

Molding of an IML Container

[0041] The resultant multilayered label was cut in accordance with the shape of the inner wall surfaces of a female mold part of a container-forming mold. The cut multilayered label was set onto the inner wall surfaces of the female mold part of the mold. Next, a male mold part was pushed into the female mold part from the above, and then a melted resin (polypropylene (NOVATEC EA7A)) was injected into the cavity between the male and female mold parts at 220°C. In this way, the injection molding was performed to mold an IML container. The thickness of the body of the container was 700 μm, and the surface area was 83 cm². The whole of the outside of the container was covered with the label. The ratio of X/Y was 0.061 where X represents the total thickness (50 μm) of the layers (the propylene layer/the adhesive layer) outside the oxygen barrier layer of the multilayered label, and Y represents the thickness (820 μm) of the container.

Measurement of the Cumulative Oxygen Transmission Amount

[0042] Regarding the resultant IML container, the cumulative transmission amount of oxygen into the container was measured as follows: The IML container was subjected to retort treatment at 121°C for 25 minutes, and then a change in the oxygen permeability of the container was measured with time under conditions that the temperature was 20°C, the relative humidity of the outside was 65% and that of the inside was 100%. From the resultant change in the oxygen permeability with time, the cumulative oxygen transmission amount was calculated when the container was stored in the air for 18 months. The result is shown in Table 1.

Example 4

[0043] The oxygen absorbing resin composition pellets obtained in Example 3, EVOH (a-1), polypropylene (PP) (NOVATEC EA7A, manufactured by Japan Polypropylene Corp.), and an adhesive resin (AD) (Admer QF500, manufactured by Mitsui Chemicals, Inc.) were separately melted and kneaded in individual extruders, and a coextruder was used to prepare, at an extruding temperature of 220°C, a multilayered label composed of 7 layers classified into 4 kinds (PP layer/AD layer/EVOH layer/oxygen absorbing resin layer/EVOH layer/AD layer/PP layer, the thicknesses of which were 40 μm, 10 μm, 10 μm, 10 μm, 10 μm, 10 μm, and 40 μm, respectively). Example 3 was repeated except that the thus-prepared multilayered label was used, an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 1.

Example 5

[0044] Example 3 was repeated except that the thickness of the oxygen barrier layer (oxygen absorbing resin layer) was set to 30 μm, an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 1.

Example 6

[0045] Example 5 was repeated except that the following were used in the preparation of the oxygen absorbing resin

composition, an IML container was molded and the cumulative oxygen transmission amount thereof was obtained: 92 parts by weight of EVOH (a-1); 8 parts by weight of a polybutadiene (polybutadiene rubber (Nipol BR 1220) manufactured by Nippon Zeon Co., Ltd.); and 0.2121 part by weight (cobalt-metal-converted amount: 200 ppm) of cobalt (II) stearate. The result is shown in Table 1.

Example 7

[0046] Example 5 was repeated except that the following were used in the preparation of the oxygen absorbing resin composition, an IML container was molded and the cumulative oxygen transmission amount thereof was obtained: 92 parts by weight of EVOH (a-1); 8 parts by weight of the styrene-isoprene-styrene triblock copolymer yielded in Example 2; and 0.2121 part by weight (cobalt-metal-converted amount: 200 ppm) of cobalt (II) stearate. The result is shown in Table 1.

Example 8

[0047] Example 3 was repeated except that the thickness of the oxygen barrier layer (oxygen absorbing resin layer) was set to 25 μm and the thickness of the container body was set to 900 μm , an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 1.

Example 9

[0048] Example 8 was repeated except that the thickness of the oxygen barrier layer (oxygen absorbing resin layer) was set to 40 μm , an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 1.

Example 10

[0049] Example 8 was repeated except that the thickness of the oxygen barrier layer (oxygen absorbing resin layer) was set to 50 μm , an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 1.

Example 11

[0050] Example 10 was repeated except that the following were used in the preparation of the oxygen absorbing resin composition, an IML container was molded and the cumulative oxygen transmission amount thereof was obtained: 92 parts by weight of EVOH (a-1); 8 parts by weight of a polybutadiene (polybutadiene rubber (Nipol BR 1220) manufactured by Nippon Zeon Co., Ltd.); and 0.2121 part by weight (cobalt-metal-converted amount: 200 ppm) of cobalt (II) stearate. The result is shown in Table 1.

Example 12

[0051] Example 10 was repeated except that the following were used in the preparation of the oxygen absorbing resin composition, an IML container was molded and the cumulative oxygen transmission amount thereof was obtained: 92 parts by weight of EVOH (a-1); 8 parts by weight of the styrene-isoprene-styrene triblock copolymer yielded in Example 2; and 0.2121 part by weight (cobalt-metal-converted amount: 200 ppm) of cobalt (II) stearate. The result is shown in Table 1.

Example 13

[0052] Example 8 was repeated except that in the preparation of the multilayered label the thicknesses of the polypropylene layer and the adhesive layer that were the outer layer of the label were set to 80 μm and 20 μm , respectively, the thicknesses of the adhesive layer and the polypropylene layer that were the inner layer of the label were set to 20 μm and 80 μm , respectively, and the thickness of the container body was set to 800 μm , an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 1.

Example 14

[0053] Example 13 was repeated except that the thickness of the oxygen barrier layer (oxygen absorbing resin layer)

was set to 40 μm , an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 1.

Example 15

[0054] Example 13 was repeated except that the thickness of the oxygen barrier layer (oxygen absorbing resin layer) was set to 50 μm , an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 1.

Example 16

[0055] Example 15 was repeated except that the following were used in the preparation of the oxygen absorbing resin composition, an IML container was molded and the cumulative oxygen transmission amount thereof was obtained: 92 parts by weight of EVOH (a-1); 8 parts by weight of a polybutadiene (polybutadiene rubber (Nipol BR 1220) manufactured by Nippon Zeon Co., Ltd.); and 0.2121 part by weight (cobalt-metal-converted amount: 200 ppm) of cobalt (II) stearate. The result is shown in Table 1.

Example 17

[0056] Example 15 was repeated except that the following were used in the preparation of the oxygen absorbing resin composition, an IML container was molded and the cumulative oxygen transmission amount thereof was obtained: 92 parts by weight of EVOH (a-1); 8 parts by weight of the styrene/isoprene/styrene triblock copolymer yielded in Example 2; and 0.2121 part by weight (cobalt-metal-converted amount: 200 ppm) of cobalt (II) stearate. The result is shown in Table 1.

Example 18

[0057] Example 3 was repeated except that an oxygen barrier resin layer (EVOH (a-1)) was used instead of the oxygen absorbing resin layer, an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 2.

Example 19

[0058] Example 18 was repeated except that the thickness of the oxygen barrier resin layer (EVOH (a-1)) was set to 30 μm , an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 2.

Example 20

[0059] Example 18 was repeated except that the thickness of the oxygen barrier resin layer (EVOH (a-1)) was set to 25 μm and the thickness of the container body was set to 900 μm , an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 2.

Example 21

[0060] Example 20 was repeated except that the thickness of the oxygen barrier resin layer (EVOH (a-1)) was set to 40 μm , an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 2.

Example 22

[0061] Example 20 was repeated except that the thickness of the oxygen barrier resin layer (EVOH (a-1)) was set to 50 μm , an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 2.

Example 23

[0062] Example 20 was repeated except that in the preparation of the multilayered label the thicknesses of the poly-

propylene layer and the adhesive layer that were the outer layer of the label were set to 80 μm and 20 μm , respectively, the thicknesses of the adhesive layer and the polypropylene layer that were the inner layer of the label were set to 20 μm and 80 μm , respectively, and the thickness of the container body was set to 800 μm , an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 2.

Example 24

[0063] Example 23 as repeated except that the thickness of the oxygen barrier resin layer (EVOH (a-1)) was set to 40 μm , an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 2.

Example 25

[0064] Example 23 was repeated except that the thickness of the oxygen barrier resin layer (EVOH (a-1)) was set to 50 μm , an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 2.

Example 26

[0065] The oxygen absorbing resin composition pellets obtained in Example 3, EVOH (a-1), polyethylene terephthalate (PET) (PET 9921, manufactured by Eastman Chemical Co.), and an adhesive resin (AD) (Admer SF731, manufactured by Mitsui Chemicals, Inc.) were separately melted and kneaded in individual extruders, and an coextruder was used to prepare, at an extruding temperature of 270°C, a multilayered label composed of 5 layers classified into 3 kinds (PET layer/AD layer/oxygen barrier layer (oxygen absorbing resin layer)/AD layer/PP layer, the thicknesses of which were 40 μm , 10 μm , 50 μm , 10 μm , and 40 μm , respectively).

[0066] Example 3 was repeated except that the temperature for the injection molding was set to 290°C and the thickness of the container body was set to 900 μm , the resultant multilayered label was used and polyethylene terephthalate (PET 9921, manufactured by Eastman Chemical Co.) was used as a melted resin to mold an IML container, and then the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 3.

Example 27

[0067] Example 26 was repeated except that the following were used in the preparation of the oxygen absorbing resin composition, an IML container was molded and the cumulative oxygen transmission amount thereof was obtained: 92 parts by weight of EVOH (a-1); 8 parts by weight of a polybutadiene (polybutadiene rubber (Nipol BR 1220) manufactured by Nippon Zeon Co., Ltd.); and 0.2121 part by weight (cobalt-metal-converted amount: 200 ppm) of cobalt (II) stearate. The result is shown in Table 3.

Example 28

[0068] Example 26 was repeated except that the following were used in the preparation of the oxygen absorbing resin composition, an IML container was molded and the cumulative oxygen transmission amount thereof was obtained: 92 parts by weight of EVOH (a-1); 8 parts by weight of the styrene/isoprene/styrene triblock copolymer yielded in Example 2; and 0.2121 part by weight (cobalt-metal-converted amount: 200 ppm) of cobalt (II) stearate. The result is shown in Table 3.

Example 29

[0069] Example 26 was repeated except that an oxygen barrier resin layer (EVOH (a-1)) was used instead of the oxygen absorbing resin layer in the oxygen barrier layer, an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 3.

Example 30

[0070] Example 10 was repeated except that in the measurement condition the relative humidity of outside was 80%, an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 4.

Example 31

[0071] Example 30 was repeated expect that in the preparation of the multilayered label the thickness of the polypropylene layer and the adhesive layer that were the outer layer of the label were set to 5 μm and 5 μm , respectively, the thickness of the adhesive layer and the polypropylene layer that were the inner layer of the label were set to 5 μm and 5 μm , respectively, and the thickness of the container body was set to 980 μm , an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 4.

Example 32

[0072] Example 30 was repeated expect that in the preparation of the multilayered label the thickness of the polypropylene layer and the adhesive layer that were the outer layer of the label were set to 60 μm and 20 μm , respectively, the thickness of the adhesive layer and the polypropylene layer that were the inner layer of the label were set to 20 μm and 60 μm , respectively, and the thickness of the container body was set to 840 μm , an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 4.

Example 33

[0073] Example 30 was repeated expect that in the preparation of the multilayered label the thickness of the polypropylene layer and the adhesive layer that were the outer layer of the label were set to 80 μm and 20 μm , respectively, the thickness of the adhesive layer and the polypropylene layer that were the inner layer of the label were set to 20 μm and 80 μm , respectively, and the thickness of the container body was set to 800 μm , an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 4.

Example 34

[0074] Example 30 was repeated expect that in the preparation of the multilayered label the thickness of the polypropylene layer and the adhesive layer that were the outer layer of the label were set to 250 μm and 50 μm , respectively, the thickness of the adhesive layer and the polypropylene layer that were the inner layer of the label were set to 20 μm and 80 μm , respectively, and the thickness of the container body was set to 600 μm , an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 4.

Example 35

[0075] Example 30 was repeated except that an oxygen barrier layer (EVOH (a-1)) was used instead of the oxygen absorbing resin layer, an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 5.

Example 36

[0076] Example 35 was repeated expect that in the preparation of the multilayered label the thickness of the polypropylene layer and the adhesive layer that were the outer layer of the label were set to 5 μm and 5 μm , respectively, the thickness of the adhesive layer and the polypropylene layer that were the inner layer of the label were set to 5 μm and 5 μm , respectively, and the thickness of the container body was set to 980 μm , an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 5.

Example 37

[0077] Example 35 was repeated expect that in the preparation of the multilayered label the thickness of the polypropylene layer and the adhesive layer that were the outer layer of the label were set to 80 μm and 20 μm , respectively, the thickness of the adhesive layer and the polypropylene layer that were the inner layer of the label were set to 20 μm and 80 μm , respectively, and the thickness of the container body was set to 800 μm , an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 5.

Example 38

[0078] Example 30 was repeated expect that in the preparation of the multilayered label the thickness of the polypropylene layer and the adhesive layer that were the outer layer of the label were set to 250 μm and 50 μm , respectively,

the thickness of the adhesive layer and the polypropylene layer that were the inner layer of the label were set to 20 μm and 80 μm , respectively, and the thickness of the container body was set to 600 μm , an IML container was molded and the cumulative oxygen transmission amount thereof was obtained. The result is shown in Table 5.

[0079] It is understood that regarding the IML containers each obtained by the process of the invention, e.g., Examples 1 through 17, Example 26 through 28 and Example 30 through 34, wherein an oxygen barrier layer contains an oxygen absorbing resin layer, the cumulative oxygen transmission amount is smaller than that of the IML containers wherein the thickness of the container body and the thickness of the multilayered label are equal to those in the corresponding examples and further no oxygen absorbing resin layer is contained, e.g., Examples 18 through 25, Example 29 and Example 35 through 38.

[0080] As used herein, ranges are used herein in shorthand, so as to avoid having to list and describe each and every value within the range. Any appropriate value within the range can be selected, where appropriate, as the upper value, lower value, or the terminus of the range.

[0081] As used herein, the singular form of a word includes the plural, and vice versa, unless the context clearly dictates otherwise. Thus, the references "a", "an", and "the" are generally inclusive of the plurals of the respective terms. For example, reference to "a supplement", "a method", or "a food" includes a plurality of such "supplements", "methods", or "foods." Similarly, the words "comprise", "comprises", and "comprising" are to be interpreted inclusively rather than exclusively. Likewise the terms "include", "including" and "or" should all be construed to be inclusive, unless such a construction is clearly prohibited from the context. Similarly, the term "examples," particularly when followed by a listing of terms, is merely exemplary and illustrative and should not be deemed to be exclusive or comprehensive.

[0082] The methods and compositions and other advances disclosed here are not limited to particular methodology, protocols, and reagents described herein because, as the skilled artisan will appreciate, they may vary. Further, the terminology used herein is for the purpose of describing particular embodiments only, and is not intended to, and does not, limit the scope of that which is disclosed or claimed.

[0083] Unless defined otherwise, all technical and scientific terms, terms of art, and acronyms used herein have the meanings commonly understood by one of ordinary skill in the art in the field(s) of the invention, or in the field(s) where the term is used. Although any compositions, methods, articles of manufacture, or other means or materials similar or equivalent to those described herein can be used in the practice of the present invention, the preferred compositions, methods, articles of manufacture, or other means or materials are described herein.

[0084] All patents, patent applications, publications, technical and/or scholarly articles, and other references cited or referred to herein are in their entirety incorporated herein by reference to the extent allowed by law. The discussion of those references is intended merely to summarize the assertions made therein. No admission is made that any such patents, patent applications, publications or references, or any portion thereof, are relevant, material, or prior art. The right to challenge the accuracy and pertinence of any assertion of such patents, patent applications, publications, and other references as relevant, material, or prior art is specifically reserved.

[0085] In the specification, there have been disclosed typical preferred embodiments of the invention. Although specific terms are employed, they are used in a generic and descriptive sense only and not for purposes of limitation. The scope of the invention is set forth in the claims. Obviously many modifications and variations of the invention are possible in light of the above teachings. It is therefore to be understood that within the scope of the appended claims, the invention may be practiced otherwise than as specifically described.

Table 1

		Multilayered label										Container body thickness (μm)	Container thickness (μm) Y	X/Y	Cumulative oxygen transmission amount (cc/pkg-air)
		Composition of (2)													
		Outer layer (μm) X	Oxygen barrier layer(s)				Inner layer (μm)	EVOH (% by weight)	Oxygen absorbent (% by weight)	Co concentration (ppm)					
(1) (μm)	(2) (μm)		(1) (μm)	(1) (μm)											
Example.	3	40/10	-	20	-	10/40	EVOH(a-1) (96)	PCOE (4)	200		700	820	0.061	8.1	
	4	40/10	10	10	10	10/40	EVOH(a-1) (96)	PCOE (4)	200		700	830	0.060	1.9	
	5	40/10	-	30	-	10/40	EVOH(a-1) (96)	PCOE (4)	200		700	830	0.060	1.4	
	6	40/10	-	30	-	10/40	EVOH(a-1) (92)	PBd (8)	200		700	830	0.060	2.5	
	7	40/10	-	30	-	10/40	EVOH(a-1) (92)	SIS (8)	200		700	830	0.060	2.8	
	8	40/10	-	25	-	10/40	EVOH(a-1) (96)	PCOE (4)	200		900	1025	0.049	3.3	
	9	40/10	-	40	-	10/40	EVOH(a-1) (96)	PCOE (4)	200		900	1040	0.048	0	
	10	40/10	-	50	-	10/40	EVOH(a-1) (96)	PCOE (4)	200		900	1050	0.048	0	
	11	40/10	-	50	-	10/40	EVOH(a-1) (92)	PBd (8)	200		900	1050	0.048	0.7	

(continued)

		Multilayered label								Container body thickness (μm)	Container thickness (μm) Y	X/Y	Cumulative oxygen transmission amount (cc/pkg-air)
		Layer structure (outer layer/oxygen barrier layer(s)/inner layer)				Composition of (2)							
Outer layer (μm) X	Oxygen barrier layer(s)			Inner layer (μm)	EVOH (% by weight)	Oxygen absorbent (% by weight)	Co concentration (ppm)						
	(1) (μm)	(2) (μm)	(1) (μm)										
	12	40/10	-	50	-	10/40	EVOH(a-1) (92)	SIS (8)	200	900	1050	0.048	0.9
	13	80/20	-	25	-	20/80	EVOH(a-1) (96)	PCOE (4)	200	800	1025	0.098	0.4
	14	80/20	-	40	-	20/80	EVOH(a-1) (96)	PCOE (4)	200	800	1040	0.096	0
	15	80/20	-	50	-	20/80	EVOH(a-1) (96)	PCOE (4)	200	800	1050	0.095	0
	16	80/20	-	50	-	20/80	EVOH(a-1) (92)	PBd (8)	200	800	1050	0.095	0.2
	17	80/20	-	50	-	20/80	EVOH(a-1) (92)	SIS (8)	200	800	1050	0.095	0.3
	Outer layer (humidity resistant resin): bilayered structure of polypropylene layer/adhesive layer Inner layer (humidity resistant resin): bilayered structure of adhesive layer/polypropylene layer (1): oxygen barrier resin layer (2): oxygen absorbing resin layer Co concentration: concentration (cobalt-metal converted concentration) in oxygen absorbing layer PCOE: polyoctenylene PBd: polybutadiene SIS: styrene-isoprene-styrene triblock copolymer The raw material of each of the containers was polypropylene, and the surface area thereof was 83 cm ² .												

Table 2

	Multilayered label										Container body thickness (μm)	Container thickness (μm) Y	X/Y	Cumulative oxygen transmission amount (cc/pkg-air)						
	Layer structure (outer layer/oxygen barrier layer(s)/inner layer)					Composition of (2)														
Example	Outer layer (μm) X	Oxygen barrier layer(s)			Inner layer (μm)	EVOH (%) by weight)	Oxygen absorbent (% by weight)	Co concentration (ppm)	700	820	0.061	9.8								
		(1) (μm)	(2) (μm)	(1) (μm)																
	40/10	20	-	-	10/40	-	-	-					700	830	0.060	4.1				
	40/10	30	-	-	10/40	-	-	-												
	40/10	25	-	-	10/40	-	-	-									900	1025	0.049	5.5
	40/10	40	-	-	10/40	-	-	-												
	40/10	50	-	-	10/40	-	-	-												
80/20	25	-	-	20/80	-	-	-													
80/20	40	-	-	20/80	-	-	-	800	1040	0.096	1.2									
80/20	50	-	-	20/80	-	-	-					800	1050	0.095	0.8					
Outer layer (humidity resistant resin): bilayered structure of polypropylene layer/adhesive layer Inner layer (humidity resistant resin): bilayered structure of adhesive layer/polypropylene layer (1): oxygen barrier resin layer (2): oxygen absorbing resin layer Co concentration: cobalt-metal converted concentration) in oxygen absorbing layer The raw material of each of the containers was polypropylene, and the surface area thereof was 83 cm ² .																				

Table 3

Example		Multilayered label							Container body thickness (μm)	Container thickness (μm) Y	X/Y	Cumulative oxygen transmission amount (cc/pkg-air)		
		Layer structure (outer layer/oxygen barrier layer(s)/inner layer)		Composition of (2)										
				Oxygen barrier layer(s)			Inner layer (μm)	EVOH (% by weight)					Oxygen absorbent (% by weight)	Co concentration (ppm)
				(1) (μm)	(2) (μm)	(1) (μm)								
	26	40/10	-	50	-	10/40	EVOH (a-1) (96)	PCOE (4)	200	900	1050	0.048	0	
	27	40/10	-	50	-	10/40	EVOH (a-1) (92)	PBd (8)	200	900	1050	0.048	0.1	
	28	40/10	-	50	-	10/40	EVOH (a-1) (92)	SIS (8)	200	900	1050	0.048	0.2	
	29	40/10	50	-	-	10/40	-	-	-	900	1050	0.048	0.4	
Outer layer (humidity resistant resin): bilayered structure of polyethylene terephthalate layer/adhesive layer Inner layer (humidity resistant resin): bilayered structure of adhesive layer/ polyethylene terephthalate layer (1): oxygen barrier resin layer (2): oxygen absorbing resin layer Co concentration: concentration (cobalt-metal converted concentration) in oxygen absorbing layer PCOE: polyoctenylene PBd: polybutadiene SIS: styrene-isoprene-styrene triblock copolymer The raw material of each of the containers was polypropylene, and the surface area thereof was 83 cm ² .														

Table 4

	Multilayered label								Container body thickness (μm)	Container thickness (μm) Y	X/Y	Cumulative oxygen transmission amount (cc/pkg-air)								
	Layer structure (outer layer/oxygen barrier layer(s)/inner layer)				Composition of (2)															
Example	Outer layer (μm) X	Oxygen barrier layer(s)			Inner layer (μm)	EVOH (% by weight)	Oxygen absorbent (% by weight)	Co concentration (ppm)	900	1050	0.048	0.05								
	(1) (μm)	(2) (μm)	(1) (μm)																	
	30	40/10	-	50	-	10/40	EVOH (a-1) (96)	PCOE (4)					200	980	1050	0.0095	7.10			
	31	5/5	-	50	-	5/5	EVOH (a-1) (96)	PCOE (4)					200							
	32	60/20	-	50	-	20/60	EVOH (a-1) (96)	PCOE (4)					200					840	1050	0.076
33	80/20	-	50	-	20/80	EVOH (a-1) (96)	PCOE (4)	200												
34	250/50	-	50	-	20/80	EVOH (a-1) (96)	PCOE (4)	200	800	1050	0.095	0								
													600	1050	0.286	0.07				
Outer layer (humidity resistant resin): bilayered structure of polypropylene layer/adhesive layer Inner layer (humidity resistant resin): bilayered structure of adhesive layer/polypropylene layer																				
(1): oxygen barrier resin layer																				
(2): oxygen absorbing resin layer																				
Co concentration: concentration (cobalt-metal converted concentration) in oxygen absorbing layer PCOE: polyoctenylene																				
The raw material of each of the containers was polypropylene, and the surface area thereof was 83 cm ² .																				

Table 5

Example		Multilayered label								Container body thickness (μm)	Container thickness (μm) Y	X/Y	Cumulative oxygen transmission amount (cc/pkg-air)
		Layer structure (outer layer/oxygen barrier layer(s)/inner layer)				Composition of (2)							
		Outer layer (μm) X	Oxygen barrier layer(s)		Inner layer (μm)	EVOH (% by weight)	Oxygen absorbent (% by weight)	Co concentration (ppm)					
35		40/10	50	-	-	10/40	-	-	-	900	1050	0.048	1.80
36		5/5	50	-	-	5/5	-	-	-	980	1050	0.0095	8.80
37		80/20	50	-	-	20/80	-	-	-	800	1050	0.095	0.94
38		250/50	50	-	-	20/80	-	-	-	600	1050	0.286	0.52
Outer layer (humidity resistant resin): bilayered structure of polypropylene layer/adhesive layer Inner layer (humidity resistant resin): bilayered structure of adhesive layer/polypropylene layer (1): oxygen barrier resin layer (2): oxygen absorbing resin layer Co concentration: concentration (cobalt-metal converted concentration) in oxygen absorbing layer The raw material of each of the containers was polypropylene, and the surface area thereof was 83 cm ² .													

Table 3

Example		Multilayered label								Container body thickness (μm)	Container thickness (μm) Y	X/Y	Cumulative oxygen transmission amount (cc/pkg-air)
		Layer structure (outer layer/oxygen barrier layer(s)/inner layer)				Composition of (2)							
		Outer layer (μm) X	Oxygen barrier layer(s)			Inner layer (μm)	EVOH (%) by weight	Oxygen absorbent (% by weight)	Co concentration (ppm)				
			(1) (μm)	(2) (μm)	(1) (μm)								
26		40/10	-	50	-	10/40	EVOH (a-1) (96)	PCOE (4)	200	900	1050	0.048	0
27		40/10	-	50	-	10/40	EVOH (a-1) (92)	PBd (8)	200	900	1050	0.048	0.1
28		40/10	-	50	-	10/40	EVOH (a-1) (92)	SIS (8)	200	900	1050	0.048	0.2
29		40/10	50	-	-	10/40	-	-	-	900	1050	0.048	0.4
Outer layer (humidity resistant resin): bilayered structure of polyethylene terephthalate layer/adhesive layer Inner layer (humidity resistant resin): bilayered structure of adhesive layer/ polyethylene terephthalate layer (1): oxygen barrier resin layer (2): oxygen absorbing resin layer Co concentration: cobalt-metal converted concentration) in oxygen absorbing layer PCOE: polyoctenylene PBd: polybutadiene SIS: styrene-isoprene-styrene triblock copolymer The raw material of each of the containers was polypropylene, and the surface area thereof was 83 cm ² .													

Table 4

	Multilayered label										X/Y	Container body thickness (μm)	Container thickness (μm) Y	Cumulative oxygen transmission amount (cc/pkg-air)						
	Layer structure (outer layer/oxygen barrier layer(s)/inner layer)					Composition of (2)														
Example	Outer layer (μm) X	Oxygen barrier layer(s)			Inner layer (μm)	EVOH (% by weight)	Oxygen absorbent (% by weight)	Co concentration (ppm)	900	1050	0.048	0.05								
		(1) (μm)	(2) (μm)	(1) (μm)																
	-				50	-	10/40	EVOH (a-1) (96)					PCOE (4)	200						
	31	5/5	-	50	-	5/5	EVOH (a-1) (96)	PCOE (4)					200	980	1050	0.0095	7.10			
	32	60/20	-	50	-	20/60	EVOH (a-1) (96)	PCOE (4)					200							
33	80/20	-	50	-	20/80	EVOH (a-1) (96)	PCOE (4)	200	800	1050	0.095	0								
34	250/50	-	50	-	20/80	EVOH (a-1) (96)	PCOE (4)	200					600					1050	0.286	0.07
Outer layer (humidity resistant resin): bilayered structure of polypropylene layer/adhesive layer Inner layer (humidity resistant resin): bilayered structure of adhesive layer/polypropylene layer (1): oxygen barrier resin layer (2): oxygen absorbing resin layer Co concentration: cobalt-metal converted concentration) in oxygen absorbing layer PCOE: polyoctenylene The raw material of each of the containers was polypropylene, and the surface area thereof was 83 cm ² .																				

Table 5

	Multilayered label										Container body thickness (μm)	Container thickness (μm) Y	X/Y	Cumulative oxygen transmission amount (cc/pkg-air)
	Layer structure (outer layer/oxygen barrier layer(s)/inner layer)					Composition of (2)								
Example	35	40/10	50	-	-	10/40	-	-	-	900	1050	0.048	1.80	
	36	5/5	50	-	-	5/5	-	-	-	980	1050	0.0095	8.80	
	37	80/20	50	-	-	20/80	-	-	-	800	1050	0.095	0.94	
	38	250/50	50	-	-	20/80	-	-	-	600	1050	0.286	0.52	
Outer layer (humidity resistant resin): bilayered structure of polypropylene layer/adhesive layer Inner layer (humidity resistant resin): bilayered structure of adhesive layer/polypropylene layer (1): oxygen barrier resin layer (2): oxygen absorbing resin layer Co concentration: concentration (cobalt-metal converted concentration) in oxygen absorbing layer The raw material of each of the containers was polypropylene, and the surface area thereof was 83 cm ² .														

Claims

1. An in-mold labeled container comprising:

a multilayered label comprising an oxygen absorbing resin layer and a resin container body, wherein the multilayered label covers all or part of an outer surface or an inner surface of the container, wherein the oxygen absorbing resin layer is a sublayer in a multilayered oxygen barrier layer, the multilayered oxygen barrier layer further comprising at least one oxygen barrier resin sublayer,

wherein the total thickness of one or more optional layers layered outside the multilayered oxygen barrier layer is represented by X and the total thickness of the container is represented by Y, the ratio of X/Y is from about 0.01 to about 0.25.

2. The in-mold labeled container as claimed in Claim 1, further comprising one or more comestible compositions inside said container.

3. The in-mold labeled container as claimed in Claim 2, wherein the comestible composition is a human food composition or a pet food composition, such as e.g. a dog food composition or a cat food composition.

4. The in-mold labeled container as claimed in Claim 1, 2 or 3, wherein the container has been sealed and retorted.

5. The in-mold labeled container as claimed in Claim 1, further comprising one or more non-comestible compositions inside said container.

6. A process for producing an in-mold labeled container comprising:

setting a multilayered label having an oxygen barrier layer into a mold and adjacent to the mold body; and injecting a melted resin into the mold leaving the label between the mold body and the melted resin, thereby forming the container, wherein the total thickness of one or more optional layers layered outside the oxygen barrier layer is represented by X and the total thickness of the container is represented by Y, the ratio of X/Y is from about 0.01 to about 0.25.

7. The process of Claim 6 wherein the oxygen barrier layer comprises at least an oxygen absorbing (scavenger) resin layer comprising an ethylene vinyl alcohol copolymer (EVOH) and/or other resin and an oxygen absorbent.

8. The process of Claim 7 wherein the ethylene content by percentage in the EVOH contained in the oxygen absorbing resin layer is from about 5 to about 60%.

9. The process of Claim 7 or 8 wherein the saponification degree of the EVOH contained in the oxygen absorbing resin layer is about 90% or more.

10. The process of Claim 7 wherein the oxygen absorbent is an organic compound, a polymer having a secondary or tertiary carbon atom, a polyamide resin; or a powder of reducible metal.

11. The process of Claim 7 wherein the oxygen absorbent further comprises one or more transition metal salts.

12. The process of Claim 7 wherein the oxygen absorbent comprises from about 10 to about 5000 ppm of one or more transition metal salts.

13. The process of Claim 7 wherein the organic compound has a double bond.

14. The process of Claim 13 wherein the compound having a carbon-carbon double bond is selected from the group consisting of polybutadiene, polyisoprene, polychloroprene, poly(2-ethylbutadiene), poly(2-butylbutadiene), poly-octenylene, polypentenylene, polynorbornene, styrene-isoprene-styrene triblock copolymer, polybutadiene, and polyoctenylene.

15. The process of Claim 7 wherein the oxygen barrier layer had a thickness of from about 5 to about 100 μm .

16. The process of Claim 7 wherein the container is retortable.

17. The process according to claim 6, wherein the oxygen barrier layer comprises a oxygen absorbing resin layer and at least one oxygen barrier resin sublayer, wherein the mold is composed of a female mold part and a male mold part, wherein

the setting the multilayered label having the oxygen barrier layer into the mold and adjacent to the mold body comprises:

setting the multilayered label onto an inner wall surface of the female mold part or an outer wall surface of the male mold part; and wherein the injecting the melted resin into the mold leaving the label between the mold body and the melted resin, thereby forming the container, comprises:

injecting the melted resin into a cavity between the male and female mold parts, thereby molding and labeling the container simultaneously.

18. The process of Claim 17, wherein the multilayered label covers all of an outer surface or an inner surface of the container, or wherein the multilayered label covers all of the outer surface of the container.

19. The process of claim 17, wherein a thickness of the multilayered oxygen barrier layer is from about 5 to about 100 μm .

20. The process of Claim 19, wherein the multilayered label further comprises at least one moisture resistant resin layer as the outermost layer or both the outermost and innermost layers of the multilayered label.

21. The process of Claim 20, wherein the multilayered label comprises moisture resistant resin layers as the outermost and innermost layers of the multilayered label.

22. The process of Claim 19, wherein the multilayered oxygen barrier layer has a layered structure as follows: first oxygen barrier resin sublayer/oxygen absorbing resin layer/second oxygen barrier resin sublayer.

23. The process of Claim 20, wherein the moisture resistant resin layer has a moisture permeability of about 40 g $\cdot$ 30 $\mu\text{m}/\text{m}^2\cdot\text{day}$ or less at a temperature of about 40°C and a relative humidity of about 90%.

24. The process of Claim 20, wherein the moisture resistant resin layer is made of a resin identical to the melted resin.

25. The process of any of Claims 17 - 24, wherein the container is retortable.

26. The process of claim 17, further comprising the steps of placing a product into the container; and sealing the container.

Patentansprüche

1. In der Form etikettierter Behälter, umfassend:

ein mehrschichtiges Etikett, eine Sauerstoff absorbierende Harzschicht und ein Harz-Behältergehäuse umfassend, wobei das mehrschichtige Etikett die gesamte oder einen Teil einer Außenfläche oder einer Innenfläche des Behälters bedeckt, wobei die Sauerstoff absorbierende Harzschicht eine Unterschicht in einer mehrschichtigen Sauerstoffbarriereschicht ist, wobei die mehrschichtige Sauerstoffbarriereschicht ferner mindestens eine Sauerstoffbarrieren-Harzunterschicht umfasst, wobei die Gesamtstärke von einer oder mehr optionalen Schichten, die außerhalb der mehrschichtigen Sauerstoffbarriereschicht geschichtet sind, von X dargestellt ist und die Gesamtstärke des Behälters von Y dargestellt ist, das Verhältnis von X/Y von etwa 0,01 bis etwa 0,25 beträgt.

2. In der Form etikettierter Behälter nach Anspruch 1, ferner ein oder mehr Nahrungsmittelzusammensetzungen in dem Behälter umfassend.

3. In der Form etikettierter Behälter nach Anspruch 2, wobei die Nahrungsmittelzusammensetzung eine Nahrungsmittel-

telzusammensetzung für Menschen oder eine Nahrungsmittelzusammensetzung für Haustiere ist, wie z. B. eine Hundefutterzusammensetzung oder eine Katzenfutterzusammensetzung.

4. In der Form etikettierter Behälter nach Anspruch 1, 2 oder 3, wobei der Behälter versiegelt und autoklaviert wurde.

5. In der Form etikettierter Behälter nach Anspruch 1, ferner ein oder mehr nicht essbare Zusammensetzungen in dem Behälter umfassend.

6. Verfahren zum Produzieren eines in der Form etikettierten Behälters, umfassend:

Setzen eines mehrschichtigen Etiketts mit einer Sauerstoffbarriereschicht in eine Form und angrenzend an das Formgehäuse; und

Einspritzen eines geschmolzenen Harzes in die Form, wobei das Etikett zwischen dem Formgehäuse und dem geschmolzenen Harz liegt, wodurch der Behälter gebildet wird, wobei die Gesamtdicke von einer oder mehr optionalen Schichten, die außerhalb der Sauerstoffbarriereschicht geschichtet sind, von X dargestellt ist und die Gesamtstärke des Behälters von Y dargestellt ist, das Verhältnis von X/Y von etwa 0,01 bis etwa 0,25 beträgt.

7. Verfahren von Anspruch 6, wobei die Sauerstoffbarriereschicht mindestens eine Sauerstoff absorbierende (Scavenger) Harzschicht umfasst, die ein Ethylenvinylalkoholcopolymer (EVOH) und/oder anderes Harz und ein Sauerstoffabsorbens umfasst.

8. Verfahren nach Anspruch 7, wobei der Ethylengehalt nach Prozent im EVOH, der in der Sauerstoff absorbierenden Harzschicht enthalten ist, von etwa 5 bis etwa 60 % beträgt.

9. Verfahren nach Anspruch 7 oder 8, wobei der Seifenbildungsgrad des EVOH, der in der Sauerstoff absorbierenden Harzschicht enthalten ist, etwa 90 % oder mehr beträgt.

10. Verfahren nach Anspruch 7, wobei das Sauerstoffabsorbens eine organische Verbindung, ein Polymer mit einem sekundären oder tertiären Kohlenstoffatom, ein Polyamidharz oder ein Pulver aus reduzierbarem Metall ist.

11. Verfahren nach Anspruch 7, wobei das Sauerstoffabsorbens ferner ein oder mehr Übergangsmetallsalze umfasst.

12. Verfahren nach Anspruch 7, wobei das Sauerstoffabsorbens von etwa 10 bis etwa 5000 ppm eines oder mehrerer Übergangsmetallsalze umfasst.

13. Verfahren nach Anspruch 7, wobei die organische Verbindung eine Doppelbindung aufweist.

14. Verfahren nach Anspruch 13, wobei die Verbindung mit einer Kohlenstoff-Kohlenstoff-Doppelbindung ausgewählt ist aus der Gruppe bestehend aus Polybutadien, Polyisopren, Polychloropren, Poly(2-ethylbutadien), Poly(2-butylbutadien), Polyoctenylen, Polypentenylene, Polynorbornen, Styrol-Isopren-Styrol-Triblock-Copolymer, Polybutadien und Polyoctenylen.

15. Verfahren nach Anspruch 7, wobei die Sauerstoffbarriereschicht eine Stärke von etwa 5 bis etwa 100 µm hat.

16. Verfahren nach Anspruch 7, wobei der Behälter autoklavierbar ist.

17. Verfahren nach Anspruch 6, wobei die Sauerstoffbarriereschicht eine Sauerstoff absorbierende Harzschicht und mindestens eine Sauerstoffbarrieren-Harzunterschicht umfasst, wobei die Form aus einem negativen Formteil und einem positiven Formteil zusammengesetzt ist, wobei das Setzen des mehrschichtigen Etiketts mit der Sauerstoffbarriereschicht in die Form und angrenzend an das Formgehäuse Folgendes umfasst:

Setzen des mehrschichtigen Etiketts auf eine Innenwandfläche des weiblichen Formteils oder eine Außenwandfläche des männlichen Formteils; und worin

das Einspritzen des geschmolzenen Harzes in die Form, das Etikett zwischen dem Formgehäuse und dem geschmolzenen Harz hinterlassend, dadurch den Behälter formend, umfasst:

Einspritzen des geschmolzenen Harzes in einen Hohlraum zwischen den männlichen und weiblichen Form-

teilen, dadurch den Behälter gleichzeitig formend und etikettierend.

18. Verfahren nach Anspruch 17, wobei das mehrschichtige Etikett eine gesamte Außenfläche oder eine gesamte Innenfläche des Behälters abdeckt oder wobei das mehrschichtige Etikett die gesamte Außenfläche des Behälters abdeckt.
19. Verfahren nach Anspruch 17, wobei eine Stärke der mehrschichtigen Sauerstoffbarriereschicht von etwa 5 bis etwa 100 μm beträgt.
20. Verfahren nach Anspruch 19, wobei das mehrschichtige Etikett ferner mindestens eine feuchtigkeitsbeständige Harzschicht als die äußerste Schicht oder sowohl die äußerste als auch die innerste Schicht des mehrschichtigen Etiketts umfasst.
21. Verfahren nach Anspruch 20, wobei das mehrschichtige Etikett feuchtigkeitsbeständige Harzschichten als die äußerste und die innerste Schicht des mehrschichtigen Etiketts umfasst.
22. Verfahren nach Anspruch 19, wobei die mehrschichtige Sauerstoffbarriereschicht eine geschichtete Struktur wie folgt aufweist: erste Sauerstoffbarrieren-Harzunterschicht/Sauerstoff absorbierende Harzschicht/zweite Sauerstoffbarrieren-Harzunterschicht.
23. Verfahren nach Anspruch 20, wobei die feuchtigkeitsbeständige Harzschicht eine Feuchtigkeitsdurchlässigkeit von etwa $40 \text{ g} \cdot 30 \cdot \mu\text{m}/\text{m}^2$ pro Tag oder weniger bei einer Temperatur von etwa 40°C und einer relativen Feuchte von etwa 90 % aufweist.
24. Verfahren nach Anspruch 20, wobei die feuchtigkeitsbeständige Harzschicht aus einem Harz hergestellt ist, das identisch mit dem geschmolzenen Harz ist.
25. Verfahren nach einem der Ansprüche 17-24, wobei der Behälter autoklavierbar ist.
26. Verfahren nach Anspruch 17, ferner die Schritte des Platzierens eines Produkts in den Behälter; und des Versiegelns des Behälters umfassend.

Revendications

1. Récipient étiqueté dans le moule comprenant :

une étiquette à couches multiples comprenant une couche de résine absorbant l'oxygène et un corps de récipient en résine, dans lequel l'étiquette à couches multiples recouvre la totalité ou une partie d'une surface externe ou d'une surface interne du récipient, dans lequel la couche de résine absorbant l'oxygène est une sous-couche dans une couche formant barrière à l'oxygène à couches multiples, la couche formant barrière à l'oxygène à couches multiples comprenant en outre au moins une sous-couche de résine formant barrière à l'oxygène, dans lequel l'épaisseur totale d'une ou de plusieurs couches optionnelles empilées à l'extérieur de la couche formant barrière à l'oxygène à couches multiples est représentée par X et l'épaisseur totale du récipient est représentée par Y, le rapport de X/Y est d'environ 0,01 à environ 0,25.

2. Récipient étiqueté dans le moule selon la revendication 1, comprenant en outre une ou plusieurs compositions comestibles à l'intérieur dudit récipient.
3. Récipient étiqueté dans le moule selon la revendication 2, dans lequel la composition comestible est une composition alimentaire pour les humains ou une composition alimentaire pour les animaux de compagnie, comme par ex. une composition alimentaire pour chien ou une composition alimentaire pour chat.
4. Récipient étiqueté dans le moule selon la revendication 1, 2 ou 3, dans lequel le récipient a été scellé et stérilisé.
5. Récipient étiqueté dans le moule selon la revendication 1, comprenant en outre une ou plusieurs compositions non comestibles à l'intérieur dudit récipient.

6. Processus de production d'un récipient étiqueté dans le moule comprenant :

le placement d'une étiquette à couches multiples ayant une couche formant barrière à l'oxygène dans un moule et à côté du corps de moule ; et

l'injection d'une résine à l'état fondu dans le moule, laissant l'étiquette entre le corps de moule et la résine à l'état fondu, formant ainsi le récipient, dans lequel l'épaisseur totale d'une ou de plusieurs couches optionnelles empilées à l'extérieur de la couche formant barrière à l'oxygène est représentée par X et l'épaisseur totale du récipient est représentée par Y, le rapport de X/Y est d'environ 0,01 à environ 0,25.

7. Processus selon la revendication 6, dans lequel la couche formant barrière à l'oxygène comprend au moins une couche de résine d'absorption (absorbeur) de l'oxygène comprenant un copolymère d'alcool vinylique d'éthylène (EVOH) et/ou une autre résine et un absorbant de l'oxygène.

8. Processus selon la revendication 7, dans lequel la teneur en éthylène par pourcentage dans l'EVOH contenu dans la couche de résine absorbant l'oxygène est d'environ 5 à environ 60 %.

9. Processus selon la revendication 7 ou 8, dans lequel le degré de saponification de l'EVOH contenu dans la couche de résine absorbant l'oxygène est d'environ 90 % ou plus.

10. Processus selon la revendication 7, dans lequel l'absorbant de l'oxygène est un composé organique, un polymère ayant un atome de carbone secondaire ou tertiaire, une résine de polyamide ; ou une poudre de métal réductible.

11. Processus selon la revendication 7, dans lequel l'absorbant de l'oxygène comprend un ou plusieurs sels de métal de transition.

12. Processus selon la revendication 7, dans lequel l'absorbant de l'oxygène comprend d'environ 10 à environ 5000 ppm d'un ou de plusieurs sels de métal de transition.

13. Processus selon la revendication 7, dans lequel le composé organique possède une double liaison.

14. Processus selon la revendication 13, dans lequel le composé ayant une double liaison carbone-carbone est choisi dans le groupe constitué de polybutadiène, polyisoprène, polychloroprène, poly(2-éthylbutadiène), poly(2-butylbutadiène), polyocténylène, polypenténylène, polynorbornène, copolymère tri-séquencé styrène-isoprène-styrène, polybutadiène et polyocténylène.

15. Processus selon la revendication 7, dans lequel la couche formant barrière à l'oxygène avait une épaisseur d'environ 5 à environ 100 μm .

16. Processus selon la revendication 7, dans lequel le récipient peut être stérilisable.

17. Processus selon la revendication 6, dans lequel la couche formant barrière à l'oxygène comprend une couche de résine absorbant l'oxygène et au moins une sous-couche de résine formant barrière à l'oxygène, dans lequel le moule est composé d'une partie de moule femelle et d'une partie de moule mâle, dans lequel le placement de l'étiquette à couches multiples ayant la couche formant barrière à l'oxygène dans un moule et à côté du corps de moule comprend :

le placement de l'étiquette à couches multiples sur une surface de paroi interne de la partie de moule femelle ou une surface de paroi externe de la partie de moule mâle ; et dans lequel

l'injection de la résine à l'état fondu dans le moule, laissant l'étiquette entre le corps de moule et la résine à l'état fondu, formant ainsi le récipient, comprend :

l'injection de la résine à l'état fondu dans une cavité entre les parties de moule mâle et femelle, moulant et étiquetant ainsi le récipient simultanément.

18. Processus selon la revendication 17, dans lequel l'étiquette à couches multiples recouvre la totalité d'une surface externe ou d'une surface interne du récipient ou dans lequel l'étiquette à couches multiples recouvre la totalité de la surface externe du récipient.

EP 2 590 791 B1

19. Processus selon la revendication 17, dans lequel une épaisseur de la couche formant barrière à l'oxygène à couches multiples est d'environ 5 à environ 100 μm .
- 5 20. Processus selon la revendication 19, dans lequel l'étiquette à couches multiples comprend en outre au moins une couche de résine résistant à l'humidité en tant que couche la plus à l'extérieur ou à la fois couche la plus à l'extérieur et la plus à l'intérieur de l'étiquette à couches multiples.
- 10 21. Processus selon la revendication 20, dans lequel l'étiquette à couches multiples comprend des couches de résine résistant à l'humidité en tant que couches la plus à l'extérieur et la plus à l'intérieur de l'étiquette à couches multiples.
22. Processus selon la revendication 19, dans lequel la couche formant barrière à l'oxygène à couches multiples a une structure en couches suivante : première sous-couche de résine formant barrière à l'oxygène/couche de résine absorbant l'oxygène/seconde sous-couche de résine formant barrière à l'oxygène.
- 15 23. Processus selon la revendication 20, dans lequel la couche de résine résistant à l'humidité a une perméabilité à l'humidité d'environ $40 \text{ g} \cdot 30 \mu\text{m}/\text{m}^2 \text{ jour}$ ou moins à une température d'environ 40°C et une humidité relative d'environ 90 %.
- 20 24. Processus selon la revendication 20, dans lequel la couche de résine résistant à l'humidité est composée d'une résine identique à la résine à l'état fondu.
- 25 25. Processus selon l'une quelconque des revendications 17 à 24, dans lequel le récipient peut être stérilisé.
26. Processus selon la revendication 17, comprenant en outre les étapes de placement d'un produit dans le récipient ; et de scellement du récipient.

FIG. 1

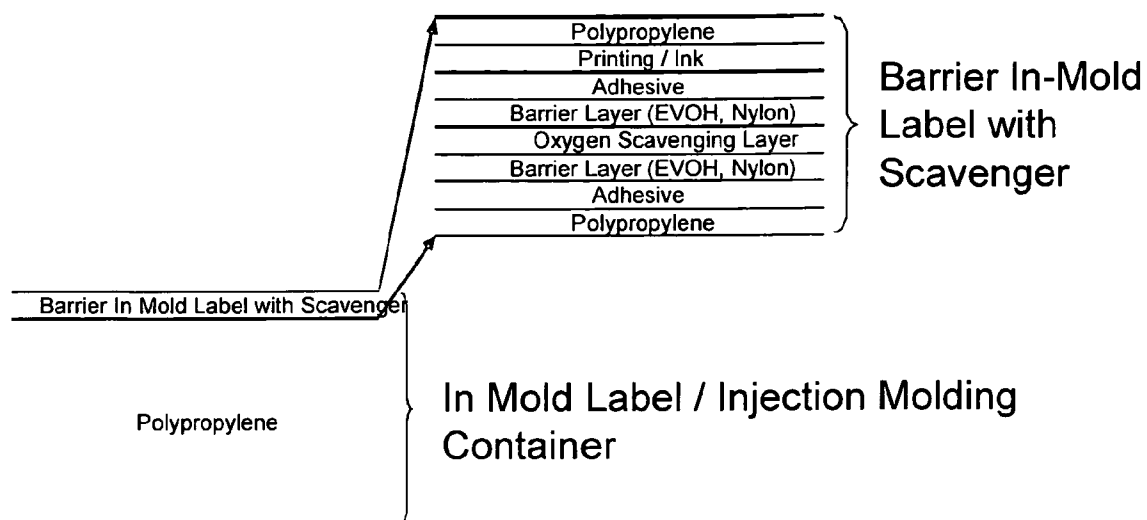


FIG. 2


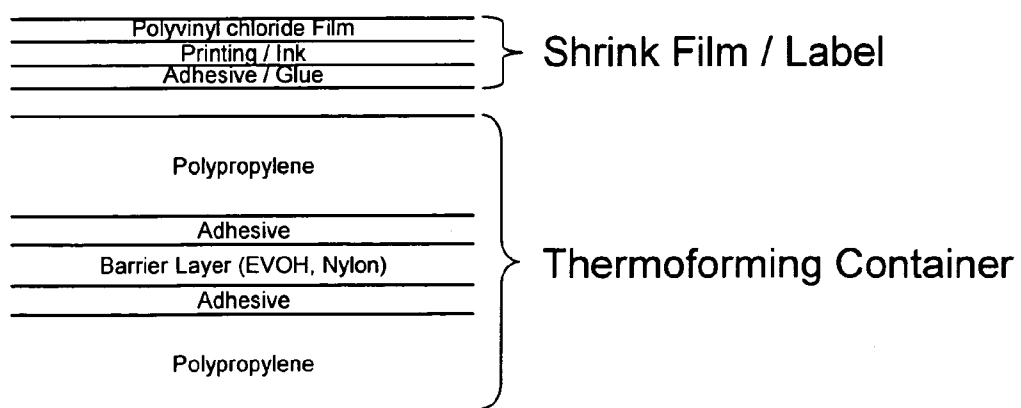


FIG. 3

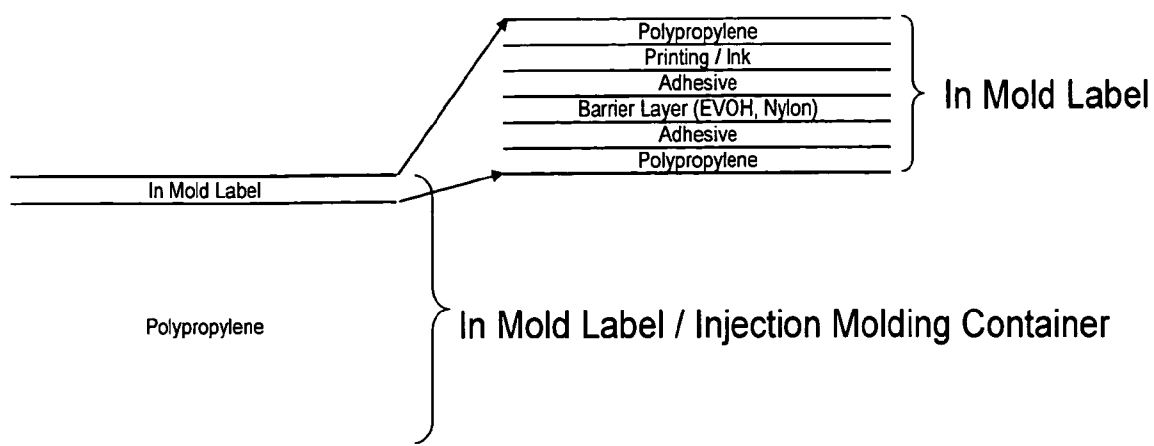

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 61399265 A [0001]
- US 20100001010 A1 [0003]
- US 5604006 A [0003]
- US 4913643 A [0003]
- US 20080069990 A1 [0004]
- WO 2009007453 A1 [0005]
- US 20090169902 A1 [0006]
- JP 2004155483 B [0007]
- JP 2002120848 B [0008]
- US 20090061061 A1 [0009]
- US 20050079306 A1 [0010]
- JP 3024995 B [0011]
- US 7608340 B [0011]
- US 7588157 B [0011]

CÍMKÉZETT TARTÁLYOK ÉS ELJÁRÁS CÍMKÉZETT TARTÁLYOK ELŐÁLLÍTÁSÁRA

Szabadalmi igénypontok

1. Szerszámban címkézett tartály, amely tartalmaz

oxigénelnyelő gyantaréteget és gyanta tartálytestet tartalmazó többrétegű címkét, ahol a
5 többrétegű címke a tartály külső felületének vagy belső felületének teljes egészét vagy egy részét borítja, ahol az oxigénelnyelő gyantaréteg egy többrétegű oxigénzáró réteg alrétege, a többrétegű oxigénzáró réteg legalább egy oxigénzáró gyantaréteget tartalmaz,

ahol a többrétegű oxigénzáró rétegen kívülre rétegzett egy vagy több opcionális
10 réteg összvastagságát X -szel, továbbá a tartály összvastagságát Y -nal jelölve az X/Y hányados mintegy 0,01 és mintegy 0,25 között van.

2. Az 1. igénypont szerinti, szerszámban címkézett tartály, amely a tartályban egy vagy több élelmiszerkészítményt tartalmaz.

3. A 2. igénypont szerinti, szerszámban címkézett tartály, ahol az élelmiszerkészítményt em-
15 beri fogyasztásra alkalmas ételkészítmény vagy állateledel-készítmény, például kutyaeledel-készítmény vagy macskaeledel-készítmény képezi.

4. Az 1., a 2. vagy a 3. igénypont szerinti, szerszámban címkézett tartály, ahol a tartály lég-
mentes és csíramentesített.

5. Az 1. igénypont szerinti, szerszámban címkézett tartály, amely a tartályban egy vagy több
20 nemélelmiszer-készítményt tartalmaz.

6. Eljárás szerszámban címkézett tartály előállítására, melynek során

oxigénzáró réteggel rendelkező többrétegű címkét szerszámban és a szerszámtesttel
szomszédosan rendezünk el; és

a szerszámba megömlesztett gyantát injektálunk a címkét a szerszámtest és a megöm-
25 lesztett gyanta között hagyva, miáltal létrehozuk a tartályt, ahol a többrétegű oxigénzá-
ró rétegen kívülre rétegzett egy vagy több opcionális réteg összvastagságát X -szel, to-
vábbá a tartály összvastagságát Y -nal jelölve az X/Y hányados mintegy 0,01 és mintegy
0,25 között van.

7. A 6. igénypont szerinti eljárás, ahol az oxigénzáró réteg legalább oxigénelnyelő (adszorber)
30 gyantaréteget tartalmaz, amely etilén/vinil-alkohol kopolimert (EVOH) és/vagy más gyantát
és oxigénelnyelő anyagot tartalmaz.

8. A 7. igénypont szerinti eljárás, ahol az oxigénelnyelő gyantarétegben lévő EVOH százalékos etiléntartalma mintegy 5% és mintegy 60% között van.
9. A 7. vagy a 8. igénypont szerinti eljárás, ahol az oxigénelnyelő gyantarétegben lévő EVOH elszappanosítási foka legalább mintegy 90%.
- 5 10. A 7. igénypont szerinti eljárás, ahol az oxigénelnyelő anyagot szerves vegyület, szekunder vagy tercier szénatomot tartalmazó polimer, poliamid gyanta; vagy porított redukálható fém képezi.
11. A 7. igénypont szerinti eljárás, ahol az oxigénelnyelő anyag legalább egy átmenetifém-sót tartalmaz.
- 10 12. A 7. igénypont szerinti eljárás, ahol az oxigénelnyelő anyag legalább egy átmenetifém-sót mintegy 10 ppm és mintegy 5000 ppm közé eső koncentrációban tartalmaz.
13. A 7. igénypont szerinti eljárás, ahol a szerves vegyület kettős kötést tartalmaz.
14. A 13. igénypont szerinti eljárás, ahol a szén-szén kettős kötéssel rendelkező vegyületet a polibutadién, poliizoprén, polikloroprén, poli(2-etilbutadién), poli(2-butilbutadién),
15 polioktenilén, polipentenilén, polinorbornén, sztirol-izoprén-sztirol triblokk-kopolimer, polibutadién, és polioktenilén alkotta csoportból választjuk.
15. A 7. igénypont szerinti eljárás, ahol az oxigénzáró réteg vastagsága mintegy 5 μm és mintegy 100 μm közé esik.
16. A 7. igénypont szerinti eljárás, ahol a tartály csíramentesíthető.
- 20 17. A 6. igénypont szerinti eljárás, ahol az oxigénzáró réteg oxigénelnyelő gyantaréteget és legalább egy oxigénzáró gyanta alréteget tartalmaz, ahol a szerszám anya szerszámrészből és apa szerszámrészből áll, ahol
az oxigénzáró réteget tartalmazó többrétegű címke szerszámban és szerszámtesttel szomszédosan történő elhelyezése során
- 25 a többrétegű címkét az anya szerszámrész belső falára vagy az apa szerszámrész külső falára helyezzük; továbbá ahol
a megömlesztett gyantának a címkét a szerszámtest és a megömlesztett gyanta között hagyva történő szerszámba injektálása, és a tartály ezáltal történő létrehozása során

a megömlesztett gyantát egy az apa és anya szerszámrészek között elhelyezkedő üregbe injektáljuk, miáltal a tartályt egyidejűleg formázzuk és címkézzük.

18. A 17. igénypont szerinti eljárás, ahol a többrétegű címke a tartály külső felületének vagy
5 belső felületének egészét fedi, vagy ahol a többrétegű címke a tartály külső felületének egészét fedi.
19. A 17. igénypont szerinti eljárás, ahol a többrétegű oxigénzáró réteg vastagsága mintegy 5 μm és mintegy 100 μm közé esik.
20. A 19. igénypont szerinti eljárás, ahol a többrétegű címke legalább egy nedvességálló
10 gyantaréteget tartalmaz a többrétegű címke legkülső rétegeként vagy mind a legkülső és legbelső rétegeként.
21. A 20. igénypont szerinti eljárás, ahol a többrétegű címke nedvességálló gyantaréteget tartalmaz mind a többrétegű címke legkülső, mind a többrétegű címke legbelső rétegeként.
22. A 19. igénypont szerinti eljárás, ahol a többrétegű oxigénzáró réteg az alábbi rétegszerkezettel rendelkezik: első oxigénzáró gyanta alréteg / oxigénelnyelő gyantaréteg / második oxigénzáró gyanta alréteg.
15
23. A 20. igénypont szerinti eljárás, ahol a nedvességálló gyantaréteg nedvességáteresztőképessége mintegy 40°C hőmérsékleten és mintegy 90% relatív páratartalom mellett legfeljebb mintegy 40g·30 μm /m²·nap.
- 20 24. A 20. igénypont szerinti eljárás, ahol a nedvességálló gyantaréteget a megömlesztett gyantával azonos gyantából készítjük.
25. A 17-24. igénypontok bármelyike szerinti eljárás, ahol a tartály csíramentesíthető.
26. A 17. igénypont szerinti eljárás, melynek során a tartályban terméket helyezünk el; és a tartályt légmentesen zárjuk.