Feb. 28, 1967 E. J. PEHAM 3,305,874

PLASTIC HAT

Filed Feb. 1, 1965 2 Sheets-Sheet 1

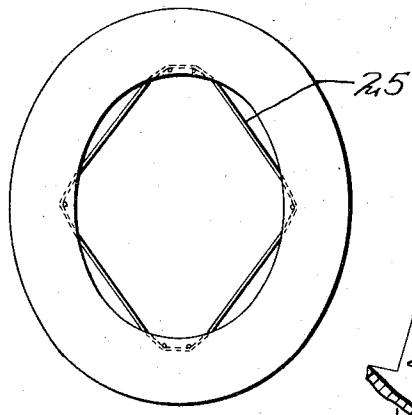


FIG. 7

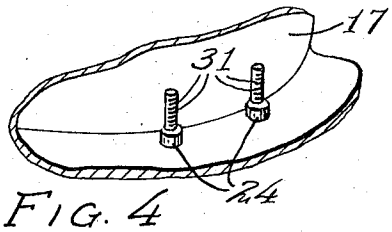


FIG. 4

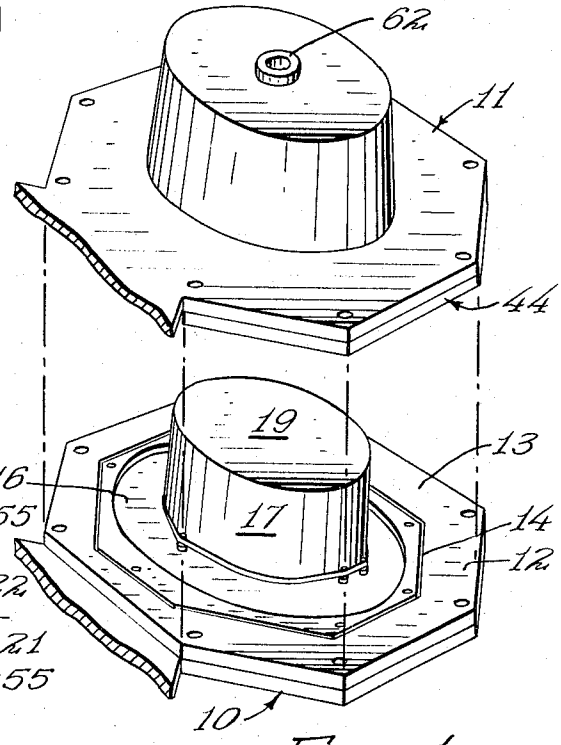


FIG. 1

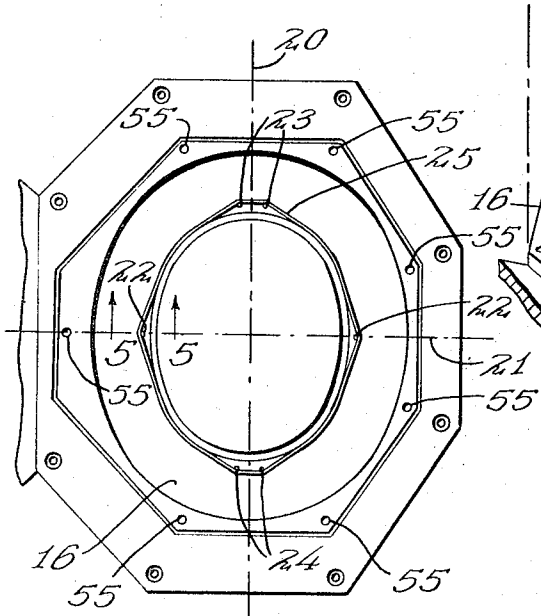


FIG. 2




FIG. 5




FIG. 6

INVENTOR

ENGLEBERT J. PEHAM

BY Robert M. Dunning

ATTORNEY

Feb. 28, 1967 E. J. PEHAM 3,305,874

PLASTIC HAT

Filed Feb. 1, 1965 2 Sheets-Sheet 2

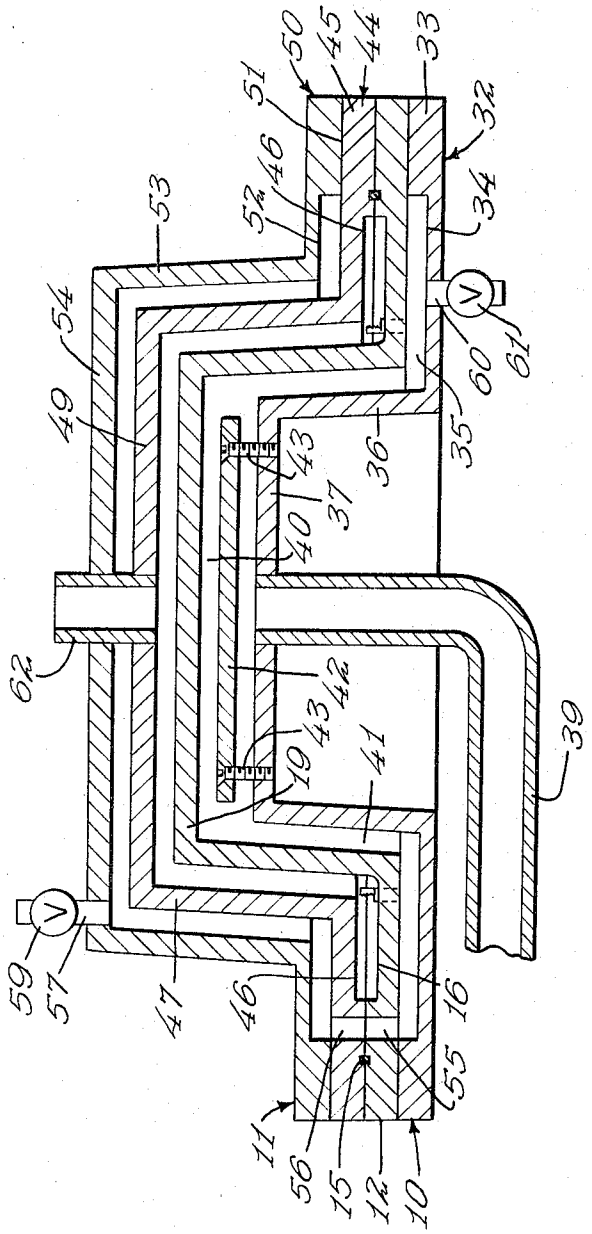


FIG. 3

INVENTOR

ENGLEBERT J. PEHAM

BY Robert M. Dunning

ATTORNEY

United States Patent Office 3,305,874
Patented Feb. 28, 1967

3,305,874

PLASTIC HAT

Englebert J. Peham, St. Paul, Minn., assignor to Peham Plastics Company, St. Paul, Minn., a partnership

Filed Feb. 1, 1965, Ser. No. 429,231
3 Claims. (Cl. 2—183)

This invention relates to an improvement in plastic hats and method of forming the same, and deals particularly with a plastic hat having an interior elastic band adapted to extend around the periphery of the head and anchored at angularly spaced points to the head, and to the method of forming a hat of this type.

Quite a substantial business has been developed in the molding of plastic hats. These hats are different shapes and types as, for example, straw hats having oval shape flat crowns. Hats of this type may, if desired, be provided with special bands and used by persons attending conventions and the like to identify the members attending. Preferably, the hats are molded of other products such as expanded polystyrene, and in actual practice the finished product so closely resembles an actual straw hat as to be virtually indistinguishable therefrom from a short distance. At the same time, they may be produced at relatively low cost.

In order to maintain a low cost of production, it is impractical to mold the hats in all of the hat sizes normally found in the inventory of a hat store. In order to be practical, the hats are usually molded in two or three hat sizes, so that means must be provided to compensate for different shapes and sizes of heads. This can be accomplished reasonably well by means of an elastic band anchored to the body of the hat at several spaced points and under tension to bridge rounded areas of the interior of the hat. This band engages the surface of head and may be used to support the hat properly on a variety of head sizes up to the size which fills the hat.

Attempts have been made to anchor this elastic band by stapling the band in position. This is a difficult task, due to the fact that the band must be maintained under tension during the stapling operation. Furthermore, the stapling of the band in place is a slow and tedious operation, and even when in place, the band is likely to come loose if extra strain is placed upon the band, as the staples are imbedded in relatively soft plastic.

It has been found, that by providing suitable pins or projections on the male mold of the die in position to extend upwardly to the brim of the hat, and by stretching the elastic band about these pins, spaced areas of the band will be imbedded directly in the body of the plastic to hold the band in place. At the completion of the molding operation, the hat is removed from the die, the pins withdrawing from the body of the hat and leaving only small inconspicuous apertures. By this method, spaced areas of the band are actually imbedded between the inner and outer surfaces of the wall of the hat, and when the hat is removed from the mold, the elastic is stretched tightly from one point of attachment to the next, extending as a chord between portions of the curved interior of the hat.

In producing the hats, a male and female mold is used, which usually actually comprises a multiple mold including two or more cavities. The male mold defines a surface similar to the inner surface of the crown of the hat, including the side wall of the crown, and defines the lower surface of the hat brim, as well as a portion of the periphery of the brim. The female portion of the mold fits in spaced relation to the male portion and defines the outer surface of the crown and upper surface of the brim, as well as a portion of the peripheral surface of the brim. The pins which are employed preferably extend upwardly

from the undersurface of the male mold in closely spaced relation to the wall of the crown, so that the ends of these pins extend into the wall of the crown or between the areas forming the crown in the male and female molds. The resilient band or tape, is spaced to extend outwardly of the angularly spaced pins, portions of the elastic tape near the pins being in spaced relation to the outer surface of the male mold, and other areas of the tape closely following the surface of the male mold in surface contact therewith. When the plastic is inserted into the mold and expanded to fill the mold, the portions of the tape which are closely adjacent the location of the pins, becomes imbedded in the wall of the head crown, while the intermediate portions of the elastic tape which were in faced contact with the outer surface of the male mold, will be inwardly of the wall of the crown when the hat is removed from the mold. Due to the fact that the hat was molded while the elastic tape was in slightly stretched form, the portion of the elastic tape which is exposed on the inner surface of the crown, will extend in a straight line from one point of attachment to another, permitting the hat to be comfortably worn by a person whose head is somewhat smaller in size, than the maximum size of head which would fit into the hat.

A further feature of the present invention resides in supporting the band with its lower edge spaced above the undersurface of the male mold so that the tape is anchored at a point spaced on the lower edge of the brim. This is accomplished by providing a shoulder on each of the pins supporting the tape so as to locate the lower edge of the tape on a plane parallel with the undersurface of the hat brim but spaced upwardly therefrom.

A further feature of the present invention resides in providing the supporting pins in such a manner that a relatively short portion of the tape is anchored in the side walls of the hat crown while a relatively greater length of tape is imbedded in the hat at the front and rear portions of the crown wall. As a result, the elastic tape engages the head comfortably, and a wearer can accomplish the best results.

A further feature of the present invention, lies in the provision of a method of forming a hat which includes imbedding spaced areas of an elastic band in the wall of the crown of the hat during a molding operation, and while the elastic tape is under tension.

These and other objects and novel features of the present invention, will be more clearly and fully set forth in the following specification and claims:

In the drawings forming a part of the specification,

FIGURE 1 is a diagrammatic expanded view of a pair of male and female mold portions prior to the molding operation.

FIGURE 2 is a plan view of the male mold portion showing the manner in which the elastic tape is mounted thereupon prior to the molding operation.

FIGURE 3 is a vertical sectional view through the mold in closed position thereof.

FIGURE 4 is an enlarged perspective view of a portion of the male mold showing a pair of tape supporting pins in position thereupon.

FIGURE 5 is a vertical sectional view through a detailed portion of the main mold, the position of the section being indicated by the line 5—5 of FIGURE 2.

FIGURE 6 is an enlarged top view of one of the tape supporting pins.

FIGURE 7 is a bottom plan view of one of the hats formed in the molds illustrated.

The present invention has been disclosed in conjunction with a male and female mold of the type used to produce a hat similar to a flat crown straw hat, in view of the fact that this style has proven extremely popular from a commercial standpoint. However, it should be understood

that the particular style of hat illustrated is merely for the purpose of illustration, and not to form a limitation to the style of hat being made. For example, hats similar to helmets of one type or another, have also been produced in considerable volume, and molds for hats of other shapes are under consideration.

The molds illustrated include a male mold portion **10**, and a female mold portion which is indicated in general by the numeral **11**. The male mold in **10**, includes an upper portion **12**, the outer portion of which comprises a horizontal flat upper surface **13**, which is grooved as indicated at **14**. A sealing ring such as indicated at **15**, in FIGURE 3, of the drawings as positioned in the groove **14**, to seal against the co-operable surface of the female mold **11**.

Inwardly of the mold surface **13**, is an oval groove **16**, which defines the lower surface of the hat brim. Inwardly of the groove **16**, is an upstanding oval wall **17**, designed to define the inner surface of the crown of the hat. The upper surface **19**, of the crown forming wall **17**, is flat to form the under surface of the top of the hat.

For the purpose of description, the major axis of the oval mold is indicated by the broken line **20**, while the minor axis of the oval mold is indicated by the broken line **21**. As indicated in FIGURE 2, a pair of pins **22** extend upwardly from the base of the groove **16**, in closely spaced relation to the upstanding wall **17**, forming the inner wall of the crown and along the minor axis **21**. A pair of pins **23**, extend upwardly from the base of the groove **16** in closely spaced relation to the forward end of the hat mold, the pins **23**, being equally spaced on opposite sides of the major axis **20**. A third pair of pins **24**, extends upwardly from the base of groove **16**, near the rear end of the upstanding wall **17**, the pins **24**, also being spaced equally on opposite sides of the major axis **20**. It is the purpose of the pins **22**, **23** and **24**, to support an elastic tape or band **25**, portions of which are to be imbedded in the molded body of the hat, as will be later described. Due to the fact that there are two pins at the front and rear portions of the mold and one pin at each side, a relatively greater length of the elastic band is imbedded in the front and rear portions of the hat than at the sides.

The pins are formed as best illustrated in FIGURES 4, 5 and 6, of the drawings. The pins, such as the pins **22**, are shown as having cylindrical shanks **26**, which are frictionally engaged in apertures **27**, in the upper portion **12**, of the male mold **10**, and includes smaller diameter shanks **29**, projecting upwardly therefrom, the smaller diameter portions **29**, each having an inner edge **30**, which is substantially flush with the periphery of the shank **26**. The smaller diameter pins **29**, are provided with serrations **31**, extending horizontally across the surface of the pin most remote from the upstanding wall **17**, of the male mold portion. The male portion **10**, also includes a lower portion **32**, which is perhaps best illustrated in FIGURE 3 of the drawings. The lower portion **32**, includes a peripheral area **33**, about the entire periphery of the mold **10**, which is in face contact and sealed relation to the under surface of the upper portion **12**, of the male mold. The upper surface of the lower portion **32**, is grooved as indicated at **34**, inwardly of the peripheral portion to provide a steam and water chamber **35**, between the portions **12** and **32**, of the male mold. The lower portion **32**, follows the general confirmation of the upper portion **12**, including an upstanding wall **36**, spaced inwardly of the inner surface of the wall **17**, and a top panel **37**, which is spaced substantially below the under surface of the top panel **19**, of the crown forming portion of the mold. A conduit **39**, is secured to the top mold portion **37**, of the lower section of the male mold, with the interior of the conduit communicating with the chamber **40**, between the upper portions **19** and **37**, of the male mold, the chamber **41** between the upstanding walls **17** and **36** of the two mold

portions, and the chamber **35**, between the flat portions of the mold sections. In effect, the chambers **35**, **40** and **41**, form a single steam and water chamber. A baffle plate **42**, is secured in spaced relation to the top portions **19** and **37**, of the upper and lower sections of the male mold, and are held in position on the top portion **37** by screws **43**, or other suitable means. The purpose of the baffle **42**, is to deflect the water and steam entering the interior of the male portion **10**, of the mold, and to more fairly disperse the heating or cooling fluid.

The upper or female mold **11**, includes a lower portion indicated in general by the numeral **44**, having a peripheral area **45**, designed to seat against the upper surface of the peripheral portion of the male mold. The under surface of the lower mold portion **44**, is grooved as indicated at **46**, in opposed relation to the groove **16**, in the male mold, the space between the bases of the grooves **16** and **46**, forming the brim of the hat. The mold portion **45**, includes an upstanding portion **47**, which is in spaced relation to the wall **17**, so as to provide a space in which the wall of the crown is formed. The mold portion **44**, also includes a top portion **49**, which is in spaced relation to the top portion **19** of the female mold to form the top of the hat crown.

The female mold portion **11**, also includes an upper portion which is indicated in general by the numeral **50**. This upper portion has a peripheral under surface **51**, which lies in face contact with the upper surface of the lower portion **44**, and is sealed with respect thereto. Inwardly of the peripheral portion **51**, the under surface of the mold portion **50**, is grooved as indicated at **52** to form a steam and water chamber between the upper and lower portion **50** and **44**. The upper mold portion **50**, also includes an upstanding wall **53**, which is spaced outwardly of the wall **47**, and a top portion **54**, which is spaced above the top portion **49**, of the mold section **44**. In other words, both the male and female portions of the mold are hollow so that steam and water may be circulated therethrough.

In the particular arrangement illustrated, the hollow interior of the male mold **10**, is connected to the hollow interior of the female mold portion **11**, so that the two parts of the mold may both be heated and cooled from a single inlet. As indicated at the left side in FIGURE 3 of the drawings, the upper portion **12** of the male mold is provided with vertical passages **55**, which register with similarly spaced passages **56** in the lower portion **45**, of the female mold **11**. These passages extend through the sealed areas of the two mold parts and are spaced about the periphery of the hat as indicated at **55**, in FIGURE 2, of the drawings.

In order to permit the circulation of fluid to the molds, the female mold portion **11**, is provided with a return conduit **57**, closed by a valve **59**.

Steam which is introduced to the conduit **39**, into the male portion of the mold, is distributed through the male portion of the mold and flows upwardly through the passages **55**, **56**, to heat the interior of the upper portion of the mold. This may be accomplished when the valve **59** is in closed position. However, during the cooling of the mold, water may be introduced through the same conduit **39**, and into the hollow interior of the male portion of the mold before flowing upwardly through the passages **55**, **56**, into the hollow interior female mold. To permit the circulation of the cooling water, the valve **59**, is open to provide a vent and also to permit the recirculation of the cooling water to the cooling water reservoir.

In order to permit the draining of the cooling water from the mold, the conduit **60** communicates with the hollow interior of the male portion of the mold at the lower extremity thereof, the conduit being controlled by the valve **61**. At the completion of the cooling operation, the water is drained from the mold by the opening of the drain valve **61**.

A sleeve **62**, extends through the lower and upper portions of the female mold, **44** and **50**, to communicate with the chamber within the mold between the male and female portions thereof. The plastic is introduced to the mold cavity through a sleeve **62**, in an amount necessary to completely fill the mold when in its expanded form. Having described the mold, the method of operation will now be described.

While the male and female portions of the mold are in spaced relation, the elastic tape **25**, is applied to the male portion of the mold, the band or tape extending outwardly of the pins **22**, **23** and **24**, and the intermediate portions of the tape extending in face contact with the upstanding wall portion **17**, of the mold. In the insertion of the tape or band **25**, it should be noted that the band is substantially equal in width to the vertical height of the reduced diameter pins **29** and, as is best shown in FIGURE 5, the inner surface of the band **25** is in engagement with the serrated portion of the pins **29**. The shoulder which is formed by the upper ends of the larger diameter shanks **26**, engages the lower edge of the tape **25** and supports the tape spaced above the lower surface of the hat brim, or spaced above the upper surface of the grooved portion **16**, of the male mold.

After the band has been inserted in place, the mold sections are brought together to form a mold cavity, and the molding material, such as polystyrene, is injected into the mold cavity through the sleeve **62**. As the method of filling the mold is well known in the art, this procedure will not be described in detail.

Steam is then introduced into the conduit **39**, to fill the interior of the hollow mold section under pressure. This heat causes the plastic to expand to completely fill the mold. During this operation, the plastic material extends between the pins, **22**, **23** and **24** and the upstanding wall **17**, of a male mold, and also extends about the upper ends of the shanks **26**, forming the base of the pins, so that portions of the elastic tape completely imbedded within the body of the hat. However, as areas of the inner surface of the elastic band or tape, are in surface contact with the outer surface of the upstanding wall **17**, the plastic cannot force its way between the resilient band and the mold wall **17**, leaving intermediate areas of the band in face contact with the mold wall **17**.

At the heating cycle, the mold is cooled by a cooling cycle during which cooling water is circulated through the conduit **39**, into the lower portion of the mold and through the apertures **55**, **56** to the hollow interior of the female portion of the mold **11**. Cooling water is circulated through the mold for a predetermined period of time, the valve **59** being opened for this purpose.

At the completion of the cooling operation, the drain valve **61**, is opened as the water supply is cut off and the interior of the mold is permitted to drain. The mold is then opened, and the hat may be removed from the male portion of the mold. The hat normally will remain on the male portion of the mold due to the fact that the resilient band **25**, is in frictional engagement with the upstanding wall **17** of this portion of the mold, and due to the fact that the band supporting pins are imbedded in the body of the hat. The hat may be detached from

the male portion of the mold through any conventional means such as the use of compressed air.

When complete, the resilient band **25**, is thus anchored into the body of the hat, usually to opposite sides of the wall of the crown, and to the front and rear of the wall of the crown. The band **25**, permits the same hat to properly fit heads of different sizes due to the fact that the band is spaced inwardly from the inner surface of the wall of the crown at the four spaced points the largest head size which will be accommodated as obviously that which stretches the band **25**, against the inner surface of the wall of the crown.

In accordance with the patent statutes, the principal construction and operation of the improvement of hats and method of forming the same, have been described; and while an attempt has been made to set forth the best embodiment thereof, it should be understood that obvious changes may be made within the scope of the following claims, without departing from the spirit of the invention.

I claim:

1. A molded article comprising:

a hat shaped body of expanded plastic material,

said body including a crown top portion and peripheral encircling crown wall portions,

an endless elastic band,

means of securing said endless elastic band under tension at only the sides, back and front of the hat body near the lower extremity of said crown wall portions, said securing means comprising spaced portions of said band embedded in said body, said spaced portions being short relative to the remaining portions of said band,

the remaining portions of said band being unsecured to said crown wall portions,

whereby the unsecured band portions are under elastic tension with said unsecured band portions extending from one spaced embedded portion to the next spaced embedded portion of the band in a substantially straight line.

2. The article of claim **1** and in which the spaced portions of the endless elastic band embedded in the front and back of the hat body are longer than the spaced portions of the endless elastic band embedded in the sides of the hat body.

3. The article of claim **1** and including a brim portion encircling the crown wall portion.

References Cited by the Examiner

UNITED STATES PATENTS

1,219,755	3/1917	Mendenhall	2—183
2,451,140	10/1948	Wittcoff	2—185
2,454,193	11/1948	Martin	18—36
2,471,258	5/1949	Bolten	18—36
2,619,678	12/1952	Crooker	264—229
2,685,692	8/1954	Patterson	2—183
2,870,445	1/1959	Fisher	2—3
2,969,546	1/1961	Morgan	2—3
2,991,511	7/1961	Kornei	264—229

JORDAN FRANKLIN, *Primary Examiner.*

G. H. KRIZMANICH, *Examiner.*