



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2694259 C 2015/06/23

(11)(21) **2 694 259**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 2008/07/02
(87) Date publication PCT/PCT Publication Date: 2009/01/08
(45) Date de délivrance/Issue Date: 2015/06/23
(85) Entrée phase nationale/National Entry: 2009/12/22
(86) N° demande PCT/PCT Application No.: EP 2008/005402
(87) N° publication PCT/PCT Publication No.: 2009/003695
(30) Priorité/Priority: 2007/07/02 (DE10 2007 030 604.2)

(51) Cl.Int./Int.Cl. *C04B 35/486* (2006.01),
C01G 25/00 (2006.01), *C04B 35/64* (2006.01),
H01M 10/36 (2010.01), *H01M 8/12* (2006.01)
(72) Inventeurs/Inventors:
WEPPNER, WERNER, DE;
MURUGAN, RAMASWAMY, IN
(73) Propriétaire/Owner:
BASF SE, DE
(74) Agent: ROBIC

(54) Titre : CONDUCTEUR D'IONS A STRUCTURE GRENAT
(54) Title: ION CONDUCTOR HAVING A GARNET STRUCTURE

(57) **Abrégé/Abstract:**

The present invention relates to the use of chemically stable solid ion conductors having a garnet-like structure in batteries, accumulators, electrochromic devices and other electrochemical cells and also new compounds which are suitable for these uses.



(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG(19) Weltorganisation für geistiges Eigentum
Internationales Büro(43) Internationales Veröffentlichungsdatum
8. Januar 2009 (08.01.2009)

PCT

(10) Internationale Veröffentlichungsnummer
WO 2009/003695 A3

(51) Internationale Patentklassifikation:

C04B 35/486 (2006.01) **H01M 8/12** (2006.01)
C04B 35/64 (2006.01) **H01M 10/36** (2006.01)
C01G 25/00 (2006.01)

(21) Internationales Aktenzeichen: PCT/EP2008/005402

(22) Internationales Anmeldedatum:
2. Juli 2008 (02.07.2008)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:
10 2007 030 604.2 2. Juli 2007 (02.07.2007) DE(71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme
von US): **BASF SE** [DE/DE]; 67056 Ludwigshafen (DE).

(72) Erfinder; und

(75) Erfinder/Anmelder (nur für US): **WEPPNER, Werner**
[DE/DE]; Baaber Weg 12, 24226 Heikendorf (DE).(74) Anwälte: **WEICKMANN & WEICKMANN** et al.;
Postfach 860 820, 81635 München (DE).(81) Bestimmungsstaaten (soweit nicht anders angegeben, für
jede verfügbare nationale Schutzrechtsart): AE, AG, AL,
AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY,
BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE,
SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Bestimmungsstaaten (soweit nicht anders angegeben, für
jede verfügbare regionale Schutzrechtsart): ARIPO (BW,
GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ, MD, RU,
TJ, TM), europäisches (AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,
LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Erklärungen gemäß Regel 4.17:

— Erfindererklärung (Regel 4.17 Ziffer iv)

Veröffentlicht:

— mit internationalem Recherchenbericht (Artikel 21 Absatz
3)— vor Ablauf der für Änderungen der Ansprüche geltenden
Frist; Veröffentlichung wird wiederholt, falls Änderun-
gen eingehen (Regel 48 Absatz 2 Buchstabe h)(88) Veröffentlichungsdatum des internationalen Recher-
chenberichts:

4. Februar 2010

(54) Title: ION CONDUCTOR HAVING A GARNET STRUCTURE

(54) Bezeichnung: IONENLEITER MIT GRANATSTRUKTUR

(57) Abstract: The present invention relates to the use of chemically stable solid ion conductors having a garnet-like structure in batteries, accumulators, electrochromic devices and other electrochemical cells and also new compounds which are suitable for these uses.

(57) Zusammenfassung: Die vorliegende Erfindung betrifft die Verwendung von chemisch stabilen festen Ionenleitern mit granatartiger Struktur in Batterien, Akkumulatoren, elektrochromen Vorrichtungen und anderen elektrochemischen Zellen sowie neue Verbindungen, die für diese Verwendungen geeignet sind.



WO 2009/003695 A3

Ion conductor having a garnet structure

Description

5 The present invention relates to the use of chemically stable solid ion conductors having a garnet-like structure in batteries, supercapacitors, accumulators and electrochromic devices, chemical sensors and thermoelectric converters, and also novel compounds
10 which are suitable for these uses.

Rechargeable (secondary) batteries are used where grid-independent operation of electric and electronic appliances is necessary or desired for at least part of
15 the time. Research on solid ion conductors as electrolyte materials for this use forms, in this context, an important aspect of current material research. The advantages sought in a battery composed only of solids are guaranteed freedom from leaks,
20 miniaturizability, electrochemical stability, relatively high energy densities and a relatively long life.

Among the various battery technologies, battery systems
25 based on lithium ions have become increasingly established in recent years. They are particularly notable for their high achievable electric energy density and power, which are attributable to the high chemical reactivity and the low mass of lithium ions
30 and also their high mobility. The development of solid lithium ion conductors has attracted considerable attention in recent years. Examples are $\text{Li}_{2.9}\text{PO}_{3.3}\text{N}_{0.46}$ or Li_3N and Li- β -aluminium oxide. However, $\text{Li}_{2.9}\text{PO}_{3.3}\text{N}_{0.46}$ has a significantly lower ion conductivity than liquid
35 electrolytes. Li_3N and Li- β -aluminium oxide are very sensitive to moisture. In addition, Li_3N decomposes at a voltage as low as 0.445 V at room temperature and Li- β -aluminium oxide is not chemically stable.

- 2 -

Lithium ion conductors having a garnet-like structure were described for the first time in the study by Thangadurai et al., "Novel Fast Lithium Ion Conduction in Garnet-Type $\text{Li}_5\text{La}_3\text{M}_2\text{O}_{12}$ ($\text{M} = \text{Nb}, \text{Ta}$)", J. Am. Ceram. Soc. 86, 437-440, 2003. The garnet-like $\text{Li}_5\text{La}_3\text{M}_2\text{O}_{12}$ compounds have an appreciable lithium ion conductivity.

In structural terms, garnets are orthosilicates of the general composition $\text{X}_3\text{Y}_2(\text{SiO}_4)_3$, which crystallize in the cubic crystal system, where X and Y are octacoordinated and hexacoordinated cation sites. The individual SiO_4 tetrahedra are connected to one another by ionic bonds via the interstitial B cations.

The garnet-like compounds of the formula $\text{Li}_5\text{La}_3\text{M}_2\text{O}_{12}$ ($\text{M} = \text{Nb}, \text{Ta}$) which are described in the abovementioned study by Thangadurai et al. contain an excess of Li ions compared to an ideal garnet structure. The La^{3+} and M^{5+} ions occupy the octacoordinated and hexacoordinated sites, while lithium ions occupy positions having six-fold coordination.

The PCT application WO 2005/085138 reports that further garnet-like lithium ion conductors are obtained formally by aliovalent substitution from the compounds of the formula $\text{Li}_5\text{La}_3\text{M}_2\text{O}_{12}$ (where $\text{M} = \text{Nb}$ or Ta). Aliovalent substitution of the La^{3+} sites can increase the connectivity of the network and enables the number of available vacancies to be varied. Charge balance is preferably achieved by means of Li^+ ions (L). For the purposes of the present invention, "aliovalent substitution" means the replacement of an ion by an ion having a different oxidation state, as a result of which cation vacancies, anion vacancies, interstitial cations and/or interstitial anions are formed. The solid lithium ion conductors are chemically stable and have an ion conductivity of more than 3.4×10^{-6} S/cm. Owing to their high ion conductivity accompanied by negligible electron conductivity, they can be used as

- 3 -

solid-state electrolytes.

The compounds described in WO 2005/085138 generally have the stoichiometric composition $L_{5+x}A_yG_zM_2O_{12}$, where
5 L is in each case independently any preferred monovalent cation,
A is in each case independently a monovalent, divalent, trivalent or tetravalent cation,
G is in each case independently a monovalent, divalent,
10 trivalent or tetravalent cation,
M is in each case independently a trivalent, tetravalent or pentavalent cation,
 $0 < x \leq 3$, $0 \leq y \leq 3$, $0 \leq z \leq 3$ and
O can be partly or completely replaced by divalent and/
15 or trivalent anions such as N^{3-} .

In the ion conductors described M is in each case one of the metals Nb and Ta. Other examples of metal ions are not given. Ion conduction occurs via lithium ions
20 (L = Li).

Further examples of lithium ion conductors having a garnet structure have been examined in recent years (V. Thangadurai, W. Weppner, *Adv. Funct. Mater.* 2005,
25 15, 107-112; V. Thangadurai, W. Weppner, *J. Power Sources*, 2005, 142, 339-344). Here, $Li_6BaLa_2Ta_2O_{12}$ had the highest Li^+ ion conductivity of $4 \times 10^{-5} \text{ Scm}^{-1}$ at 22°C with an activation energy of 0.40 eV. While $Li_6BaLa_2Ta_2O_{12}$ is stable towards reaction with metallic
30 lithium, moisture, air and customary electrode materials, the volume conductivity and total conductivity at room temperature are still not sufficiently high to enable an ideal rechargeable solid lithium ion battery to be developed.

35

Another problem associated with the above ion conductors of the prior art is that the proposed metals niobium and tantalum are relatively expensive and not readily available. In addition, the use of a solid

- 4 -

electrolyte which consists entirely of the garnet-like compounds described is complicated and associated with high costs.

- 5 It was therefore an object of the present invention to provide improved solid ion conductors in which the above disadvantages are at least partly overcome.

10 It has now been found, according to the invention, that zirconium can be used as metal M in the garnet-like ion conductors. In contrast to niobium and tantalum, zirconium is readily available and leads to very stable solid-state structures. While Nb and Ta are formally present in the oxidation state +V in the garnet
15 structure, Zr is preferably in the oxidation state +IV.

The invention therefore provides, in one embodiment, a solid ion conductor which has a garnet-like crystal structure and has the stoichiometric composition $L_{7+x}A_xG_3-$
20 $_xZr_2O_{12}$, where

L is in each case independently a monovalent cation,

A is in each case independently a divalent cation,

25 G is in each case independently a trivalent cation,

$0 \leq x \leq 3$ and

O can be partly or completely replaced by divalent or trivalent anions such as N^{3-} .

30 L is particularly preferably an alkali metal ion, for example Li^+ , Na^+ or K^+ . In particular, combinations of various alkali metal ions are also possible for L. In a particularly preferred embodiment of the invention, $L = Na^+$. Sodium is very inexpensive and available in any
35 amounts. The small Na^+ ion can move readily in the garnet-like structures and in combination with zirconium gives chemically stable crystal structures.

A is any divalent cation or any combination of such

- 5 -

cations. Divalent metal cations can preferably be used for A. Particular preference is given to alkaline earth metal ions such as Ca, Sr, Ba and/or Mg and also divalent transition metal cations such as Zn. It has
5 been found that these ions move very little if at all in the garnet-like compounds according to the invention, so that ion conduction occurs essentially via L.

10 In the above composition, preference is also given to $0 \leq x \leq 2$ and particularly preferably $0 \leq x \leq 1$. In an embodiment according to the invention, $x = 0$, so that A is not present in the garnet-like compound.

15 G is any trivalent cation or any combination of such cations. Trivalent metal cations can preferably be used for G. Particular preference is given to $G = \text{La}$.

In a structure of the above composition, O^{2-} can be
20 partly or completely replaced by other anions. For example, it is advantageous to replace O^{2-} completely or partly by other divalent anions. Furthermore, O^{2-} can also be aliovalently replaced by trivalent anions with appropriate charge compensation.

25 In a further aspect, the present invention provides a solid ion conductor of the stoichiometric composition $\text{L}_{7+x}\text{A}_x\text{La}_{3-x}\text{Zr}_2\text{O}_{12}$, where A is a divalent metal and L is Li or Na. Because of its ready availability, Na is
30 particularly preferred. In a preferred embodiment, $x = 0$, so that the composition is $\text{L}_7\text{La}_3\text{Zr}_2\text{O}_{12}$.

A is preferably selected from among alkaline earth metals, preferably from among Ca, Sr, Ba and/or Mg.
35 Preference is likewise given to A being selected from among divalent transition metals, for example $A = \text{Zn}$. Greatest preference is given to $A = \text{Sr}$ or Ba .

Ion conductors of the composition $\text{L}_{7+x}\text{A}_x\text{La}_{3-x}\text{Zr}_2\text{O}_{12}$ have a

- 6 -

garnet-like crystal structure. Compared to the known compounds of the composition $L_5La_3Nb_2O_{12}$ ($L = Li$), the two Nb(+V) cations have formally been replaced by two Zr(+IV) cations and two monovalent L cations. In addition, La(+III) may have been replaced by A(+II) and L(+I). In this way, the total proportion of L in the structure has been increased. L is preferably Li or Na, via which the ion conduction of the compounds having a garnet structure occurs. As a result, the compounds of the present invention make it possible to provide significantly improved ion conductors.

Compared to the compounds of the prior art, the materials of the composition $L_{7+x}A_xLa_{3-x}Zr_2O_{12}$ display an increased ion conductivity. Owing to the garnet structure of the compounds of the present invention, which is a 3D-isotropic structure, ion conduction in three dimensions without a preferential direction is possible.

The electronic conductivity of the compounds of the present invention is, on the other hand, comparatively low. The polycrystalline samples of the compounds of the present invention also have a low grain boundary resistance, so that the total conductivity is made up virtually exclusively of the volume conductivity.

A further advantage of the materials is their high chemical stability. The materials display, in particular, no discernible changes on heating in contact with molten lithium. At temperatures up to 350°C and DC voltages up to 6 V, no chemical decomposition is observed.

An example of a particularly preferred compound according to the invention having a garnet structure is $Li_7La_3Zr_2O_{12}$. The high lithium ion conductivity, good thermal and chemical stability in respect of reactions with possible electrodes, environmental compatibility,

- 7 -

availability of the starting materials, low manufacturing costs and simple production and sealing make $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ a promising solid electrolyte which is particularly suitable for rechargeable lithium ion
5 batteries.

According to a further aspect, the present invention provides a process for preparing the solid ion conductors having a garnet-like structure. The
10 compounds can be formed by reaction of appropriate salts and/or oxides of the elements present, for example by means of a solid-state reaction. Particularly useful starting materials are nitrates, carbonates and hydroxides which are converted into the
15 corresponding oxides during the course of the reaction.

The present invention more specifically relates to a process for preparing the solid ion conductors of the composition $\text{L}_{7+x}\text{A}_x\text{G}_{3-x}\text{Zr}_2\text{O}_{12}$ (e.g. $\text{Na}_6\text{Ala}_2\text{Zr}_2\text{O}_{12}$). The
20 materials can be obtained by reaction of appropriate salts and/or oxides of A, G and Zr with a hydroxide, nitrate or carbonate of L in a solid-state reaction. A is as defined above. The divalent metal A is preferably used in the form of nitrates. Here, preference is given
25 to $\text{Ca}(\text{NO}_3)_2$, $\text{Sr}(\text{NO}_3)_2$ and $\text{Ba}(\text{NO}_3)_2$. In the case of G, preference is given to using La which is preferably employed in the form of La_2O_3 . Zr is advantageously used as oxide, preferably ZrO_2 . L is preferably used in the form of LOH , LNO_3 or L_2CO_3 . For example, $\text{LiOH}\cdot\text{H}_2\text{O}$ or
30 $\text{NaOH}\cdot\text{H}_2\text{O}$ can preferably be used. To compensate for a weight loss of L (e.g. $\text{L} = \text{Li}, \text{Na}$) during the heat treatment of the samples, the respective salt is preferably used in excess, for example an excess of 10% by weight.

35

The starting materials are mixed in a first step and can, for example, be milled in 2-propanol in a ball mill using zirconium oxide milling media. The mixture obtained in this way is subsequently heated at

- 8 -

temperatures in the range of preferably 400-1000°C in air for a number of hours, preferably 2-10 hours. Temperatures of 600-800°C, for example about 700°C, and a heat treatment time of 4-8 hours e.g. about 6 hours, are particularly suitable. Milling is then carried out again, preferably likewise in 2-propanol in a ball mill using zirconium oxide milling media. The reaction product is subsequently pressed uniaxially or preferably isostatically to give moulded pieces, for example pellets. These are then sintered for a number of hours, preferably 10-50 hours, more preferably 20-30 hours, at temperatures in the range of preferably 700-1200°C, more preferably 800-1000°C. Temperatures of about 900°C and a heat treatment time of about 24 hours are particularly suitable here. During this sintering process, it is advantageous to cover the samples with a powder of the same composition in order to avoid excessive losses of the L oxide.

Possible methods which can easily be employed for preparing the compound are precursor methods, e.g. the Pecchini method, the glycine method or precipitation reactions, since soluble salts exist for all components.

The solid ion conductors of the invention (e.g. lithium or sodium ion conductors) are, as solid-state electrolytes, a valuable starting material. Since the materials have an extraordinarily high ion conductivity accompanied by negligible electron conduction, they can be used as solid electrolyte for batteries (e.g. lithium or sodium batteries) having a very high energy density. The high stability of the materials in respect of chemical reactions, e.g. with elemental lithium and customary electrode materials, leads to, for example, the solid ion conductors of the present invention being able to be put to practical use in batteries.

The resistance of the phase boundary between the solid

- 9 -

electrolytes of the present invention and the electrodes is also very small compared to customary solid electrolyte materials. As a result, batteries having a comparatively high power (high currents) can
5 be produced using the materials according to the invention. The use of the solid-state electrolytes of the present invention also results in improved safety compared to the use of liquid electrolytes. This is of particular advantage when the electrolytes are used in
10 motor vehicles.

In a further aspect, the present invention provides for, apart from the use in batteries, the use of the solid ion conductors (e.g. lithium ion conductors) in
15 electrochromic systems (windows, VDUs, exterior walls, etc.) and for instantaneous energy storage and release in supercapacitors (supercaps). When the ion conductors of the invention are used, it is possible to achieve energy densities of capacitors of 100 F/cm^3 or more. A
20 further aspect of the invention is the use of the garnet-like solid ion conductors as sensors, in particular for numerous gases. According to the invention, it is also possible to use the material in thermoelectric converters for efficient direct
25 conversion of heat into electric energy.

The ion conductors having garnet-like structures can also be used as buffer layers in combination with other electrolytes, for example conventional aprotic liquid
30 electrolytes. It is therefore not necessary to use an electrolyte which consists entirely of the garnet-like structure. Rather, it is possible to use any known electrolytes which can, for example, be present in liquid, gel or solid form in combination with the novel
35 garnet-like ion conductors.

The invention therefore provides, in a further aspect, for the use of a solid ion conductor having a garnet-like crystal structure as protective layer before an

- 10 -

electrode so as to improve the chemical stability towards the electrolyte. For this purpose, it is possible to use not only the garnet-like structures according to the invention containing zirconium but
5 also, for example, the garnet-like compounds described in WO 2005/085138. The use of the ion conductors as buffer structure before the electrodes prevents short circuits and makes it possible to generate and apply relatively high voltages so as to achieve a
10 significantly greater energy density and life.

Figures

15 Figure 1:

AC impedance curve of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$, measured at 18°C in air on a thick pellet (1.02 cm thick and 0.92 cm in diameter). The continuous line represents the simulated data for an equivalent current circuit comprising $(R_b Q_b)$
20 $(R_{gb} Q_{gb}) (Q_{el})$ (where R is the resistance and Q is the constant phase element and the indices g, gb and el indicate grain volume, grain boundary and electrode) using the EQUIVALENT Program (B.A. Boukamp, Equivalent Circuit, Version 4.55, 1997, Faculty of Chemical
25 Technology, University of Twente, 7500 AE Enschede (The Netherlands), Report No. CT88/265/128/CT89/214/128, May 1989). The impedance curve measured at 18°C in air on a thin pellet (0.18 cm thick and 0.98 cm in diameter) of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ is shown in the inset.

30

Figure 2:

a) Arrhenius curves for the electrical volume and total conductivity (volume and grain boundaries) of the thick pellets of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$, obtained in two successive
35 heating and cooling cycles.

b) Comparison of the Arrhenius curves obtained for the thick and thin pellets of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ during the first heating run (18-300°C).

- 11 -

Figure 3:

Comparison of the total conductivity (volume + grain boundaries) of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ and other known lithium ion conductors which come into question for battery applications.

Figure 4:

Measured powder XRD pattern of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ and standard pattern of the known garnet phase $\text{Li}_5\text{La}_3\text{Nb}_2\text{O}_{12}$ (JCPDS: 80-0457) as per Joint Committee on Powder Diffraction Standards.

Figure 5:

AC impedance curves measured at 25 and 50°C in air on the thick pellet of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$.

Figure 6:

AC impedance curves measured at 25 and 50°C in air on the thin pellet of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$. The further curve at higher frequency is shown as an inset.

Figure 7:

Arrhenius curves for the electrical volume and total (volume + grain boundary) conductivity of the thin pellet of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$, obtained in two successive heating and cooling cycles.

Figure 8:

Photographs of a) $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ pellet and molybdenum crucible before exposure to molten lithium, b) $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ pellet in molten lithium and c) $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ pellet and molybdenum crucible immediately after exposure to molten lithium for 48 hours. The photograph depicted in Figure c) shows that the colour of the pellet remains unchanged (ivory colour) and no reaction product is formed.

The following example serves to illustrate a particularly preferred embodiment of the present

- 12 -

invention.

Example:

- 5 Stoichiometric amounts of the in each case highly pure starting materials:
LiOH (Alfa Aesar, >99%), predried at 200°C for 6 h, 10% by weight excess in order to compensate for the Li loss during the sintering process;
- 10 La₂O₃ (Alfa Aesar, >99.99%), predried at 900°C for 24 h; and
ZrO₂ (Aldrich, >99%)
were reacted in a solid-state reaction.
- 15 The starting materials were ball-milled for about 12 hours in 2-propanol using zirconium oxide containers and balls. This was followed by heat treatment at 900 and 1125°C in air for 12 hours. The product obtained was then once again ball-milled. The reaction products
- 20 were subsequently isostatically pressed to form pellets and sintered at 1230°C for 36 h. The samples were covered with a powder having the same composition during this procedure in order to avoid an excessive loss of lithium. The heating rate in all treatments was
- 25 1°C per minute. The sintered compressed pellets were cut into thinner pellets by means of a diamond saw. Phase formation was monitored using X-ray powder diffraction (XRD) (SEIFERT 3000, CuK_α, Germany). The lattice constants were determined from the powder XRD
- 30 data using the method of least squares.

The measurement of the electrical conductivity was carried out in air using two pellets of differing thickness (thick pellet: 1.02 cm thick and 0.92 cm in

35 diameter, and thin pellet: 0.18 cm thick and 0.98 cm in diameter). The measurement was carried out using Li-ion-blocking Au electrodes (Au paste cured at 700°C for 1 h) in the temperature range from 18 to 350°C by means of an impedance and gain phase analyzer

- 13 -

(HP 4192 A, Hewlett-Packard Co., Palo Alto, CA) (5 Hz - 13 MHz). Before each impedance measurement, the samples were equilibrated at constant temperature for from 3 to 6 hours. The impedance measurements were
5 carried out in two successive heating and cooling cycles for each pellet. The data for the thermogravimetric analysis (TGA) and differential thermal analysis (NETZSCH STA 409 C/CD) were measured in air over the temperature range 29-900-20°C at a
10 heating and cooling rate of 2°C per minute and isothermally at 900°C.

The stability of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ towards molten lithium was examined in an argon-filled glove box by reacting the
15 pellet with a large excess of molten lithium in a molybdenum crucible for 48 hours.

Although numerous X-ray diffraction (XRD) studies have been carried out on $\text{Li}_5\text{La}_3\text{M}_2\text{O}_{12}$ ($\text{M} = \text{Nb}, \text{Ta}$) garnets,
20 there has been controversy about the structure in respect of the space group and position of the lithium cations (a) D. Mazza, Mater. Lett. 1988, 7, 205-207; b) H. Hyooma, K. Hayashi, Mater. Res. Bull. 1988, 23, 1399-1407; c) J. Isasi, M.L. Veiga, R. Saez-Puche,
25 A. Jereze, C. Pico, J. Alloys Compd. 1991, 177, 251-257). Recently, neutron diffraction studies have indicated that $\text{Li}_5\text{La}_3\text{M}_2\text{O}_{12}$ ($\text{M} = \text{Nb}, \text{Ta}$) crystallizes in the space group $\text{Ia}\bar{3}\text{d}$ and that Li is located both in the tetrahedral positions and octahedral positions and that
30 vacancies are present in both types of positions (a) E.J. Cussen, Chem. Commun. 2006, 412-413; b) M.P. O'Callaghan, D.R. Lynham, E.J. Cussen, G.Z. Chen, Chem. Mater. 2006, 18, 4681-4689). The measured powder XRD pattern of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ agrees well with the standard
35 pattern of the known garnet phase $\text{Li}_5\text{La}_3\text{M}_2\text{O}_{12}$ and demonstrates the ability of the garnet structure to incorporate cations of differing oxidation state and different size without an excessive change in the symmetry. The diffraction pattern for a cubic cell

- 14 -

having a lattice constant of $A = 12.9682 \text{ (6) \AA}$ was determined.

A typical impedance curve obtained at 18°C for a thick
5 pellet of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ is shown in Figure 1. The
occurrence of the rise in the region of low frequencies
when the electrodes are ionically blocked is an
indication that the material examined is an ion
conductor (a) V. Thangadurai, R.A. Huggins, W. Weppner,
10 J. Power Sources 2002, 108, 64-69; b) J.T.S. Irvine,
D.C. Sinclair, A.R. West, Adv. Mater. 1990, 2,
132-138). Similar behaviour has been observed for the
previously studied materials having a garnet-like
structure. The impedance curve could be resolved into
15 volume, grain boundary and electrode resistances. The
continuous line in Figure 1 represents the data for an
equivalent current circuit of $(R_b Q_b)(R_{gb} Q_{gb})(Q_{el})$ using
the EQUIVALENT Program. The impedance curve for the
thin pellet of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ measured at 18°C is shown as
20 an inset in Figure 1. The volume and total conductivity
of the thick pellet (1.02 cm thick and 0.92 cm in
diameter) and the thin pellet (0.18 cm thick and
0.98 cm in diameter) of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ observed at various
temperatures were obtained from the intersections of
25 the high-frequency and low-frequency semicircles with
the axis and are summarized in Table 1. The data shown
in Figure 1 and Table 1 indicate similar electrical
properties for the thick and thin pellets of
 $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$. The thin pellet displays a slightly higher
30 volume and total conductivity compared to the thick
pellet. In addition, it is interesting to note that the
grain boundary contribution to the total resistance is
less than 50% and decreases with increasing temperature
(Table 1) both for the thick pellet and for the thin
35 pellet. At higher temperature (above 75°C for the thick
pellet and above 50°C for the thin pellet), it is
difficult to determine the grain boundary contribution
compared to the volume contribution precisely; the
total value of the volume and grain boundary

- 15 -

- contributions has therefore been shown for the determination of the electrical conductivity over the temperature range examined. The total conductivity at room temperature (3×10^{-4} S/cm at 25°C) of the novel
- 5 crystalline fast lithium ion conductor $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ having a garnet-like structure is better than that of all other solid lithium ion conductors and all previously described lithium garnets.
- 10 This result, viz. that total and volume conductivities are of the same order of magnitude, is a particularly advantageous property of the $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ garnet structure examined here compared to other ceramic lithium ion conductors. For many applications of solid
- 15 electrolytes in electrochemical devices such as batteries, sensors and electrochromic displays, the total conductivity should be as high as possible. In addition, volume and total conductivity can be improved further by means of a low-temperature synthesis of
- 20 $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ and by means of further densification using a suitable sintering process.

The Arrhenius curves for the electrical volume and total conductivity of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$, obtained in two

25 heating and cooling cycles, are shown for the thick pellet in Figure 2a. There is no appreciable change in the conductivity between the two cycles. This means that the garnet-like structure examined is thermally stable and that no phase transition occurs in the

30 temperature range examined, viz. from room temperature to 350°C. A similar Arrhenius behaviour was also observed for the thin pellet of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$. In Figure 2b, the data for the thick pellet and the thin pellet of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$, which were in each case obtained

35 in the first heating run, are compared. The activation energies obtained for the volume and total conductivity of the thin pellet (0.32 eV at 18-50°C and 0.30 eV at 18-300°C) are slightly lower than those for the volume and total conductivity of the thick pellet (0.34 eV at

- 16 -

18-70°C and 0.31 eV at 18-300°C). The conductivity obtained for the thin pellet is slightly higher than that of the thick pellet.

- 5 In addition to the impedance analysis, the ionic nature of the electrical conductivity was also confirmed by EMF measurements in which $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ was used as solid electrolyte between elemental lithium and Al, LiAl. The sample was covered with an aluminium layer on the upper
10 side and placed on lithium which had been melted in a glove box filled with inert Ar gas. The aluminium was alloyed both by chemical reaction with lithium and also by coulometric titration of lithium into the aluminium from the lithium electrode located opposite it. The
15 resulting voltage was in the region of the theoretical value. The difference could be attributed to the inhomogeneous temperature distribution and corresponding phenomena due to irreversible processes.
- 20 Figure 3 shows a comparison of the lithium ion conductivity of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ with other known lithium ion conductors which are under consideration for use in connection with batteries. The conductivity is higher than that of Li- β -aluminium oxide, thin-layer Lipon
25 ($\text{Li}_{2.9}\text{PO}_{3.3}\text{N}_{0.46}$), $\text{Li}_9\text{SiAlO}_8$, $\text{LiI} + 40 \text{ mol Al}_2\text{O}_3$, $\text{LiZr}_2(\text{PO}_4)_3$, $\text{Li}_{3.5}\text{Si}_{0.5}\text{P}_{0.5}\text{O}_4$, $\text{Li}_5\text{La}_3\text{Ta}_2\text{O}_{12}$ and $\text{Li}_6\text{BaLa}_2\text{Ta}_2\text{O}_{12}$. The high lithium conductivity compared to other lithium-containing garnets and low activation energy which are observed are possibly due to the increase in the cubic
30 lattice constants, the increase in the lithium ion concentration, a reduced chemical interaction between the lithium ions and other ions which form the lattice and partly to the improved densification (92% of the theoretical density). At relatively low temperatures, the conductivity of the less stable polycrystalline Li_3N
35 ($6.6 \times 10^{-4} \text{ S/cm}$ at 27°C) is comparable with that of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$. However, at higher temperature, $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ displays a higher total conductivity.

- 17 -

The thermal stability of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$, which is the fundamental advantage of the crystalline lithium ion conductor, was confirmed by thermogravimetric measurements (TGA) and differential thermal analysis (DTA). The TG-DTA data measured in an air atmosphere indicated no significant change in the mass and no discernible phase change both during heating and during cooling within the temperature range from 20 to 900°C. It was found that zirconium-containing $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ is stable towards molten lithium and is also chemically stable to the action of moisture and air over the observation period of several weeks.

Table 1

Impedance data for $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ (thick pellet: 1.02 cm thick and 0.92 cm in diameter, and thin pellet: 0.18 cm thick and 0.98 cm in diameter), measured in air.

Type of pellets	Temperature (°C)	σ_{volume} (Scm^{-1})	σ_{total} (Scm^{-1})	$R_{\text{gb}}/R_{\text{b}}+R_{\text{gb}}^{[a]}$
Thick pellet	18	3.37×10^{-4}	1.90×10^{-4}	0.44
	25	4.67×10^{-4}	2.44×10^{-4}	0.48
	50	1.19×10^{-3}	6.15×10^{-4}	0.49
Thin pellet	18	3.97×10^{-4}	2.32×10^{-4}	0.42
	25	5.11×10^{-4}	3.01×10^{-4}	0.41
	50	1.45×10^{-3}	7.74×10^{-4}	0.47

[a] R_{gb} = grain boundary resistance, R_{b} = volume resistance

Table 2: Powder XRD pattern of $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ having a garnet structure

h	k	l	$d_{\text{obs.}} (\text{\AA})$	$d_{\text{cal.}} (\text{\AA})$	I_{obs}
2	1	1	5.278	5.294	99
2	2	0	4.574	4.584	17
3	2	1	3.460	3.465	55
4	0	0	3.239	3.242	42
4	2	0	2.897	2.899	100
3	3	2	2.761	2.764	14
4	2	2	2.645	2.647	61
5	2	1	2.365	2.367	49
5	3	2	2.102	2.103	37
6	2	0	2.048	2.050	11
6	3	1	1.911	1.912	16
4	4	4	1.870	1.871	12
6	4	0	1.798	1.798	21
6	3	3	1.764	1.764	20
6	4	2	1.732	1.732	93
7	3	2	1.646	1.646	15
8	0	0	1.620	1.621	14
6	5	3	1.549	1.550	13
7	5	2	1.468	1.468	9
8	4	0	1.450	1.449	11
8	4	2	1.415	1.414	17
9	2	1	1.398	1.398	14
6	6	4	1.382	1.382	14
9	3	2	1.337	1.337	24
7	7	2	1.283	1.284	10
7	6	5	1.236	1.236	11
8	6	4	1.204	1.204	21
10	4	2	1.184	1.183	14
10	5	1	1.155	1.155	13
8	8	0	1.146	1.146	10
10	5	3	1.120	1.120	10

Claims

1. Solid ion conductor which has a garnet-like crystal structure and has the stoichiometric composition $L_{7+x}A_xG_{3-x}Zr_2O_{12}$, where
L is in each case independently a monovalent cation,
A is in each case independently a divalent cation,
G is in each case independently a trivalent cation,
 $0 \leq x \leq 3$ and
O is optionally partly or completely replaced by divalent or trivalent anions.
2. Solid ion conductor according to claim 1, wherein the trivalent anion is N^{3-} .
3. Solid ion conductor according to claim 1 or 2, wherein $0 \leq x \leq 1$.
4. Solid ion conductor according to any one of claims 1 to 3, wherein L is Li, Na or K.
5. Solid ion conductor according to claim 4, wherein L is Na.
6. Solid ion conductor according to any one of claims 1 to 5, wherein A is a divalent alkaline earth metal cation.
7. Solid ion conductor according to any one of claims 1 to 6, wherein A is Ca, Sr or Ba.
8. Solid ion conductor according to any one of claims 1 to 4, wherein the stoichiometric composition is $Li_7La_3Zr_2O_{12}$.
9. Process for preparing a solid ion conductor according to any one of claims 1 to 8, characterized in that components consisting of salts and/or oxides of L, A, G and Zr are reacted with one another.

- 10.** Process according to claim 9, characterized in that the reaction is carried out by means of precursor methods or by means of precipitation reactions of dissolved salts of the components.
- 11.** Process according to claim 10, characterized in that the precursor method is a Pechini method or a glycine method.
- 12.** Process according to claim 10 or 11, characterized in that the reaction is carried out in a solid-phase reaction.
- 13.** Process according to claim 9 or 12, characterized in that L and A are used in the form of nitrates, carbonates or hydroxides and are reacted with G_2O_3 and ZrO_2 .
- 14.** Process according to any one of claims 9, 12 and 13, characterized in that it comprises the following steps:
- a) mixing of the components and ball-milling,
 - b) heating of the mixture from step a) at from 400 to 1000°C in air for from two to ten hours,
 - c) ball-milling,
 - d) isostatic pressing of the mixture to produce a desired shape, and
 - e) sintering of the product from step d) covered with a powder of the same composition at from 700 to 1200°C for from 10 to 50 hours.
- 15.** Process according to claim 14, characterized in that the ball-milling in step a), step c) or both of said steps, is carried out in 2-propanol using zirconium oxide containers and balls.
- 16.** Process according to claim 14 or 15, wherein the mixture is heated at 700°C for six hours in step b) and is sintered at 900°C for 24 hours in step e).

- 17.** Use of a solid ion conductor according to any one of claims 1 to 8 in batteries, accumulators, supercaps, fuel cells, sensors, thermoelectric converters or electrochromic devices.
- 18.** Use of a solid ion conductor according to any one of claims 1 to 8 in windows, VDUs or exterior walls.
- 19.** Use of a solid ion conductor according to any one of claims 1 to 8 as coating for an electrode or protective layer before an electrode.
- 20.** Electrode coated with a solid ion conductor according to any one of claims 1 to 8.
- 21.** Battery comprising one or more electrodes according to claim 20.

Application number/numéro de demande: EP08 / 5402

Figures: 8

Pages: 9/9

Unscannable Item(s) received with this application.

To inquire if you can order a copy of the unscannable item(s),

Please visit the CIPO Website at [HTTP://CIPO.GC.CA](http://CIPO.GC.CA)

Item(s) ne pouvant être balayés.

Documents reçus avec cette demande ne pouvant être balayés.

Pour vous renseigner si vous pouvez commander

une copie des items ne pouvant être balayés,

veuillez visiter le site web de l' OPIC au [HTTP://CIPO.GC.CA](http://CIPO.GC.CA)

Figure 1


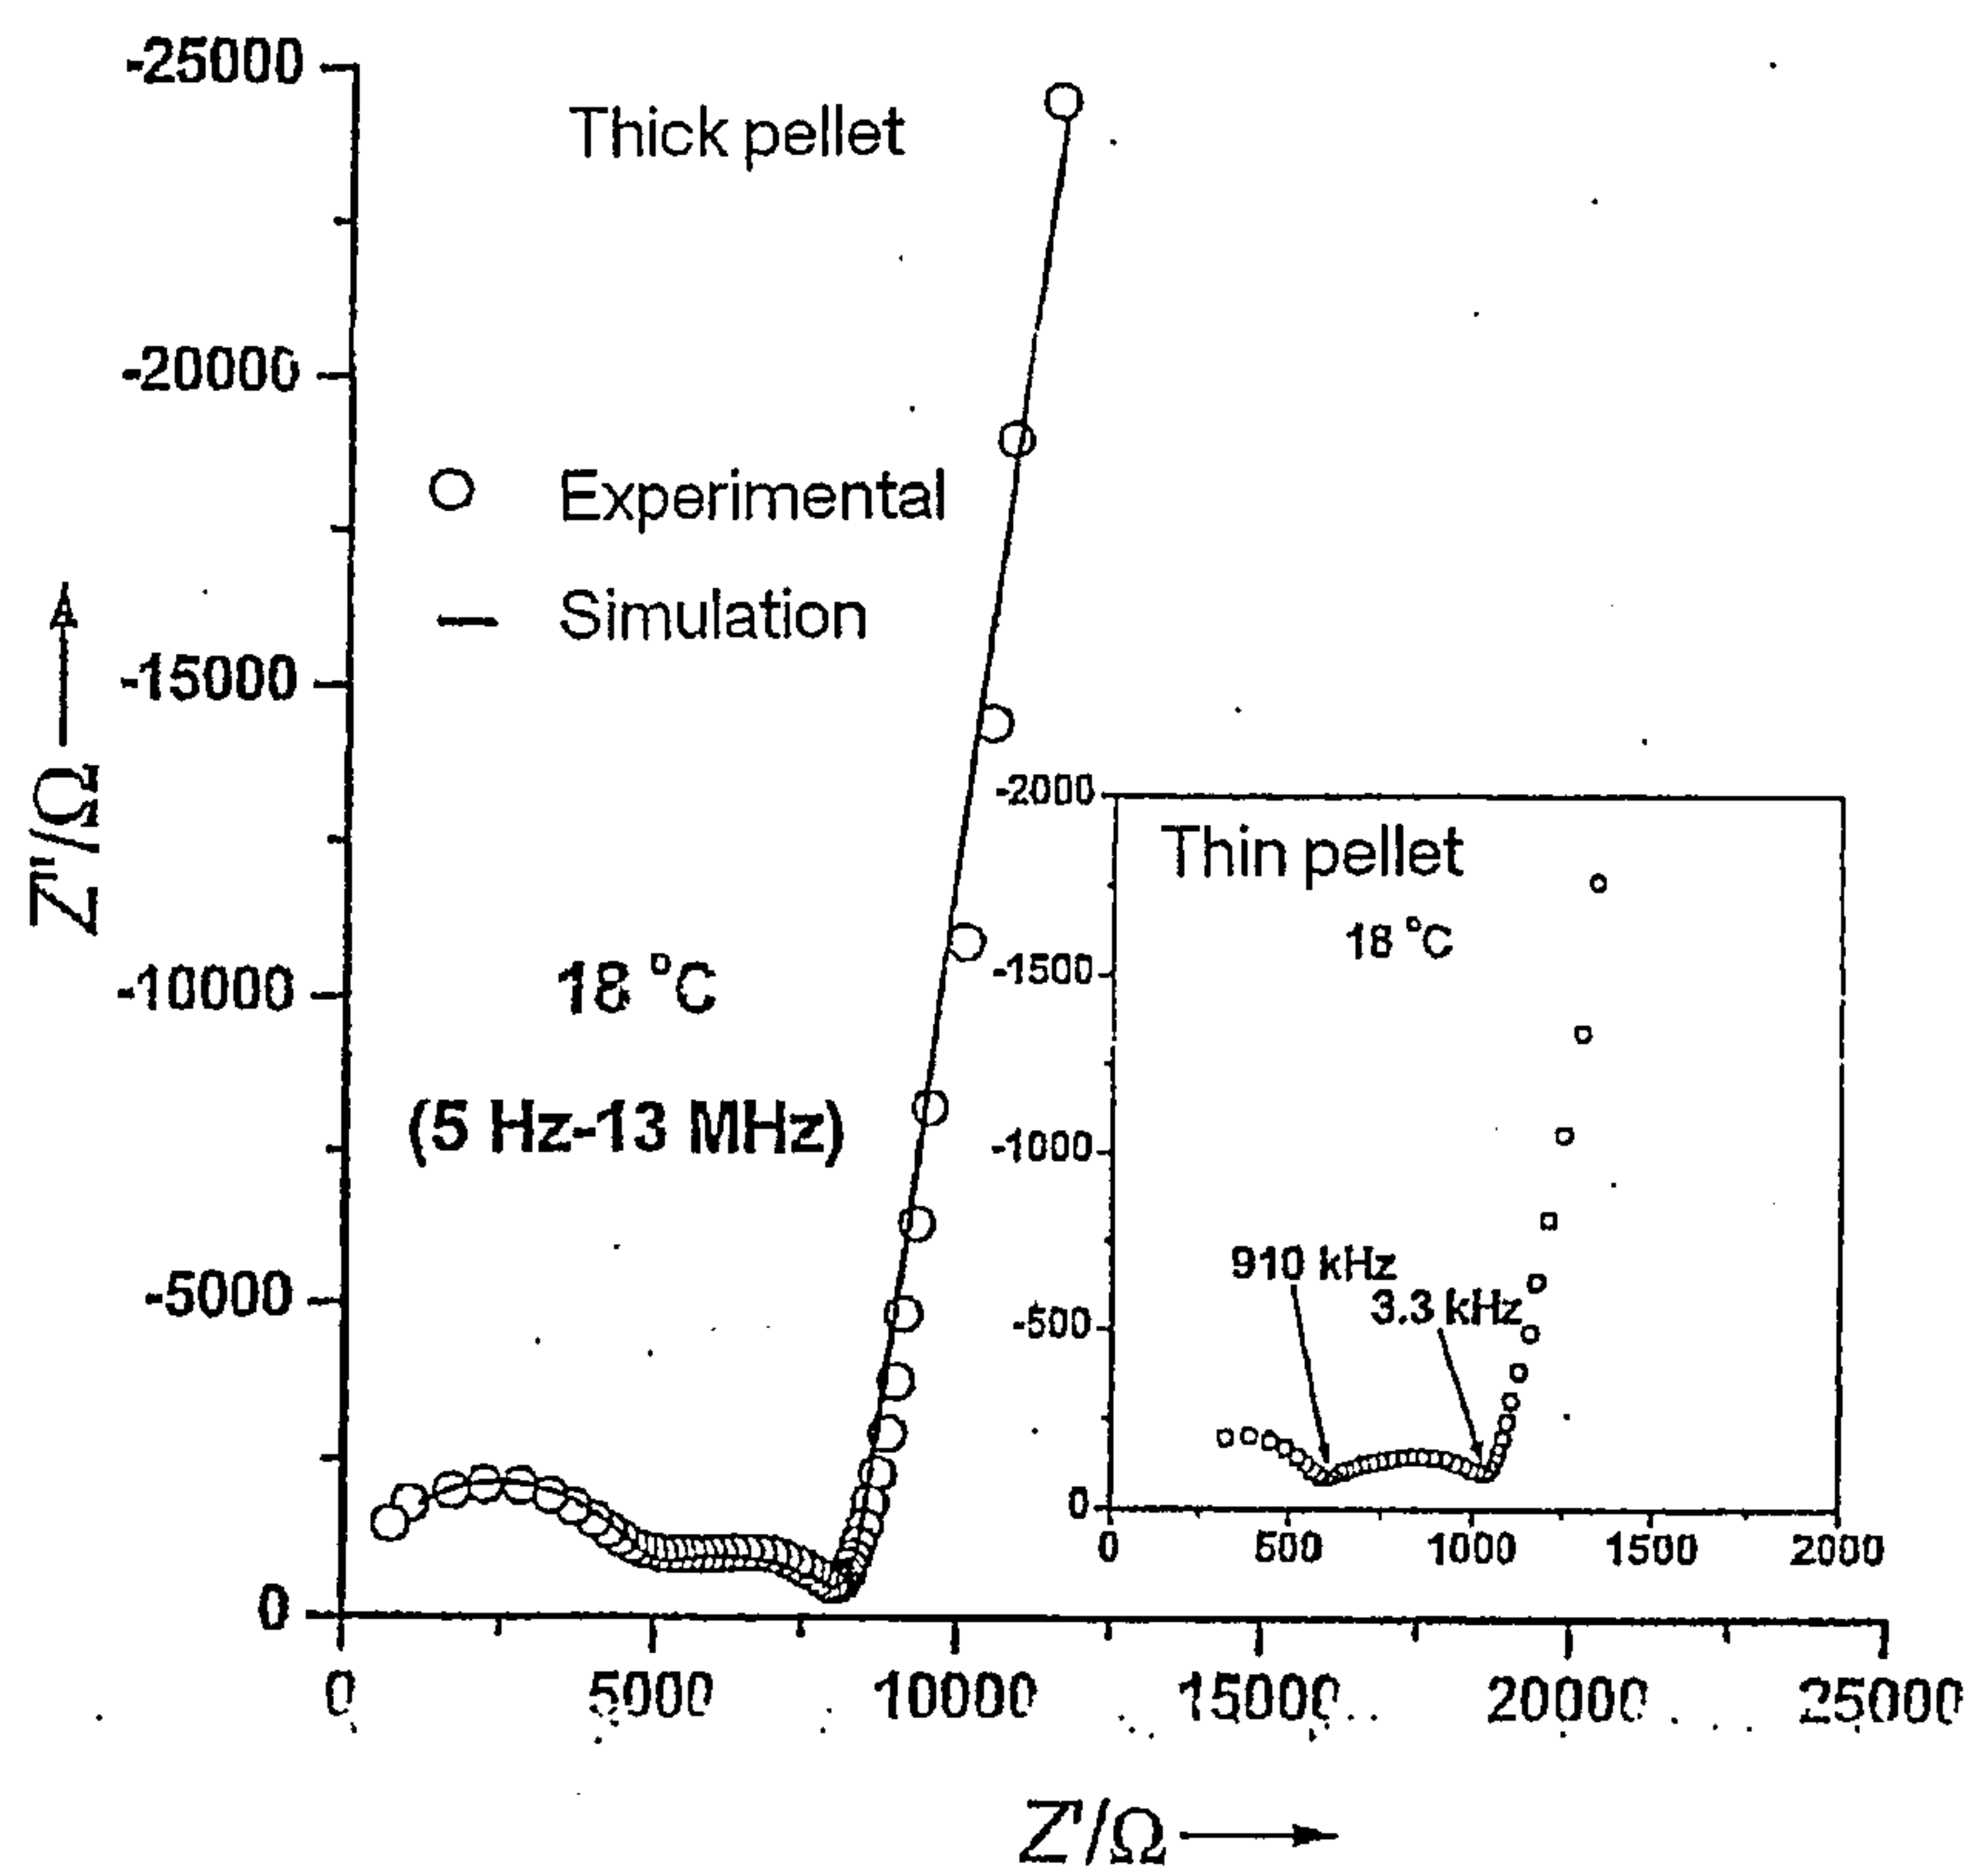


Figure 2a

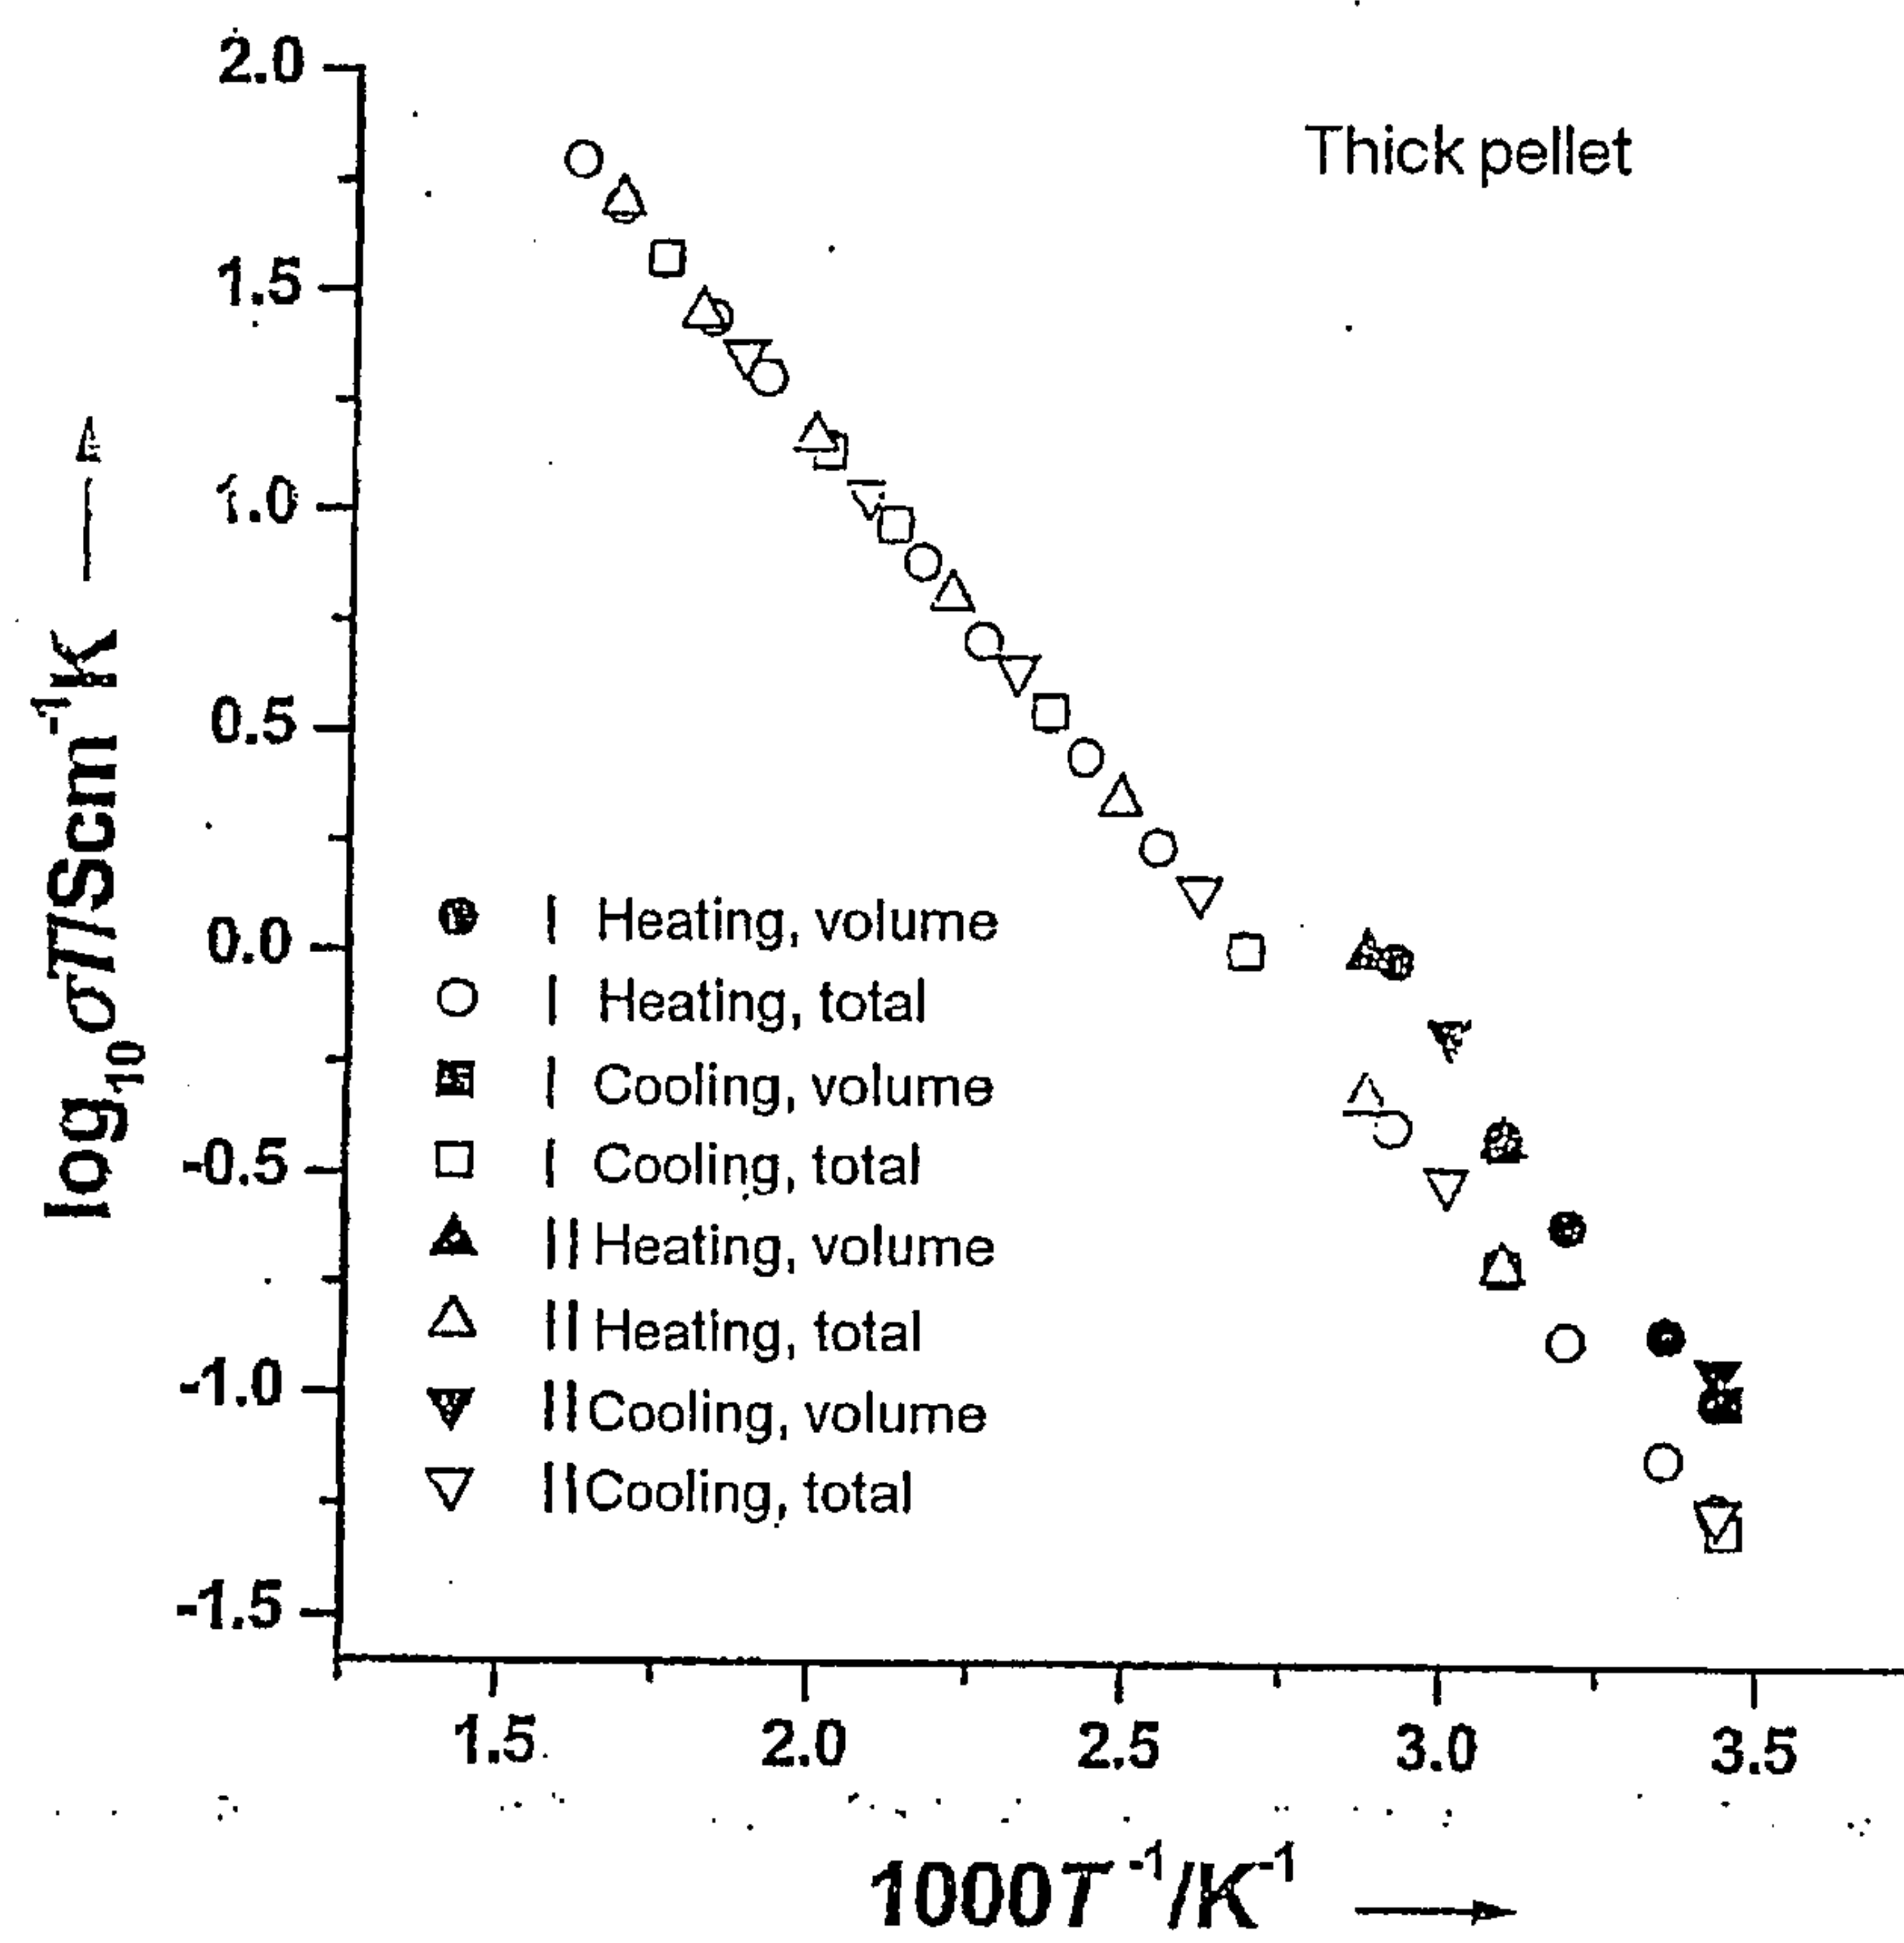

3/9

Figure 2b


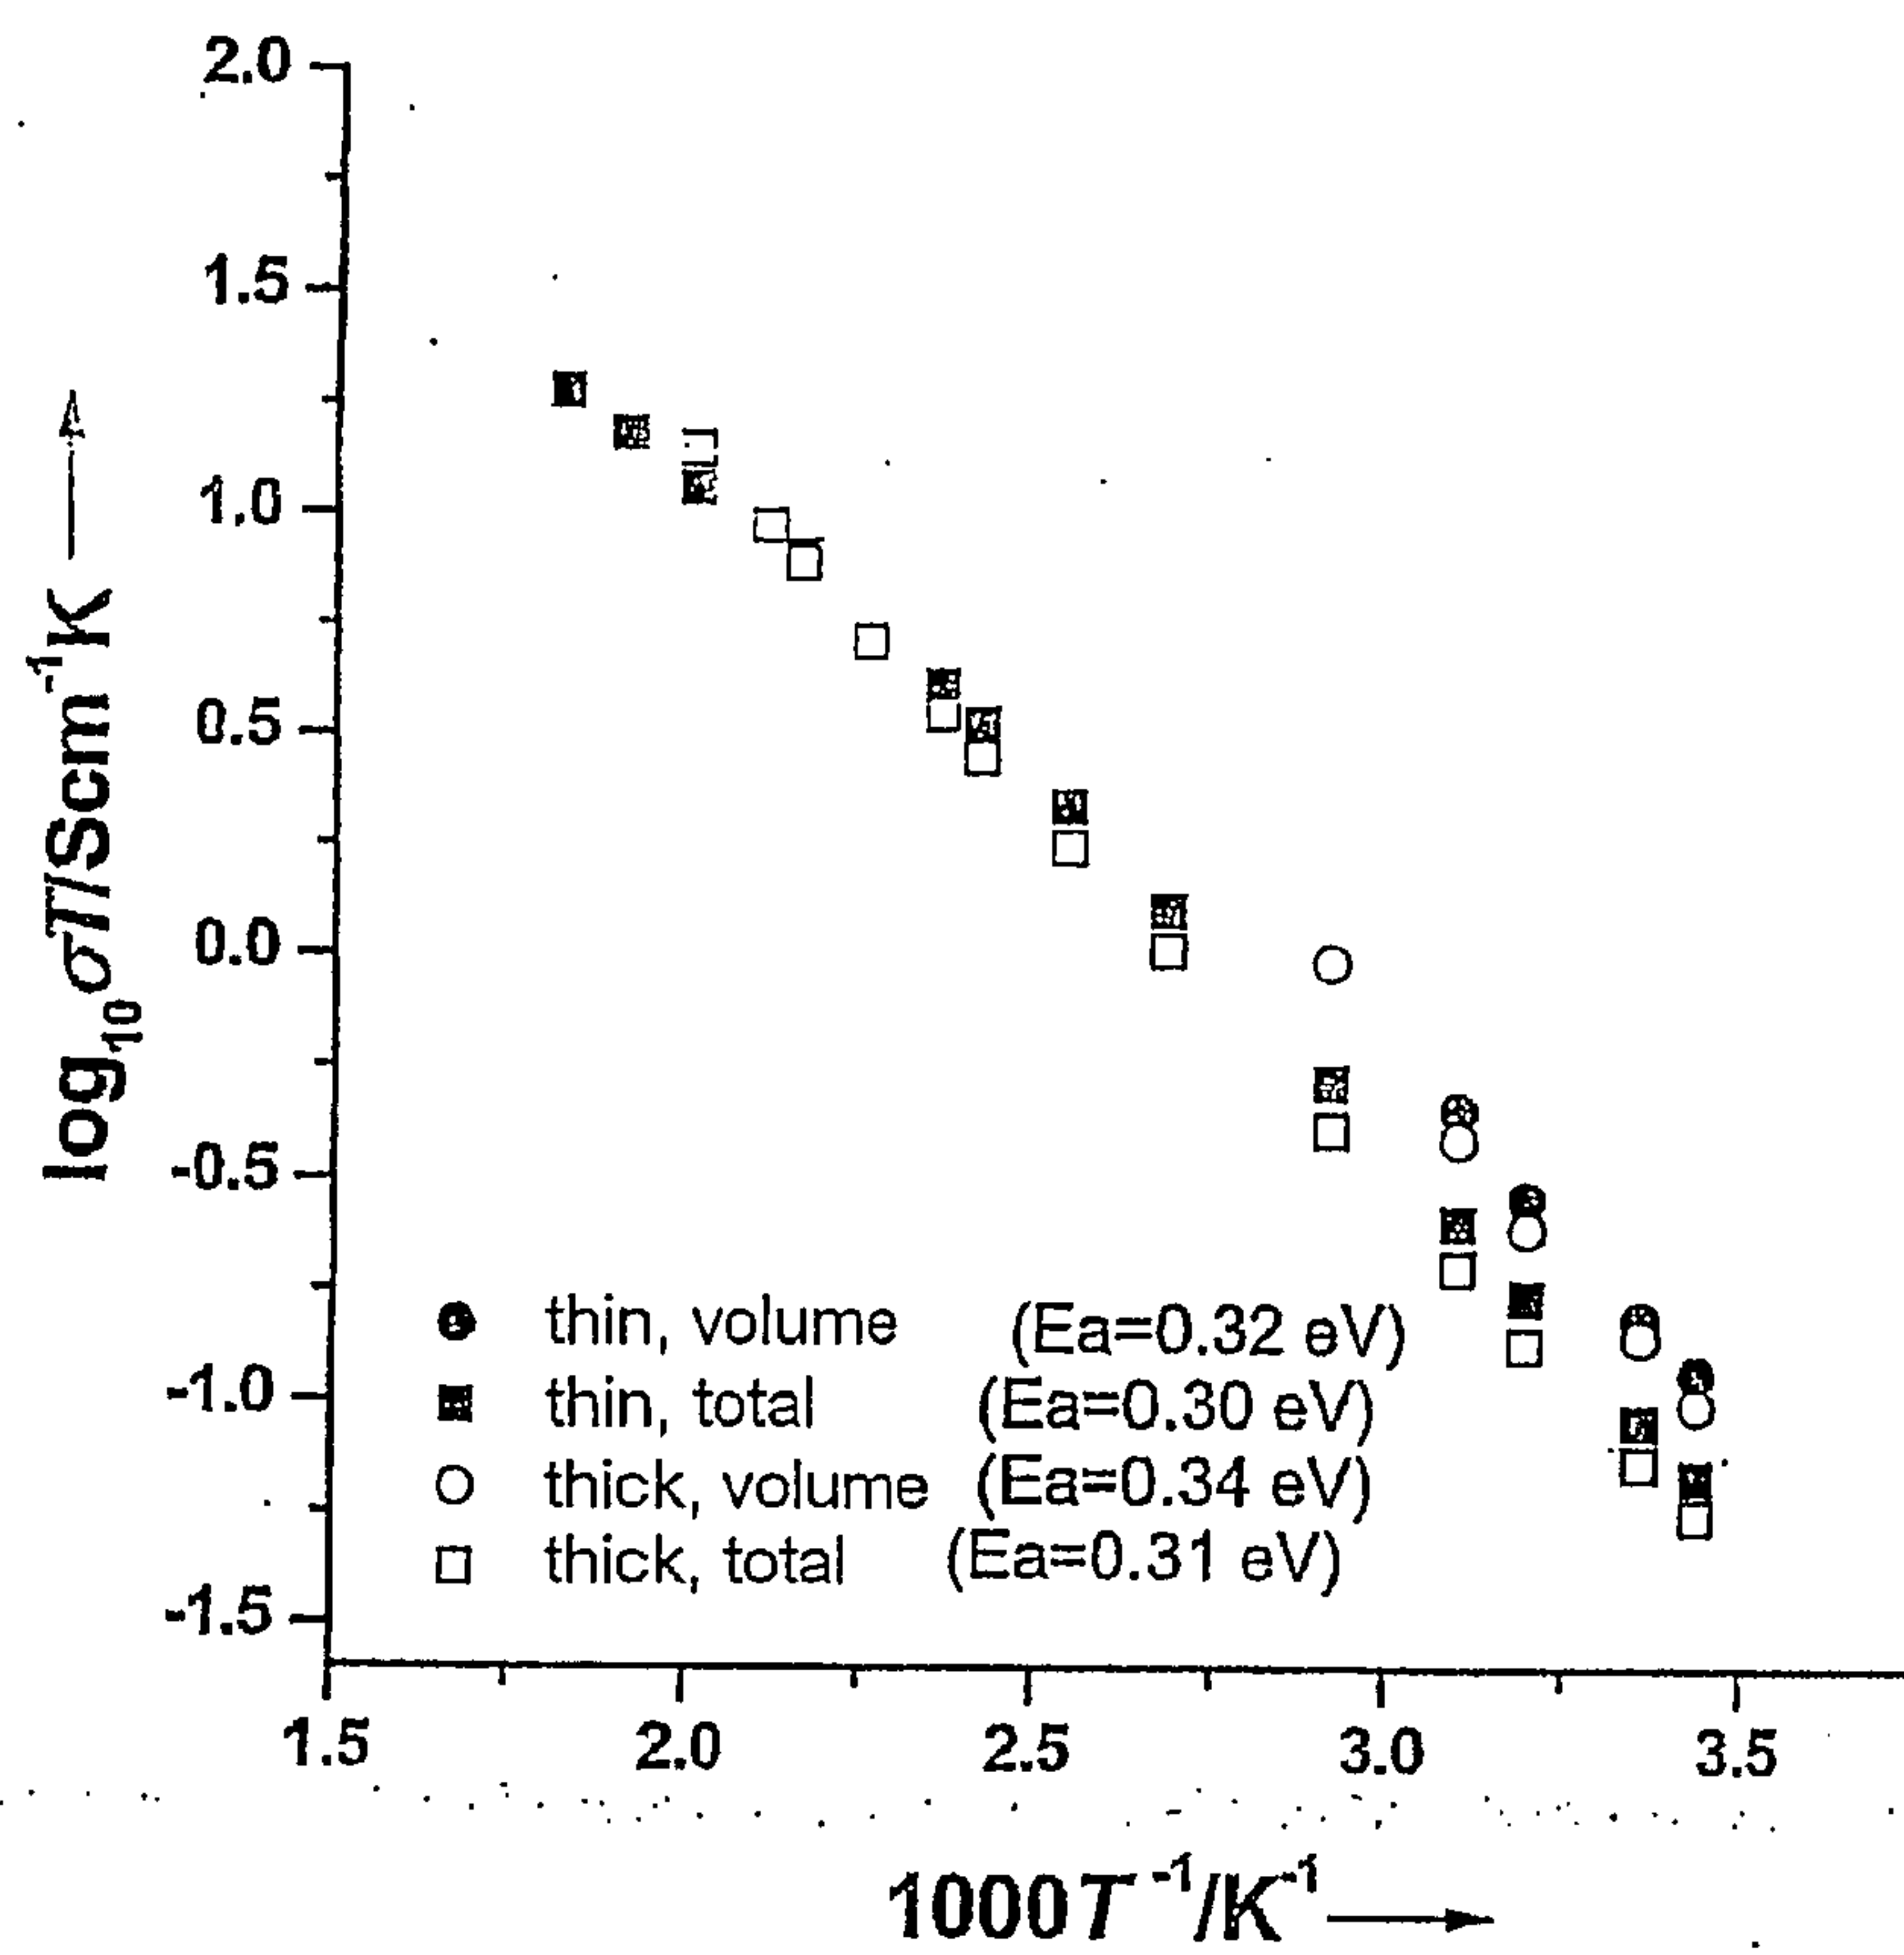


Figure 3

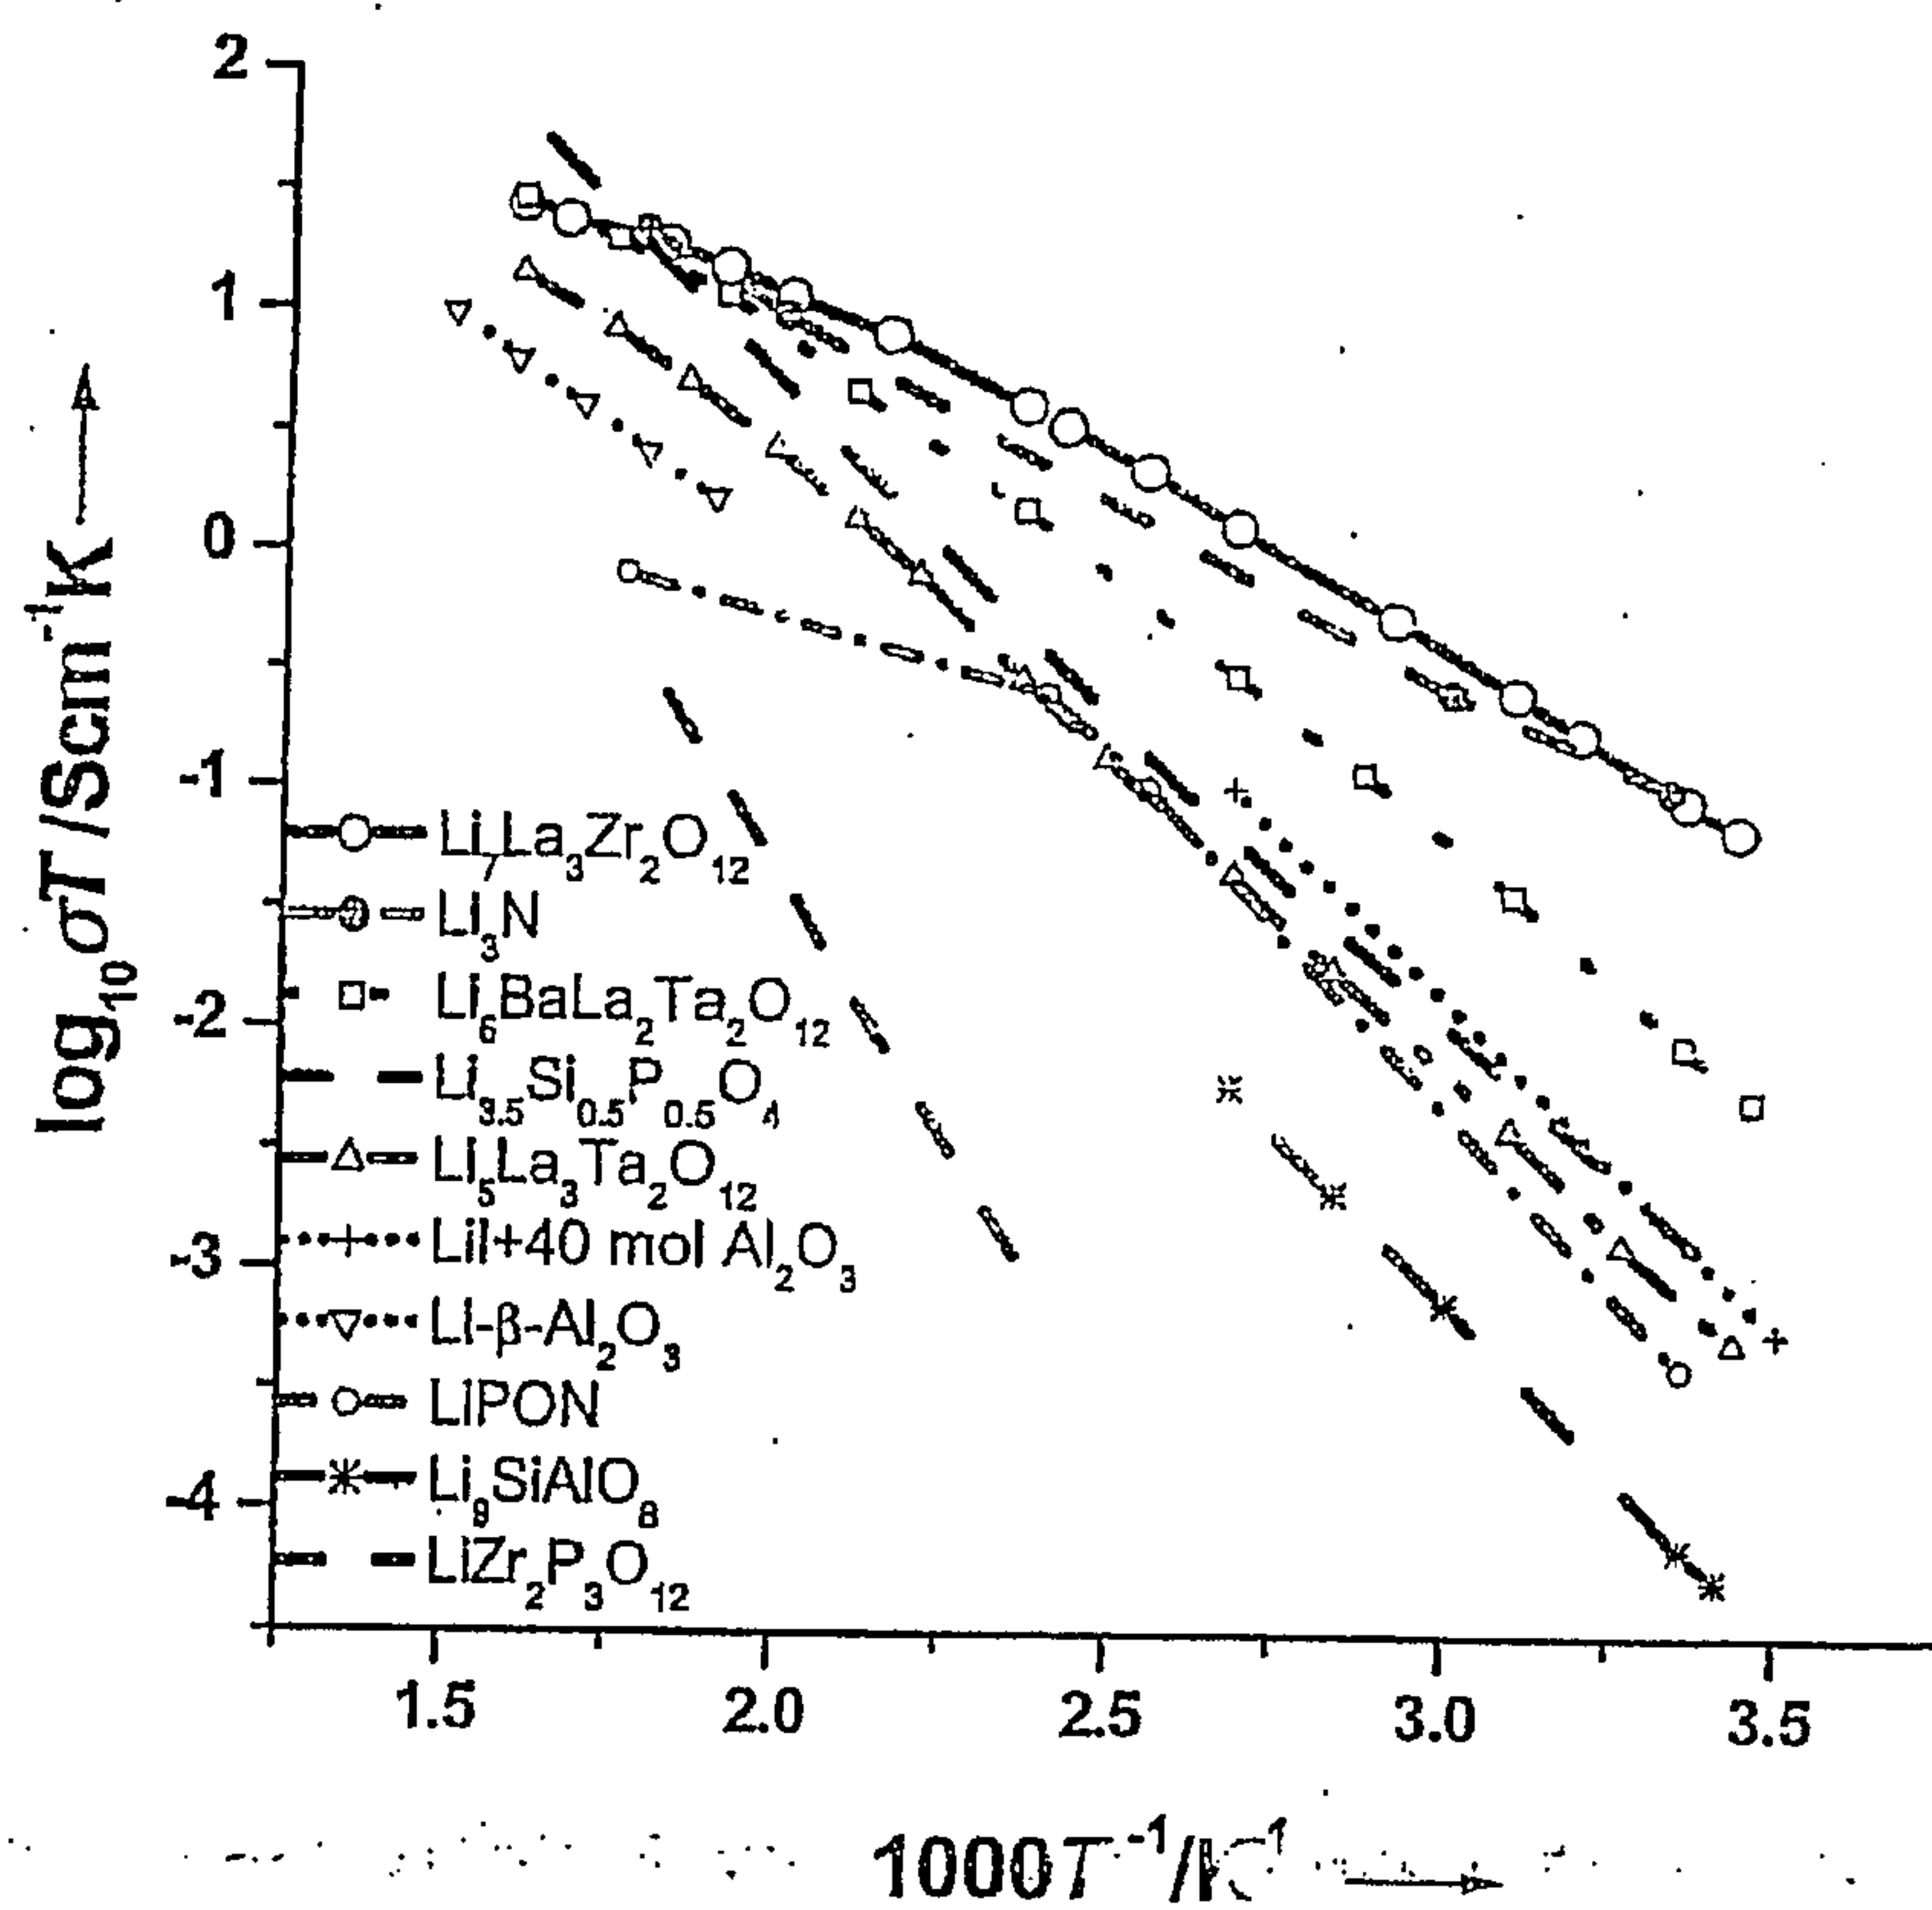

Intensity ↑

$\text{Li}_7\text{La}_3\text{ZrO}_{12}$


$\text{Li}_5\text{La}_3\text{Nb}_2\text{O}_{12}$
JCPDS: 80-0457

20 40 60 80

$2\theta / ^\circ \rightarrow$

6/9

Figure 5

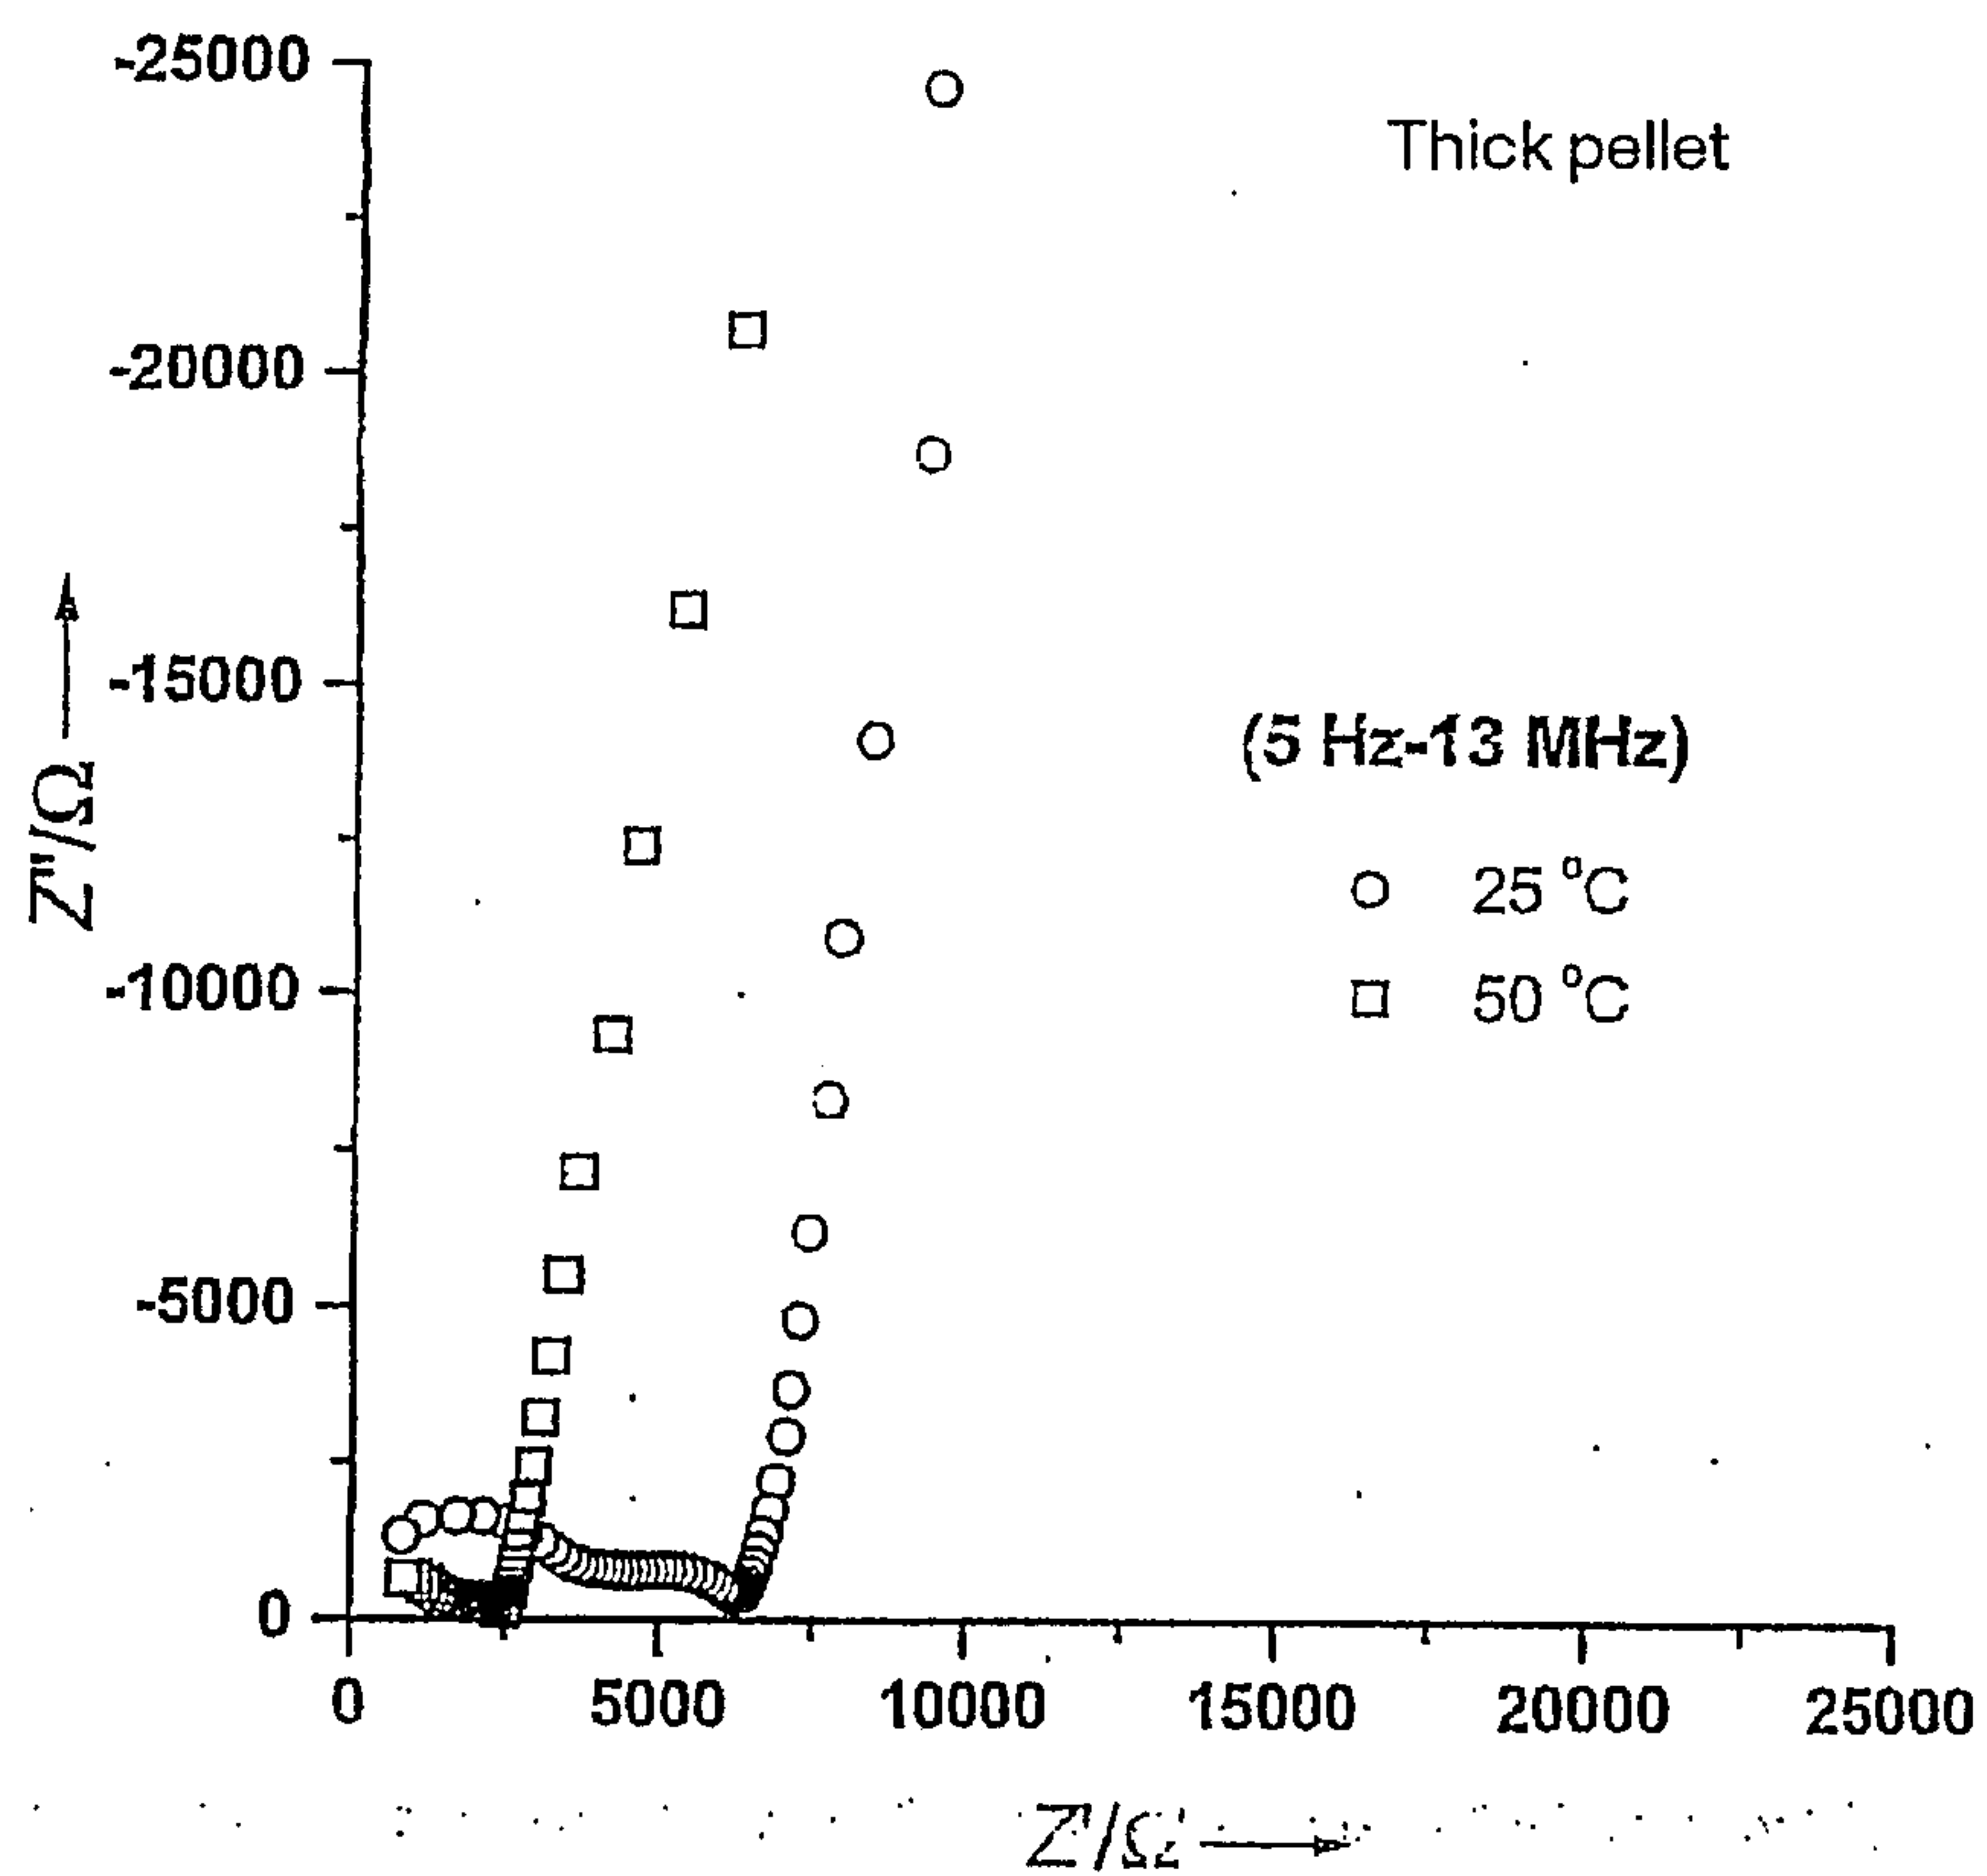

7/9

Figure 6

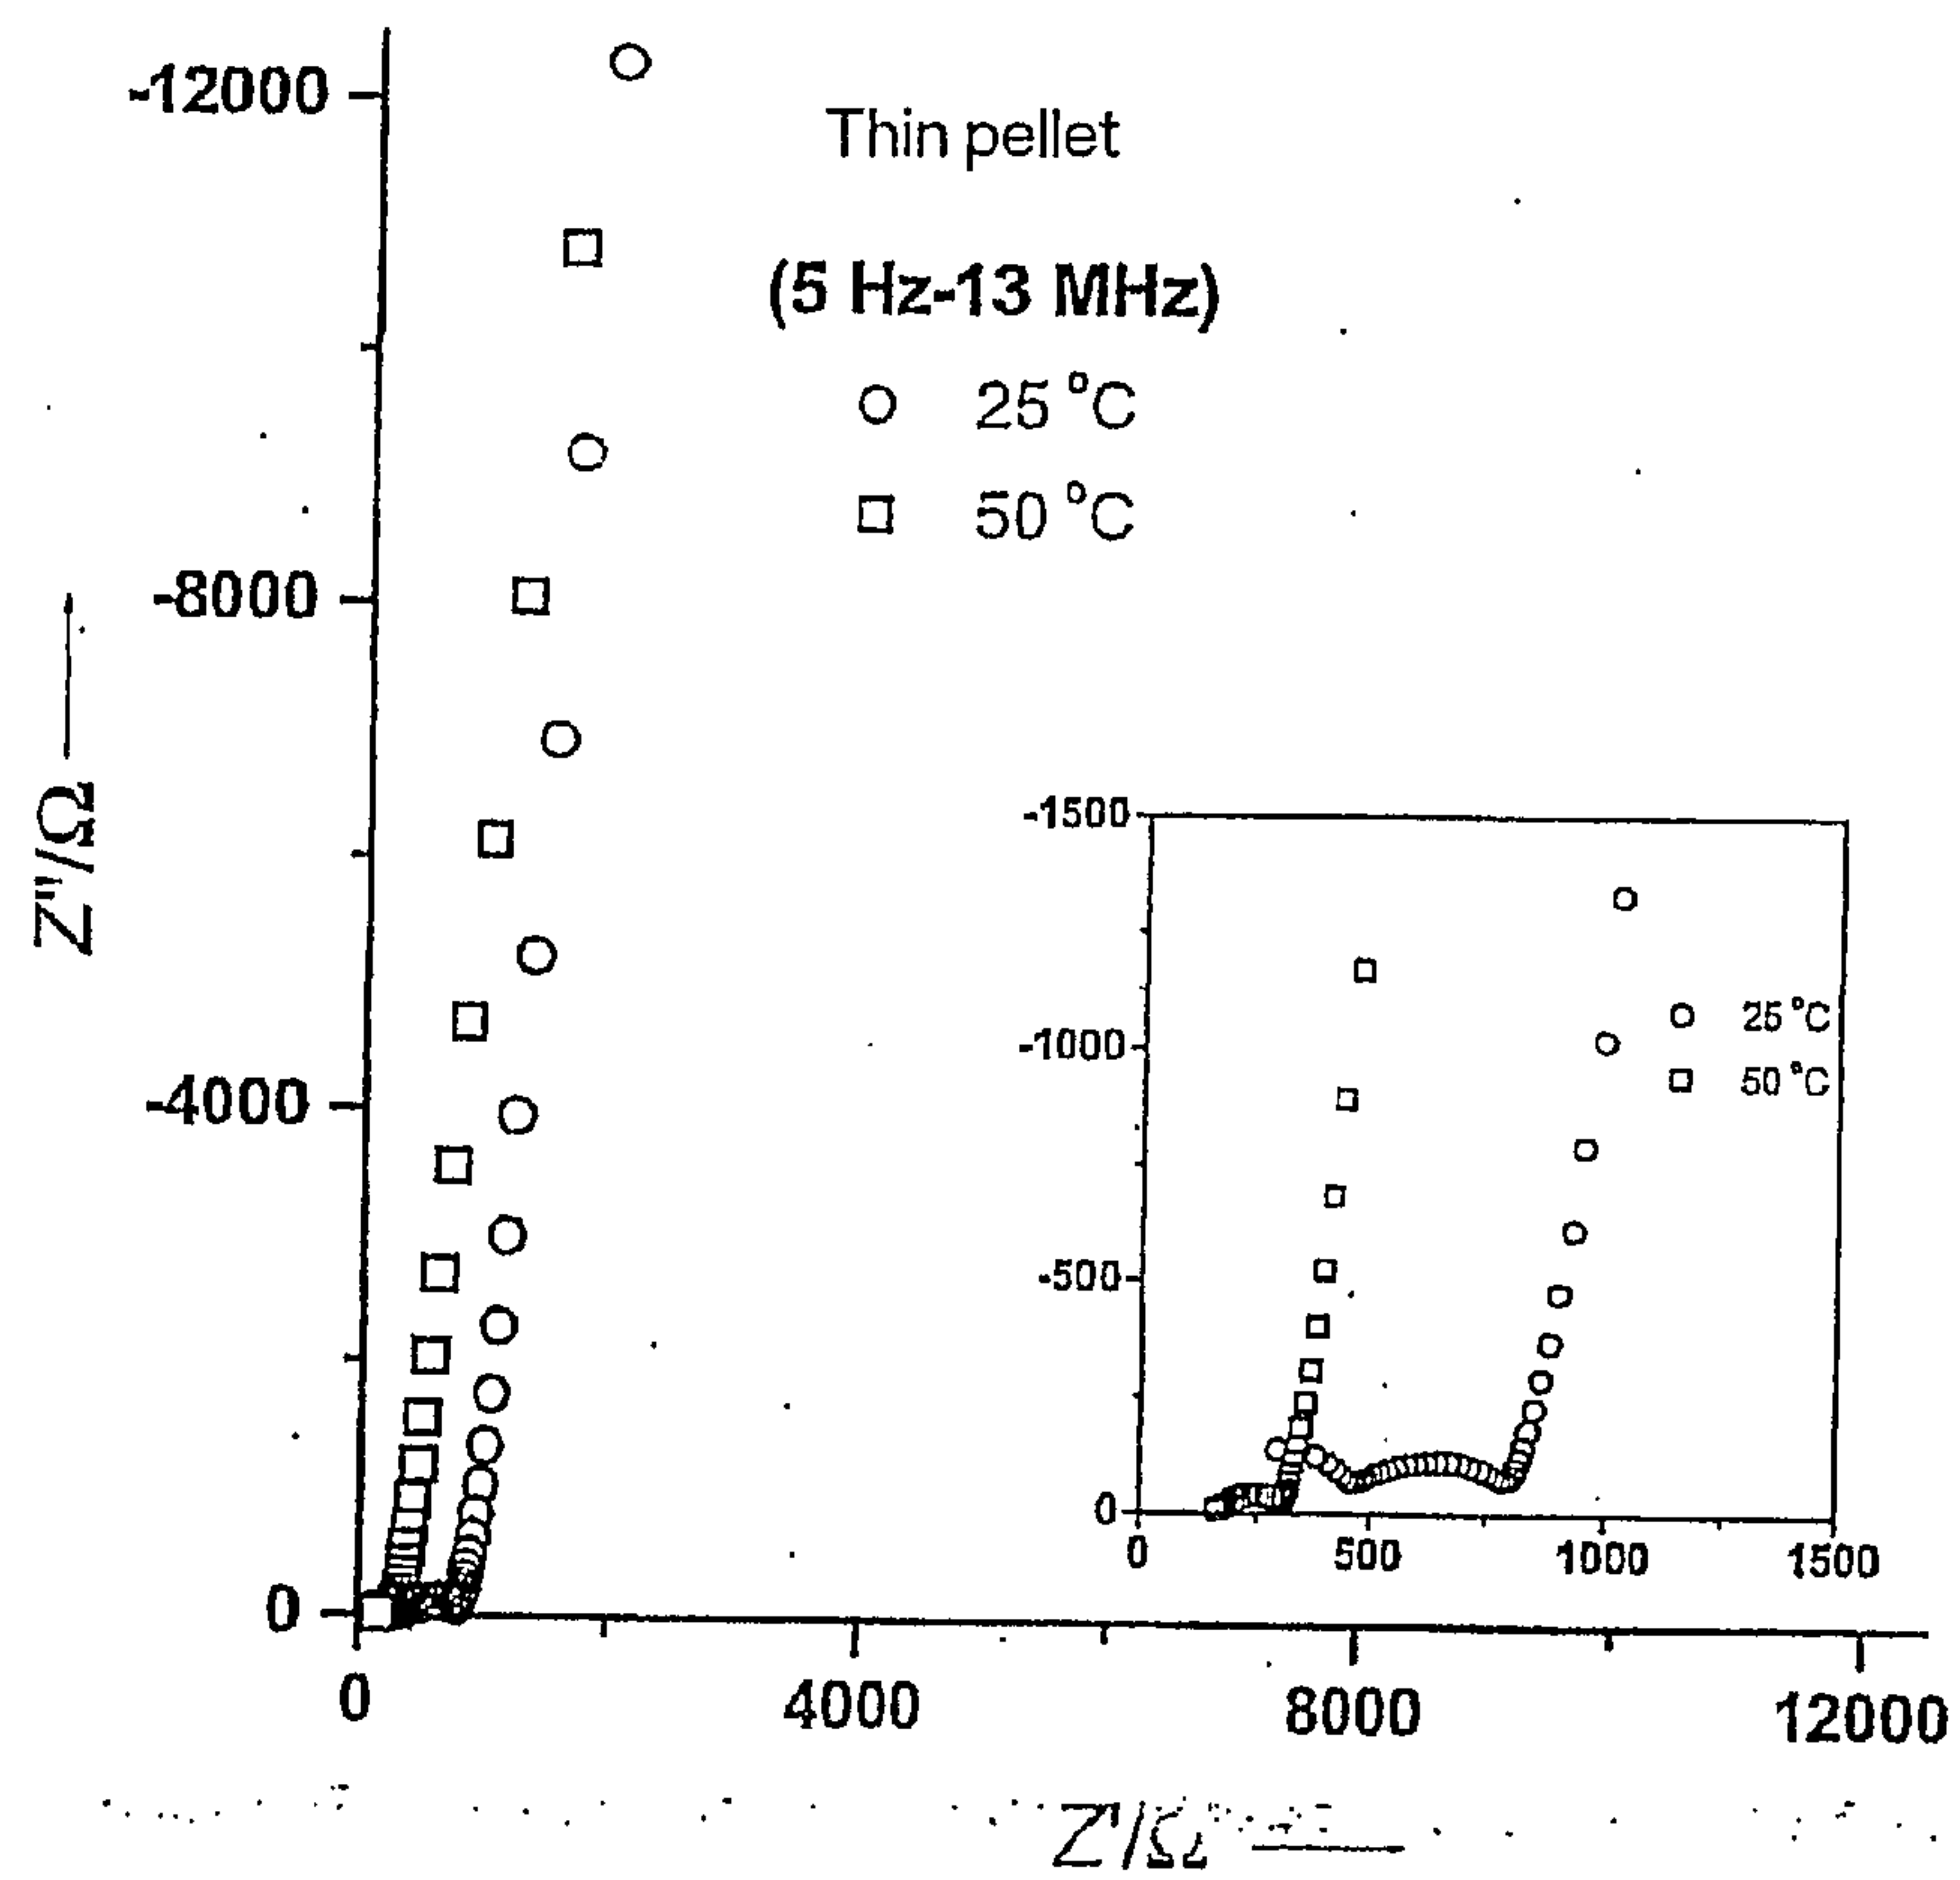


Figure 7

