



(51) International Patent Classification:

A01C 7/04 (2006.01) A01C 7/20 (2006.01)
A01C 5/06 (2006.01)

(21) International Application Number:

PCT/SE2011/050318

(22) International Filing Date:

22 March 2011 (22.03.2011)

(25) Filing Language:

Swedish

(26) Publication Language:

English

(30) Priority Data:

1050271-4 23 March 2010 (23.03.2010) SE

(71) Applicant (for all designated States except US):
VÄDERSTAD-VERKEN AB [SE/SE]; Box 85, S-590
21 Väderstad (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): STARK, Magnus
[SE/SE]; Ullevi Domaregård 4, S-596 93 Skänninge (SE).

(74) Agent: AWAPATENT AB; Att: Ole Bokinge, Junkers-
gatan 1, S-582 35 Linköping (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ROW UNIT FOR A PLANTER, PLANTER AND METHOD FOR PLANTING

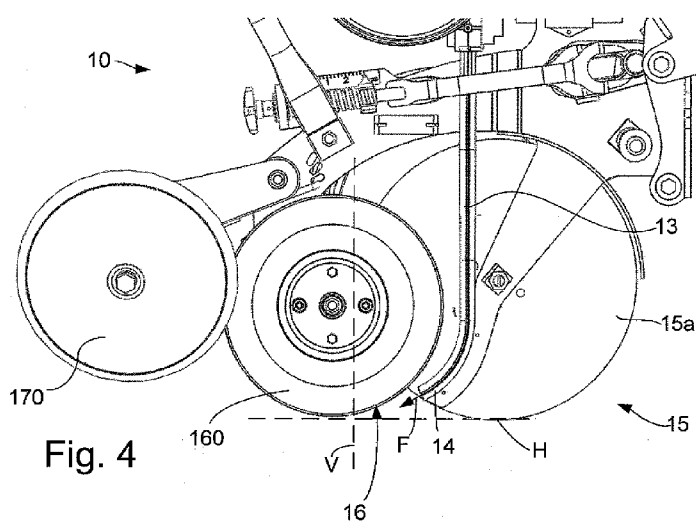


Fig. 4

(57) Abstract: A precision seeder for sowing seeds to obtain a predetermined number of plants per unit of length comprises a seed discharging tube (13) adapted to feed said seed by means of an excess air pressure from a seed distributing device (11) to a seed outlet (14), a seed furrow opener (15) comprising two sowing discs (15a, 15b) arranged at an angle relative to each other, and a resilient press surface (16) for pressing the seed into the soil. The press surface (16) is designed such that a direction of flow (F) of the seeds at the seed outlet (14) intersects or is substantially tangent to at least a portion of the press surface (16). The seed outlet (14) is located between the sowing discs (15a, 15b) and, as seen in the transverse direction, inside or immediately adjacent to the periphery of at least one of the sowing discs (15).



ROW UNIT FOR A PLANTER, PLANTER AND METHOD FOR PLANTING

Technical Field

The invention relates to a row unit and a precision seeder or planter for sowing seeds to obtain a predetermined number of plants per unit of length, and more specifically to a precision seeder of the kind that uses an excess air pressure to feed seeds from the seed distributing device to a seed outlet. The invention further concerns a method for precision sowing.

Background Art

When sowing crops such as maize, sunflowers and soya beans it is desirable to plant, in each row, single seeds at a predetermined distance from each other. This requires a device for singling out single seeds from a hopper containing many seeds. An example of such a seed distributing device is disclosed in EP-0 216 057 B1. The distributed seeds are fed by means of an excess pressure in the hopper through a tube to a seed knife, which creates a furrow in the ground into which the seeds are dropped.

In many practical applications, a seed knife is not enough to provide optimal conditions for the seed.

A seeder known in the art, which is marketed by Amazonen-Werke H. Dreyer GmbH under the name Amazone EDX and which has a seed distributing device according to EP-0 216 057 B1 mentioned above, uses a pair of sowing discs, which operate at a forwardly oriented acute angle so as to make a furrow, and where the seed knife is located partly between the sowing discs. Arranged after the seed knife is a press wheel, whose function is to apply pressure on the seed to ensure satisfactory contact between the seed and the soil, and a pair of wheels, which operate at a rearwardly oriented acute angle relative to each other to cover the seed with soil.

In seeders where the seeds are fed by means of an excess air pressure the seeds usually travel at a relatively high speed as compared with seeders where the seeds are singled out using a vacuum technique and are then allowed to drop by gravity through a seed discharging tube. Speeds of up to 15 m/s are not uncommon. The seed knife ensures here that the seed

lands in the intended spot in the furrow and does not bounce off before the succeeding press wheel is able to press it down.

However, the seed knife is a wearing part, which needs to be replaced a number of times during the life of the seeder. Furthermore, when using a
5 seed knife there is a risk that plant residues get stuck, eventually causing malfunctioning. There is also a risk that the seed knife is damaged by obstacles, such as stones, in the ground, thus causing operating disturbances.

There is therefore a need to provide a seeder that solves the above problems while maintaining its precision.

10

Summary of the Invention

An object of the present invention is to provide a seeder that eliminates or reduces the drawbacks of prior-art seeders.

A further object is to provide a seeder that eliminates or reduces the
15 problem associated with seed knife wear.

Yet another object is to provide a seeder that eliminates or reduces the problem of plant residues sticking to the seed knife.

The invention is defined by the appended independent claims. Embodiments of the invention will be apparent from the dependent claims and
20 from the following description and the appended drawings.

According to a first aspect, a row unit is provided for precision sowing of seeds to obtain a predetermined number of plants per unit of length. The row unit comprises a seed discharging tube adapted to feed said seed by means of an excess air pressure from a seed distributing device to a seed
25 outlet, a seed furrow opener comprising two sowing discs arranged at an angle relative to each other, and a resilient press surface for pressing the seed into the soil. The press surface is designed such that a direction of flow of the seeds at the seed outlet intersects or is substantially tangent to at least a portion of the press surface. The seed outlet is located between the sowing discs
30 and, as seen in the transverse direction, inside or immediately adjacent to the periphery of at least one of the sowing discs.

By "feeding single seeds" is meant feeding of the kind that enables control of each individual seed, so that a predetermined distance between the

seeds can be obtained. In practice, a large number of seeds are discharged in series from the seed hopper.

By "is substantially tangent to" is meant that the direction of flow of the seeds should be such that a discharged seed is highly likely to engage with the press surface before touching the soil. The expression also covers seed
5 flow directions where the seed touches the soil before the press surface, but where it is sufficiently close to the press surface so as not to bounce out of the seed furrow before it is pressed down by the press surface.

The fact that the press surface is designed in such a way that a seed
10 flow direction at the seed outlet intersects or is tangent to at least a portion of the press surface ensures that the seed discharged by means of the excess air pressure, despite its high velocity, ends up in the right position in the furrow. By arranging the seed outlet inside or immediately adjacent to the periphery of at least one of the sowing discs it can be protected from damages
15 that could otherwise occur as a result of contact with hard portions of soil and/or objects in the ground.

Thus, the seed knife can be eliminated altogether, which eliminates the problem associated with seed knife wear. By eliminating the seed knife, the problem with plant parts sticking to the seed knife is also eliminated. Finally,
20 the seed knife as a component is eliminated, which is advantageous both from a logistics perspective and from the perspective of production costs. The advantages for the user are that the seeder will be cheaper and less sensitive to operational disturbances. Since the seed knife has been eliminated, the seed furrow is formed essentially by the seed furrow opener. Moreover, by
25 eliminating the seed knife the press surface can be positioned closer to the seed furrow opener. As a result, a more compact row unit can be obtained, which offers a better ability to follow the contour of the ground, less sensitivity to irregularities and more reliable seed placement since the time between the opening of the seed furrow and the placing of the seed in the furrow is re-
30 duced. The seed outlet, as seen in a plane perpendicular to the direction of flow of the seeds, can have substantially the same cross section as the seed discharging tube. The seed outlet and the seed discharging tube can, for ex-

ample, be formed in one piece from a pipe, which offers a cheap and simple component.

The seed outlet as a whole can be positioned in front of a vertical plane, which is tangent to one of the sowing discs and perpendicular to a main operating direction of the row unit.

The seed outlet can be located at a distance from a horizontal plane that is tangent to a lower edge of one of the sowing discs.

The direction of flow of the seeds at the seed outlet can be at least 45 degrees relative to a vertical plane, at least 60 degrees relative to said vertical plane or at least 75 degrees relative to said vertical plane.

The press surface can be formed by a press wheel.

The press wheel can have a press part and at least one side wall, a material thickness of the side wall being smaller than a material thickness of the press part, preferably approximately 20% smaller, approximately 30% smaller, approximately 40% smaller, or approximately 50% smaller.

Alternatively, the press surface can be formed by a substantially rigid body, which is connected to said precision seeder by means of a spring element. Said substantially rigid body makes it possible to supply, in a controlled manner, for example fertilizer and/or pesticides.

As a further alternative, the press surface can be formed by an elastically resilient body. Such a solution can be achieved at a comparatively low cost.

The seed discharging tube can comprise a substantially straight portion, whose length is greater than a radius of at least one of the sowing discs.

The straight portion can be substantially vertical.

The seed distributing device can be integrated with the row unit. Consequently, a row unit of this kind can have a seed distributing device which feeds seeds to that row unit only. A row unit of this kind can also have a seed hopper of its own from which the seeds are fed.

According to a second aspect, a precision seeder comprising at least two row units according to the above is provided.

According to a third aspect, a precision seeder comprising at least two row units according to the above and a seed distributing device adapted to feed seeds to both row units is provided.

Each row unit can be designed to operate substantially independently, possibly using a compressed air supply common to all row units.

According to a fourth aspect, a method is provided for precision sowing of seeds to obtain a predetermined number of plants per unit of length. The method comprises feeding single seeds from a seed hopper by means of a seed distributing device, feeding said seed by means of an excess air pressure via a seed discharging tube from the seed distributing device to a seed outlet, opening a seed furrow by means of a seed furrow opener, comprising two sowing discs arranged at an angle relative to each other, and pressing the seed into the soil by means of a resilient press surface.

The seeds are fed through the seed outlet in such a way that a direction of flow of the seeds at the seed outlet intersects or is substantially tangent to at least a portion of the press surface.

The seeds leave the seed outlet at a position between the sowing discs and, as seen in the transverse direction, inside or immediately adjacent to the periphery of at least one of the sowing discs. This means that the seeds leave the seed outlet at a position that is sufficiently protected, without the need for using a seed knife.

According to the method, the seed furrow is formed essentially exclusively by the seed furrow opener. As a result, no seed knife is required.

25 Brief Description of the Drawings

Fig. 1 is a schematic perspective view of a precision seeder.

Fig. 2 is a schematic perspective view of a row unit that can be used in the precision seeder in Fig. 1.

Fig. 3 is a plan view of a part of the row unit in Fig. 2.

30 Fig. 4 is a plan view of a part of the row unit in Fig. 3, where one of the sowing discs has been removed to expose a seed discharging tube.

Fig. 5 is a plan view of an alternative row unit, where one of the sowing discs has been removed to expose a seed discharging tube.

Fig. 6 is a plan view of yet another alternative row unit, where one of the sowing discs has been removed to expose a seed discharging tube.

Fig. 7 is a cross-sectional view of a press wheel.

Fig. 8 is a cross-sectional view showing a detail of the press wheel in
5 Fig. 7.

Description of Embodiments

Fig. 1 shows an embodiment of a seeder 1 comprising a plurality of row units 10, each of which has a seed distributing device 11, which is connected to a seed hopper 12 and adapted to feed single seeds from the seed hopper via a seed discharging tube 13 (Figs 2, 3) to a seed outlet 14.

The seed distributing device singles out seeds from the seed hopper so that a line of seeds spaced apart a predetermined distance is obtained, the line of seeds being successively fed towards the inlet (not shown) of the seed discharging tube 13, whereupon they are forced through the seed discharging tube 13 by means of compressed air.

The seed discharging tube 13 can be in the form of a pipe that extends substantially straight down from the seed distributing device 11 and is terminated by a rearwardly curved portion, immediately upstream of the seed outlet 14. The pipe can thus have a substantially straight portion, which is longer than a radius of at least one of the sowing discs 15a, 15b. The curved portion can be designed in such a way that a direction of flow F of the seeds at the seed outlet 14 is at least 45 degrees relative to a vertical plane, at least 60 degrees relative to said vertical plane or at least 75 degrees relative to said vertical plane.

The seed outlet 14 is located between the sowing discs 15a, 15b and, as seen in the transverse direction, inside or immediately adjacent to the periphery of at least one of the sowing discs 16, 16', 16''. In one embodiment, at least a part of the orifice of the seed outlet is located on or inside the periphery of the sowing disc.

In one embodiment, the seed discharging tube 13 and the seed outlet 14 form an integrated unit. They can, for example, be formed from one and the same piece of pipe, one end of the pipe piece forming the seed outlet 14.

The pipe can be made of a polymer material, for example plastic or rubber, or of metal.

In any case, the seed outlet 14 can be located in front of a vertical plane V, which is perpendicular to the main operating direction of the row unit and which is tangent to one of the sowing discs 15a, 15b. In one embodiment, the seed outlet 14 is located at a horizontal distance from the vertical plane V that corresponds to at least approximately 10% of the radius of at least one of the sowing discs 15a, 15b, alternatively at least approximately 20% or at least approximately 30% of the radius of at least one of the sowing discs.

Moreover, the seed outlet can be located at a vertical distance above a horizontal plane H, which is tangent to a lower part of one of the sowing discs 15a, 15b. The vertical distance can correspond to at least approximately 10% of the radius of at least one of the sowing discs, at least approximately 15% of the radius of at least one of the sowing discs, at least approximately 20% of the radius of at least one of the sowing discs or at least approximately 25% of the radius of at least one of the sowing discs.

The row unit 10 further comprises a seed furrow opener 15, which can comprise a pair of mutually angled sowing discs 15a, 15b and one or several wheels 15c, which limit the depth of sowing. Furthermore, the row unit 10 can comprise a press wheel 160, which has a press surface 16 the purpose of which is to apply pressure on the seed to ensure satisfactory contact between the seed and the soil.

Seed furrow openers having two sowing discs are known, for instance, from US4590869A, and comprise a pair of discs or wheels, which are adapted to rotate about their respective axes of rotation, which form an obtuse angle, so that the discs themselves form an acute angle with each other. At the edge opposite to the acute angle there is a space between the discs in which, for example, a seed outlet can be arranged.

Moreover, the row unit can comprise a seed furrow covering means 17, which can comprise a pair of angled wheels or discs 170. The wheels or discs 170 can be arranged at an angle opposite to that of the sowing discs, in such a way that they scrape or press soil down on top of the seed so that the seed furrow is covered.

As shown in Fig. 4, the seed outlet is adapted to discharge the seed in an outlet direction F, which is tangent to or intersects the press surface 16. A seed that is discharged at a high speed (often nearly 15 m/s) will thus bounce off the press surface 16 and onto the ground, where it is pressed down by the
5 press surface 16.

Referring now to Figs 7 and 8, the press wheel 160 can be provided in the form of an annular tube with an inwardly oriented flange 165, which is adapted to engage with a periphery of a rim 164. With reference to Fig. 8, the press wheel 160 can have a press part 161 that forms the press surface 16,
10 which has a first material thickness T_t that is greater than a second material thickness T_s of a side wall 162a, 162b of the press wheel. The tube of the press wheel can be made of an elastic material such as rubber or a rubber-like material. The material thickness T_s of the side wall 162a, 162b can be smaller than a material thickness T_t of the press part 161, for example ap-
15 proximately 20% smaller, approximately 30% smaller, approximately 40% smaller, or approximately 50% smaller.

With reference to Fig. 5, an alternative embodiment of a row unit 10' is shown, where the press surface 16' is formed by a substantially rigid body 160', which is arranged in a resilient manner relative to the row unit 10' by
20 way of an elastic element 163. The rigid body 160' can be made of a polymer material or metal and the elastic element 163 can be made of a resilient material, for example spring steel. The elastic element 163 can in turn be mounted on the frame 167 of the row unit 10' by means of a spacer part 166.

Alternatively, the rigid body and the elastic element can be formed in
25 one piece and of the same material, where the rigid body 160' and the elastic element 163 have different material thicknesses, thereby giving them different stiffness.

In this kind of embodiment, the rigid body can be provided with one or several ducts with an associated orifice (not shown) adapted for fertilizer
30 and/or pesticides. Such ducts can be connected to a container for fertilizer and pesticide, respectively, of which there may be one for each row unit or a single one that is common to all row units of the seeder.

With reference to Fig. 6, an alternative embodiment of a row unit 10'' is shown, in which the press surface 16'' is formed by an elastic element 160''. The elastic element 160'' can in turn be mounted on the frame 167 of the row unit 10' by means of a spacer part 166. The elastic element 160'' can be
5 made of metal, for example spring steel. Alternatively, a polymer material such as plastic or rubber can be used.

In the embodiment shown in Fig. 6, the elastic element can be formed from a composite material, which may include metal and a polymer material in combination.

10 In both of the embodiments shown in Fig. 5 and Fig. 6, the press surface 16', 16'' can be modified in order to obtain a durable surface, for example by applying a cemented carbide coating.

As illustrated in the drawings, the precision seeder can comprise a plurality of row units, which each have their own seed hopper, seed discharging
15 device, etc.

Alternatively, the solution can be used in conjunction with a precision seeder where, for example, one or more seed hoppers and/or seed discharging devices are common to two or more row units, and where the seeds are fed from the respective seed discharging device via pipes or tubes, which are
20 connected to the seed discharging device 13.

The sowing discs 15a, 15b can be of the same size and relatively offset in a longitudinal direction of the row unit. Alternatively, the sowing discs can be of different size. The sowing discs can be made of different materials, for example one made of metal and one made of a polymer material, such as
25 rubber or plastic.

10
CLAIMS

1. A row unit for precision sowing of seeds to obtain a predetermined number of plants per unit of length, comprising
- 5 a seed discharging tube (13) adapted to feed said seed by means of an excess air pressure from a seed distributing device (11) to a seed outlet (14),
- a seed furrow opener (15), comprising two sowing discs (15a, 15b) arranged at an angle relative to each other, and
- 10 a resilient press surface (16, 16', 16'') for pressing the seed into the soil,
- c h a r a c t e r i s e d in that
- said press surface (16, 16', 16'') is designed such that a direction of flow (F) of the seeds at the seed outlet (14) intersects or is substantially tangent to at least a portion of the press surface (16, 16', 16''), and
- 15 the seed outlet (14) is located between the sowing discs (15a, 15b) and, as seen in the transverse direction, inside or immediately adjacent to the periphery of at least one of the sowing discs (15a, 15b).
- 20 2. A row unit according to claim 1, wherein the seed outlet (14), as seen in a plane perpendicular to the direction of flow (F) of the seeds, has substantially the same cross section as the seed discharging tube (13).
3. A row unit according to claim 1 or 2, wherein the whole of the
- 25 seed outlet (14) is located in front of a vertical plane (V) that is tangent to one of the sowing discs (15a, 15b) and perpendicular to a main operating direction of the row unit.
4. A row unit according to any one of claims 1-3, wherein the seed
- 30 outlet (14) is located at a distance from a horizontal plane (H) that is tangent to a lower edge of one of the sowing discs (15a, 15b).

5. A row unit according to any one of the preceding claims, wherein the seed outlet (14) is designed such that the direction of flow (F) of the seeds at the seed outlet (14) is at least 45 degrees relative to a vertical plane, at least 60 degrees relative to said vertical plane or at least 75 degrees
5 relative to said vertical plane.

6. A row unit according to any one of the preceding claims, wherein the press surface (16, 16', 16'') is formed by a press wheel (160).

10 7. A row unit according to claim 6, wherein the press wheel has a press part (161) and at least one side wall (162a, 162b), a material thickness (Ts) of the side wall (162a, 162b) being smaller than a material thickness (Tt) of the press part (161), preferably approximately 20% smaller, approximately 30% smaller, approximately 40% smaller, or approximately 50% smaller.

15

8. A row unit according to any one of claims 1-5, wherein the press surface (16, 16', 16'') is formed by a substantially rigid body (160'), which is connected to said precision seeder by means of a spring element (163).

20 9. A row unit according to any one of claims 1-5, wherein the press surface is formed by an elastically resilient body (160'').

10. A row unit according to any one of the preceding claims, wherein the seed discharging tube (13) comprises a substantially straight portion, whose length is greater than a radius of at least one of the sowing discs (15a, 15b).
25

11. A row unit according to claim 11, wherein the straight portion is substantially vertical.

30

12. A row unit according to any one of the preceding claims, wherein the seed distributing device (11) is integrated with the row unit.

13. A precision seeder comprising at least two row units according to any one of the preceding claims.

14. A precision seeder comprising at least two row units according to any one of claims 1-11, and a seed distributing device that is adapted to feed seeds to both row units.

15. A method for precision sowing of seeds to obtain a predetermined number of plants per unit of length, comprising feeding single seeds from a seed hopper (12) by means of a seed distributing device (11), feeding said seed by means of an excess air pressure via a seed discharging tube (13) from the seed distributing device (11) to a seed outlet (14), opening a seed furrow by means of a seed furrow opener (15), comprising two sowing discs (15a, 15b) arranged at an angle relative to each other, and pressing the seed into the soil by means of a resilient press surface (16, 16', 16''), characterised in that the seeds are fed through the seed outlet in such a way that a direction of flow (F) of the seed at the seed outlet (14) intersects or is substantially tangent to at least a portion of the press surface (16, 16', 16''), and the seeds are discharged from the seed outlet (14) at a position between the sowing discs (15a, 15b) and, as seen in the transverse direction, inside or immediately adjacent to the periphery of at least one of the sowing discs (15a, 15b).

16. A method according to claim 13, wherein the seed furrow is formed essentially exclusively by the seed furrow opener.

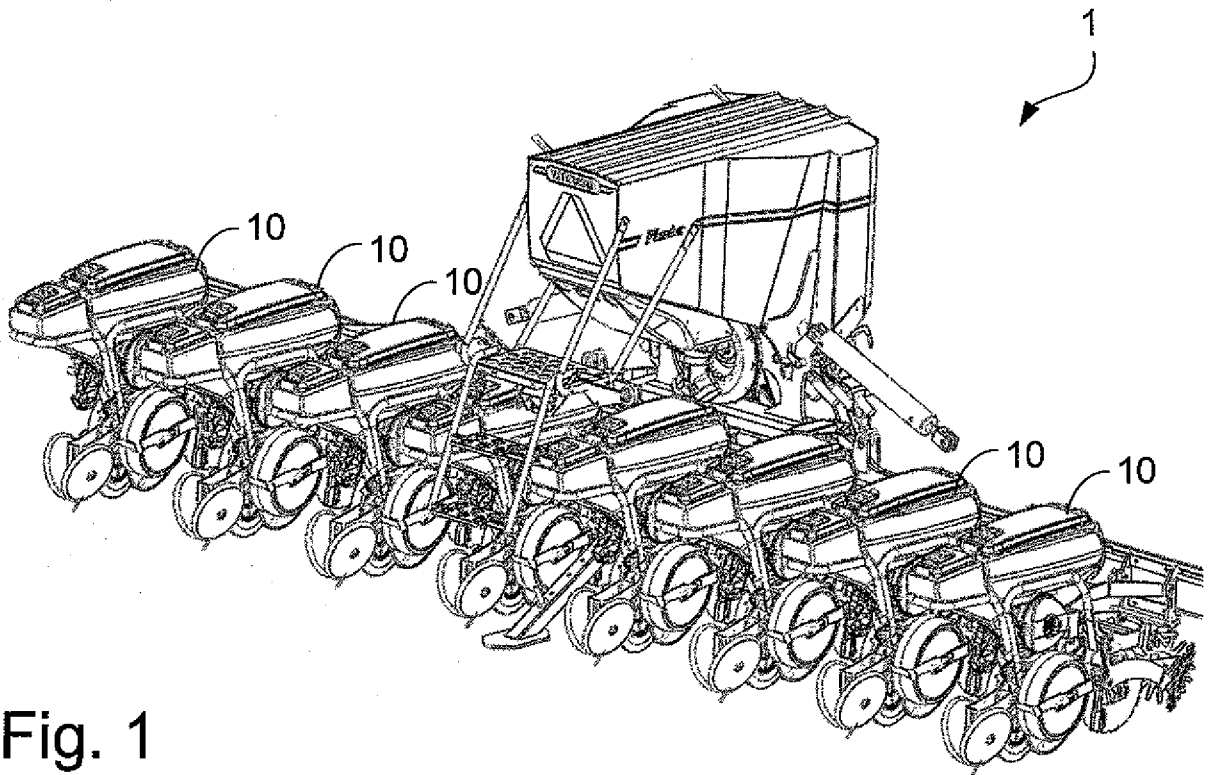


Fig. 1

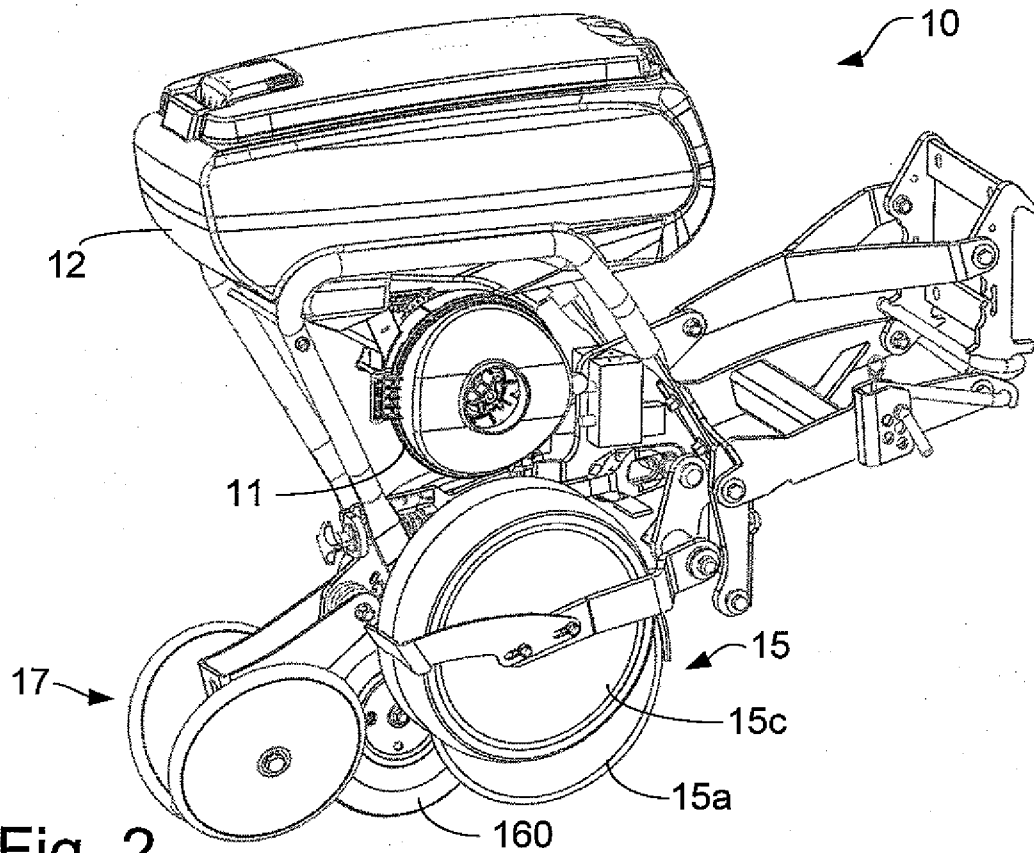


Fig. 2

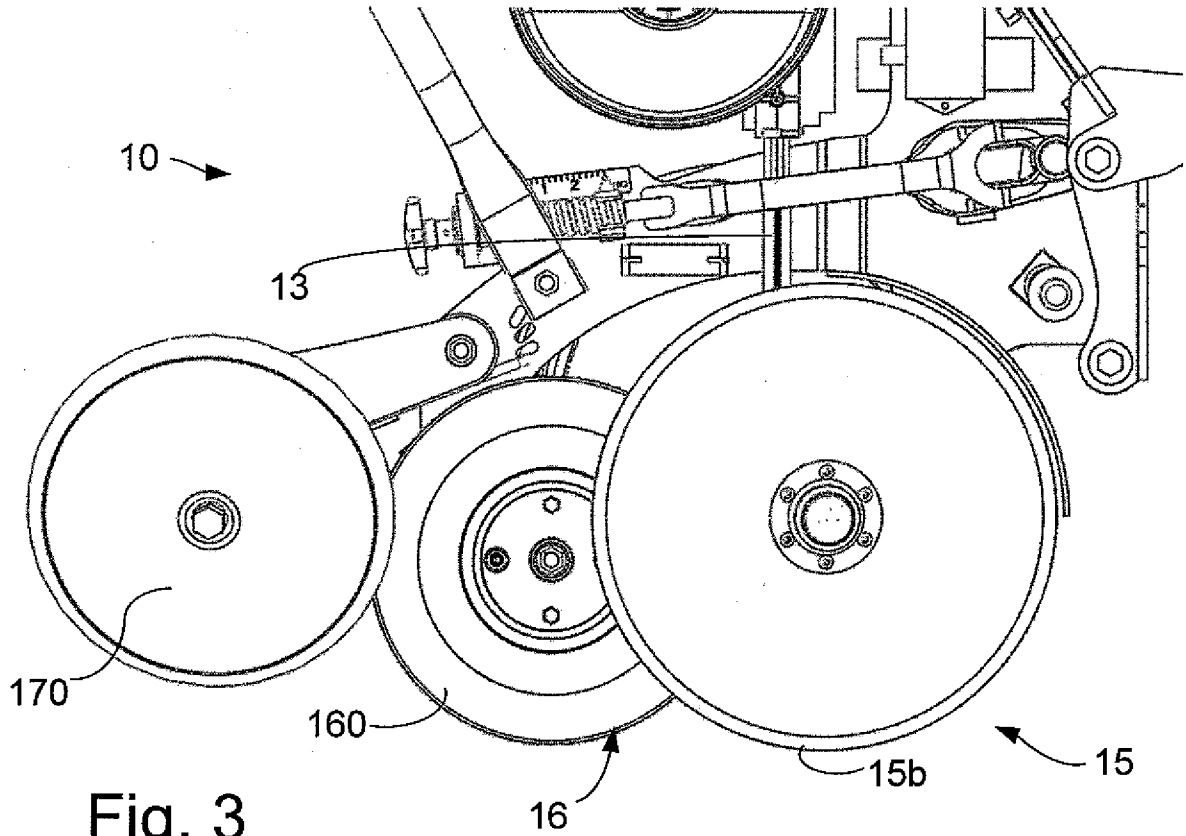


Fig. 3

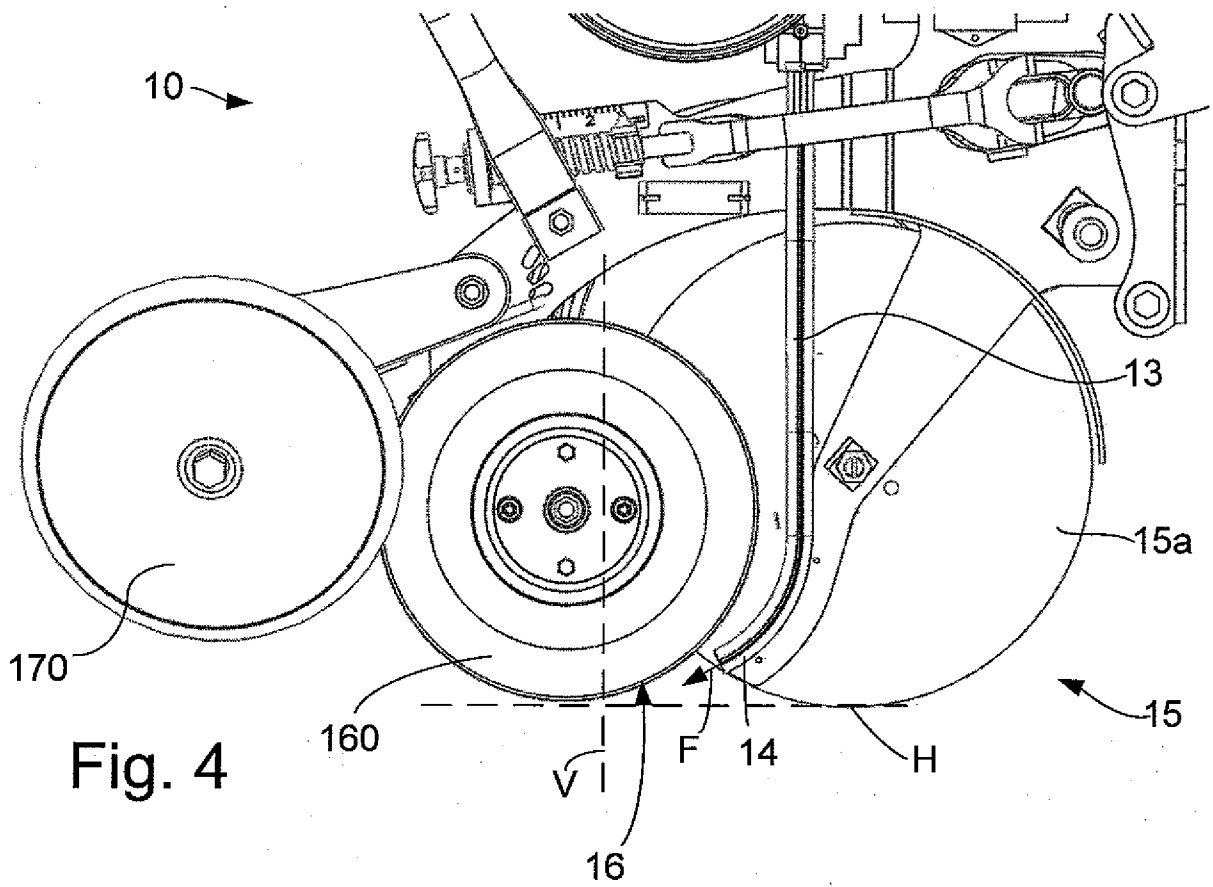


Fig. 4

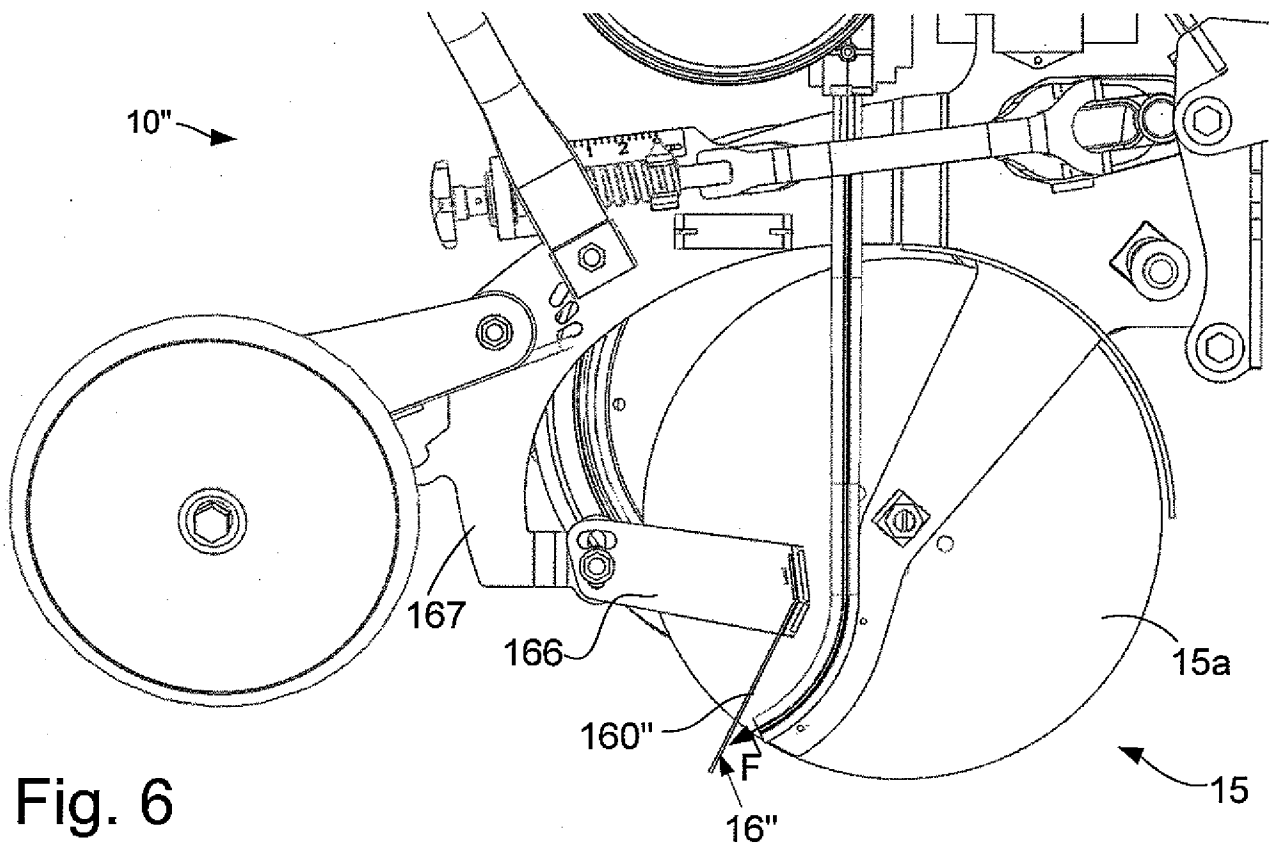
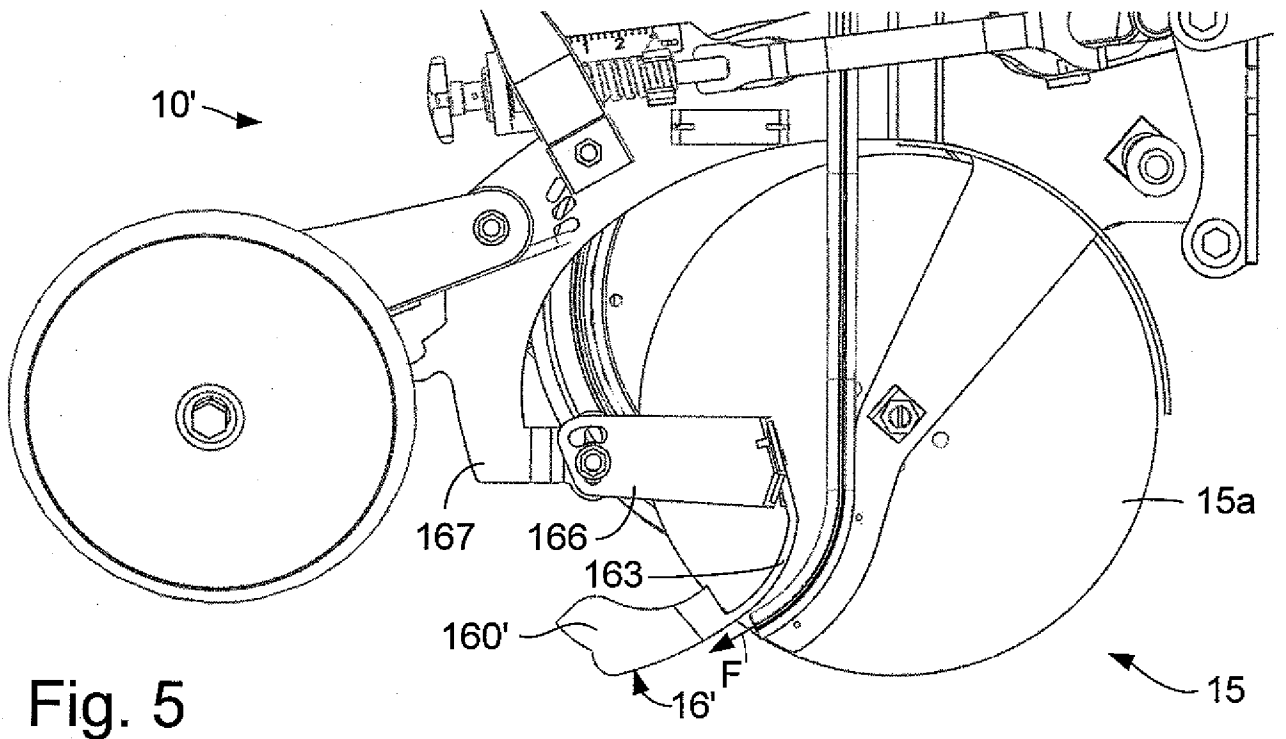


Fig. 7

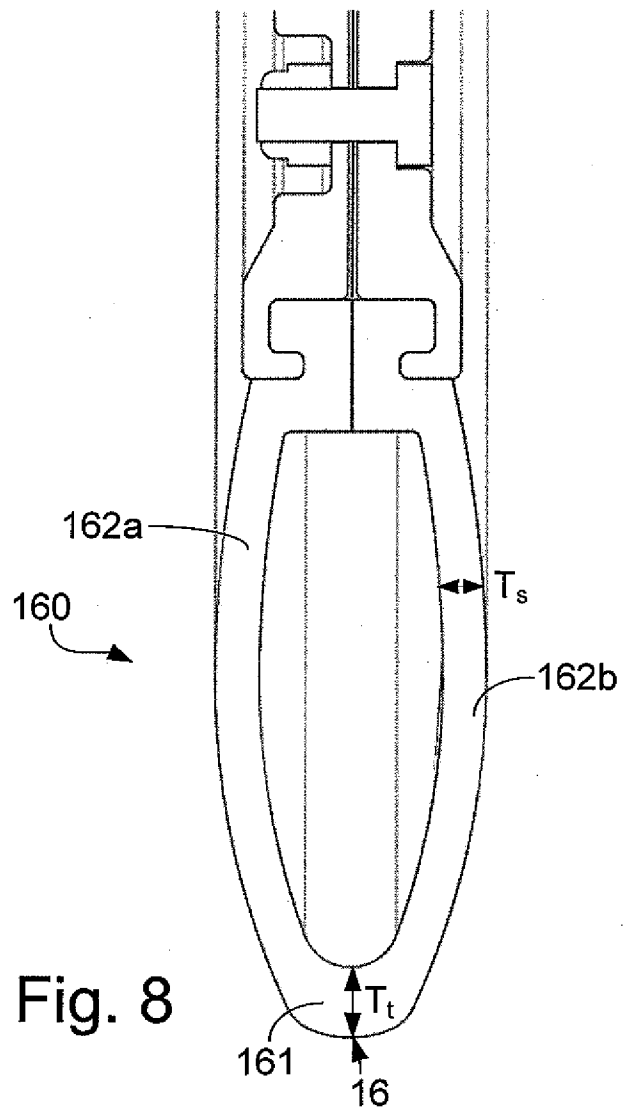
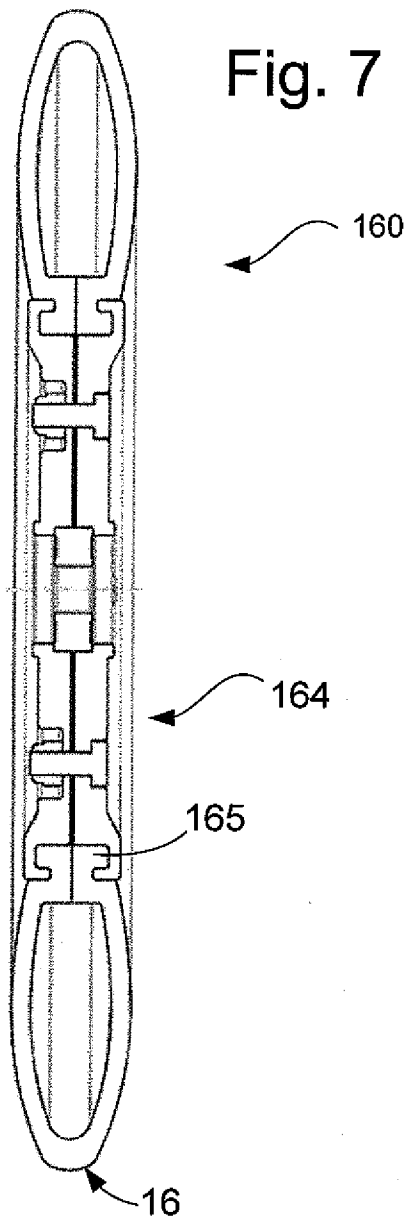


Fig. 8

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2011/050318

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: A01C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE, DK, FI, NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, PAJ, WPI data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1461989 A1 (AMAZONEN WERKEH DREYER GMBH &), 29 September 2004 (2004-09-29); whole document --	1-6, 8-13
A	EP 2055165 A1 (AMAZONEN WERKE DREYER H), 6 May 2009 (2009-05-06); whole document --	1-6, 8-13
A	US 20050061219 A1 (SAUDER GREGG A ET AL), 24 March 2005 (2005-03-24); paragraphs [0002], [0024]; figures 1,9 --	1, 3-5, 8-13
A	US 5092255 A (LONG JOHN D ET AL), 3 March 1992 (1992- 03-03); abstract; figure 1 --	1, 3-5, 8-13

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17-06-2011

Date of mailing of the international search report

22-06-2011

Name and mailing address of the ISA/SE

Patent- och registreringsverket
Box 5055
S-102 42 STOCKHOLM
Facsimile No. + 46 8 666 02 86

Authorized officer

Magnus Thorén

Telephone No. + 46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2011/050318

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5522328 A (LONG JOHN D), 4 June 1996 (1996-06-04); whole document --	1, 3-5, 7, 10-13
A	US 5673638 A (KEETON EUGENE G), 7 October 1997 (1997- 10-07); abstract; figures 1,2 --	1, 3-5, 8-13
A	US 5724903 A (YODER ALFRED DEAN ET AL), 10 March 1998 (1998-03-10); abstract; figure 1 --	1, 3-5, 8-13
A	US 6082275 A (SCHAFFERT PAUL E), 4 July 2000 (2000-07- 04); abstract; figures 1-3 --	1, 3-5, 8-13
A	US 5425318 A (KEETON EUGENE G), 20 June 1995 (1995- 06-20); abstract; figures 1,3 --	1, 3-5, 8-13
A	US 4995325 A (HERRIAU AUGUSTE ET AL), 26 February 1991 (1991-02-26); figures 1,2 -- -----	1, 7

Continuation of: second sheet

International Patent Classification (IPC)

A01C 7/04 (2006.01)

A01C 5/06 (2006.01)

A01C 7/20 (2006.01)

Download your patent documents at www.prv.se

The cited patent documents can be downloaded:

- From "Cited documents" found under our online services at www.prv.se
(English version)
- From "Anförda dokument" found under "e-tjänster" at www.prv.se
(Swedish version)

Use the application number as username. The password is **DPUSUJKYZP**.

Paper copies can be ordered at a cost of 50 SEK per copy from PRV InterPat (telephone number 08-782 28 85).

Cited literature, if any, will be enclosed in paper form.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE2011/050318

EP	1461989 A1	29/09/2004	BR	PI0400772 A	11/01/2005
			DE	10313180 A1	07/10/2004
EP	2055165 A1	06/05/2009	AT	460832 T	15/04/2010
			DE	102007051702 A1	07/05/2009
			DE	502008000447 D1	29/04/2010
			ES	2338944 T3	13/05/2010
US	20050061219 A1	24/03/2005	US	7921787 B2	12/04/2011
			US	20090158979 A1	25/06/2009
			US	6918342 B2	19/07/2005
			US	20050241554 A1	03/11/2005
			US	7497174 B2	03/03/2009
US	5092255 A	03/03/1992	CA	2056507 C	07/10/1997
US	5522328 A	04/06/1996	AU	690820 B2	30/04/1998
			AU	4806796 A	26/09/1996
			BR	9601013 A	30/12/1997
			CA	2166424 C	12/10/1999
			DE	59600218 D1	02/07/1998
			EP	0732044 A1	18/09/1996
US	5673638 A	07/10/1997	NONE		
US	5724903 A	10/03/1998	CA	2206901 A1	16/04/1998
US	6082275 A	04/07/2000	US	5918557 A	06/07/1999
			US	5640915 A	24/06/1997
US	5425318 A	20/06/1995	AU	680969 B2	14/08/1997
			AU	1141795 A	24/08/1995
			CA	2140068 A1	15/08/1995
US	4995325 A	26/02/1991	AU	3009689 A	07/09/1989
			AU	620589 B2	20/02/1992
			BR	8900987 A	24/10/1989
			DE	68901353 D1	04/06/1992
			EP	0331560 B1	29/04/1992
			ZA	8901368 A	31/10/1990