

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 March 2004 (04.03.2004)

PCT

(10) International Publication Number
WO 2004/018546 A1

(51) International Patent Classification⁷: **C08G 77/18**,
77/04, C08L 83/04

Rheinfelden (DE). **STANDKE, Burkhard** [DE/DE];
Chrischonastrasse 25, 79540 Lörrach (DE).

(21) International Application Number:
PCT/EP2003/006543

(74) Common Representative: **DEGUSSA AG**; Intellectual
Property Management, Patente U. Marken, Bau 1042/PB
15, 45764 Marl (DE).

(22) International Filing Date: 20 June 2003 (20.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
102 38 369.3 22 August 2002 (22.08.2002) DE

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): European patent (AT, BE,
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,
IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(71) Applicant (*for all designated States except US*): **DE-
GUSSA AG** [DE/DE]; Bennigsenplatz 1, 40474 Düssel-
dorf (DE).

Published:

— with international search report

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **BARFURTH,
Dieter** [DE/DE]; Römerstrasse 18, 79618 Rheinfelden
(DE). **MACK, Helmut** [DE/DE]; Baselmatten 17, 79618

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: COMPOSITION ACTING AS COUPLING AGENT FOR FILLED AND PEROXIDICALLY CROSSLINKING RUB-
BER COMPOUNDS

(57) Abstract: The present invention relates to a composition acting as coupling agent between fillers and peroxidically crosslinking elastomers in rubber compounds, which comprises, as component comprising silicon compounds, a mixture a) of vinylalkoxysiloxanes with alkylalkoxy-siloxanes, or b) of vinylalkoxysiloxanes with phenylalkoxy-siloxanes, or c) of vinylalkoxysiloxanes with phenyl/alkyl-alkoxysiloxanes or d) of acrylic or methacrylic alkoxysiloxanes with alkylalkoxysiloxanes, or e) of acrylic or methacrylic alkoxysiloxanes with phenylalkoxysiloxanes, or f) of acrylic or methacrylic alkoxysiloxanes with phenyl/alkylalkoxysiloxanes, or g) of at least one co-oligomeric organosiloxane which, as organofunctional groups, bears at least one group from the series vinyl, acrylic and methacrylic, and at least one group from the series alkyl and phenyl, and at least one alkoxy or hydroxy group. The present invention further relates to the use of a composition of the invention as a coupling agent in filled and peroxidically crosslinking rubber compounds, to rubber compounds obtained in this way, and to items made therefrom.



WO 2004/018546 A1

Composition acting as coupling agent for filled and peroxidically crosslinking rubber compounds

5

The present invention relates to a composition which comprises silicon compounds and acts as a coupling agent between fillers and peroxidically crosslinking elastomers in rubber compounds, and to its use.

- 10 The use of vinylsilanes, in particular vinyltrimethoxyethoxysilane (DYNASYLAN[®] VTMOEO), and vinyltriethoxysilane (DYNASYLAN[®] VTEO) as coupling agent in peroxidically crosslinking ethylene-propylene rubber (EPR), ethylene-propylene-diene rubber (EPDM), or in other rubber compounds, such as styrene-butadiene rubber (SBR), natural rubber (NR), acrylate copolymer rubber
- 15 (ACM), acrylonitrile-butadiene rubber (NBR), or polybutadiene rubber (BR) is known. These are usually filled rubber compounds. Examples of fillers used are kaolin, where appropriate in calcined form, or other silicatic fillers, such as silica, quartz, cristobalite, talc, montmorillonite, wollastonite, or mica, or CaCO₃, aluminum hydroxide (ATH), magnesium hydroxide (MDH), or titanium dioxide, or else organic fillers, such as
- 20 cellulose, flax, and sisal. The vinylsilane here binds the filler to the rubber.

It is also known that physical mixtures of monomeric unsaturated silanes, such as vinyltriethoxysilane (DYNASYLAN[®] VTEO) or 3-methacryloxypropyltrimethoxysilane (DYNASYLAN[®] MEMO) with oligomeric alkylsilanes permit improved dispersion of the

25 filler in the rubber matrix (EP 0 124 805 A). A disadvantage of monomeric silanes is their volatility. The boiling point of VTEO is 158°C. Another disadvantage of monomeric silanes is that for each mole of trialkoxysilane an equimolar amount of hydrolysis alcohol is liberated.

30 An object on which the present invention was based was to mitigate the disadvantages mentioned.

Surprisingly, it has been found that a mixture of oligomeric vinylsilanes, i.e. vinyl-functional siloxanes, such as DYNASYLAN[®] 6498, and of oligomeric alkylsilanes, i.e.

35 alkyl-functional siloxanes, such as DYNASYLAN[®] 9892, has excellent suitability as a

coupling agent for peroxidically crosslinking, filled rubber compounds. The volatility of mixtures of the invention is considerably less than that of monomeric unsaturated silanes, and also than that of mixtures of monomeric unsaturated silane and oligomeric alkylsilanes. This also leads to increased product safety during usage. The use of the vinylalkoxysiloxane-containing mixtures of the invention can moreover reduce significantly the amount of volatile organic compounds (VOCs), in particular alcohol, produced on application, while coupling-agent properties are generally at least comparably good.

10 The invention achieves the object set as set out in the patent claims.

The present invention therefore provides a composition acting as coupling agent between fillers and peroxidically crosslinking elastomers in rubber compounds, which comprises, as component comprising silicon compounds, a mixture

- 15 a) of vinylalkoxysiloxanes with alkylalkoxysiloxanes, or
- b) of vinylalkoxysiloxanes with phenylalkoxysiloxanes, or
- c) of vinylalkoxysiloxanes with phenyl/alkylalkoxysiloxanes, or
- d) of acrylic or methacrylic alkoxysiloxanes with alkylalkoxysiloxanes, or
- e) of acrylic or methacrylic alkoxysiloxanes with phenylalkoxysiloxanes, or
- 20 f) of acrylic or methacrylic alkoxysiloxanes with phenyl/alkylalkoxysiloxanes, or
- g) of at least one co-oligomeric organosiloxane which, as organofunctional groups, bears at least one group from the series vinyl, acrylic and methacrylic, and at least one group from the series alkyl and phenyl, and at least one alkoxy or hydroxy group.

25

An example of a method of preparing said vinyl-, alkyl-, phenyl-, acrylic, methacrylic, or organoalkoxysiloxanes can use the teaching of the following documents: EP 0 101 541 A, EP 0 518 057 A, EP 0 814 110 A, EP 0 978 525 A and EP 1 205 505 A. The protected rights mentioned here are incorporated into the disclosure content of the present application by way of reference.

30



The composition of the invention may generally be prepared by mixing the respective components to be used, or stirring these together. Operations here should be carried

out with exclusion of water. The siloxanes used here are therefore substantially alkoxysiloxanes. However, it is also possible for any of the alkoxy groups to be converted by hydrolysis into a hydroxy group.

- 5 The composition of the invention may also comprise, besides the siloxane components, other components which are non-silicon-containing, such as plasticizers, and/or processing aids.

The composition of the invention preferably comprises from 0.1 to 100% by weight, with preference from 20 to 80% by weight, particularly preferably from 40 to 60% by weight, of a vinyl-, acrylic-, and/or methacrylic-functional alkoxysiloxane, based on all of the components present in the composition. The composition of the invention also appropriately comprises from 0 to 80% by weight, preferably from 0.1 to 70% by weight, particularly preferably from 20 to 60% by weight, in particular from 40 to 50% by weight, of an alkyl- and/or phenyl-functional alkoxysiloxane, based on all of the components present in the composition. It should be emphasized that no monomeric silanes are present in the composition of the invention.



The composition of the invention preferably comprises at least one chain-type or cyclic vinylalkoxysiloxane of the general formula (Ia) or (Ib)

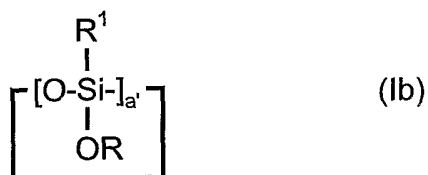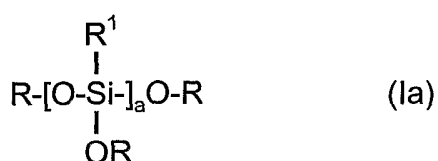

where the groups R are identical or different and R is methyl, ethyl, n-propyl, isopropyl, 2-methoxyethyl, or hydrogen, R¹ is a vinyl group, each of a and a', independently, is an integer from 2 to 50, preferably from 3 to 15, where the

siloxanes may be present in the form of linear, branched, or cyclic moieties.

Preferred chain-type or cyclic alkylalkoxysiloxanes of the composition of the invention may be described by the general formulae (IIa) and (IIb)

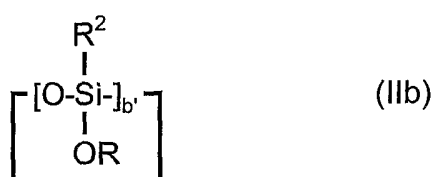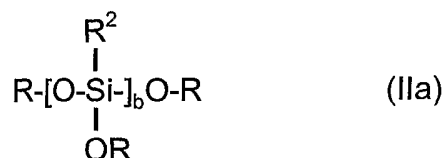

5

where the groups R are identical or different and R is methyl, ethyl, n-propyl, isopropyl, 2-methoxyethyl, or hydrogen, the groups R² are identical or different, and each R² is a linear, branched, or cyclic alkyl group having from 1 to 18 carbon atoms, each of b and b', independently, is an integer from 2 to 50, preferably from 3 to 15, where the siloxanes may be present in the form of linear, branched, or cyclic moieties.

10

Examples which should be mentioned are: methylmethoxysiloxane, also termed methylmethoxysilane oligomer, and correspondingly propylmethoxysilane oligomer, isobutylmethoxysilane oligomer, octylmethoxysilane oligomer, methylethoxysilane oligomer, propylethoxysilane oligomer, isobutylethoxysilane oligomer, octylethoxysilane oligomer, methylmethoxysilane cyclooligomer, propylmethoxysilane cyclooligomer, to mention just a few examples.

15

Chain-type or cyclic phenylalkoxysiloxanes which are also preferred may be described by the general formulae (IIIa) and (IIIb)

20



25



where the groups R are identical or different and R is methyl, ethyl, n-propyl, isopropyl, 2-methoxyethyl, or hydrogen, R^3 is a phenyl group, each of c and c', independently, is an integer from 2 to 50, preferably from 3 to 15, where the siloxanes may be present in the form of linear, branched, or cyclic moieties.

Examples which should be mentioned here are: phenylmethoxysilane oligomer, phenylethoxysilane oligomer, phenylmethoxysilane cyclooligomer, phenylethoxysilane cyclooligomer.

Chain-type or cyclic alkylphenylalkoxysilanes which are also preferred may be described by the general formulae (IVa) and (IVb)

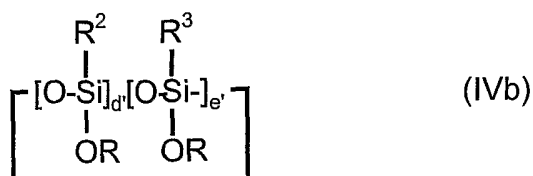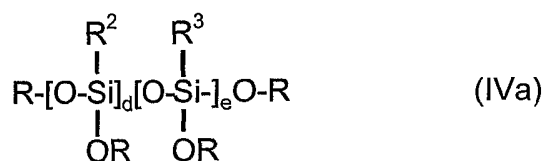

where the groups R are identical or different and R is methyl, ethyl, n-propyl, isopropyl, 2-methoxyethyl, or hydrogen, the groups R^2 are identical or different, each R^2 being a linear, branched, or cyclic alkyl group having from 1 to 18 carbon atoms, for example n-propyl, n-butyl, isobutyl, tert-butyl, n-octyl,

isooctyl, or hexadecyl, R^3 is a phenyl group, each of d , d' , e and e' , independently, is an integer from 1 to 35 and complies with the provisos that $1 < (d+e) < 50$ and $1 < (d'+e') < 50$, preferably $2 < (d+e) < 30$ and $2 < (d'+e') < 30$, particularly preferably $3 < (d+e) < 10$ and $3 < (d'+e') < 10$, where the siloxanes may be present in the form of linear, branched, or cyclic moieties.

Examples which should be mentioned are: methylphenylmethoxysilane oligomer, propylphenylmethoxysilane oligomer, isobutylphenylmethoxysilane oligomer, octylphenylmethoxysilane oligomer, methylphenylethoxysilane oligomer, propylphenylethoxysilane oligomer, isobutylphenylethoxysilane oligomer, octylphenylethoxysilane oligomer, methylphenylmethoxysilane cyclooligomer, propylphenylmethoxysilane cyclooligomer, to mention just a few examples.

Also preferred is the use in the composition of the invention of at least one chain-type or cyclic acrylic- or methacrylic-functional alkoxysiloxane of the general formula (Va) or (Vb)





where the groups R are identical or different and R is methyl, ethyl, n -propyl, isopropyl, 2-methoxyethyl, or hydrogen, the groups R^4 are identical or different, and R^4 is an acrylic or methacrylic group, each of f and f' , independently, is an integer from 2 to 50, preferably from 3 to 15, where the siloxanes may be present in the form of linear, branched, or cyclic moieties.

Examples which may be mentioned here are: acryloxypropylmethoxysilane oligomer, methacryloxypropylmethoxysilane oligomer, acryloxypropylethoxysilane oligomer,

methacryloxypropylethoxysilane oligomer, acryloxypropylmethoxysilane
 cyclooligomer, methacryloxypropylmethoxysilane cyclooligomer,
 acryloxypropylethoxysilane cyclooligomer, methacryloxypropylethoxysilane
 cyclooligomer.

5

However, the functionalities hitherto mentioned may also be present in the
 composition of the invention in a preferred chain-type or cyclic organoalkoxysiloxane
 of the general formula (VIa) or (VIb)

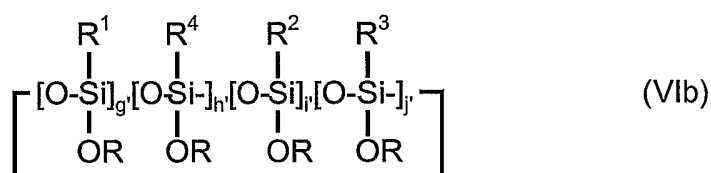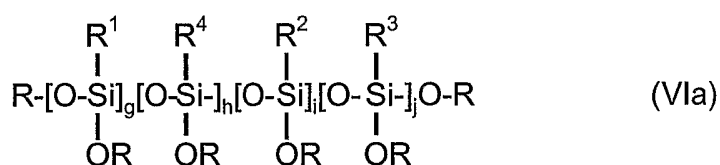

10

where the groups R, R¹, R², R³ and R⁴ are as defined above, each of g, g', h,
 h', i, i', j, and j' is, independently, an integer from 0 to 35 and complies with the
 provisos g ≥ 1 and/or h ≥ 1, and 1 < (g+h+i+j) < 50, and g' ≥ 1 and/or h' ≥ 1, and
 1 < (g'+h'+i'+j') < 50, preferably 2 < (g+h+i+j) < 30 and 2 < (g'+h'+i'+j') < 30, particularly
 preferably 3 < (g+h+i+j) < 10 and 3 < (g'+h'+i'+j') < 10, where these siloxanes may
 be present in the form of linear, branched, or cyclic moieties.


15

Examples which should be mentioned are: methylacryloxypropylmethoxysiloxane or
 methylacryloxypropylmethoxysilane oligomer, and correspondingly
 methylacryloxypropylmethoxysilane cyclooligomer,
 propylmethacryloxypropylmethoxysiloxane, propylacryloxypropylethoxysilane
 oligomer, octylmethacryloxypropylethoxysiloxane, to mention must a few examples.

20

A preferred example of a formula of branched moieties which are mentioned above
 is:

25



where the groups R and R' = R¹, R², R³, R⁴, independently, are as defined above,

x, y and z, independently, are integers from 1 to 35 and have the meaning of above a, b, c, d, e, f, g, h, i and/or j and (x + y + z) = a or (x + y + z) = b or (x + y + z) = c or (x + y + z) = (d + e) or (x + y + z) = f or (x + y + z) = (g + h + i + j).

If the composition of the invention is added to a mixture of elastomer and filler, reactions take place firstly under processing conditions, e.g. in the case of an EPDM rubber mixed with kaolin and processed at about 140°C, between the alkoxy or hydroxy groups of the siloxane components and appropriate hydrophilic groups of the filler, in particular a hydroxy group, and secondly under crosslinking conditions, e.g. using a peroxide at about 180°C within a period of about a quarter of an hour, between the unsaturated ethylenic group and the elastomer. The result is that the filler becomes advantageously bound into the rubber compound or appropriately obtainable items, since, inter alia, no losses of coupling agent occur.

The composition of the invention may also be advantageously applied on a carrier in the form of a "dry liquid". Carrier materials suitable for this purpose are preferably porous polymers, e.g. polyethylene with pore volume >50%, carbon black, waxes, e.g. LDPE-based polyolefin waxes, silicas (fumed, precipitated, naturally occurring), calcium silicates.

A composition of the invention may thus be used advantageously as a coupling agent in filled and peroxidically crosslinking rubber compounds.

The invention also provides filled and peroxidically crosslinking rubber compounds which comprise a composition of the invention.

The manner of preparing rubber compounds of the invention is generally that, for example, an EPDM rubber is mixed in an internal mixer, e.g. Werner & Pfleiderer BANBURY type, with kaolin, and where appropriate with another filler, and also, where appropriate, with a vulcanization activator and a hydrocarbon-based plasticizer, at from about 100 to 140°C. This intermediate product may then be mixed on a roll mill with peroxide and accelerator and may be vulcanized, i.e. crosslinked, by heating to about 180°C to give the rubber composition. The vulcanizate may be processed using suitable machinery, e.g. using specific roll mills (calenders), inter alia to give sheet-like strips of rubber from which products such as gaskets are produced in downstream processes.

Rubber compounds of the invention preferably have a content of elastomer from the series ethylene-propylene rubber (EPR), ethylene-propylene-diene rubber (EPDM), styrene-butadiene rubber (SBR), natural rubber (NR), acrylate copolymer rubber (ACM), acrylonitrile-butadiene rubber (NBR), and/or polybutadiene rubber (BR).

Rubber compounds of the invention also have a content of filler from the series silicatic or organic fillers, such as kaolin, silica, quartz, cristobalite, talc, montmorillonite, wollastonite, mica, calcium carbonate, chalk, dolomite, aluminum hydroxide, magnesium hydroxide, titanium dioxide, cellulose, flax, and sisal.

This is therefore an advantageous method – advantageous since the proportion of volatile silanes has been reduced practically to zero and moreover the proportion of volatile alcohols (VOCs) has also been reduced to less than 50% of the amount of silane used – of producing the following items, for example, from rubber compounds: cable sheathing, gaskets, moldings for damping purposes, hoses and profiles, shaped items, rubber-metal composites, conveyor belts, flat or V-shaped drive belts, foam products, sponge products, cellular rubber product, shoe-sole material, and sheet products, to mention just a few examples.

The present invention therefore also provides items which are obtained by processing rubber compounds of the invention.

The examples below give further description of the present invention:

5

Examples

1. General description of experimental method:

- 10 The EPDM rubber (BUNA[®] EP 3473) is mixed in a BANBURY internal mixer with calcined kaolin (POLESTAR[®] 200 R), and with a second filler (chalk: Mikrosöhl 20), and with a vulcanization activator (RS zinc oxide), and with a hydrocarbon-based plasticizer (Tudalen B-8013), and also with the vinylsilane or with an appropriate Si-containing composition (variable amounts), at from about 100 to 140°C.
- 15 The resultant intermediate product is mixed on a roll mill with antioxidant (a mixture of Vulkanox HS and Vulkanox MB), and with the accelerator (triallylcyanurate), and finally with the peroxide (Perkadox 14/40). The rubber composition is then vulcanized (crosslinked) by heating to about 180°C within a period of from 8 to 10 min.
- 20 Sheets are compression molded from the vulcanizate, and from these the test specimens are produced for the mechanical and electrical tests.

2. Description of silicon compounds used

2.1 Chemical structure

25

DYNASYLAN [®] VTMO	CH ₂ =CH-Si(O-CH ₃) ₃ ; vinyltrimethoxysilane
DYNASYLAN [®] VTEO	CH ₂ =CH-Si(O-C ₂ H ₅) ₃ ; vinyltriethoxysilane
DYNASYLAN [®] VTMOEO	CH ₂ =CH-Si(O-C ₂ H ₄ -O-CH ₃) ₃ ; vinyltris(2-methoxyethoxy)silane
DYNASYLAN [®] 6498	Oligomeric vinyltriethoxysilane: [CH ₂ =CH-Si(O-C ₂ H ₅)-O] _n where n = 3-10
DYNASYLAN [®] 9892	Oligomeric propyltriethoxysilane: [C ₃ H ₇ -Si(O-C ₂ H ₅)-O] _n

	where n = 3-10
Comparative product: RC-1	Mixture of vinyltriethoxysilane and an oligomeric methyltriethoxysilane

2.2 Product data

DYNASYLAN [®] (abbreviation: DS)	VTMO	VTEO	VTMOEO	RC-1	Mixture of the invention: 48% DS 6498 + 52% DS 9892
Flashpoint [°C]	22	38	115	38	> 120
Boiling point[°C]	123	158	108 [3 h Pa)	about 160	> 240
SiO ₂ content [% by weight]	40.5	31.6	21.4	39.7	43.3
Vinyl content [% by weight]	18.2	14.2	9.6	9.6	9.9
Alcohol eliminated [g/kg]	650	730	815	640	470
Alcohol eliminated [nature]	methanol	ethanol	2-methoxy- ethanol	ethanol	ethanol

5

When the inventive mixture of DYNASYLAN[®] 6498 with DYNASYLAN[®] 9862 is used, the amount of volatile constituents (VOCs) reduces by 42% when comparison is made with DYNASYLAN[®] VTMOEO, by 36% when comparison is made with DYNASYLAN[®] VTEO, and by 27% when comparison is made with the comparative product RC-1. When compared with DYNASYLAN[®] VTMOEO, the inventive mixture has a similar boiling point and flashpoint, without at the same time having the disadvantage of the high content of volatile and physiologically hazardous 2-methoxyethanol.

15 3. Composition of mixes

Components amounts given in parts by weight	Comparative example 1	Comparative example 2	Comparative example 3	Inventive example
BUNA® EP 3473 (EPDM rubber)	130	130	130	130
POLESTAR® 200 R (calcined kaolin)	140	140	140	140
Mikrosöhl 20 (chalk)	80	80	80	80
RS zinc oxide (activator)	10	10	10	10
Tudalen B-8013 (plasticizer)	15	15	15	15
Silane [nature], see table 2.2 product data	VTMOEO	VTEO	RC-A	DS6498 + DS9892 mixture (48/52)
Silane (parts by weight)	1.4	1.0	1.4	1.4
Vulkanox HS (antioxidant)	1.2	1.2	1.2	1.2
Vulkanox MB (antioxidant)	0.5	0.5	0.5	0.5
Triallyl cyanurate (accelerator)	1.0	1.0	1.0	1.0
Perkadox 14/40 (peroxide crosslinker)	7.5	7.5	7.5	7.5

4. Processing conditions (rheological data)

5

Test results	Comparative example 1	Comparative example 2	Comparative example 3	Inventive example
t ₁₀ (10% vulcanization) [min]	1.33	1.43	1.48	1.50

Test results	Comparative example 1	Comparative example 2	Comparative example 3	Inventive example
t ₉₀ (90% vulcanization) [min]	6.87	6.90	7.18	7.13
Mooney viscosity [dNm] 0% vulcanization	9.6	10.1	10.0	9.7
Mooney viscosity [dNm] 100% vulcanization	54.9	55.3	54.0	54.2

The inventive additive can be processed in the same way as the comparative products in the rubber mixture. The usual extent of vulcanization occurs.

5 5. Mechanical data after vulcanization (15 min/180°C)

Test results	Comparative example 1	Comparative example 2	Comparative example 3	Inventive example
Tensile strength [MPa]	8.7	8.2	8.2	8.5
100% modulus [MPa]	5.0	5.0	4.9	5.0
200% modulus [MPa]	8.0	7.9	7.8	8.2
Elongation at break [%]	254	228	245	243
Residual elongation [%]	8	5	7	7
Shore A hardness at 23°C	70	72	72	72

10 The mechanical values which can be obtained from the rubber component produced using the mixture of the invention are equivalent or better than those of the comparative products.

6. Mechanical data after aging (7 days at 135°C)

15

Test results	Comparative example 1	Comparative example 2	Comparative example 3	Inventive example
Tensile strength [MPa]	10.3	9.7	9.5	10.6
100% modulus [MPa]	6.1	6.0	6.0	6.0

Test results	Comparative example 1	Comparative example 2	Comparative example 3	Inventive example
200% modulus [MPa]	10.1	9.6	-	10.2
Elongation at break [%]	210	206	198	227
Shore A hardness at 23°C	72	73	73	73

After the rubber components produced using the inventive mixture have been subjected to thermal aging, some of the mechanical values are better than those of the comparative products. For example, elongation at break is up to 14% higher.

5

7. Electrical data

Test results	Comparative example 1	Comparative example 2	Comparative example 3	Inventive example
Volume resistivity ρ_D [10^{14} $\Omega \cdot \text{cm}$] after 16 h at standard conditions of temperature and humidity	4.88	4.89	4.98	5.87
Volume resistivity ρ_D [10^{14} $\Omega \cdot \text{cm}$] after 2 h of storage in water (90°C)	1.17	2.19	7.32	7.01
Volume resistivity ρ_D [10^{14} $\Omega \cdot \text{cm}$] after 100 h of storage in water (90°C)	0.45	0.72	7.28	9.40
Dielectric constant ϵ_r after 16 h at standard conditions of temperature and humidity	3.3	3.4	3.4	3.4
Dielectric constant ϵ_r after 2 h of storage in water (90°C)	4.9	4.9	4.5	4.3
Dielectric constant ϵ_r after 100 h of storage in water (90°C)	6.3	6.2	4.9	4.7

Test results	Comparative example 1	Comparative example 2	Comparative example 3	Inventive example
Tan δ [10^{-3}] after 16 h at standard conditions of temperature and humidity	18.6	26.4	21.5	15.7
Tan δ [10^{-3}] after 2 h of storage in water (90°C)	70.2	59.8	36.5	31.1
Tan δ [10^{-3}] after 100 h of storage in water (90°C)	94.2	77.8	33.7	28.7



The superiority of the inventive mixture is apparent from the electrical data, particularly after storage in water. Unlike comparisons 1 and 2, in which the insulating action breaks down (fall-off in volume resistivity, rise in dielectric coefficient and in tan δ),
5 even after 100 hours at 90°C insulation is retained or even improved, e.g. by virtue of the rise in volume resistivity.

What is claimed is:

1. A composition acting as coupling agent between fillers and peroxidically crosslinking elastomers in rubber compounds, which comprises, as component
5 comprising silicon compounds, a mixture
 - a) of vinylalkoxysiloxanes with alkylalkoxysiloxanes, or
 - b) of vinylalkoxysiloxanes with phenylalkoxysiloxanes, or
 - c) of vinylalkoxysiloxanes with phenyl/alkylalkoxysiloxanes or
 - d) of acrylic or methacrylic alkoxysiloxanes with alkylalkoxysiloxanes, or
 - 10 e) of acrylic or methacrylic alkoxysiloxanes with phenylalkoxysiloxanes, or
 - f) of acrylic or methacrylic alkoxysiloxanes with phenyl/alkylalkoxysiloxanes, or
 - g) of at least one co-oligomeric organosiloxane which, as organofunctional groups, bears at least one group from the series vinyl, acrylic, and
15 methacrylic, and at least one group from the series alkyl and phenyl, and at least one alkoxy or hydroxy group.
2. The composition as claimed in claim 1,
which comprises
20 as other non-silicon-containing components, plasticizers and/or processing aids.
3. The composition as claimed in claim 1 or 2,
which comprises
25 from 0.1 to 100% by weight of a vinyl-, acrylic-, and/or methacrylic-functional alkoxysiloxane, based on all of the components present in the composition.
4. The composition as claimed in any of claims 1 to 3,
which comprises
30 from 0 to 80% by weight of the alkyl- and/or phenyl-functional alkoxysiloxane, based on all of the components present in the composition.
5. The composition as claimed in any of claims 1 to 4,



which comprises

at least one vinylalkoxysiloxane of the general formula (Ia) or (Ib)

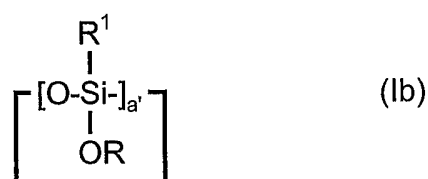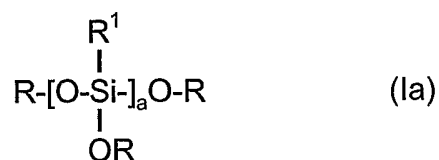

- 5 where the groups R are identical or different and R is methyl, ethyl, n-propyl, isopropyl, 2-methoxyethyl, or hydrogen, R^1 is a vinyl group, each of a and a' , independently, is an integer from 2 to 50, where the siloxanes may be present in the form of linear, branched, or cyclic moieties.

- 10 6. The composition as claimed in any of claims 1 to 5,
which comprises
at least one alkylalkoxysiloxane of the general formula (IIa) or (IIb)

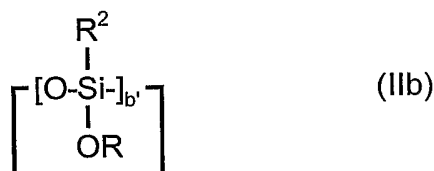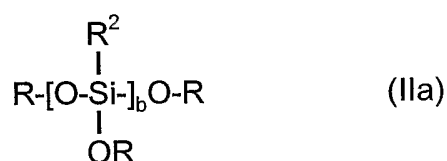

- 15 where the groups R are identical or different and R is methyl, ethyl, n-propyl, isopropyl, 2-methoxyethyl, or hydrogen, the groups R^2 are identical or different, and each R^2 is a linear, branched, or cyclic alkyl group having from 1 to 18 carbon atoms, each of b and b' , independently, is an integer



from 2 to 50, where the siloxanes may be present in the form of linear, branched, or cyclic moieties.

7. The composition as claimed in any of claims 1 to 6,

5

which comprises

at least one phenylalkoxysiloxane of the general formula (IIIa) or (IIIb)

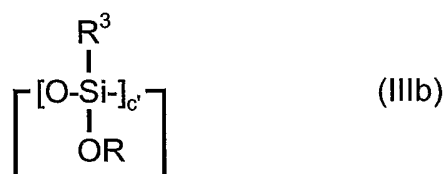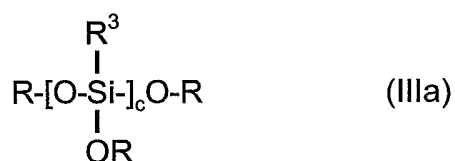

where the groups R are identical or different and R is methyl, ethyl, n-propyl, isopropyl, 2-methoxyethyl, or hydrogen, R³ is a phenyl group, each of c and c', independently, is an integer from 2 to 50, where the siloxanes may be present in the form of linear, branched, or cyclic moieties.



10

8. The composition as claimed in any of claims 1 to 7,

15

which comprises

at least one alkylphenylalkoxysiloxane of the general formula (IVa) or (IVb)

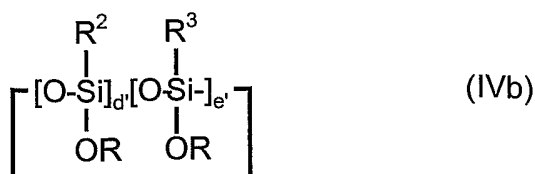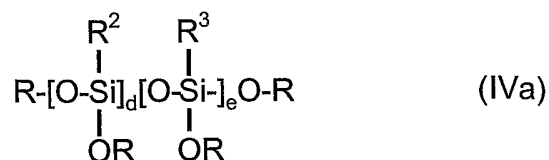



where the groups R are identical or different and R is methyl, ethyl, n-propyl, isopropyl, 2-methoxyethyl, or hydrogen, the R² groups are identical or different, each R² being a linear, branched, or cyclic alkyl group having from 1 to 18 carbon atoms, R³ is a phenyl group, each of d, d', e and e', independently, is an integer from 1 to 35 and complies with the provisos that 1<(d+e)<50 and 1<(d'+e')<50, where the siloxanes may be present in the form of linear, branched, or cyclic moieties.

9. The composition as claimed in any of claims 1 to 8,
which comprises
at least one acrylic or methacrylic alkoxy siloxane of the general formula (Va) or (Vb)



where the groups R are identical or different and R is methyl, ethyl, n-propyl, isopropyl, 2-methoxyethyl, or hydrogen, the groups R⁴ are identical or different, and R⁴ is an acrylic or methacrylic group, each of f and f', independently, is an integer from 2 to 50, where the siloxanes may be present in the form of linear, branched, or cyclic moieties.

10. The composition as claimed in any of claims 1 to 9,
which comprises
at least one organoalkoxy siloxane of the general formula (VIa) or (VIb)

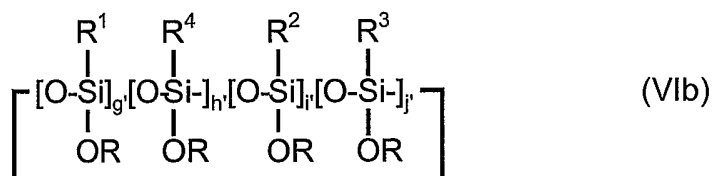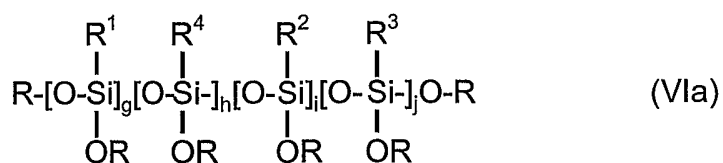

where the groups R, R¹, R², R³ and R⁴ are as defined above, each of g, g', h, h', i, i', j, and j' is, independently, an integer from 0 to 35 and complies with the provisos g ≥ 1 and/or h ≥ 1, and 1 < (g+h+i+j) < 50, and g' ≥ 1 and/or h' ≥ 1, and 1 < (g'+h'+i'+j') < 50, where these siloxanes may be present in the form of linear, branched, or cyclic moieties.

11. The composition as claimed in any of claims 1 to 10, which has been applied to a carrier.
12. The composition as claimed in claim 11, wherein the carrier material has been selected from the series porous polymer, carbon black, wax, silica, and calcium silicate.
13. The use of the composition as claimed in any of claims 1 to 12 as coupling agent in filled and peroxidically crosslinking rubber compounds.
14. A filled and peroxidically crosslinking rubber compound which comprises a composition as claimed in any of claims 1 to 12.
15. The rubber compound as claimed in claim 14, which comprises a content of elastomer from the series ethylene-propylene rubber (EPR), ethylene-propylene-diene rubber (EPDM), styrene-butadiene rubber (SBR), natural rubber (NR), acrylate copolymer rubber (ACM), acrylonitrile-butadiene rubber (NBR), polybutadiene rubber (BR).

16. The rubber compound as claimed in claim 14 or 15, which comprises a content of filler from the series silicatic or organic fillers.
- 5 17. The rubber compound as claimed in claim 16, which comprises a content of filler from the series kaolin, silica, quartz, cristobalite, talc, montmorillonite, wollastonite, mica, calcium carbonate, chalk, dolomite, aluminum hydroxide, magnesium hydroxide, titanium dioxide, cellulose, flax, and sisal.
- 10 18. An item obtained during the processing of rubber compounds as claimed in any of claims 13 to 17.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 03/06543

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C08G77/18 C08G77/04 C08L83/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08G C08L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 395 856 B1 (PETTY HERBERT E ET AL) 28 May 2002 (2002-05-28) column 11, line 1 -column 23, line 30	1-4, 10-18
Y	column 19, line 34-40 ---	1-18
X	EP 0 518 057 A (HUELS CHEMISCHE WERKE AG) 16 December 1992 (1992-12-16) cited in the application	1-4, 10-18
Y	page 1, line 1-34; example 1 the whole document ---	1-18
X	EP 0 814 110 A (HUELS CHEMISCHE WERKE AG) 29 December 1997 (1997-12-29) cited in the application	1-4, 9-18
Y	column 4, line 15-31; example 1 the whole document ---	1-18
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

4 September 2003

Date of mailing of the international search report

12/09/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Buestrich, R

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/06543

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 978 525 A (DEGUSSA) 9 February 2000 (2000-02-09) cited in the application example 2 -----	1-18
Y	EP 1 205 505 A (DEGUSSA) 15 May 2002 (2002-05-15) cited in the application example 2 -----	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/06543

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6395856	B1	28-05-2002	US 6323277 B1 27-11-2001
			US 6140445 A 31-10-2000
			US 2002115811 A1 22-08-2002
			BR 9906369 A 22-01-2002
			CN 1272858 T 08-11-2000
			EP 0991698 A1 12-04-2000
			JP 2002513427 T 08-05-2002
			WO 9954386 A1 28-10-1999
			US 6207783 B1 27-03-2001
			US 2001021761 A1 13-09-2001
			US 6258914 B1 10-07-2001
			AT 239737 T 15-05-2003
			AU 8917998 A 08-03-1999
			BR 9806096 A 24-08-1999
			DE 69814353 D1 12-06-2003
			EP 0958298 A1 24-11-1999
			JP 2001505225 T 17-04-2001
			US 6204339 B1 20-03-2001
			US 6127468 A 03-10-2000
			US 6414061 B1 02-07-2002
EP 0518057	A	16-12-1992	DE 4137278 A1 10-12-1992
			CA 2070578 A1 09-12-1992
			DE 59209434 D1 03-09-1998
			EP 0518057 A1 16-12-1992
			ES 2120423 T3 01-11-1998
			FI 922613 A 09-12-1992
			JP 2962934 B2 12-10-1999
			JP 5194544 A 03-08-1993
			US 5282998 A 01-02-1994
EP 0814110	A	29-12-1997	DE 19624032 A1 18-12-1997
			CA 2207977 A1 17-12-1997
			DE 59703030 D1 05-04-2001
			EP 0814110 A1 29-12-1997
			JP 10059984 A 03-03-1998
			PL 320584 A1 22-12-1997
			US 5932757 A 03-08-1999
EP 0978525	A	09-02-2000	DE 19834990 A1 27-04-2000
			EP 0978525 A2 09-02-2000
			JP 2000053683 A 22-02-2000
			US 6133466 A 17-10-2000
EP 1205505	A	15-05-2002	DE 10056343 A1 16-05-2002
			EP 1205505 A2 15-05-2002
			JP 2002193980 A 10-07-2002
			US 2002086907 A1 04-07-2002

INTERNATIONALER RECHERCHENBERICHT

Internationaler Patentsymbol

PCT/EP 03/06543

A. KLASSIFIZIERUNG DES ANMELDUNGSGEGENSTANDES
IPK 7 C08G77/18 C08G77/04 C08L83/04

Nach der Internationalen Patentklassifikation (IPK) oder nach der nationalen Klassifikation und der IPK

B. RECHERCHIERTE GEBIETE

Recherchierter Mindestprüfstoff (Klassifikationssystem und Klassifikationssymbole)
IPK 7 C08G C08L

Recherchierte aber nicht zum Mindestprüfstoff gehörende Veröffentlichungen, soweit diese unter die recherchierten Gebiete fallen

Während der internationalen Recherche konsultierte elektronische Datenbank (Name der Datenbank und evtl. verwendete Suchbegriffe)

EPO-Internal, PAJ, WPI Data

C. ALS WESENTLICH ANGESEHENE UNTERLAGEN

Kategorie*	Bezeichnung der Veröffentlichung, soweit erforderlich unter Angabe der in Betracht kommenden Teile	Betr. Anspruch Nr.
X	US 6 395 856 B1 (PETTY HERBERT E ET AL) 28. Mai 2002 (2002-05-28) Spalte 11, Zeile 1 - Spalte 23, Zeile 30	1-4, 10-18
Y	Spalte 19, Zeile 34-40 ---	1-18
X	EP 0 518 057 A (HUELS CHEMISCHE WERKE AG) 16. Dezember 1992 (1992-12-16) in der Anmeldung erwähnt Seite 1, Zeile 1-34; Beispiel 1	1-4, 10-18
Y	das ganze Dokument ---	1-18
X	EP 0 814 110 A (HUELS CHEMISCHE WERKE AG) 29. Dezember 1997 (1997-12-29) in der Anmeldung erwähnt Spalte 4, Zeile 15-31; Beispiel 1	1-4,9-18
Y	das ganze Dokument ---	1-18
	--- -/--	



Weitere Veröffentlichungen sind der Fortsetzung von Feld C zu entnehmen



Siehe Anhang Patentfamilie

* Besondere Kategorien von angegebenen Veröffentlichungen :

A Veröffentlichung, die den allgemeinen Stand der Technik definiert, aber nicht als besonders bedeutsam anzusehen ist

E älteres Dokument, das jedoch erst am oder nach dem internationalen Anmeldedatum veröffentlicht worden ist

L Veröffentlichung, die geeignet ist, einen Prioritätsanspruch zweifelhaft erscheinen zu lassen, oder durch die das Veröffentlichungsdatum einer anderen im Recherchenbericht genannten Veröffentlichung belegt werden soll oder die aus einem anderen besonderen Grund angegeben ist (wie ausgeführt)

O Veröffentlichung, die sich auf eine mündliche Offenbarung, eine Benutzung, eine Ausstellung oder andere Maßnahmen bezieht

P Veröffentlichung, die vor dem internationalen Anmeldedatum, aber nach dem beanspruchten Prioritätsdatum veröffentlicht worden ist

T Spätere Veröffentlichung, die nach dem internationalen Anmeldedatum oder dem Prioritätsdatum veröffentlicht worden ist und mit der Anmeldung nicht kollidiert, sondern nur zum Verständnis des der Erfindung zugrundeliegenden Prinzips oder der ihr zugrundeliegenden Theorie angegeben ist

X Veröffentlichung von besonderer Bedeutung; die beanspruchte Erfindung kann allein aufgrund dieser Veröffentlichung nicht als neu oder auf erfinderischer Tätigkeit beruhend betrachtet werden

Y Veröffentlichung von besonderer Bedeutung; die beanspruchte Erfindung kann nicht als auf erfinderischer Tätigkeit beruhend betrachtet werden, wenn die Veröffentlichung mit einer oder mehreren anderen Veröffentlichungen dieser Kategorie in Verbindung gebracht wird und diese Verbindung für einen Fachmann naheliegend ist

Z Veröffentlichung, die Mitglied derselben Patentfamilie ist

Datum des Abschlusses der internationalen Recherche

4. September 2003

Absendedatum des internationalen Recherchenberichts

12/09/2003

Name und Postanschrift der Internationalen Recherchenbehörde
Europäisches Patentamt, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Bevollmächtigter Bediensteter

Buestrich, R

INTERNATIONALER RECHERCHENBERICHT

Internationaler Markenzeichen

PCT/EP 03/06543

C.(Fortsetzung) ALS WESENTLICH ANGESEHENE UNTERLAGEN

Kategorie*	Bezeichnung der Veröffentlichung, soweit erforderlich unter Angabe der in Betracht kommenden Teile	Betr. Anspruch Nr.
Y	EP 0 978 525 A (DEGUSSA) 9. Februar 2000 (2000-02-09) in der Anmeldung erwähnt Beispiel 2 -----	1-18
Y	EP 1 205 505 A (DEGUSSA) 15. Mai 2002 (2002-05-15) in der Anmeldung erwähnt Beispiel 2 -----	1-10

INTERNATIONALER RECHERCHENBERICHT

Angaben zu Veröffentlichungen, die derselben Patentfamilie gehören

Internationale Einzelzeichen

PCT/EP 03/06543

Im Recherchenbericht angeführtes Patentdokument	Datum der Veröffentlichung	Mitglied(er) der Patentfamilie	Datum der Veröffentlichung
US 6395856 B1	28-05-2002	US 6323277 B1	27-11-2001
		US 6140445 A	31-10-2000
		US 2002115811 A1	22-08-2002
		BR 9906369 A	22-01-2002
		CN 1272858 T	08-11-2000
		EP 0991698 A1	12-04-2000
		JP 2002513427 T	08-05-2002
		WO 9954386 A1	28-10-1999
		US 6207783 B1	27-03-2001
		US 2001021761 A1	13-09-2001
		US 6258914 B1	10-07-2001
		AT 239737 T	15-05-2003
		AU 8917998 A	08-03-1999
		BR 9806096 A	24-08-1999
		DE 69814353 D1	12-06-2003
		EP 0958298 A1	24-11-1999
		JP 2001505225 T	17-04-2001
		US 6204339 B1	20-03-2001
		US 6127468 A	03-10-2000
		US 6414061 B1	02-07-2002
EP 0518057 A	16-12-1992	DE 4137278 A1	10-12-1992
		CA 2070578 A1	09-12-1992
		DE 59209434 D1	03-09-1998
		EP 0518057 A1	16-12-1992
		ES 2120423 T3	01-11-1998
		FI 922613 A	09-12-1992
		JP 2962934 B2	12-10-1999
		JP 5194544 A	03-08-1993
		US 5282998 A	01-02-1994
EP 0814110 A	29-12-1997	DE 19624032 A1	18-12-1997
		CA 2207977 A1	17-12-1997
		DE 59703030 D1	05-04-2001
		EP 0814110 A1	29-12-1997
		JP 10059984 A	03-03-1998
		PL 320584 A1	22-12-1997
		US 5932757 A	03-08-1999
EP 0978525 A	09-02-2000	DE 19834990 A1	27-04-2000
		EP 0978525 A2	09-02-2000
		JP 2000053683 A	22-02-2000
		US 6133466 A	17-10-2000
EP 1205505 A	15-05-2002	DE 10056343 A1	16-05-2002
		EP 1205505 A2	15-05-2002
		JP 2002193980 A	10-07-2002
		US 2002086907 A1	04-07-2002