

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
21 February 2008 (21.02.2008)

PCT

(10) International Publication Number
WO 2008/021082 A2

- (51) International Patent Classification:
F21V 1/00 (2006.01)
 - (21) International Application Number:
PCT/US2007/017534
 - (22) International Filing Date: 7 August 2007 (07.08.2007)
 - (25) Filing Language: English
 - (26) Publication Language: English
 - (30) Priority Data:
11/505,110 16 August 2006 (16.08.2006) US
 - (71) Applicant (for all designated States except US): **RPC PHOTONICS, INC.** [US/US]; 330 Clay Road, Rochester, NY 14623 (US).
 - (72) Inventors: **CHAKMAKJIAN, Stephen, H.**; 13 Old Brook Trail, Honeoye Falls, NY 14472 (US). **SCHERTLER, Donald, J.**; 27 Sothery Place, Rochester, NY 14624 (US). **SALES, Tasso**; 153 West Squire Drive #8, Rochester, NY 14623 (US). **MORRIS, Michael, G.**; 8 SCR Lane, Victor, NY 14564 (US).
 - (74) Agent: **LUKACHER, Kenneth, J.**; South Winton Court, 3136 Winton Road South, Suite 301, Rochester, NY 14623 (US).
 - (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
 - (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— without international search report and to be republished upon receipt of that report

(54) Title: ILLUMINATION DEVICES

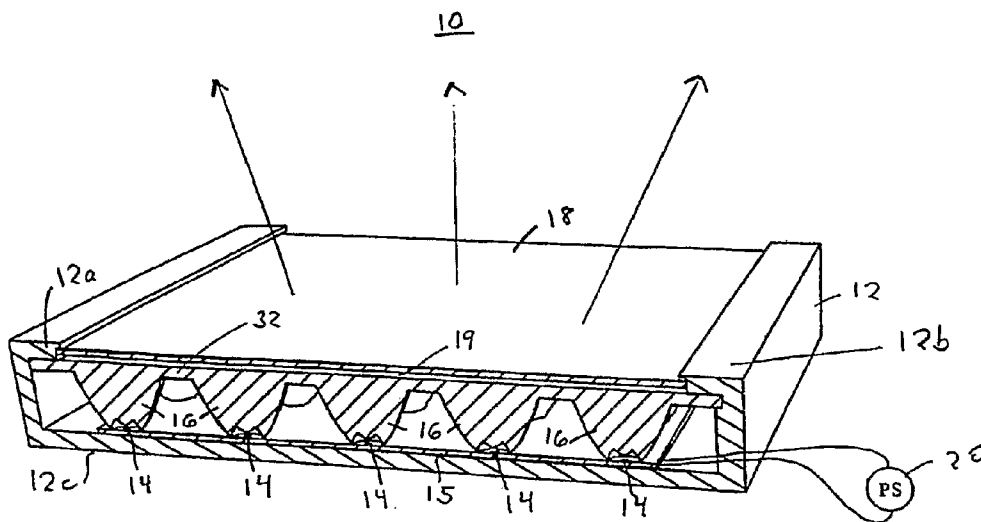

(57) Abstract: Lighting devices (10) are provided for efficiently distributing light over an area to provided uniform illumination over a wide angle or other tailored illumination patterns. Each light device has at least one light source (14), at least one collimator (16) for partially collimating light from the light source, and at least one diffuser (18) for diffusing light from the collimator. The diffuser (18) provides diffused light over an area from the diffuser having an intensity that is angularly dependent in accordance with the angular distribution intensity of light outputted from the collimator (16), so as to provide a predetermined illumination pattern from the device (10). The light sources (10) and collimators (16) may be provided in one or two-dimensional arrays, and a single diffuser (18) may be formed on each collimator (16) or the diffuser (18) may be spaced from the collimators (16).

WO 2008/021082 A2

ILLUMINATION DEVICES

Field of the Invention

The invention relates to illumination devices, often called luminaires, and in particular to illumination devices using small light sources, such as light-emitting diodes (LEDs) or the like, for the efficient and controlled illumination of a desired area. The illumination devices of the present invention may be utilized for general-purpose lighting in and around homes and commercial buildings, and may also be used in architectural and industrial lighting applications.

Background of the Invention

Devices have been developed for collecting and collimating light from a small light source, such as an incandescent, LED, or the like. Often such devices use a reflective parabolic structure which are designed to collimate the light from a point source placed at the focus of the reflector due to the divergent nature of the light source. The light striking the structure is redirected parallel to the axis of the parabola, exits out the open end of the reflector, and propagates as a narrow, well-confined beam. In practice the source is not a point, but has some spatial extent and, as a result, the actual divergence of this reflected beam is determined by the size of the reflector and by the finite, i.e., non-zero, size of the source. Also, the quality of the beam of light in the far field is poor, forming a ring structure caused by the base of the reflector being blocked by the light source. An additional drawback of reflective parabolic structure designs is that the light from the source which does not strike the reflector propagates out the open end of the reflector un-collimated. To correct these issues, some designs, such as those often used in flashlights, incorporate a lens element at the open end of the reflector. The lens captures both the direct light from the source and the light from the reflector. If the lens is made to collimate the direct light then it will cause the reflected light to be highly divergent. Since true collimation of all the light from such an arrangement cannot be achieved, such designs compromise between the divergence of the light and the uniformity of the resulting beam.

Catadioptric designs incorporating both reflection and refraction in a single optical component have been proposed which often operate by total-internal-reflection (TIR) using parabolic or conical wall structures. For example, Bittner in U.S. Patent No. 2,215,900

- 2 -

describes a multi-surfaced rotationally-symmetric optical element with aspheric surfaces and a recess or cavity on one side for positioning the light source, such as a small flashlight bulb. Marshall et al., U.S. Patent No. 6,547,423 describes a rotationally symmetrical, bowl shaped collector lens formed from a single material with an indentation in the bottom a light source. In U.S. Patent No. 6,819,505, Cassarly et al. has a similar design as a collector of the light from the source, but it does not collimate the light. Instead, it transmits the light from a collector portion through a transition section to a projector lens. The collector portion substantially focuses the light within the transition section to produce a substantially circular light distribution. The light is then refracted by the projector lens section to produce a highly collimated beam.

These designs work to produce a fairly well collimated beam of light from a small light source. This limits their use for general lighting applications without the use of some diffuser or other light control device. Although diffusers have been used to smooth light over an area in general lighting applications, such as diffusing panel for fluorescent light, or diffusing surfaces in incandescent lighting fixtures, they have not been adapted to work with small divergent light sources, such as LEDs. However, passing light such a small divergent light source collimated as described in the above cited patents through a typical general lighting diffuser will provide poor results since the collimation needed to efficient collect light from the source will cause non-uniform light patterns having undesirable bright spot(s). It is thus desirable to use collimated light from low power light sources, such as LEDs, in general lighting applications by combining with a diffuser designed to provide uniform light over a desired angle that can also be used in tailored lighting applications, such as in architectural and industrial lighting.

Summary of the Invention

Accordingly, it is one feature of the present invention to provide lighting devices that utilize small, wide-angle light sources, such as an LEDs, in combination with a collimating and diffusing optics to provided substantially uniform light suitable for general light applications that can also be used to provided other tailored illumination patterns.

It is another feature of the present invention to provide lighting devices for general lighting application using a high efficiency diffuser element and low power light sources.

- 3 -

It is still a further feature of the present invention to provide lighting devices utilizing one or two dimensional arrays of small, wide-angle light sources that can produce a light distribution pattern that is substantially uniform over a prescribed region of space.

It is another feature of the present invention to provide a low profile luminaire having a housing with an array of collimators for collimating light from such small, wide-angle light sources in which the diffuser represents one of multiple diffusers interchangeable in such housing to provide luminaires producing different illumination patterns.

Briefly described, the present invention embodies a lighting device having at least one wide-angle light source, such as an LED, at least one collimator for partially collimating light from the light source to provide angular distribution intensity narrower than the light source, and at least one diffuser for diffusing light from the collimator. The diffuser has an optical diffusion property providing over an area an angularly dependent output light intensity in accordance with the angular distribution intensity of the light from the collimator so as to provide a predetermined illumination pattern from the diffuser.

The angular distribution intensity of the collimator may be considered as having collimated bright central portion and non-collimated light portions at decreasing light intensity at increasing angles from the central portion. To provide substantially uniform area illumination from the light device over an angle, the diffuser provides an angularly dependent output light intensity complementary to the angular distribution intensity of the partially collimated light from the collimator.

Preferably the collimator has a parabolic body having a flat light exiting end and a light entering end with a cavity having spherical side surfaces and a center portion having a hyperbolic or ellipsoidal shape, and a parabolic outer surface. The light source is centrally disposed at the entrance of the cavity. The parabolic outer surface total internally reflects light received via the spherical sides of the cavity toward the light exiting end, in which light received by the center portion is collimated toward the light exiting end. The parabolic is rotationally symmetric, but may also be linearly symmetric. The cavity is preferably filled with air, but may be filled with material having an index of refraction effecting the shape of the collimator body. Other optics for collimating light from a wide-angle light source to the diffuser may also be used.

The diffuser has a randomized microlens structure as described in U.S. Patent Nos. 6,859,326 or 7,033,736, which are herein incorporated by reference, to provide the desired predetermined illumination pattern over an area from the partially collimated light from the

- 4 -

collimator. The microlens structure of the diffuser may be formed, such as molded, in the material at the light exiting end of the collimator, or along the surface of a plate spaced from the collimator.

Lighting devices are provided having a single collimator and diffuser, or multiple light sources to a one or two-dimensional array of collimators having either an integrated diffuser, or a diffuser spaced from the light exit end of the collimators. Such collimators may be mounted to a board supporting the electronics of the light sources in which the collimators have flat base or extending collar ring or posts for mounting the collimators to the board.

One example of a light device of the present invention is a low profile luminaire lighting device having a housing with an arrays of collimators for collimating light from small, wide-angle light sources with one of multiple interchangeable diffusers to produce luminaires producing different illumination patterns. Optionally, the collimator and diffuser may be integrated into a single, monolithic, structure.

The invention addresses the need to make the most efficient use of light from a given light source and to substantially distribute the light over a specified region of space. The versatility of this invention is that a single source-collimator arrangement can be used for a variety of applications. One need only replace the diffuser to meet the needs of the task.

Detailed Description of the Drawings

The foregoing features and advantages of the invention will become more apparent from a reading of the following description in connection with the accompanying drawings, in which:

FIG. 1 is a perspective view of one example of a lighting device of the present invention in which part of the luminaire housing is cut away;

FIG. 2 is a perspective cut-away view of one of the collimators of the lighting device of FIG. 1;

FIG. 3 is an optical ray diagram of the collimator of FIG. 2 with rays traced from an ideal point source at the origin;

FIG. 4 is a plot of the light output distribution just above the top surface in an example of the collimator of FIGS. 2 and 3;

FIG. 5 is a graph of the angular light distribution just above the top surface in the same example of the collimator of FIGS. 2 and 3;

FIG. 6 is an optical ray diagram similar to FIG. 3 in which the top surface of the

- 5 -

collimator is extended to allow for the formation of a mounting flange that extends outward beyond the parabolic surface;

FIG. 7 is an optical ray diagram similar to FIG. 3 for an example of a collimator in which the base of its parabolic body is expanded to allow for a flat region to serve as a mounting surface;

FIG. 8 is an optical ray diagram of the collimator similar to FIG. 3 for an example of a collimator in which the base of its parabolic body is expanded to allow for a collar ring or posts to serve as a mounting surface;

FIG. 9 is an optical ray diagram similar of the collimator to FIG. 3 with traced rays for the case of a filled cavity at the base of the collimator in which the index of the fill material, n_0 , is lower than the index of the collimator, n ;

FIG. 10 is an optical ray diagram similar to FIG. 3 with traced rays for the case of a filled recess in which the index of the fill material, n_0 , is larger than the index of the collimator, n ;

FIG. 11 is a graph of the measured angular output distribution of the intensity in an example of the collimator of FIGS. 2 and 3 collimating light from an LED source;

FIG. 12 is a graph of the angular output distribution of the intensity in an example of the diffuser of FIG. 1 when illuminated by a laser light source having a microlens array structure providing an angular dependent output intensity complementary to the of the collimator of FIG. 11;

FIG. 13 is a graph of the angular output distribution of the intensity of light from an LED light source operated upon by the series of the collimator and diffuser, which provided graphs of FIGS. 11 and 12, respectively, to output substantially uniform area illumination over an angular range from the diffuser;

FIG. 14A is an optical ray diagram showing a diffuser integrated into the material of the collimator of FIGS. 2 and 3;

FIGS. 14B and 14C are optical ray diagram showing a diffuser spaced from the collimator of FIGS. 2 and 3 in which the diffusing surface of the diffuser faces the collimator in FIG. 14B and faces away from the collimator in FIG. 14C;

FIG. 15A is a perspective view of another example of the lighting device of the present invention having a one-dimensional array of collimator-diffuser assemblies as shown in FIG. 14A;

- 6 -

FIG. 15B is a similar perspective view of the lighting device of FIG. 15A in which the diffusers are part of a single structure;

FIG. 16A is a similar perspective view of the lighting device of FIG. 15A having collimator-diffuser assemblies as shown in FIG. 14A to provide collimation in the cross axis direction and some collimation along the source axis;

FIG. 16B is a perspective view of another example of the lighting device of the present invention having a one-dimensional array collimators that each linearly symmetric to provide collimation in the cross axis direction of the source array in which a diffuser integrated at the top surface of each collimator as illustrated in FIG. 14A;

FIG. 17 is a perspective view of another example of the lighting device of the present invention having a two-dimensional array of individual collimator-diffuser assemblies of FIG. 14A in which a diffuser integrated at the top surface of each collimator as illustrated in FIG. 14A; and

FIGS. 18A and 18B are top and bottom perspective view of another example of the lighting device of the present invention shown without light sources having a polygon two-dimensional array of collimators provided in a single monolithic structure, and the diffuser is integrated into the top surface of such monolithic structure.

Detailed Description of the Invention

Referring to FIG. 1, one example of a lighting device 10 of the present invention is shown enclosed in a housing 12. The lighting device 10 has multiple wide angle light sources 14, such as LEDs, mounted on a circuit board 15 which are disposed to provide light to a two-dimensional array of parabolic shaped collimators 16 disposed along interior of the housing. The collimators 16 each partially collimates the light for each of their respective light sources 14, and provides such partially collimated light to a diffuser 18 spaced by a gap 19 from the array of collimators. Partially collimated light represents light having an angular distribution intensity narrower than the light source 14, and may particularly refer to light having an angular distribution intensity with collimated or bright central portion and non-collimated light portions of decreasing light intensity at increasing angles, e.g., $\pm 10^\circ$, from the central portion (see, examples of collimator distribution intensity of FIGS. 5 or 11). Since each collimator 16 need only provide partially collimated light, the collimator may be smaller in size than in contrast to a collimator element that provides more ideal or substantial collimation. In this example, the diffuser 18 represents a plate or sheet having a randomized

- 7 -

microlens array on its surface facing the collimators 16. Such diffusing surface takes into account both the collimated light, and the non-collimated light at larger angles, outputted by each collimator 16 (see, for example, the diffuser's complementary diffusion property illustrated in FIG. 12). The microlens array structure of the diffuser 18 provides an intensity of the diffused light over an area that is angularly dependent in accordance with the angular distribution intensity of light outputted from each of the collimators 16, so as to provide a substantially uniform illumination or other predetermined illumination pattern over an area from the device 10, such as illustrated by the arrows in FIG. 1.

A power source 20 provides power to the light sources, which may be a battery, an external power source, and may include electronics typically used for powering light sources. Although the divergent light source 14 is described as a low power LED, other light sources may be used, such as a halogen bulb, OLED, laser (e.g., solid state laser source), or an optical fiber illuminated by a remote light source, such as a halogen, arc lamp, or solar. The housing may have flanges 12a and 12b each providing a slot, or other mechanically mounting means, such as a clamp or snapping features, along which diffuser 18 slides into to capture the diffuser in housing 12. The array of collimators 16 are shown as a monolithic structure, such as of molded optical material, to provide a common flange 32 (see FIG. 6) captured under flanges 12a and 12b. Optionally each collimator 16 of the array may be separate from each other and aligned and mounted over their respective light source. To provide different lighting devices 10 for different applications, the diffuser 18 may be interchangeable with one or more different diffusers via the slots defined by flanged 12a and 12b in housing 10, where different diffusers when located in the housing provide different area illumination patterns for the partially collimated light from the collimators 16.

The housing 12 may be mounted along surface 12c on a wall or ceiling providing a low profile device as the height of the collimators from board 15 may be, for example, between 1-40 mm, and the diffuser has a thickness, for example, of 0.5-3.0 mm, and the overall housing may be, for example, between 2-45 mm. Ventilation of heat from the light sources may be provided by slots or openings along the side walls of the housing, if needed. The housing 12 may also be recessed in a ceiling or wall depending on its particular application with sufficient ventilation of heat from the light sources, if needed. Other housings may also be used for supporting the light sources, collimators and diffuser, which may be of other polygonal shapes. For example, a light on a cellular phone or other portable device may have as part of its housing a compact collimator, e.g., 1-2mm is height, and a thin

- 8 -

diffuser plate, e.g., 0.5-1 mm, while larger housings may be used for flash lights, or general or architectural lighting. Other examples of lighting device 10 will be described later in connection with FIGS. 15A, 15B, 16A, 16B, 17, 18A and 18B.

A cut-way of one of the collimator 16 is shown in FIG. 2. The collimator 16 has a body 21 representing a single monolithic structure of a transparent optical material of refractive index n composed of four surface elements 24, 25, 26, and 27. For example, the optical material may be plastic, such as an acrylic, which may be molded to provide the desired shape of body 21. An LED or similar light source 14 sits at the bottom at the entrance to a cavity or recessed area 22, as shown in FIG. 3 at the base end 16a of body 21. The lower outer surface 24 of the body has a parabolic shape. The cavity 22 has an inner concave surface 25 which is spherical, and the surface 26 just above the source is hyperbolic. These surfaces 25 and 26 act to collimate the light from the source 14 and direct it toward the fourth surface 27 at the top end 16b of the body 21, as illustrated by rays 28 and 29, respectively. This fourth surface 27 may be smooth and flat, and acts to transmit the collimated beam of light toward the detached and interchangeable diffuser 18, or the diffuser 18 may represent a diffusing surface integrated directly onto the top surface 17 of the body 21, as described below. In either case, the diffuser 18 redistributes the collimated light into a wide range of desired shapes and profiles.

The optical design of the collimator 16 will now be described. Referring to FIG. 3, consider a point source positioned at the origin of the coordinate system shown sending light upward in the $+z$ direction. Light emitted by the source strikes one of the two surfaces 25 or 26 comprising the air-filled recessed portion 22, of the spherical section 25a or the hyperbolic section or lens 26a. Light from the origin striking the spherical section hits the surface at normal incidence and is transmitted into the body 21 without experiencing any angular deflection due to refraction. The equation defining this spherical surface 25 of the device is

$$z_s = \sqrt{(D/2)^2 - (x^2 + y^2)}, \quad d/2 < \sqrt{(x^2 + y^2)} < D/2, \quad (1)$$

where D is the diameter of the sphere and d is the diameter of the center hyperbolic section. This light propagates through the material of the body 21 until it hits the parabolic surface 24 and experiences total internal reflection (TIR). The parabola has its focus at the origin. Therefore, since the light ray has a direct, straight-line path (as shown by rays 29) from the origin, the focus of the parabola, it is reflected by the parabolic surface 24 upward parallel to the axis of the collimator 16. Several such rays 30 are shown in the figure. The surface 24 of

- 9 -

the parabola is given by the expression

$$z_p = \frac{x^2 + y^2}{D} - \frac{D}{4}, \quad D/2 < \sqrt{x^2 + y^2} < L/2, \quad (2)$$

where L is the diameter of the body 21.

Light from the point source that does not strike the spherical section 25a, hits the hyperbolic lens 26a just above the position of the light source 14. The function of the hyperbolic lens section is to collimate the light that would not otherwise strike the parabolic surface 24. The lens 26a also has its focus at the origin so that light from the point source (as shown by rays 28) striking surface 26 is refracted into the optical material of body 21 and travels upward parallel to the axis of the body. Two such rays 31 are shown in the figure. The equation for the lens surface 26 is given by

$$\frac{(z - z_0)^2}{a^2} - \frac{x^2 + y^2}{b^2} = 1, \quad \sqrt{x^2 + y^2} \leq d/2, \quad (3)$$

where the variables a , b , and z_0 are given by

$$\begin{aligned} a^2 &= \frac{R_H^2}{(n^2 - 1)^2}, \\ b^2 &= \frac{R_H^2}{n^2 - 1}, \\ z_0 &= \frac{nR_H}{n^2 - 1}. \end{aligned} \quad (4)$$

n is the refractive index of the optical material of body 21 and R_H is the base radius of curvature of the hyperbola.

Just two quantities are needed to fully specify the geometry of the collimator 16: the diameter L of the collimator and the sphere diameter D . All other quantities are derived from them. The height of the parabola, H , between ends 16a and 16b is determined by knowing that the focus of the parabola is at the origin, and the surface passes through the point at $z = H$, $x = D/2$. Thus the expression for H is

$$H = \frac{L^2}{4D} - \frac{D}{4}. \quad (5)$$

Or, alternatively, if H is known then the diameter L is given by

$$L = D\sqrt{1 + \frac{4H}{D}}. \quad (6)$$

- 10 -

The diameter of the hyperbolic lens, d , is determined by the location of the ray that passes through the spherical section or surface 25 and strikes the top edge of the parabola surface 24 before being reflected vertically. The hyperbolic lens 26a collimates the light (shown by rays 28) from the source 14 that would not strike the parabola surface 24, and direct the light to surface 27 (as shown by rays 31). The inclusion of the hyperbolic lens 26a permits us to reduce the height of the collimator 16 while still providing the highest degree of collimation for all the light emitted by the source 14. The diameter d of the hyperbolic section 26a is given by

$$d = D \frac{\sqrt{1 + 4H/D}}{1 + 2H/D}. \quad (7)$$

The final quantity to be specified is the base radius of curvature, R_H , of the hyperbola. As the height H of the body 21 increases, the angle subtended by the hyperbolic lens section 26a decreases and it is drawn away from the origin. Thus the radius will increase. The radius is determined by replacing z in Eq. (3) with the expression for z_S in Eq. (1) when

$\sqrt{x^2 + y^2} = d/2$. The result yields

$$R_H = -\frac{D}{2} + n \frac{DH}{D + 2H} \quad (8)$$

This expression also gives a limiting relationship for H in terms of D , since R_H cannot be negative. It is found that

$$H \geq \frac{D}{2(n-1)}, \quad (9)$$

the equality resulting in R_H equal to zero. The largest radius for the hyperbola is

$$R_H = \frac{D}{2}(n-1), \quad (10)$$

for $H \gg D$.

With a point source at the origin, this design offers perfect collimation of the light at the exit surface 27 of the body 21. An LED or other similar source 14 emits light over an extended area and will therefore degrade the degree of collimation. Ultimately, the final size of the collimator 16 will be determined by the size of the light source 14 and the degree of collimation that is desired.

The table below shows the amount of collimation that is achieved for several examples of collimator 16. In these examples, collimator 16 has a diameter D of 5mm, is of a

material having a refractive index of 1.5, and an LED source is centered at the origin with an area of 1mm × 1mm. Simulations were performed using commercial raytracing software, such as ASAP sold by Breault Research Organization, Inc. of Tucson, Arizona, USA, to determine the full width at half maximum (FWHM) of the light exiting the unpatterned top surface 27 of the collimator 16. It was found that the larger the collimator 16 is relative to the size of the light source 14 the better the collimation.

<i>D</i> (mm)	<i>H</i> (mm)	<i>L</i> (mm)	<i>D</i> (mm)	<i>R_H</i> (mm)	Collimation FWHM
5	40	$5\sqrt{33}$	$\frac{5\sqrt{33}}{17}$	1.029	2.7°
5	20	$5\sqrt{17}$	$\frac{5\sqrt{17}}{9}$.833	4.4°
5	10	15	3	0.5	6°
5	5	$5\sqrt{5}$	$\frac{5\sqrt{5}}{3}$	0.0	8.5°

It is necessary to know the degree of collimation in order to design the diffuser 18 that is to be placed above the collimator 16 or integrated into the top surface 27 of the collimator in order to achieve the desired intensity distribution from the lighting device 10. In FIG. 4 the spatial light distribution is shown just above the top surface of the collimator 16 for the case of *D*=5mm and *H*=10mm and a refractive index of 1.5. The size of the frame is 15mm × 15mm. In FIG. 5, the angular distribution of the light is shown in the horizontal and vertical directions from the same example. The full width at half max is 6°. The angular distribution intensity of the collimator 16 may be considered as having a collimated bright central portion and non-collimated light portions at decreasing light intensity at increasing angles along wings from the central portion. The examples in the table illustrate the relationship that the more collimated the light (i.e., at lower collimation FWHM), the larger the height, *H*, and length, *L*, of the collimator, needed.

The collimator 16 can be modified to accommodate a mounting surface 32 without loss in performance by extending the top surface 27 outward and increase the value of *H* beyond that required by Eq. (5). The extra height would be used to produce a flange 32a that

- 12 -

extends out beyond the parabolic surface 24 of the collimator. An example is shown in FIG. 6. This mounting flange 32 is useful in providing, such as by molding, two or more collimators together as a monolithic unit, as shown for example in FIG. 1.

Another mounting surface 34 to the collimator 16 would be to increase the size of the parabolic surface 24 extending it outward thus increasing the diameter L and its focal length. This provides a transition region at the base end 16a of the collimator 16 between the recess 22 and the parabolic surface 24. This transition region could be a flat annulus mounting surface 34, as shown in FIG. 7, for mounting the collimator flush with the light source 14. Or the flat region could be extruded downward to form a mounting collar ring or a series of posts 36 for mounting the collimator 16 below the plane of the light source 14, as shown in FIG. 8. The performance of the parabolic surface 24 remains essentially unchanged since the light source 14 remains at its focus. The hyperbolic lens 26a diameter also has to increase to accommodate the increased diameter of the collimator 16.

Optionally, the recess 22 of the collimator 16 may be filled with an adhesive material to bond the collimator 16 to the light source 14 or to use the same material used to encapsulate the light source, such as is used for an LED die. In such case, a solution exists provided the index of the filling material is substantially different from the refractive index of the material that makes the collimator. If the index of the fill material 37a is n_0 and is less than the index of the collimator n , then the general solution form the shape of the hyperbolic lens surface 26a is of the form

$$\frac{(z - z_0)^2}{a^2} - \frac{x^2 + y^2}{b^2} = 1, \quad \sqrt{x^2 + y^2} \leq d/2, \quad (11)$$

where now the variables a , b , and z_0 are given by

$$\begin{aligned} a^2 &= \frac{R_H^2}{\left(\frac{n^2}{n_0^2} - 1\right)^2}, \\ b^2 &= \frac{R_H^2}{\frac{n^2}{n_0^2} - 1}, \\ z_0 &= \frac{\frac{n}{n_0} R_H}{\frac{n^2}{n_0^2} - 1}. \end{aligned} \quad (12)$$

- 13 -

The base radius of curvature of the hyperbola R_H is now given by

$$R_H = -\frac{D}{2} + \frac{n}{n_0} \frac{DH}{D+2H}. \quad (13)$$

For this expression to be valid it is required that the refractive index of the fill material obey the expression

$$n_0 \leq \frac{n}{1 + \frac{D}{2H}}. \quad (14)$$

As an example, for $D=2\text{mm}$, $H=10\text{mm}$, and a collimator with a 1.5 index, $n_0 \leq 1.36$.

Choosing a value of 1.35 gives a base radius for the hyperbolic lens surface 26 of 0.01mm. The basic shape of the collimator 16 is shown in FIG. 9. The shape of the hyperbolic lens component is determined by the difference in the indexes of the materials. Reducing the difference by adding a material other than air forces the lens to extend closer to the light source 14 and results in a smaller base radius of curvature. This is to maintain the optical power of the lens to perfectly collimate the light from a point source at the origin. But this reduces the collimation capability of the hyperbolic lens for the off-axis light emitted by the extended light source 14 and degrades the overall performance of the collimator.

If the index n_0 of the fill material 27b is greater than the index of the collimator 16 then a lens 26b is provided that is no longer hyperbolic but rather elliptical in shape and the expressions in Eqs. (11) and (12) are modified slightly to become

$$\frac{(z - z_0)^2}{a^2} + \frac{x^2 + y^2}{b^2} = 1, \quad \sqrt{x^2 + y^2} \leq d/2, \quad (15)$$

where now the variables a , b , and z_0 are given by

$$\begin{aligned} a^2 &= \frac{R_H^2}{\left(\frac{n^2}{n_0^2} - 1\right)^2}, \\ b^2 &= -\frac{R_H^2}{\frac{n^2}{n_0^2} - 1}, \\ z_0 &= \frac{\frac{n}{n_0} R_H}{\frac{n^2}{n_0^2} - 1}. \end{aligned} \quad (16)$$

- 14 -

R_H is still given by Eq. (13) but now has a negative value. The restriction on n_0 is

$$n_0 \geq n \left(\frac{D}{2H} + 1 \right). \quad (17)$$

For the example above with $D=2\text{mm}$, $H=10\text{mm}$, and a collimator with a 1.5 index, $n_0 \geq 1.65$. Choosing a value of 1.65 gives a base radius for the elliptical lens 26b of - 0.174mm. The shape of the collimator 16 for this example is depicted in FIG. 10.

With the use of the higher index material 27b on the source side of the collimator 16, there is a risk potential for total internal reflection at the interface between the collimator and the fill material 27b for light emitted from the off-axis area of the light source 14. This will result in stray light emerging from the sides of the collimator 16. Preferably, an air-gap in recess 22 of collimator 16 is provided to mitigate such stray light.

The collimator 16 of the lighting device 10 of the present invention is combined with diffuser 18 so that the light distribution can be controlled to meet the needs of a particular task or application. As an example, the diffuser 18 can redistribute the light into a uniform circular beam to illuminate a table or counter top. In another example, the diffuser 18 can produce a long narrow illumination for lighting a hallway or narrow walkway. As a further example, it can produce accent lighting for artwork. The diffuser 18 can be used to tailor the light from the collimator 16 and produce any arbitrary distribution of light. Consequently, many other applications for general purpose illumination can benefit from lighting device 10.

The optical design of the diffuser 18 will now be described. A surface structure that separates two media of distinct indices of refraction and incorporates randomized features generally operates as a diffuser element. Any diffuser structure that provides homogenization and distribution of light can be utilized with the present invention. Examples include diffusers surfaces such as those found in ground glass, microlens arrays, holographic recording of speckle, and diffractive elements. Even volume diffusers such as opal glass, for example, can be utilized in accordance with the present invention. Such diffusers, however, provide limited control of light and thus have narrow scope of applications. The preferred method for generating a diffuser is one that has an optical diffusion property providing an angular dependent output light intensity over an area such as described in earlier incorporated by reference U.S. Patent Nos. 6,859,326 and 7,033,736. In summary, a diffuser produced in accordance with these patents provides an array of microlenses of different prescriptions which are iteratively determined such that the overall combined output of such microlenses

- 15 -

provides the desired angular diffusion distribution. Thus, U shaped angular distributions (as in FIG. 12) or other distributions in accordance with the angular distribution of light from the collimator 16 can be provided.

This enables these diffusers to compensate for the wings of non-collimated light in the angular distribution of the source collimation. As seen in the example of FIG. 5 there is still a certain amount of non-collimated light beyond 6°. For example, to provide a flat top intensity distribution the diffuser needs to compensate or account for this light. One such example is shown in the data plots of FIGS. 11, 12 and 13. The angular distribution of the light from a collimated Lambertian LED is shown in FIG. 11 which, in this example, shows a significant amount of light beyond 10°. To produce a flat top intensity distribution over an angular range of $\pm 10^\circ$ a diffuser 18 is used which provides the scatter pattern shown in FIG. 12 when illuminated with a laser. Such a diffuser 18 can be made as described in the incorporated by reference patents. When combined with the collimated LED of FIG. 11 this diffuser produces the desired flat-top intensity distribution, which is substantially uniform over an angular range, as shown in FIG. 13. Other diffusers 18 may be used in the lighting device 10 having different angular distributions of light to provide different predetermined illumination patterns when illuminated with light from the collimator. For example, different diffusers 18 may have different angular ranges over which substantially uniform light may be provided in accordance with the incorporated patents.

The diffuser 18 may be integrated into the top output surface 27 of the collimator 16 as shown in FIG. 14A to provide a collimator-diffuser assembly 17, or such integration may be along the top surface of collimator flange 32 of FIG. 6. Preferably, integration is by molding the light diffusing microlens surface 18 with the collimator 16. The diffuser 18 may also be a separate component, such as a plate, spaced from the collimator 16 as shown in FIGS. 14B and 14C. The diffuser 18 of FIGS. 14B has a microlens array diffusing surface 18a that faces the collimator 16, and a flat surface 18b. In FIG. 14C, the microlens array diffusing surface 18a faces away from the collimator 16, and flat surface 18b faces the collimator. The diffuser 18 of FIGS. 14B or 14C may be the same or different optical material than that of the collimator 16. In either of these three cases the diffuser redistributes the collimated light from the collimator 16 portion of the device into the desired light intensity distribution for which the diffuser is designed. Diffuser orientation of FIG. 14B is preferable as it can provide better performance than that of diffuser orientations of FIGS. 14A and 14C, especially for diffusing non-collimated light at large angles ($\pm 15^\circ$, or 30° total) at

- 16 -

which TIR can occur at some rays at the diffusing surface of FIGS. 14A and 14C. Further, when an array 16 of collimator 16 is formed as a monolithic structure having common flange 32, as shown in FIG. 1, the diffuser 18 may be integrated directly along the top of the common flange along the array.

For applications where a single source does not provide sufficient luminance, the lighting device 10 of the present invention can be implemented with multiple light sources in a variety of array configurations, one of which was shown earlier in FIG. 1. For a one-dimensional array of light sources, individual integrated collimator-diffuser assemblies 17 (FIG. 14A) are placed over each light source 14, as shown in FIG. 15A, or collimator-diffuser assemblies of FIGS. 14B or 14C are used, as shown in FIG. 15B, in which adjacent collimators 16 are equally spaced from each other. The collimator 16 and diffuser 18 may be separate components with the diffuser as a single strip, plate, or sheet that is placed over the array of collimators 16, as shown in FIG. 15B. In the lighting devices of FIGS. 15A and 15B, the light sources 14 and collimators 16 are attached to a board or mounting fixture 38. To provide a housing for the lighting device 10 of FIG. 15B, two end caps 40 are each placed over one of the ends of the lighting device, where such end caps 40 each have a slot for receiving one end of diffuser 18. For purposes of illustration only one of the end caps 40 is shown. This configuration, like that of FIG. 1, has the advantage that the diffuser plate can be easily interchangeable based on the desired application and the required light distribution pattern. The collimators 16 of FIGS. 15A or 15B may have such mounting means 34 or 36 to attach collimator end 16a to board 38 with their respective lighting source 14. For purposes of illustration, the recess 22 and light source 14 for only one of the collimators 16 is shown in dotted lines in FIGS. 15A and 15B. Two-dimensional arrays of collimator-diffuser assemblies of FIGS. 14A, 14B, or 14C may similarly be formed along a board 38 with light sources 14.

In cases where the light sources 14 are closely spaced, the parabolic surface 24 of adjacent collimators 18 may merge partially together into a single monolithic structure, as shown in FIGS. 16A and 16B. Thus the best collimation perpendicular to the one-dimensional linear array is maintained while only slightly degrading the collimation along the array. The closer the light sources 14 are then the more the collimators 16 have to be merged or brought together thus reducing the amount of collimation in that direction.

When the light source spacing becomes too small to consider collimation along the axial direction of the array, the cross sectional profile of the collimator 16 in FIG. 3 can be

- 17 -

formed, such as extruded, along the length of the array as shown in FIG. 16B forming a one-dimensional collimator 16 (with or without end caps). This configuration collimates the light sources in the direction perpendicular to the array axis and is suitable for use in applications such as hallway or path lighting in which the diffuser is responsible for tailoring the illumination in one direction. The collimator 16 of FIG. 16B is linearly symmetric, rather than rotationally symmetric as in other figures.

In two-dimensional arrangements of light sources that are spaced far enough apart, individual collimator-diffuser assemblies 17 are possible in hexagonal arrangements as shown in FIG. 17 or other configurations, such as square, rectangular, or generally random. Again, the diffuser 18 can be incorporated directly into the collimator 16. Optionally, the diffuser may be a single plate or sheet spaced from the top surface of the array of collimators 16 and retained in a housing adapted to receive the board 38, collimators attached thereto, and diffuser 18.

For more closely spaced light sources 14 the individual collimators 16 may be merged into a single two-dimensional structure to provide a collimator structure, such as shown in FIGS. 18A and 18B, to provide a continuous top surface onto which diffuser 18 is integrated. Although a polygon shaped configuration is shown, other configurations may be provided, such as square, rectangular, or generally random. The collimator structure and diffuser may be a molded assembly. This type of configuration reduces the amount of collimation that can be achieved and reduces the light-shaping performance of the diffuser. However, as with all the light devices 10 described herein, it remains highly efficient.

From the foregoing description, it will be apparent that there has been provided lighting devices using small light sources. Variations and modifications in the herein described lighting devices in accordance with the invention will undoubtedly suggest themselves to those skilled in the art. Accordingly, the foregoing description should be taken as illustrative and not in a limiting sense.

Claims:

1. A lighting device comprising:
 - at least one light source;
 - at least one first optical element for partially collimating light from said light source to provide an angular distribution intensity narrower than said the light source;
 - at least one second optical element for diffusing light from said first optical element in which said second optical element has an optical diffusion property providing an angularly dependent output light intensity over an area in accordance with the angular distribution intensity of the partially collimated light from said first optical element to provide a predetermined illumination pattern.
2. The lighting device according to Claim 1 wherein said optical diffusion property of said second optical element provides an angularly dependent output light intensity complementary with the angular distribution intensity of said first optical element to enable said second optical element to provide said illumination pattern that is substantially uniform light over an angular range.
3. The lighting device according to Claim 1 wherein said second optical element has a microlens array structure to diffuse said angularly distribution of light intensity over an area.
4. The lighting device according to Claim 3 wherein said microlens structure represents a randomized microlens array structure.
5. The lighting device according to Claim 3 wherein said second optical element is a plate or sheet having a first surface having said microlens structure and a second surface.
6. The lighting device according to Claim 5 wherein said first surface of the second optical element faces and receives light from said first optical element.

- 19 -

7. The lighting device according to Claim 5 wherein said first surface of the second optical element faces away from said first optical element, and said second faces and receives light from said first optical element.

8. The lighting device according to Claim 1 wherein said second optical element is integrated along a surface of said first optical element to enable said second optical element to diffuse the partially collimated light.

9. The lighting device according to Claim 1 wherein said second optical element spaced from said first optical element.

10. The lighting device according to Claim 1 wherein said light source is one of an LED, remotely illuminated optical fiber, halogen source, OLED, or laser.

11. The lighting device according to Claim 1 further comprising:
a plurality of ones of said light source;
a plurality of ones of said first optical element arranged in an array each to receive light from said plurality of ones of said light source; and
said second optical element diffuses the light from said plurality of ones of said first optical element.

12. The lighting device according to Claim 11 further comprising a plurality of one of said second optical element each disposed for diffusing light from each one of said plurality of ones of said first optical element.

13. The lighting device according to Claim 11 wherein said second optical element is sized to diffuse light received from said plurality of ones of said first optical element.

14. The lighting device according to Claim 11 wherein said array is a two-dimensional array.

15. The lighting device according to Claim 11 wherein said array is a one-

- 20 -

dimensional array.

16. The lighting device according to Claim 11 wherein said plurality of ones of said first optical element are formed in said array as a monolithic structure.

17. The lighting device according to Claim 16 wherein said plurality of ones of said first optical element each have an end for exiting said partially collimated light, and each of said plurality of ones of said first optical element has a flange at said connected to provide said monolithic structure.

18. The lighting device according to Claim 16 wherein said first optical elements having parabolic sides merge with each other to form said monolithic structure.

19. The lighting device according to Claim 1 wherein first optical element comprises:

a parabolic rotationally symmetric body having a flat light exiting end and a light entering end with a cavity having spherical sides and hyperbolic or elliptic center portion; and
a parabolic outer surface for total internally reflecting light received via said spherical sides of said cavity toward said light exiting end, in which light received by said center portion is collimated toward said light exiting end.

20. The lighting device according to Claim 19 wherein said center portion in hyperbolic shaped to provide a lens facing said light source.

21. The lighting device according to Claim 19 wherein said center portion in elliptic shaped to provide a lens facing away from said light source.

22. The lighting device according to Claim 19 wherein said light source is centered at the entrance of said cavity.

23. The lighting device according to Claim 19 wherein said cavity is filled with a medium for mounting said light source to said first optical element.

- 21 -

24. The lighting device according to Claim 19 wherein said body extends at said light entering end to provide a flat base.

25. The lighting device according to Claim 19 wherein said body extends at said light entering end to provide a collar ring or one or more posts.

26. The lighting device according to Claim 19 wherein said cavity is filled with a material having a lower numerical aperture than the material of said first optical element.

27. The lighting device according to Claim 19 wherein said cavity is filled with a material having a higher numerical aperture than the material of said first optical element, and said central portion is elliptical.

28. The lighting device according to Claim 1 wherein said first optical element comprises:

a parabolic linearly symmetric body having a flat light exiting end and a light entering end with a cavity having spherical sides and hyperbolic or elliptic center portion; and

a parabolic outer surface for total internally reflecting light received via said spherical sides of said cavity toward said light exiting end, in which light received by said center portion is collimated toward said light exiting end.

29. The lighting device according to Claim 1 further comprising a housing having said light source, said first optical element, and said second optical element.

30. The lighting device according to Claim 29 wherein said housing has a low profile.

31. A collimating optical element comprising:

a parabolic body having a flat light exiting end and a light entering end with a cavity having spherical sides and hyperbolic or elliptic center portion; and

a parabolic outer surface for total internally reflecting light received via said spherical sides of said cavity toward said light exiting end, in which light received by said center portion is collimated toward said light exiting end.

- 22 -

32. The collimating optical element according to Claim 31 wherein said parabolic body is rotationally symmetric.

33. The collimating optical element according to Claim 31 wherein said parabolic body is linearly symmetric.

34. A diffusing optical element for producing substantially uniform light from partially collimated illumination comprising:
a body having a microlens array structure capable of distributing illumination intensity from received partially collimated light that is substantially uniform over an angular range.

35. The diffusing optical element according to Claim 34 wherein said microlens structure represents a randomized microlens array structure.

36. A luminaire comprising:
a plurality of light sources disposed on a board;
an array of first optical elements each for substantially collimating light from one of said light sources; and
a second optical element for diffusing light from said array of first optical elements, in which said second optical element provides an angularly dependent output light intensity in accordance with the angular distribution intensity of said first optical elements to enable said second optical element to output a predetermined light pattern;
a housing having said array of first optical elements, said board having said light sources each disposed to provide light to one of said first optical elements, and said second optical element.

37. The luminaire according to Claim 36 wherein said housing is of a low profile.

38. The luminaire according to Claim 36 wherein said array represent one of a one or two-dimensional array.

- 23 -

39. The luminaire according to Claim 36 wherein said light sources are each one of an LED, remotely illuminated optical fiber, halogen source, OLED, or laser.

40. The luminaire according to Claim 36 wherein said second optical element is a plate or sheet having a surface with a microlens structure to provide said angularly dependent output light intensity in accordance with the angular distribution intensity of said first optical elements.

41. The luminaire according to Claim 36 wherein each of said first optical elements comprise:

a parabolic body having a flat light exiting end and a light entering end with a cavity having spherical sides and hyperbolic or elliptic center portion; and

a parabolic outer surface for total internally reflecting light received via said spherical sides of said cavity toward said light exiting end, in which light received by said center portion is collimated toward said light exiting end.

42. The luminaire according to Claim 36 further comprising a plurality of ones of said second optical elements each capable of diffusing light to provide a different predetermined light pattern, and said plurality of ones of said second optical elements being interchangeable with each other in said housing.

43. The luminaire according to Claim 36 wherein one or more of said first optical elements of said array are formed as a monolithic structure.

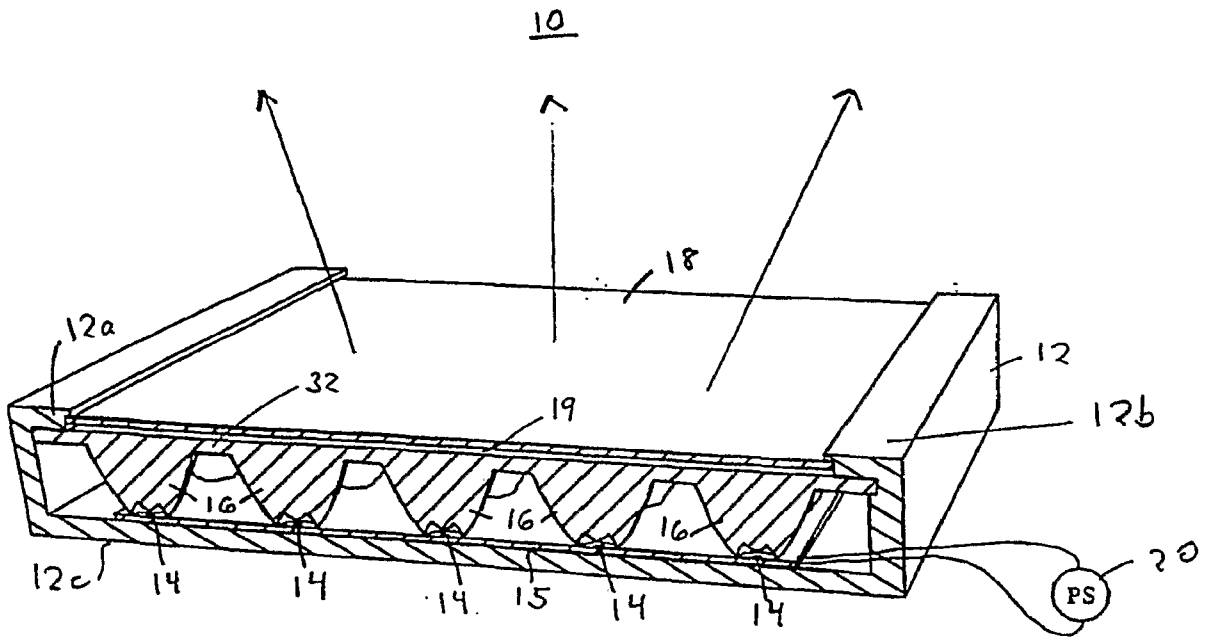


FIG. 1

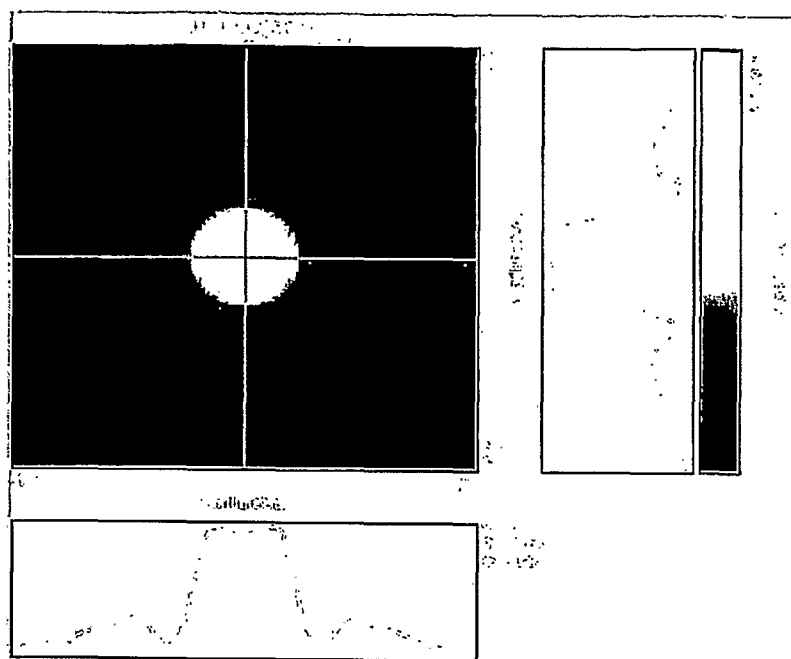


FIG. 4

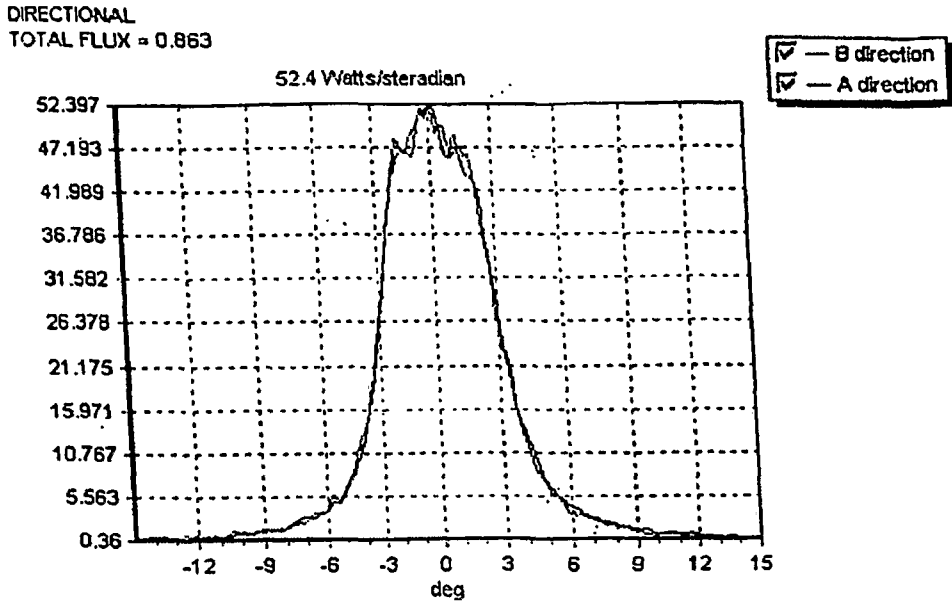


FIG 5

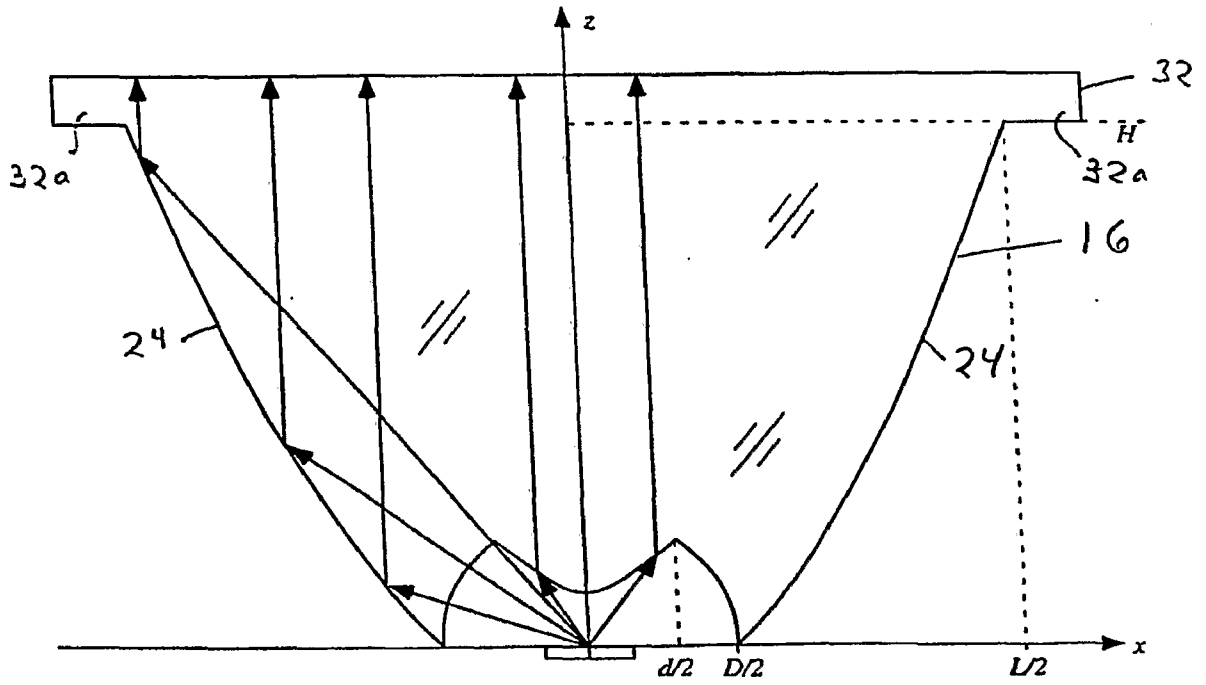


FIG 6

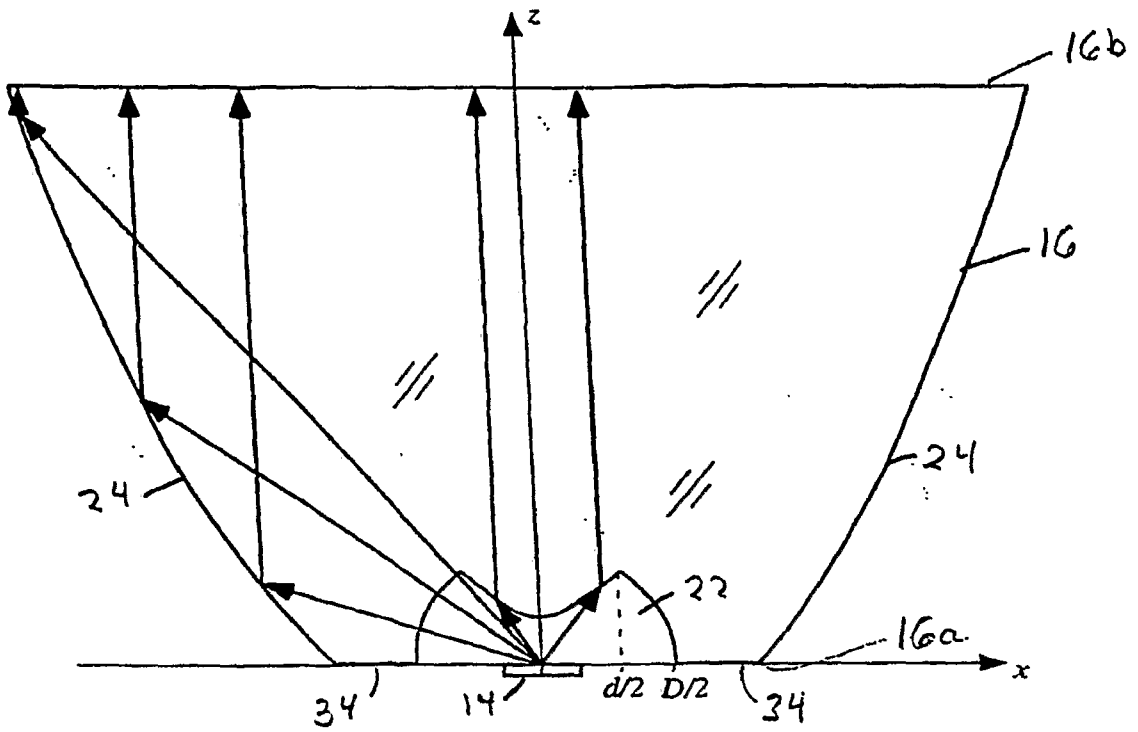


FIG 7

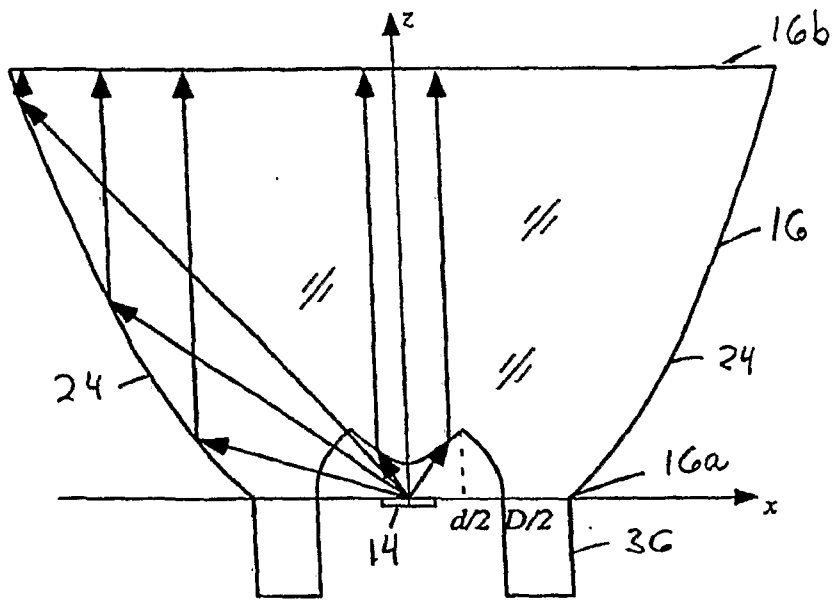


FIG 8

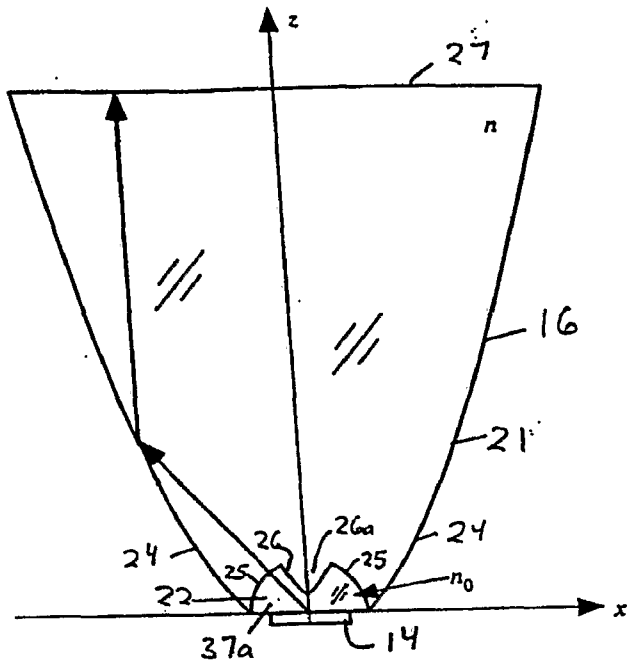


FIG 9

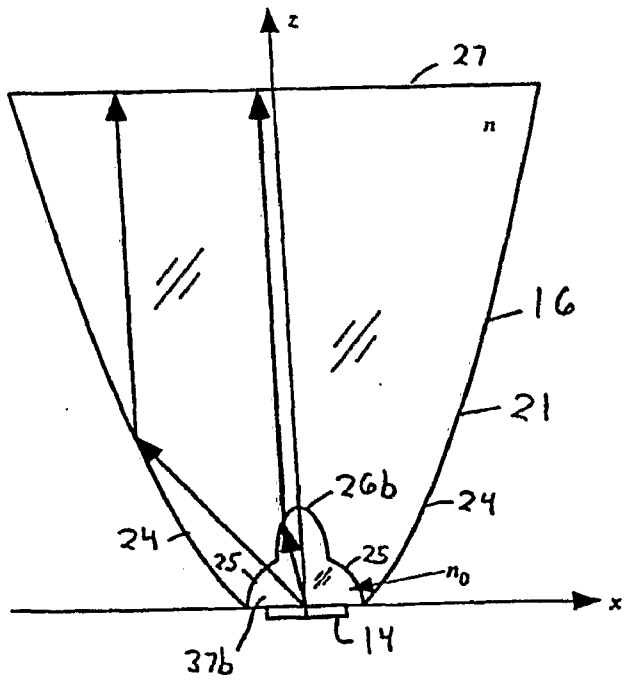


FIG 10

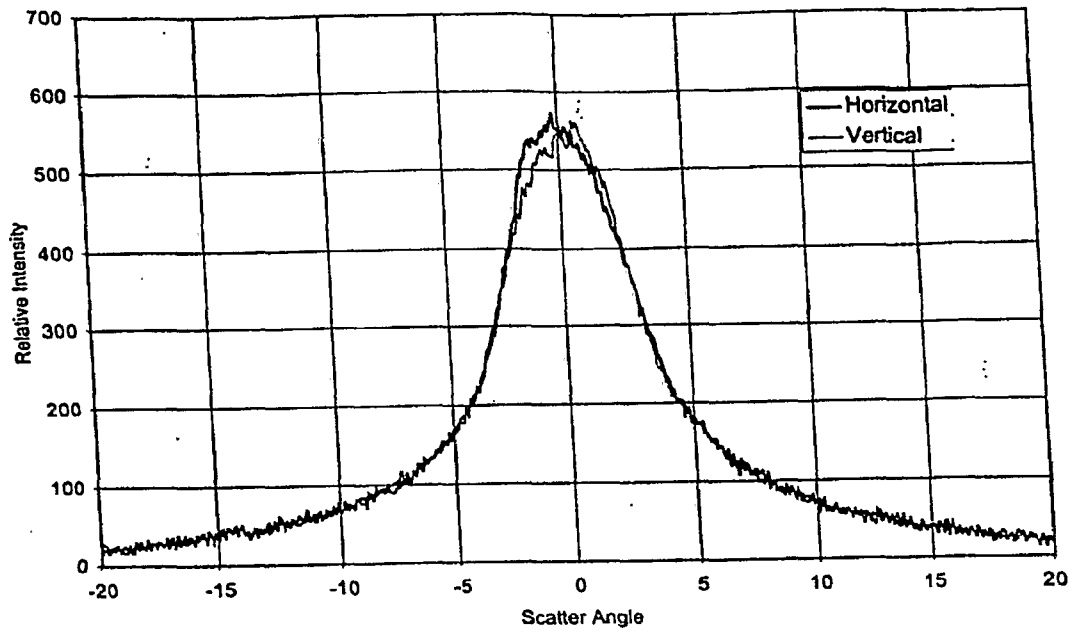


FIG 11

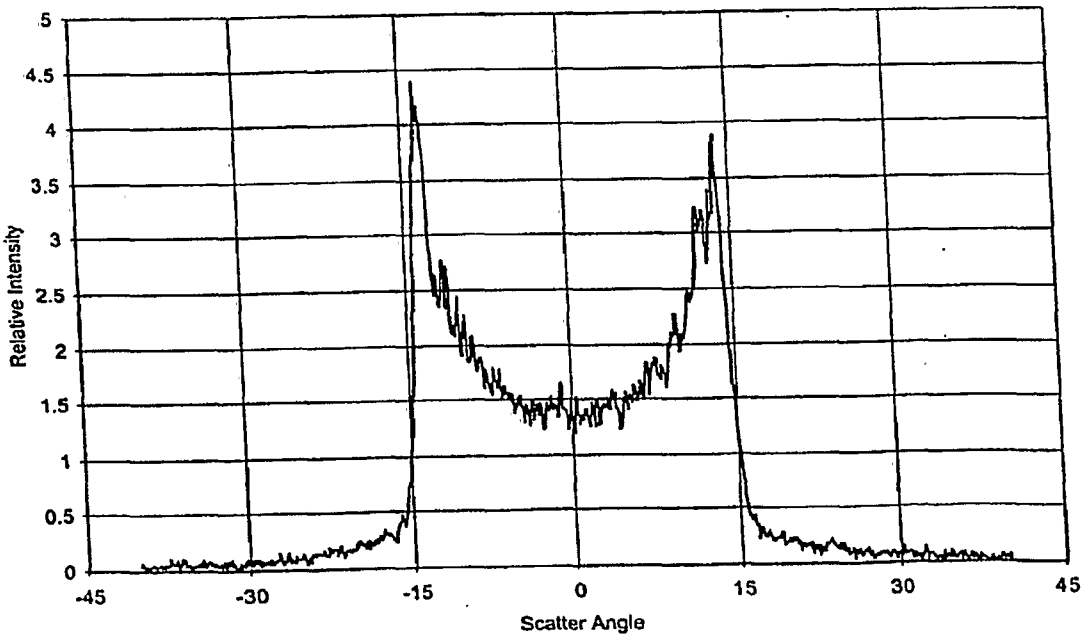


FIG 12

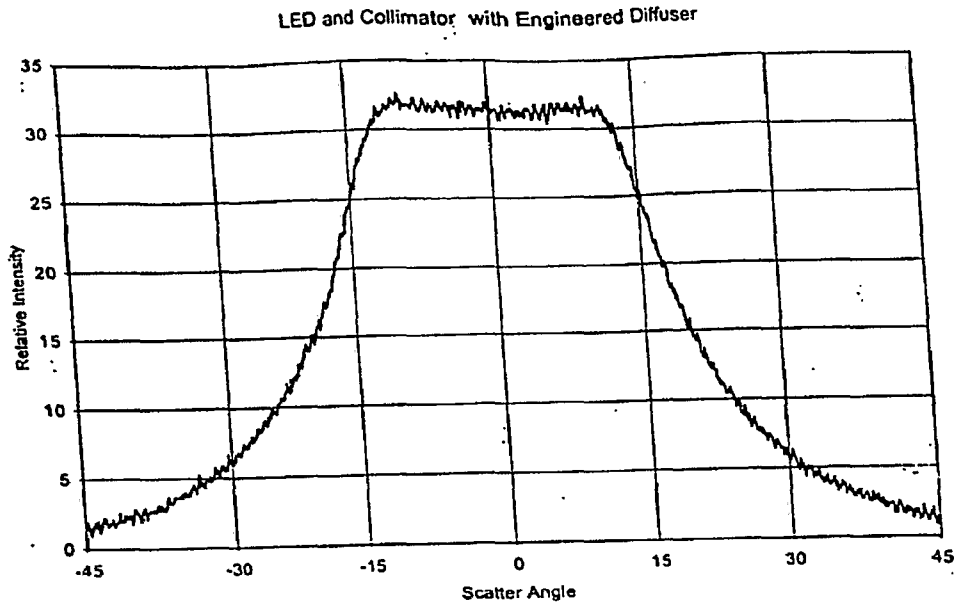


FIG 13

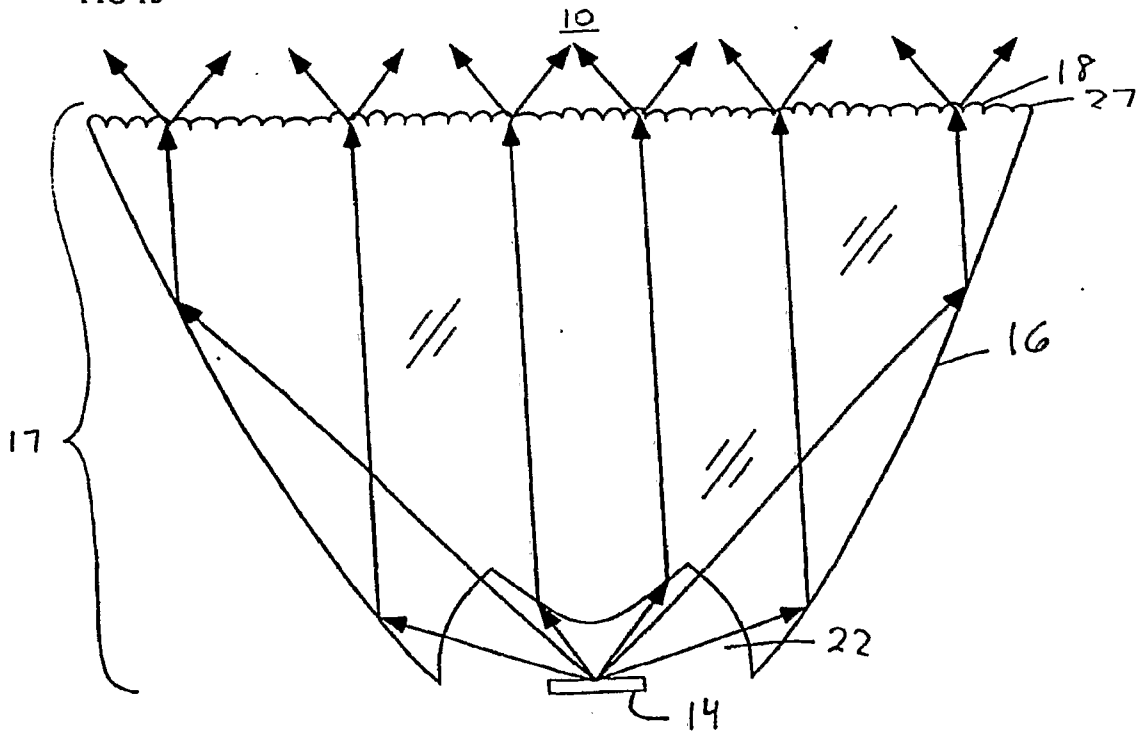


FIG 14A

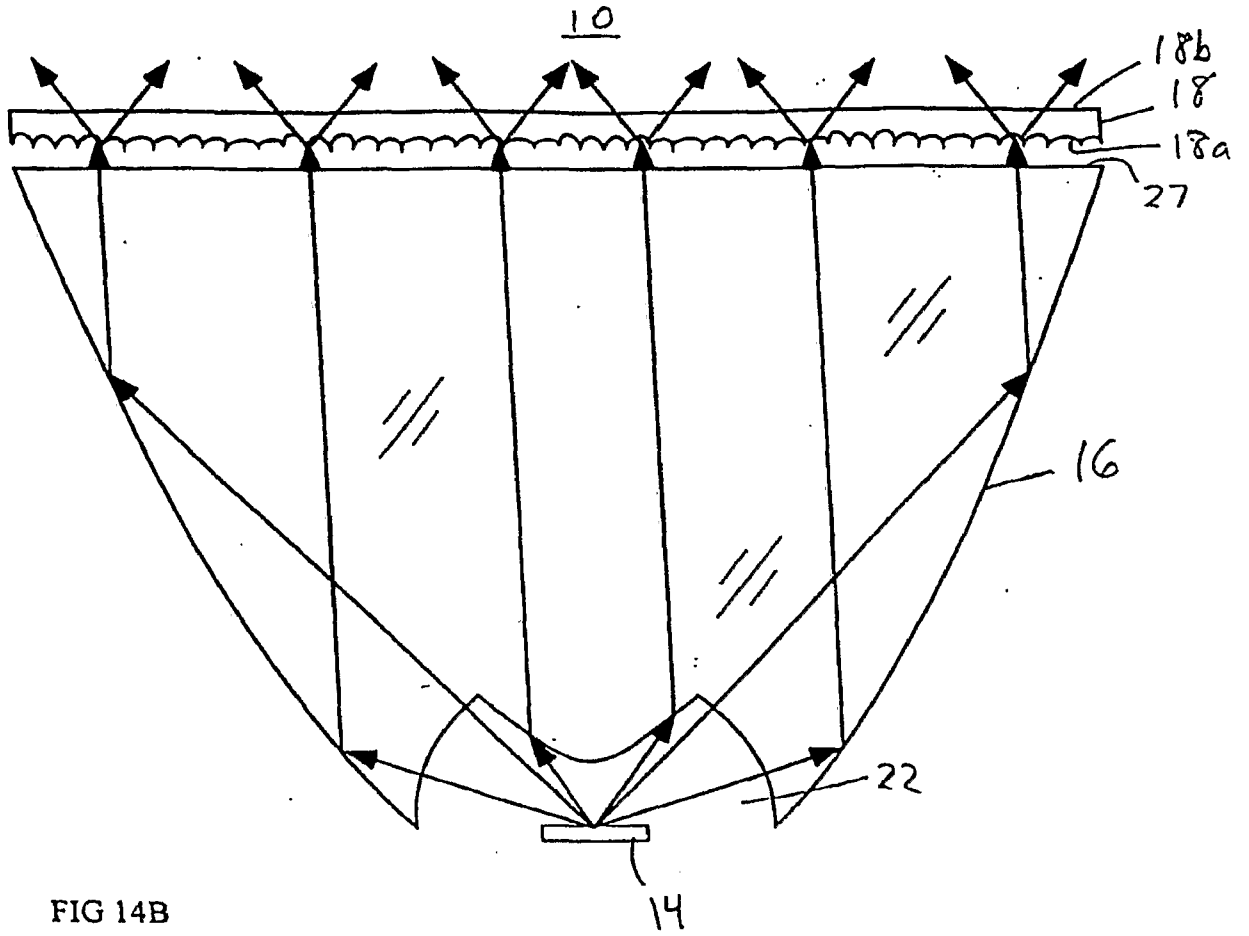


FIG 14B

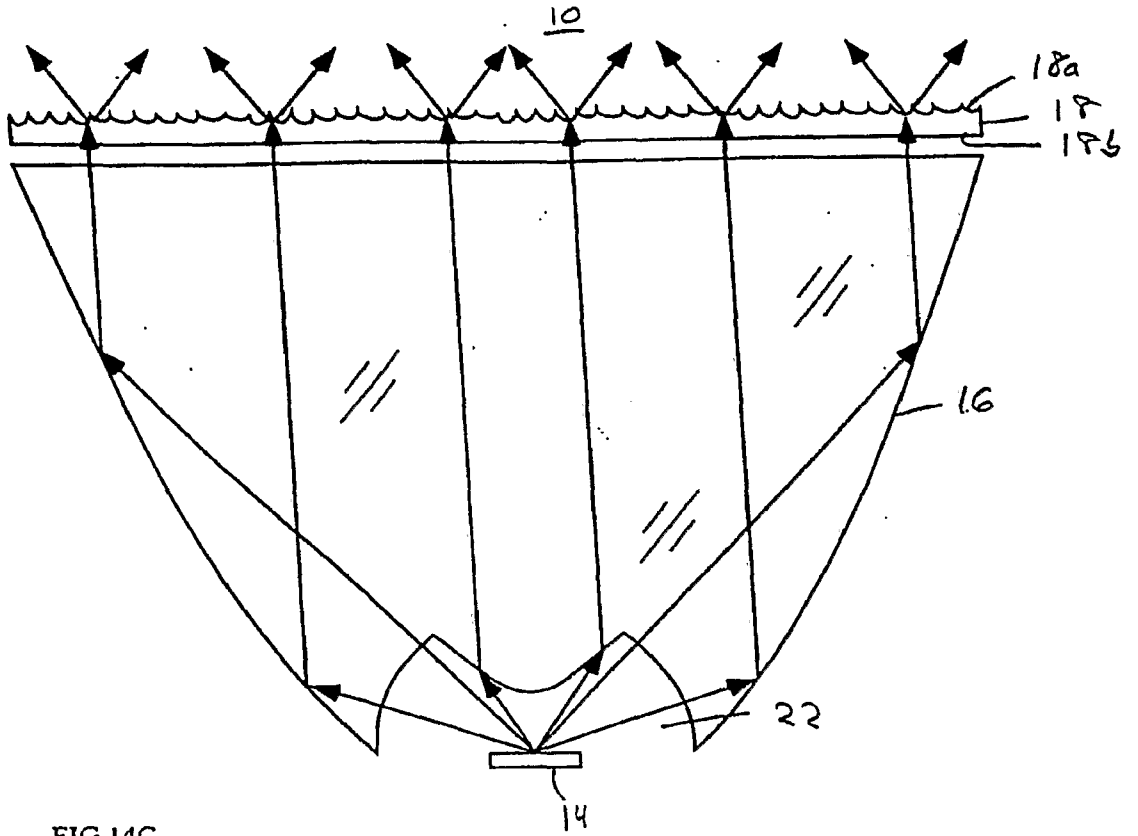


FIG 14C

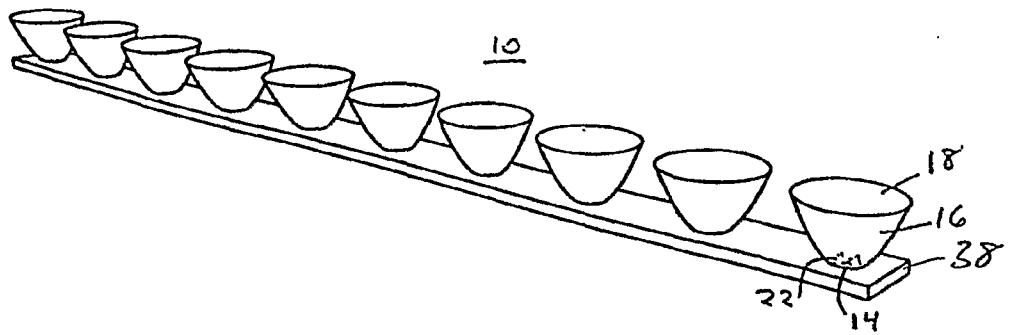


FIG 15A

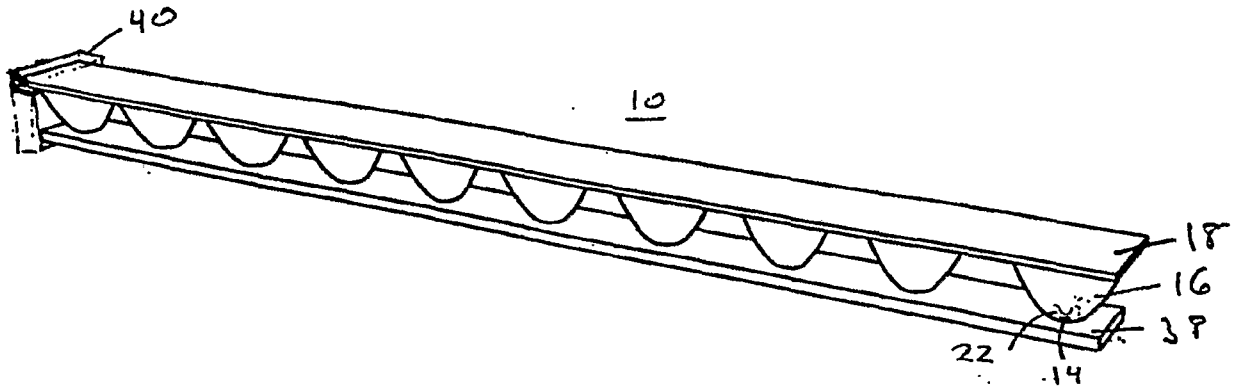


FIG 15B

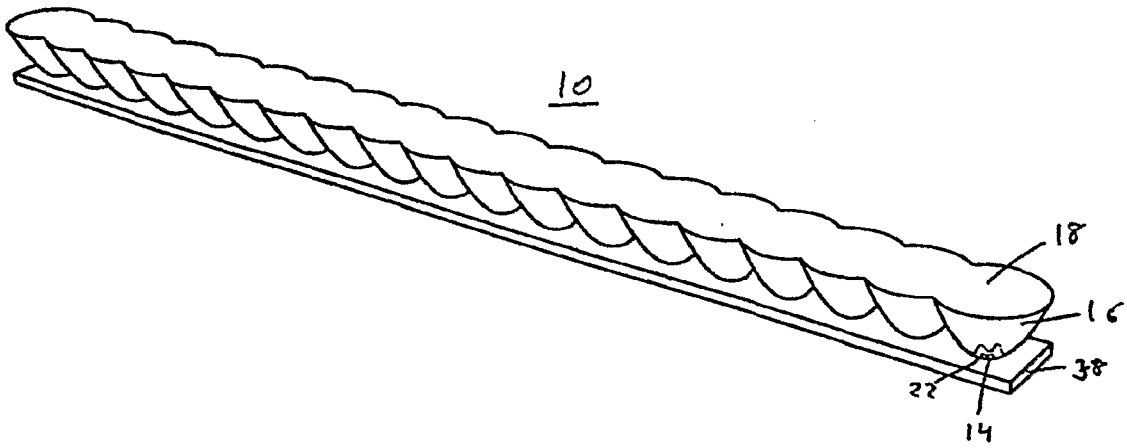


FIG 16A

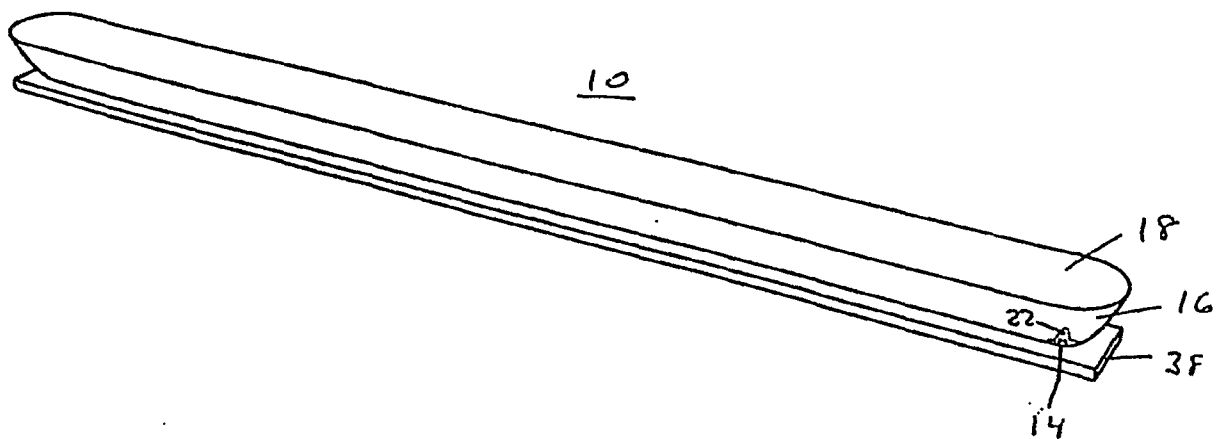


FIG 16B

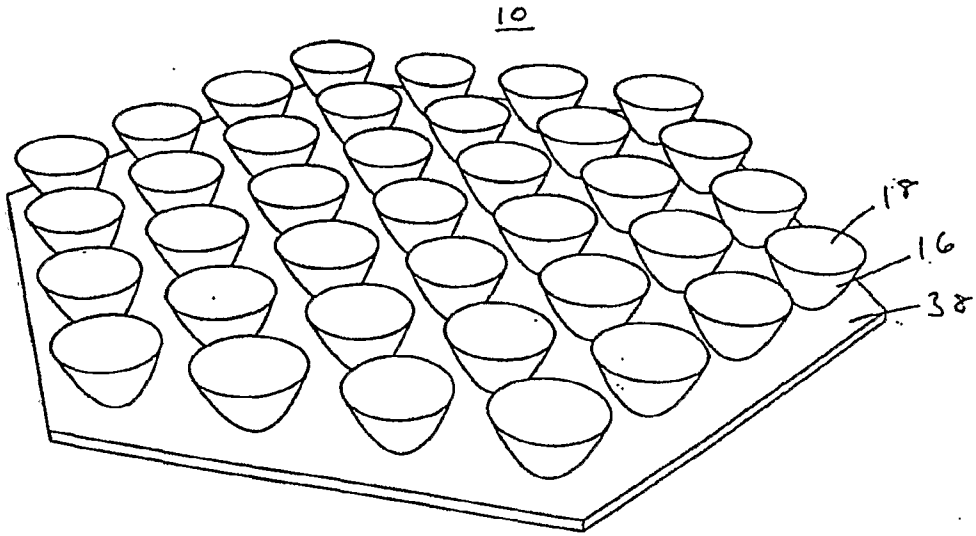


FIG. 17.

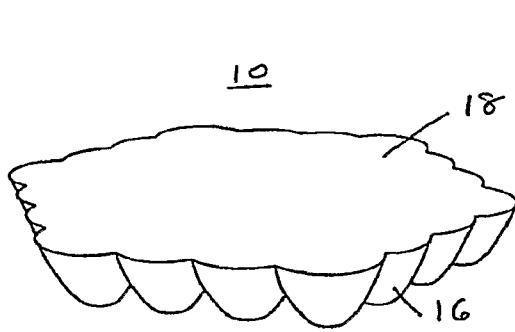


FIG. 18A

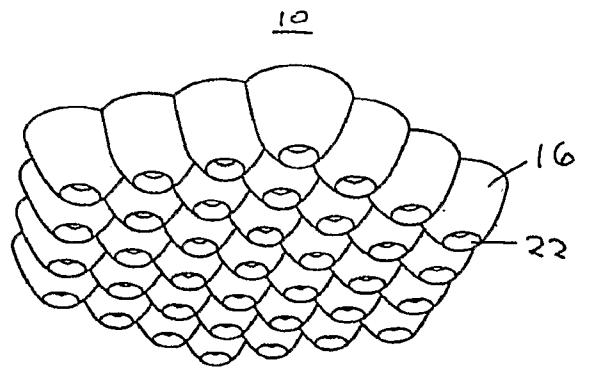


FIG. 18B