

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 September 2002 (26.09.2002)


PCT

(10) International Publication Number
WO 02/074377 A1

- (51) International Patent Classification⁷: **A61M 16/04** (74) Agent: **BLOMBERG & CO., SKANDINAVISKA**;
Patentbyrå AB, Box 14031, S-104 40 Stockholm (SE).
- (21) International Application Number: PCT/SE02/00523
- (22) International Filing Date: 19 March 2002 (19.03.2002)
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data:
0100953-9 19 March 2001 (19.03.2001) SE
- (71) Applicant (for all designated States except US): **AB FOG-
LESS INTERNATIONAL** [SE/SE]; Box 4406, S-165 15
Hässelby (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **BLOMQUIST, Inge**
[SE/SE]; Storgatan 26, S-567 32 Vaggeryd (SE).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: BREATHING-SPEAKING VALVE

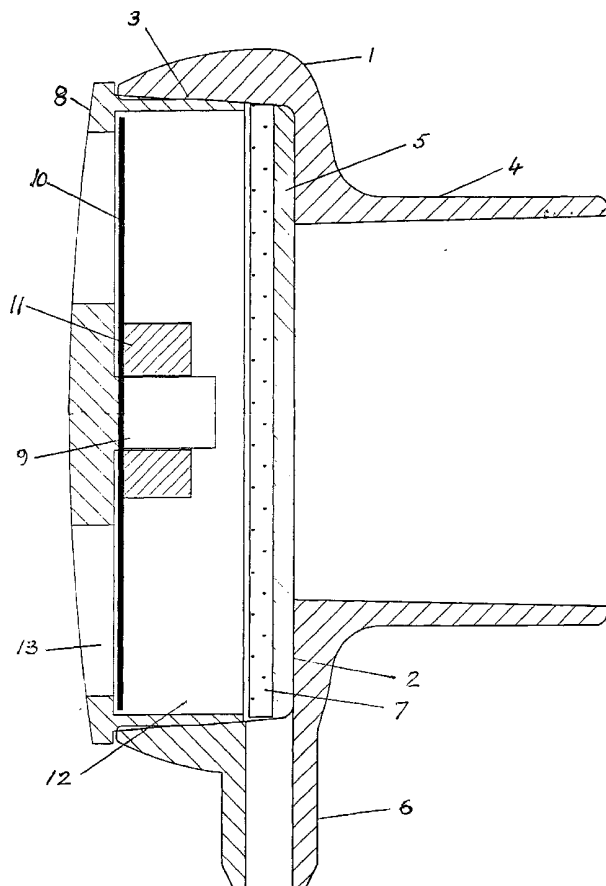

(57) Abstract: The present invention relates to a breathing-speaking valve intended to be used as a speaking valve of patients requiring filtration of inspiration air inhaled via tracheostomas and are mounted on a tracheal tube, which breathing-speaking valve includes a valve housing (1) intended to be attached to the tracheal tube and which comprises a check valve in the form of a membrane (10), which check valve opens when the patient inhales and closes at expiration and filter (7) for filtration of the inspiration air, which filter is located within this membrane, and optional, a nipple (6) for connection to a oxygen apparatus for oxygen delivery to the inspiration air whereby the filter (7) is laying against a number of ribs (5) located in the bottom (2) of the valve housing (1) and a nipple (6) for connection to a oxygen apparatus is mounted substantially perpendicular to the longitudinal direction of the valve housing (1) by the bottom of the valve housing (1), and said nipple (6) opens into the space (14) defined by the ribs (5) and the bottom (2) of the valve housing (1) and also opens into the filter (7) substantially parallel to the extension of the filter, whereby the distribution of the inspiration air and the optional oxygen delivery into the tracheal tube takes place in said space (14) and in the filter (7).



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Breathing-speaking valve

The technical field of the invention

The present invention relates to a breathing valve intended to be used as a speaking valve for patients requiring filtration of inspiration air inhaled via tracheostomas and are mounted on a tracheal tube, which breathing-speaking valve includes a valve housing intended to be attached to the tracheal tube and which comprises a check valve in the form of a membrane, which opens when the patient inhales and closes when the patient exhales and a filter for filtration of the inspiration air, which filter is located within this membrane.

Description of the background art

Different types of solutions for breathing valves including membranes are known to the above mentioned art to make the valve useful as a speaking valve. The valves are large and clumsy and therefore difficult for the user to hide behind e.g. collars, scarves etc. and the valves often have difficulties to distribute the air evenly through the filter. As an example patent SE B 462 367 may be mentioned. Said patent discloses a breathing valve intended to be used as a speaking valve having a nipple for connection to an oxygen apparatus. This breathing valve is awkward under certain circumstances and has the disadvantage that it does not always evenly distribute and mix the inspiration air with oxygen when inspiring; the filter can disturb the delivery of oxygen, as the nipple for oxygen is situated behind the filter and the filter is easily pressed down against the bottom of the valve housing in the inspiration step.

Further, the respiratory passages are very often dried up when breathing only through the valve. The expiration air can not damp the filter of the valve when breathing through natural respiratory passages and one is able to speak.

Brief disclosure of the inventive concept

An object of the present invention is to eliminate the above mentioned drawbacks of breathing valves and to provide a breathing valve evenly distributing the inspiration air and optional oxygen delivery by the filter and enabling external damp to be supplied to the valve and thereby prevent drying up of the respiratory passages.

According to the inventive concept the above mentioned problem is solved by placing the filter against a number of ribs located in the bottom of the valve housing and a nipple for connection to an oxygen apparatus for oxygen delivery to the inspiration air and mounted substantially perpendicular to the longitudinal direction of the valve housing by the bottom of the valve housing, and said nipple opens into the space defined by the ribs and the bottom of the valve housing and also opens into the filter parallel to the extension of the filter, whereby the distribution of the inspiration air and the optional oxygen delivery into the tracheal tube takes place in said space and in the filter.

According to the inventive concept additionally a breathing valve is obtained which is reliable and durable, humidifying the inspiration air, easy to clean, small and handy

and gives the user a higher quality of life as it can be easily hidden underneath a collar, a shawl or the like.

Brief description of the drawings

Figure 1 is a sectioned side view of a breathing valve according to the invention

Detailed description of a preferred embodiment of the invention

Figure 1 shows the valve housing 1 of the breathing valve according to the invention with bottom 2, walls 3, an tubular stub 4 connectable to a tracheal tube, a number of ribs 5 in the bottom 2 of the valve housing and a nipple 6 for oxygen delivery. The stud has tapered design to fit common tracheal tubes.

From Fig.1 it is clear how a filter 7 is arranged in the bottom 2 of the valve housing 1, right in front of a nipple 6 for oxygen delivery, and on the ribs 5 which is extending from the centre valve housing 1 and radiate to its periphery. The diameter of the nipple 6 is between 1,5 and 5,5 mm. The height of the ribs 5 are between 0,5 and 3 mm, preferably 1 mm. A cap 8 with a centre neck 9 for fastening of a membrane 10 and a membrane holder 11 is arranged over this membrane 10 over the opening 12 of the valve housing 1. The cap 8 has a number of openings 13 through which the inspiration air flows and will easily open the membrane 10 which is a thin, ductile and silent working silicon membrane 10. When exhaling the membrane 10 is closing the valve and the exhaling is done through the natural respiratory passages and thus the user is able to speak in a common way. The filter 7 of the valve is whole or partly made of e.g. electrostatic polymer filter which is a very thin material, about 1-5 mm, preferably 2 mm thick and which is cleaning the inspiration air on a particular effective way of particles with a size of 0,3-1,0 micron and which filter is silent during use. The filter can also wholly or partly be made of a conventional filter of cell plastic, paper, fibre material or the same. The valve housing 1 and the cap 8 have arched areas and have a total length of the breathing valve of about 22 mm of which length only 10 mm extends out from the tracheal tube.

When the air, which inhales via the valve, is dry due to the fact that is not humidified by the mucous membrane, it is suitably with a humidifier which e.g. is able to be connected to an opening in the oxygen nipple or to an opening, channel or the like in the bottom of the valve housing or in the walls or in any other way to supply damp to the filter and in this way be able to increase and/or regulate the humidity of the inspiration air. The filter is acting as the mucous membrane in e.g. the nose, which humidifies the inhaled air when inhaling through the nose. If somebody is inhaling and exhaling through a valve where the membrane is taken away, the valve is acting as a air humidifier and can advantage be used also in the night. The filter is absorbing moisture from the expiration air and leave it to the inspiration air and counteracts in this way drying up the bronchial tubes. Even here a moisture of the inhaled air is suitable, e.g. through a special prepared filter to give a extra moisture to the inspiration air.

By night the valve can also be used only as a breathing valve with a humidifier by taking the membrane away, or it can also be delivered without a membrane and only be used as a humidifier.

Breathing-speaking valve can also be mounted on the tracheal tube by the fact that the tubular stud has a shorter longitudinal direction and can be shaped as a bayonet socket, quick coupling of any suitable kind or the same to simplify the arrangement on the tracheal tube and to shorten the longitudinal direction of the valve.

It is also possible to make the valve in one piece with a hose, an inner cannula (tube), which is moved into a outer tracheal tube and is mounted at this tracheal tube instead of a tubular stud which is mounted at a tracheal tube.

The filter, the membrane, the cap and the valve housing can easily be replaced and be cleaned as required.

It will be noted that the invention naturally can be modified in many ways within the scope of the appended claims.

Claims

1. Breathing-speaking valve intended to be used as a speaking valve for patients requiring filtration of inspiration air inhaled via tracheostomas and are mounted on a tracheal tube, which breathing-speaking valve includes a valve housing (1) intended to be attached, via its bottom (2), to the tracheal tube and which comprises a check valve in the form of a membrane (10), which check valve opens when the patient inhales and closes when the patient exhales and a filter (7) for filtration of the inspiration air, which filter is located within this membrane (10), characterized in that the filter (10) is laying against a number of ribs (5) located in the bottom (2) of the valve housing (1) and a nipple for connection to an oxygen apparatus for oxygen delivery to the inspiration air and mounted substantially perpendicular to the longitudinal direction of the valve housing (1) by the bottom of the valve housing (1), and said nipple (6) opens into the space (14) defined by the ribs (5) and the bottom (2) of the valve housing (1) and also opens into the filter (7) parallel to the extension of the filter (7), whereby the distribution of the inspiration air and the optional oxygen delivery into the tracheal tube takes place in said space (14) and in the filter (7).
2. Breathing valve according to claim 1, characterized in that an external humidifier is mounted to deliver humidity to the filter (7).
3. Breathing valve according to claim 2, characterized in that the humidifier is connected to the oxygen nipple (6) or to a special nipple on this oxygen nipple (6).
4. Breathing valve according to claim 1, characterized in that the thickness of the filter (7) is between 0,5 and 3,0 mm, preferably 2 mm.
5. Breathing valve according to claim 1, characterized in that height of the ribs (5) are between 0,5 and 3,0 mm, preferably 1 mm.
6. Breathing valve according to claim 1, characterized in that the nipple (6) for oxygen delivery have a diameter between 1,5 and 5,5 mm.

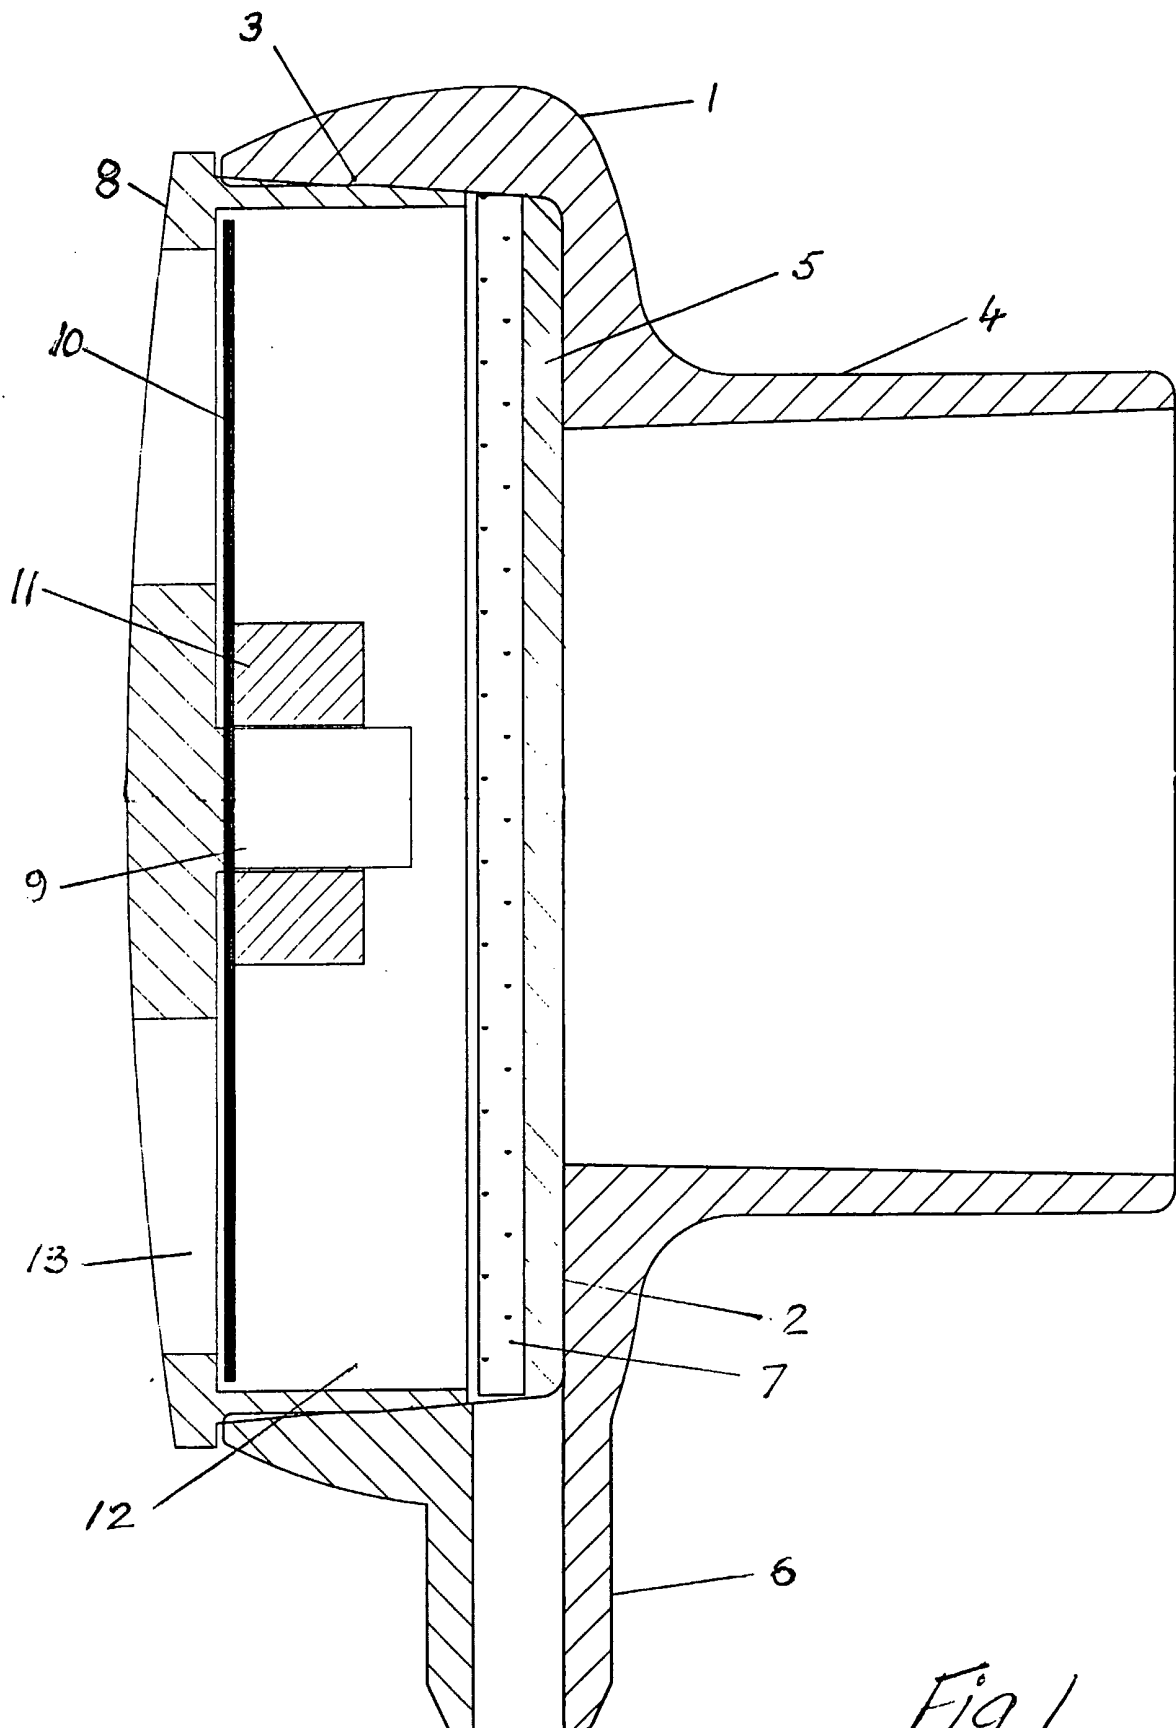


Fig 1

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 02/00523

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: A61M 16/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	SE 462367 B (RESPAID AB), 18 June 1990 (18.06.90) --	1-6
A	WO 9701366 A1 (RESPAID AB), 16 January 1997 (16.01.97) --	1-6
A	US 5487382 A (R. BEZICOT), 30 January 1996 (30.01.96) --	1-6
A	US 5606966 A (R.J.M. SMITH), 4 March 1997 (04.03.97) -- -----	1-6

☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

13 June 2002

Date of mailing of the international search report

27 -06- 2002

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Åke Olofsson / MRo
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

01/05/02

International application No.

PCT/SE 02/00523

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
SE	462367	B	18/06/90	BR	8806995 A	31/10/89
				DE	3900183 A,C	03/08/89
				DK	720088 A	17/02/89
				FI	87607 B,C	15/10/92
				FI	885890 A	20/12/88
				GB	2214089 A,B	31/08/89
				GB	8901229 D	00/00/00
				NO	172365 B,C	29/03/93
				NO	885748 A	23/12/88
				SE	8800203 A	23/07/89
				US	4971054 A	20/11/90

WO	9701366	A1	16/01/97	SE	9502354 A	29/12/96

US	5487382	A	30/01/96	AT	138273 T	15/06/96
				AU	663900 B	26/10/95
				AU	2948592 A	07/06/93
				CA	2122256 A	13/05/93
				DE	69211011 D,T	05/12/96
				DK	610413 T	02/09/96
				EP	0610413 A,B	17/08/94
				SE	0610413 T3	
				ES	2087561 T	16/07/96
				FR	2683150 A,B	07/05/93
				GR	3020547 T	31/10/96
				JP	3176370 B	18/06/01
				JP	7500518 T	19/01/95
				MX	9206244 A	01/05/93
				PL	169888 B	30/09/96
				RU	2089228 C	10/09/97
				WO	9308860 A	13/05/93
				ZA	9208415 A	14/05/93
				FR	2686982 A,B	06/08/93
				GB	2263767 A,B	04/08/93
				GB	9301081 D	00/00/00
				US	5349195 A	20/09/94

INTERNATIONAL SEARCH REPORT

Information on patent family members

01/05/02

International application No.

PCT/SE 02/00523

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	5606966	A	04/03/97	AU	670110 B	04/07/96
				AU	4511193 A	31/01/94
				CA	2139669 A	20/01/94
				DE	69309064 D,T	25/09/97
				DE	69309276 D,T	14/08/97
				EP	0649321 A,B	26/04/95
				SE	0649321 T3	
				EP	0649333 A,B	26/04/95
				SE	0649333 T3	
				GB	9214716 D	00/00/00
				JP	3016861 B	06/03/00
				JP	8501947 T	05/03/96
				JP	8501948 T	05/03/96
				US	5666950 A	16/09/97
				WO	9401158 A	20/01/94
				WO	9401199 A	20/01/94
				AT	157936 T	15/09/97
				AU	673888 B	28/11/96
				AU	5864694 A	15/08/94
				BR	9406192 A	09/01/96
				CA	2151842 A	04/08/94
				CN	1116841 A	14/02/96
				DE	69405536 D,T	22/01/98
				EP	0680409 A,B	08/11/95
				GB	9301429 D	00/00/00
				JP	8507005 T	30/07/96
				US	5658847 A	19/08/97
				WO	9416903 A	04/08/94
