



US009325115B2

(12) **United States Patent**  
**Zhang et al.**

(10) **Patent No.:** **US 9,325,115 B2**  
(45) **Date of Patent:** **Apr. 26, 2016**

(54) **ELECTRICAL CONNECTOR**

USPC ..... 439/35, 660, 353, 374, 638, 653  
See application file for complete search history.

(71) Applicant: **Drapho Electronics Technology Co., Ltd.**, Kunshan, Jiangsu (CN)

(72) Inventors: **Ming Zhang**, Jiangsu (CN); **Zhihong Fang**, Jiangsu (CN); **Zhuping Wu**, Jiangsu (CN)

(73) Assignee: **DRAPHO ELECTRONICS TECHNOLOGY CO., LTD.**, Kunshan, Jiangsu (CN)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **14/226,330**

(22) Filed: **Mar. 26, 2014**

(65) **Prior Publication Data**

US 2014/0295693 A1 Oct. 2, 2014

(30) **Foreign Application Priority Data**

Mar. 29, 2013 (CN) ..... 2013 2 0153379 U

(51) **Int. Cl.**  
**H01R 13/64** (2006.01)  
**H01R 12/70** (2011.01)  
**H01R 24/62** (2011.01)  
**H01R 12/71** (2011.01)

(52) **U.S. Cl.**  
CPC ..... **H01R 13/64** (2013.01); **H01R 12/7088** (2013.01); **H01R 24/62** (2013.01); **H01R 12/716** (2013.01)

(58) **Field of Classification Search**  
CPC ..... H01R 12/716; H01R 12/712; H01R 13/6658; H01R 27/07

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,344,414 B2 *	3/2008	Kuo	.....	439/620.04
7,381,068 B1 *	6/2008	Lin et al.	.....	439/136
7,430,801 B2 *	10/2008	Iida et al.	.....	29/883
7,758,374 B2 *	7/2010	Yu et al.	.....	439/493
8,721,353 B2 *	5/2014	Xu et al.	.....	439/108
2005/0059296 A1 *	3/2005	Wang	.....	439/541.5
2012/0196490 A1 *	8/2012	De Bleeck	.....	H01R 43/16 439/681
2013/0309912 A1 *	11/2013	Tai et al.	.....	439/660
2014/0194008 A1 *	7/2014	Locker et al.	.....	439/638

\* cited by examiner

*Primary Examiner* — Amy Cohen Johnson



*Assistant Examiner* — Oscar C Jimenez

(74) *Attorney, Agent, or Firm* — Locke Lord LLP; Tim Tingkang Xia, Esq.

(57) **ABSTRACT**

An electrical connector includes an insulative housing, a plurality of terminals retained in the insulative housing. The insulative housing has a receiving room and a mating part received in the receiving room, the mating part defines a mating hole and a pair of receiving grooves extending rearward on two lateral sides of the mating hole. The terminals include a detecting terminal received in the mating hole and a pair of power terminals received in the receiving grooves. The mating part further defines a pair of guiding surfaces on two sides of the mating hole and a pair of stiffening ribs on two sides of the receiving groove, which can reduce the mating force during the mating process and protect the mating part.

**9 Claims, 7 Drawing Sheets**

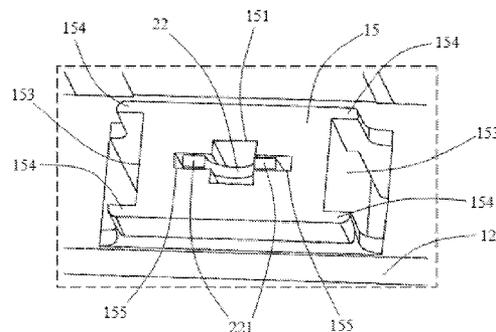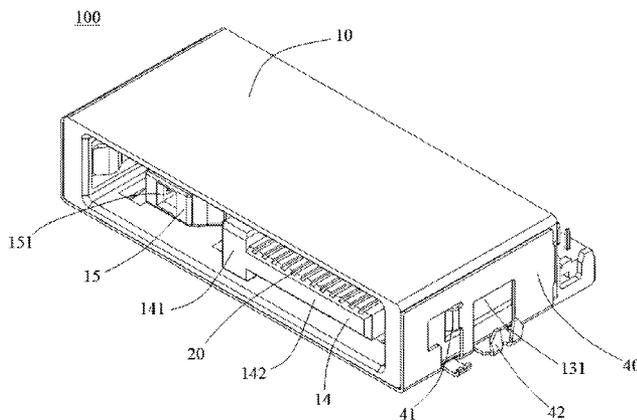

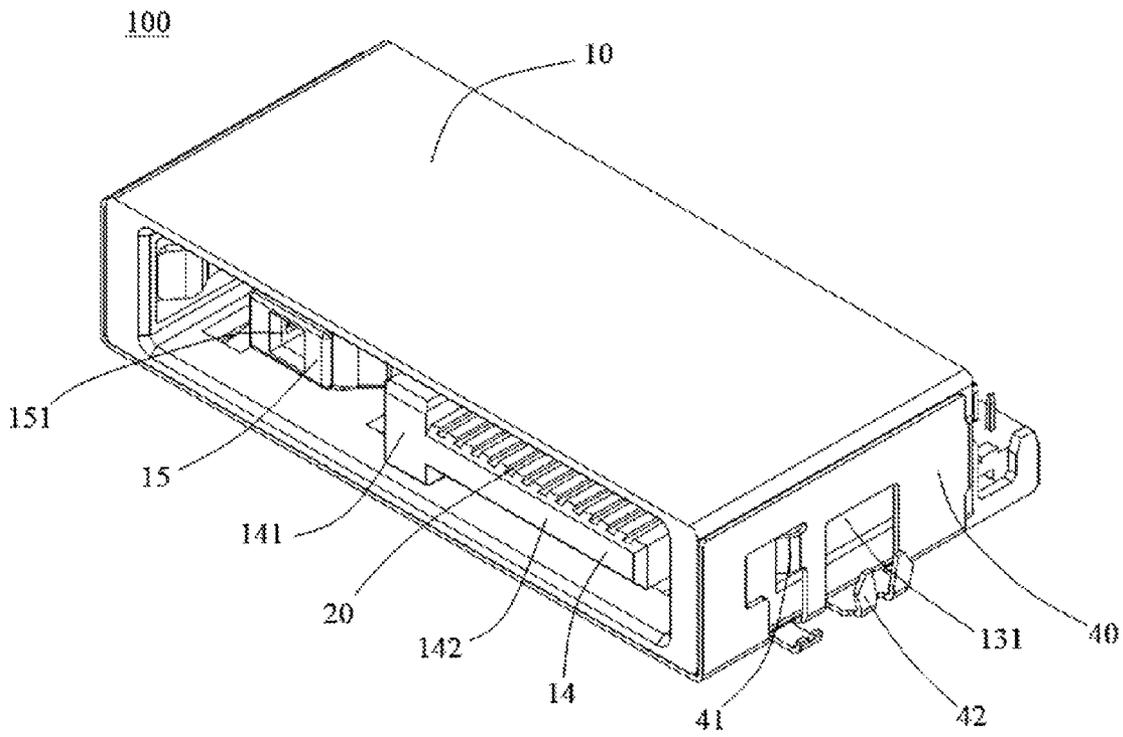


FIG. 1

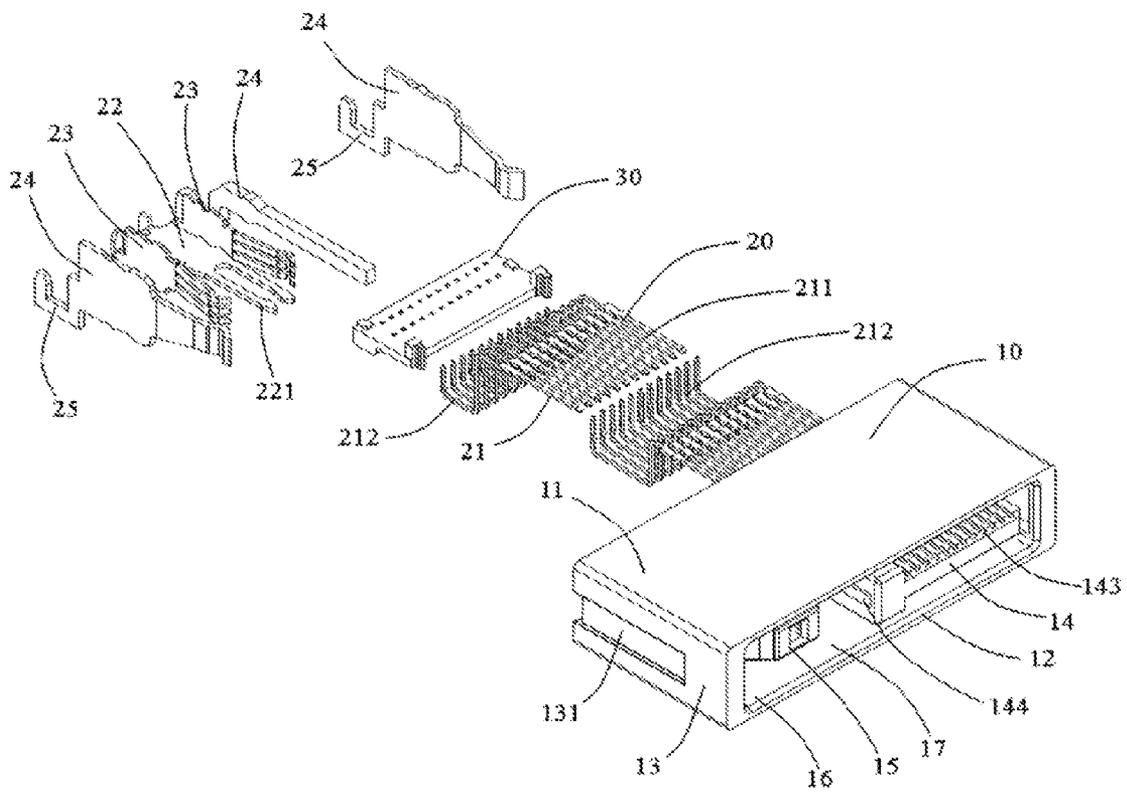


FIG. 2

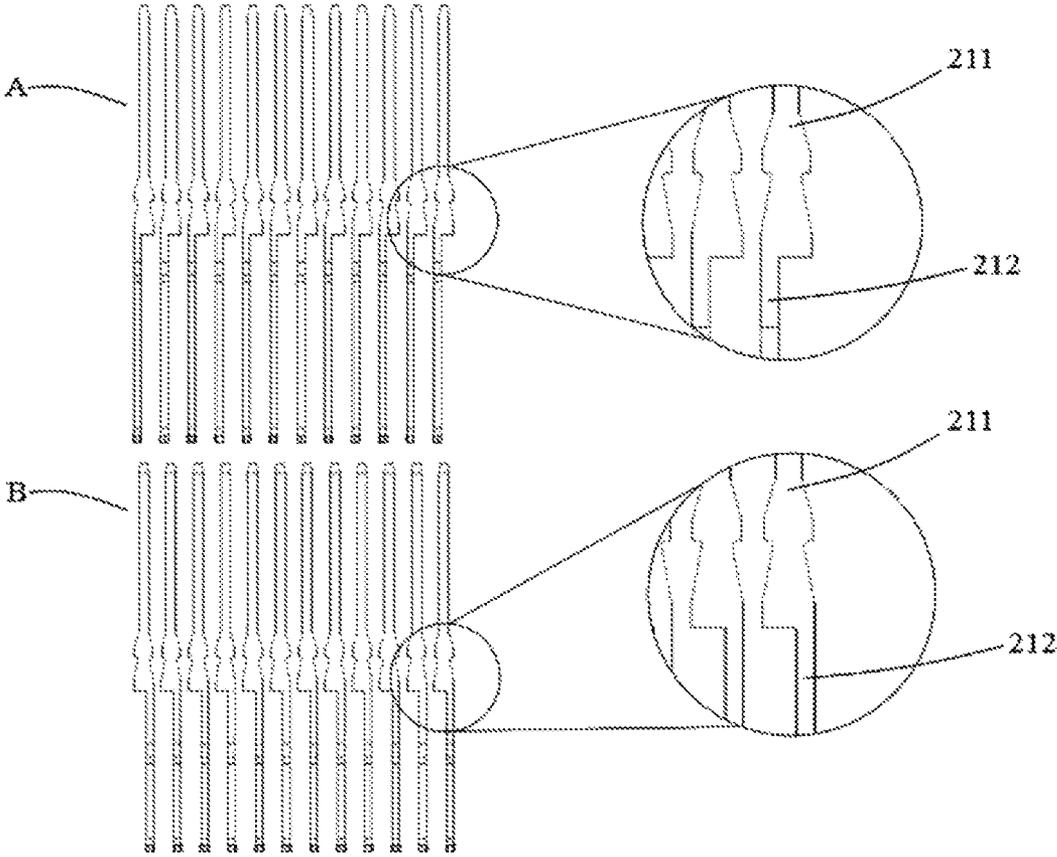


FIG. 3

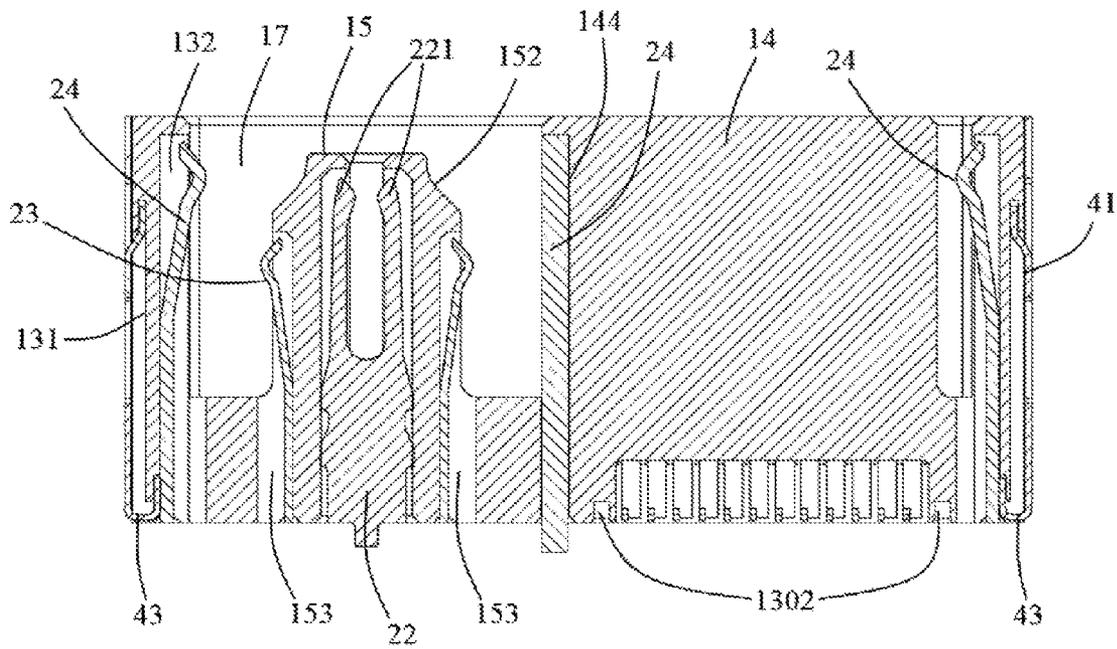


FIG. 4

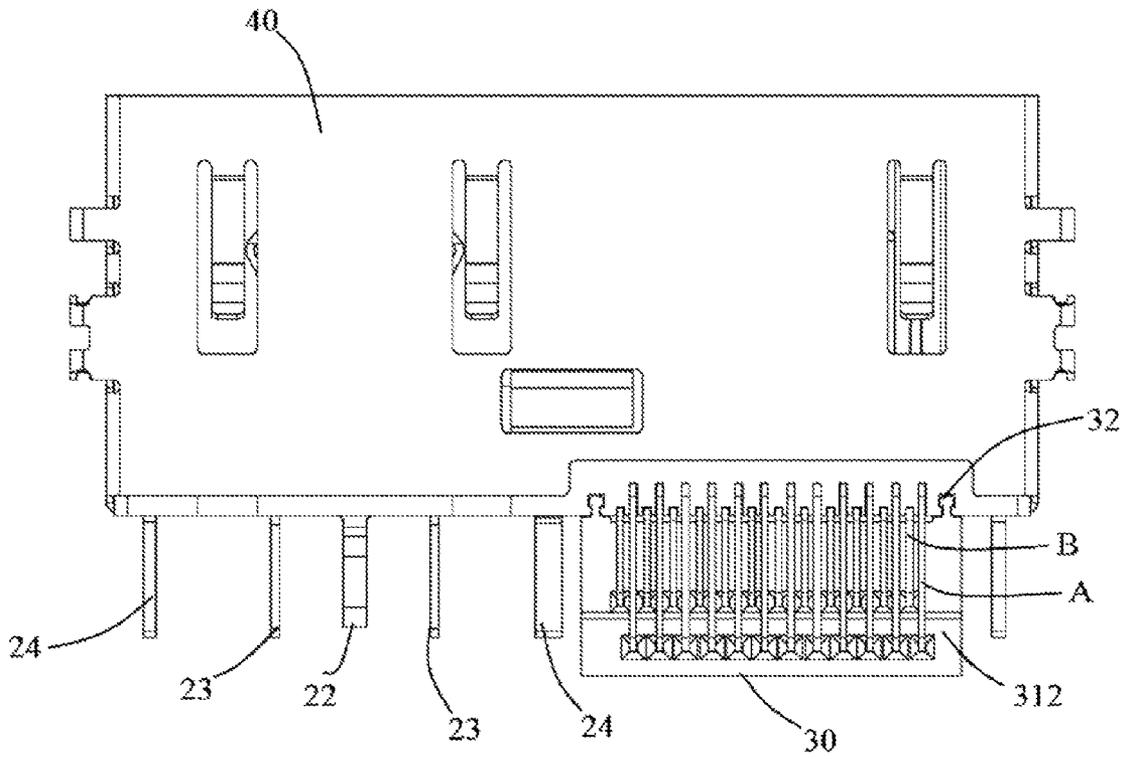


FIG. 5

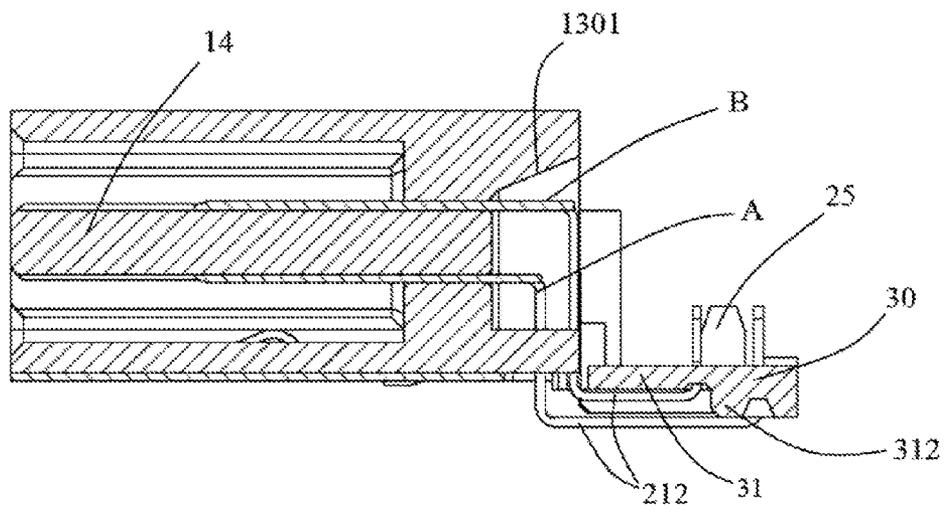


FIG. 6

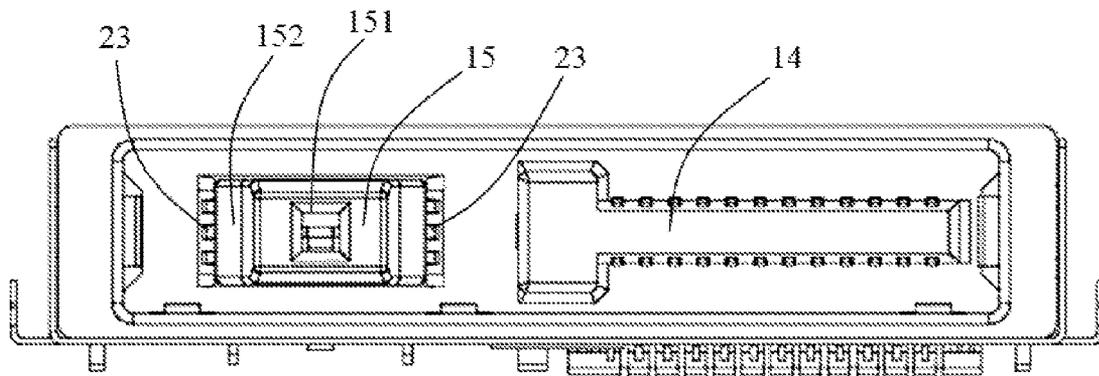


FIG. 7

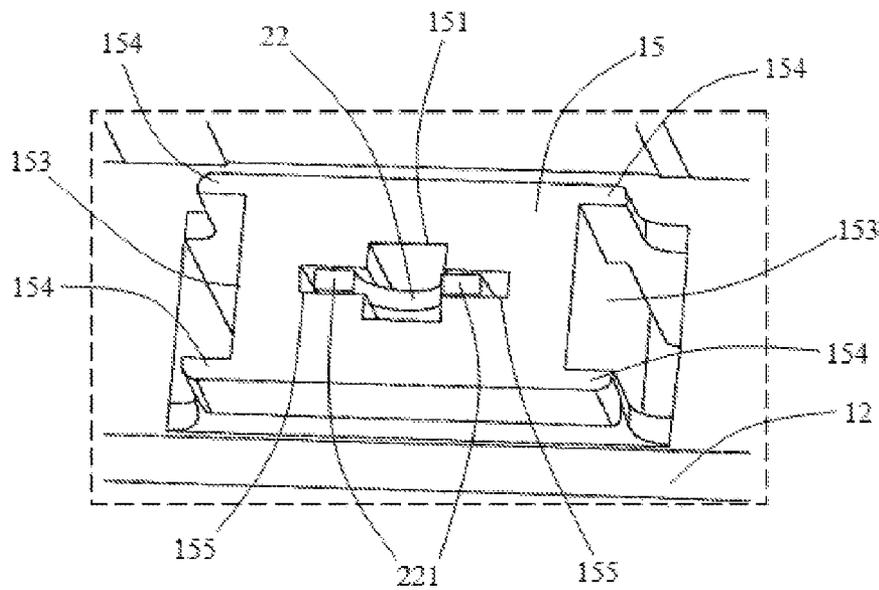


FIG. 8

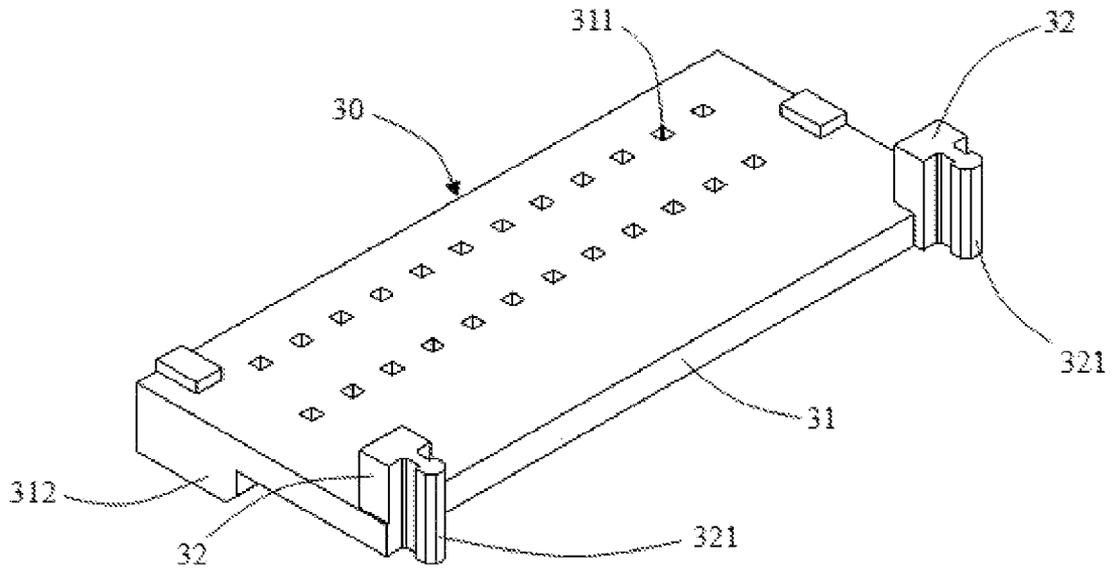


FIG. 9

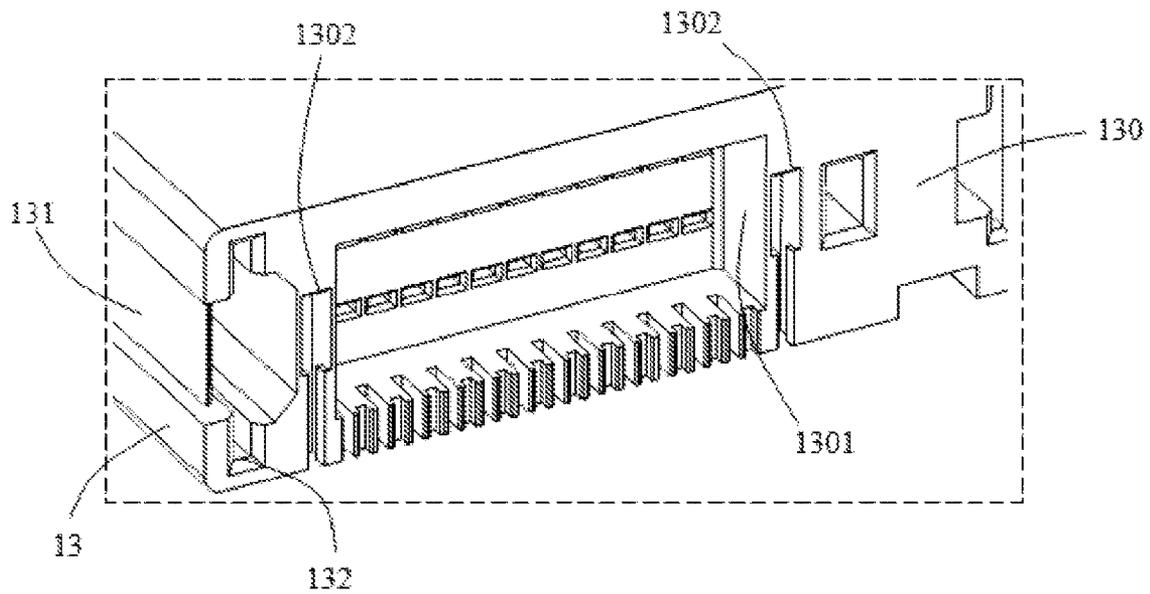


FIG. 10

1

**ELECTRICAL CONNECTOR****CROSS-REFERENCE TO RELATED APPLICATIONS**

This application claims priority under 35 U.S.C. §119 to People's Republic of China Patent Application 201320153379.0 entitled "Electrical Connector" filed Mar. 29, 2013.

**FIELD OF THE INVENTION**

The present invention relates generally to electrical connection, and more particularly to electrical connectors mounted on a printed circuit board (short as "PCB").

**BACKGROUND**

Electrical connector is one kind of electrical components with high accuracy, which is normally used for mating with another coupled electrical connector in order to provide signal transmission, so electrical connectors are widely used in kinds of electrical connections, especially in computer, such as USB connector, D-sub connector, RJ-45 connector etc.

Usually, an electrical connector includes an insulative housing and a plurality of terminals retained in a mating portion of the insulative housing. Normally, each terminal has a tail soldered on a PCB, and there is a plurality of soldering areas corresponding to said tails so that the tails can be mounted on the PCB. Meanwhile, said mating portion mates with a coupled electrical connector to build up electrical connection therebetween. During the mating process, the mating portion will be damaged easily by mating force if mating in a wrong way, because most of the mating portion is made of insulative material with small size. Moreover, the terminals retained on said mating portion will also have risk of being damaged which may cause wrong connection.

**SUMMARY OF THE INVENTION**

Accordingly, an object of the present invention is to provide an electrical connector with firm structure during a mating process.

In order to achieve the object set forth, in one embodiment, an electrical connector in accordance with the present invention comprises an insulative housing having a mating room and a mating part received in said mating room, said mating part defines a mating hole and a pair of receiving grooves extending rearward on two lateral sides of said mating hole; a plurality of terminals retained in said insulative housing and including a detecting terminal received in said mating hole and a pair of power terminals received in said receiving grooves; wherein said mating part further defines a pair of guiding surfaces on two sides of said mating hole and a pair of stiffening ribs on two sides of each receiving groove.

In yet another embodiment, an electrical connector, comprising: an insulative housing having a mating room, a T-shaped first mating part and a second mating part which are both received in said mating room, said first mating part including a vertical portion and a horizontal portion, said second mating part having a mating hole; a plurality of terminals retained in said insulative housing; a shell covering on said insulative housing; a spacer engaged with said insulative housing; wherein said second mating part has a pair of slanted guiding surfaces on two lateral sides and a pair of receiving grooves behind said slanted guiding surface.

2

Other objects, advantages and novel features of the invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings.

**DESCRIPTION OF THE DRAWINGS**

FIG. 1 is an assembled, perspective view of an electrical connector.

FIG. 2 is an exploded, perspective view of the electrical connector without a shell.

FIG. 3 is a perspective view of the terminals of the electrical connector.

FIG. 4 is a section view of the electrical connector.

FIG. 5 is a bottom view of the electrical connector.

FIG. 6 is another section view of the electrical connector.

FIG. 7 is front view of the electrical connector.

FIG. 8 is a partial cross section view of a second mating portion of the electrical connector.

FIG. 9 is a perspective view of the spacer of the electrical connector.

FIG. 10 is a backside perspective view of the insulative housing of the electrical connector.

**DETAILED DESCRIPTION**

The following description is presented to enable a person of ordinary skill in the art to make and use the various embodiments. Descriptions of specific devices, techniques, and applications are provided only as examples. Various modifications to the examples described herein will be readily apparent to those of ordinary skill in the art, and the general principles defined herein may be applied to other examples and applications without departing from the spirit and scope of the various embodiments. Thus, the various embodiments are not intended to be limited to the examples described herein and shown, but are to be accorded the scope consistent with the claims.

As referring to FIG. 1 to FIG. 10, the present invention provides an electrical connector **100**. The electrical connector **100** includes an insulative housing **10**, a plurality of terminals **20** retained in said insulative housing **10**, a spacer **30** for fixing said terminals **20**, and a shell **40** covered on said insulative housing **10**. Said terminals **20** are soldered on a printed circuit board (short as "PCB") and also mating with a coupled connector so that the electrical connection therebetween is formed.

Said insulative housing **10** extends longitudinally and has a top wall **11**, a bottom wall **12**, a pair of sidewalls **13**, a rear wall **130** connecting with two sidewalls **13**, and a mating portion formed between said walls. Said top wall **11**, bottom wall **12**, sidewalls **13** and rear wall **130** jointly define a mating room **17** and a mating port **16** for receiving said coupled connector. Additionally, the sidewall **13** has a retaining slot **131** on an outer surface thereof for retaining said shell **40**, and an engaging slot **132** on an inner surface thereof. Said rear wall **130** has a notch **1301** for receiving the terminals **20** and a fixing slot **1302** located on two sides of said notch **1301**, as shown in FIG. 10, said fixing slot **1302** is vertically extending and having a wider upper part and a narrower lower part which defines a T-shape for engaging with said spacer **30**.

Said mating portion includes a first mating part **14** and a second mating part **15** which are both located in said mating room **17** in way of left and right arrangement. Said first mating part **14** is T-shaped with a vertical portion **141** and a horizontal portion **142**, the vertical portion **141** is used for preventing wrong insertion, the horizontal portion **142**

defines a plurality of passageways **143** on a top face and a bottom face for receiving said terminals **20**. Said second mating part **15** is rectangular-shaped, and further defines a rectangular mating hole **151**, a pair of slanted guiding surfaces **152** on two sides of said mating hole **151** and a pair of receiving grooves **153** which extends rearward through the rear wall **130** and located behind the guiding surfaces **152**. Said guiding surface **152** can lead a smooth insertion for the coupled connector when the inserting direction is wrong so that the second mating part **15** may not be damaged easily by the mating force. Moreover, said rectangular mating hole **151** is located in the middle of said second mating part **15** and facing to said mating part **16**, as referring to FIG. 7 and FIG. 8, said second mating part **15** further defines a pair of stiffening ribs **154** on two sides of each receiving groove **153** which configures a cross section of the second mating part **15** with a horizontal H shape. Said stiffening ribs **154** will make the second mating part **15** stronger and difficult to be broken during the mating process with the coupled connector. Furthermore, there are two lateral channels **155** on two sides said rectangular mating hole **151**, said lateral channels **155** and the rectangular mating hole **151** are connected to define a cross-shaped hole.

As mentioned above, the electrical connector of the present invention provides two types of mating parts for transmitting two different types of signals. The electrical connector combines two kinds of connector which reduces the cost and the occupancy on PCB.

Said terminals **20** includes a plurality of signal terminals **21** retained on said first mating part **14**, a detecting terminal **22** and a pair of power terminals **23** retained on said second mating part **15**, and at least one pair of ground terminals **24** retained on two sidewalls **13** of the insulative housing **10**.

Said signal terminals **21** is divided into two groups which located on the top face and the bottom face of the horizontal portion **142** as a upper array and a lower array respectively. Said signal terminal **21** extends longitudinally and includes a contacting arm **211** receiving in said passageways **143**, and a U-shaped tail **212** extending outwardly beyond the rear wall **130** from an end of said contacting arm **211**. Said tail **212** is firmly retained in said spacer **30** which prevents the tail from moving during the process of soldering onto the PCB, therefore, the tails **212** can be soldered onto the soldering areas on the PCB. Moreover, in order to reduce the influence between said two arrays of signal terminals, the contacting arms **211** of said two arrays of signal terminals are configured in way of one-to-one correspondence while the tails **212** of said two arrays of signal terminals are arranged in a stagger way. As shown in FIG. 3, the tails **212** of said upper array B extend from a right side of the contacting arms **211** while the tails **212** of said lower array A extend from a left side of the contacting arm **211**, as a result, there is enough space for the lower array A to be installed into the insulative housing **10** even after the upper array B been installed, the tails of the two arrays may not influence each other during the installation process which improves the efficiency of installation and reduces the cost.

Said detecting terminal **22** is received in said rectangular mating hole **151** of the second mating part **15**. And the power terminal **23** is received in said receiving groove **153** on two sides of second mating part **15** and located between said stiffening ribs **154** which are used for stopping moving. Said ground terminals **24** are retained on an inner surface of the sidewalls **13** of the insulative housing **10**, furthermore, in order to improve the grounding effect and avoid impact between the first mating part **14** and the second mating part **15**, there is another ground terminal **24** retained between said first mating part **14** and second mating part **15**, as referring to

FIG. 2 and FIG. 4, this ground terminal **24** is received in a receiving slot **144** which is formed on a lateral surface of the first mating part **14**. All detecting terminal **22**, the power terminal **23** and the ground terminal **24** has a U-shaped leg **25** for mounting onto a PCB. Specially, said detecting terminal **22** includes a pair of mating beams **221** which is fork-shaped and retained in said lateral channels **155**.

As shown in FIG. 9, said spacer **30** is plate-shaped and includes a horizontal base plate **31** and a pair of locking posts **32** formed on a lateral side of the base plate **31**. Said base plate **31** is a rectangular plate with a plurality of retaining holes **311** formed thereon for receiving the tails **212** of said signal terminals **21**. Moreover, said base plate **31** further includes a step portion **312** on a bottom side for stopping against the tails **212** of the lower array signal terminals **21**, as shown in FIG. 6, so that the U-shaped tails **212** of the lower array signal terminals **21** can be firmly retained along vertical direction. Furthermore, the step portion **312** also detaches the tails **212** of said upper array and lower array away from each other, which reduces the cross-talk influence therebetween. Said locking post **32** extends vertically from a top surface the base plate **31** for engaging with said fixing slot **1302** so that the spacer **30** can be firmly retained along a horizontal direction. Said locking post **32** has a protruding strip **321** engaging into said fixing slot **1302**. As a result, after the U-shaped tails **212** leans against said step portion **312**, the locking post **32** engages with said fixing slot **1302**, the spacer is stopped from moving horizontally and vertically.

Said shell **40** covers on said insulative housing **10** and includes a retaining portion **41** retained into said retaining slots **131** of sidewalls **13**, a soldering portion **42** mounted onto the PCB and a pair of bended tabs **43**. Said bended tabs **43** are inwardly bended and extending into the engaging slots **132** of the sidewalls **13** to contact with said ground terminals **24**.

The electrical connector of the present invention provides a new type second mating part **15** with two lateral guiding surfaces **152** and a spacer **30**. Said second mating part **15** makes the insertion smoothly even in a wrong inserting direction, so the second mating part **15** may not be damaged easily. Moreover, the spacer **30** can firmly hold the tails of the terminals and engage with the insulative housing **10** by the locking post **32**, the structure of the spacer **30** is simple which can reduce the cost and make the installation convenient.

Although embodiments have been fully described with reference to the accompanying drawings, it is to be noted that various changes and modifications will become apparent to those skilled in the art. Such changes and modifications are to be understood as being included within the scope of the various embodiments as defined by the appended claims.

What is claimed is:

1. An electrical connector, comprising:
  - an insulative housing having two sidewalls, a mating room between said two sidewalls and a mating part received in said mating room, said mating part defining a mating hole and a pair of receiving grooves extending rearward on two lateral sides of said mating hole;
  - a plurality of terminals retained in said insulative housing and including a detecting terminal received in said mating hole, two ground terminals retained on said sidewalls and a pair of power terminals received in said receiving grooves;
  - wherein said mating part further defines a pair of guiding surfaces on two sides of said mating hole and a pair of stiffening ribs on two sides of each receiving groove, said stiffening ribs are respectively formed on a top side and a bottom side of said receiving groove to stop said power terminal from moving vertically;

5

wherein said mating part is rectangular-shaped with a horizontal H-shaped cross section which is received in said mating room, said mating hole is located in the middle of said mating part, said horizontal H-shaped cross section is defined by two pairs of said stiffening ribs and one pair of said receiving grooves, and two pairs of said stiffening ribs extend horizontally from a top surface and a bottom surface of said mating part.

2. The electrical connector according to claim 1, wherein there are two lateral channels on two sides of said mating hole, said lateral channels connect with the mating hole to define a cross shape.

3. The electrical connector according to claim 2, wherein said electrical connector further includes a shell covered on said insulative housing, said shell has a pair of bended tabs contacting with said ground terminals, said bended tabs are 180-degree bended from a rear side of the shell for engaging with the insulative housing.

4. An electrical connector, comprising:

an insulative housing having a mating room, a T-shaped first mating part and a second mating part which are both received in said mating room, said first mating part including a vertical portion and a horizontal portion, said second mating part having a mating hole;

a plurality of terminals retained in said insulative housing;

a shell covering on said insulative housing;

a spacer engaged with said insulative housing;

wherein said second mating part has a pair of slanted guiding surfaces on two sides of said mating hole, a pair of receiving grooves behind said slanted guiding surface and a pair of stiffening ribs respectively formed on a top side and a bottom side of said receiving groove;

wherein said first mating part defines a receiving slot on a lateral surface of said vertical portion, said insulative

6

housing has a top wall, a bottom wall, a pair of sidewalls and a rear wall, there is an engaging slot and a retaining slot respectively formed on an inner surface and an outer surface of said sidewall, said rear wall has a notch for receiving said terminals and a fixing slot on two sides of said notch for engaging with said spacer, said fixing slot is vertically extending and having a wider upper part and a narrower lower part which defines a T shape.

5. The electrical connector according to claim 4, wherein said terminals include a plurality of signal terminals retained on said horizontal portion, a fork-shaped detecting terminal received in said second mating part, a pair of power terminals and several ground terminals; said ground terminals are respectively retained in said engaging slot of the sidewalls and receiving slot of the first mating part.

6. The electrical connector according to claim 5, wherein said spacer includes a horizontal base plate and a pair of locking posts formed on a lateral side of the base plate.

7. The electrical connector according to claim 6, wherein said signal terminal has a U-shaped tail leaning against a step portion which is formed on a bottom side of said base plate; said locking post is formed on a top side of said base plate and has a protruding strip engaged with said fixing slot.

8. The electrical connector according to claim 7, wherein said second mating part is rectangular-shaped with a horizontal H-shaped cross section, said mating hole is located in the middle of said second mating part, said stiffening ribs extend horizontally from a top surface and a bottom surface of said second mating part.

9. The electrical connector according to claim 8, wherein said shell has a pair of bended tabs which are 180-degree bended from a rear side of the shell and extending into the engaging slots to contact with said ground terminals.

\* \* \* \* \*