

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 November 2005 (03.11.2005)

PCT

(10) International Publication Number
WO 2005/102442 A1

(51) International Patent Classification⁷: **A61M 39/02**,
39/12

(US). **BELL, Benjamin** [US/US]; 115 Monument Street,
Haverhill, MA 01832 (US). **BEAUPRE, Todd** [US/US];
49 Longwood Road, Reading, MA 01867 (US).

(21) International Application Number:
PCT/US2004/043752

(74) Agents: **KAPLUN, Oleg, F.** et al.; 150 Broadway, Suite
702, New York, NY 10038 (US).

(22) International Filing Date:
22 December 2004 (22.12.2004)

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/807,590 24 March 2004 (24.03.2004) US

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,


(71) Applicant (*for all designated States except US*): **SCIMED
LIFE SYSTEMS, INC.** [US/US]; One Scimed Place,
Maple Grove, MN 55311-1566 (US).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **GIRARD, Mark**
[US/US]; 134 School Street, #2, Waltham, MA 02451

[Continued on next page]

(54) Title: DUAL LUMEN PORT WITH F-SHAPED CONNECTOR

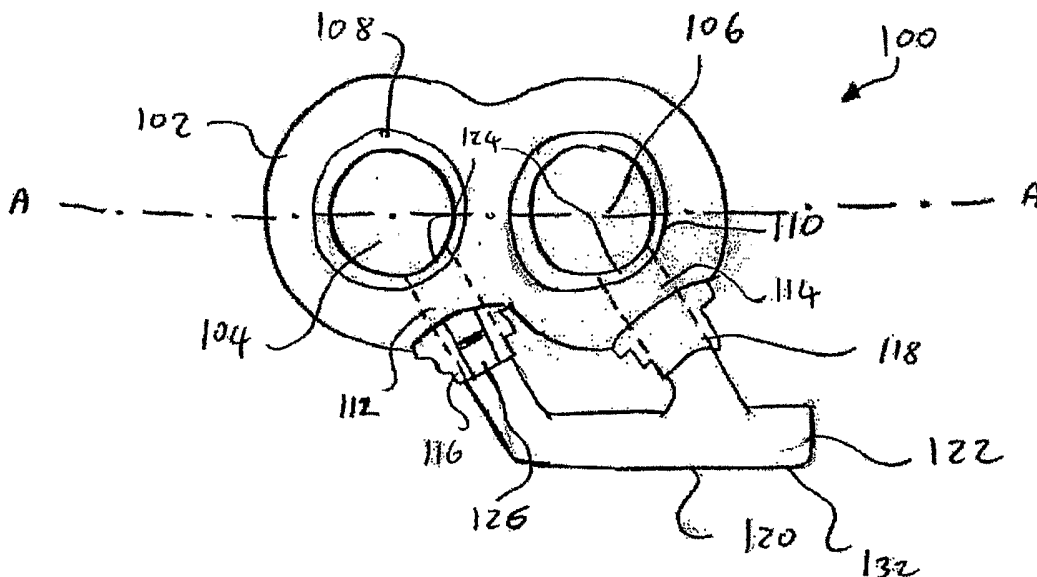

(57) Abstract: A port for subcutaneous implantation, comprising a housing including first and second wells formed therein and a substantially F-shaped flow element including first and second lumens extending therethrough wherein, when in an operative configuration the F-shaped flow element is coupled to the housing with a proximal end of each of the lumens in fluid communication with a respective one of the first and second wells for receiving fluid therefrom, and wherein distal ends of each of the lumens form outlets, each outlet being coupleable to a lumen of a medical catheter, the F-shaped flow element including first and second arms extending from a trunk with the first lumen extending through the first arm to the trunk and the second lumen extending through the second arm to the trunk, the first and second lumens being separated from one another within the trunk.



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM,*

AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*

Published:

- *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DUAL LUMEN PORT WITH F-SHAPED CONNECTOR

Background of the Invention

[0001] Medical procedures for the treatment of chronic diseases often require repeated and prolonged access to a patient's vascular system to inject therapeutic compounds and/or to obtain blood samples. Kidney dialysis, chemotherapy and other chronic treatments may have to be performed several times a week. However it is impractical and dangerous to insert and remove a catheter and a needle from the patient's vein at every session. Thus, these catheters are generally implanted semi permanently with a distal end remaining within the patient in contact with the vascular system and a proximal end remaining accessible from outside the patient's body. A port may be used to access the proximal end of the catheter from outside the body, for example, via a syringe. In many cases, such ports are implanted subcutaneously in the arm or chest to provide protection to the port while maintaining easy access thereto. Such ports typically consist of a housing with one or more wells to receive therapeutic agents.

[0002] Under certain conditions, it may be necessary to infuse therapeutic agents (e.g., chemotherapy agents) that are not compatible with one another. In some cases, the therapeutic agents are fluids that cannot be mixed together outside of the body, but which preferably are infused together. These unmixable fluids may lose their potency or may become toxic if mixed prior to infusion in the body. They are therefore kept separate until they reach the blood stream. To address this difficulty, a separate catheter may be used for each of the fluids with distal ends of the catheters (i.e., outlets) near one another. Alternatively, a multi-lumen catheter (e.g., a dual lumen catheter) may be used, with each lumen transporting a different fluid.

[0003] Providing two unmixable therapeutic fluids to a dual lumen catheter or to two separate catheters near each other presents challenges as a conventional port may not be useable to inject both fluids. Multiple ports are generally not implanted near one another because of the surgery required to insert each port and additional complications that may arise with respect to each port. For these purposes a dual well port device having two ports formed within a single housing may be used with each port being connected to a different catheter or to a different lumen of a dual lumen catheter. However, conventional dual well port devices are larger than single port devices, and may require more extensive surgery to be placed in the patient's body. The connections between the wells and the catheter further increase the width of the dual well port, so that a larger incision is often necessary to place such a port within the patient.

Summary of the Invention

[0004] The present invention is directed to a port for subcutaneous implantation, comprising a housing including first and second wells formed therein and a substantially F-shaped flow element including first and second lumens extending therethrough wherein, when in an operative configuration the F-shaped flow element is coupled to the housing with a proximal end of each of the lumens in fluid communication with a respective one of the first and second wells for receiving fluid therefrom, and wherein distal ends of each of the lumens form outlets, each outlet being coupleable to a lumen of a medical catheter, the F-shaped flow element including first and second arms extending from a trunk with the first lumen extending through the first arm to the trunk and the second lumen extending through the second arm to the trunk, the first and second lumens being separated from one another within the trunk.

[0005] The present invention is further directed to a dual well port device comprising a housing defining first and second wells disposed along an axis of the housing in

combination with an F-shaped flow element including first and second lumens independent of one another, the first lumen, when the flow element is in an operative configuration coupled to the housing, being fluidly connected to the first well and having an arm portion extending at a first angle relative to the axis and wherein, when in the operative configuration, the second lumen is fluidly connected to the second well and includes an arm portion extending at a second angle relative to the axis, the F-shaped flow element including a trunk enclosing trunk portions of the first and second lumens.

[0006] The present invention is further directed to a method of infusing fluids into a patient, comprising implanting distal ends first and second catheter lumens into a blood vessel and fluidly connecting each of the first and second catheter lumens to first and second flow element lumens of an F-shaped flow element, the first flow element lumen extending through the trunk and through the first arm to fluidly connect to a first well of a dual well port and the second flow element lumen extending through the trunk and the second arm to a second F arm to fluidly connect to a second well of the port, wherein the first and second flow element lumens are separated from one another in the trunk in combination with introducing a first fluid into the first well and introducing a second fluid into the second well so that the first and second fluids are passed to the blood vessel without intermingling with one another prior to leaving the distal ends of the first and second catheter lumens.

Brief Description of the Drawings

[0007] Figure 1 is a perspective view of a dual well port according to an embodiment of the present invention;

Figure 2 is a top plan view of the dual well port according the embodiment of the present invention shown in Fig. 1;

Figure 3 is a detail view of an F-shaped flow element according to an embodiment of the present invention;

Figure 4 is a detail view of an F-shaped flow element according to another embodiment of the invention, and

Figure 5 is a top plan view of a different embodiment of the dual well port device according to the invention.

Detailed Description

[0008] The present invention may be further understood with reference to the following description and the appended drawings, wherein like elements are referred to with the same reference numerals. The present invention is related to medical devices that are used to access the vascular system of a patient. In particular, the present invention relates to access ports used to inject therapeutic agents into the vascular access devices.

[0009] As described above, semi-permanent central catheters may be kept in place for extended periods of time – up to two years or more. Central catheters generally comprise a flexible elongated portion that is tunneled or otherwise placed within the patient's body in fluid contact with a blood vessel. The proximal end of such a central catheter may be connected to a port placed subcutaneously in the arm or chest of the patient to selectively provide access to the catheter. These ports often include a self sealing surface (e.g., a septum) that can be pierced by a needle passing through the skin, for injection of therapeutic agents thereinto. Examples of implantable catheters include the catheters manufactured by Vaxcel™, such as the Chronic Dialysis Catheter and the Implantable Vascular Access System.

[0010] In a dual well port, separate wells are maintained to separate fluids which are to be presented separately to the bloodstream - i.e., which are not to mix together prior to entering the bloodstream. As described above, certain chemicals may react negatively if mixed together outside of the bloodstream or may lose their potency, etc. Each of the fluids is injected into a corresponding one of the wells through a corresponding septum for the well (or through a portion of a common septum corresponding to the particular well) so that no mixing occurs in the port device. The lumens leading from each of the wells to the catheter (or catheters) also are separate and independent and, due to the size of the wells, are often disposed far apart from one another. The separation of the lumens in conventional dual well port devices has lead to increased bulk and a larger cross sectional area of such port devices. This increased size, consequently, requires proportionally larger incisions through which the port devices are to be subcutaneously implanted, lengthening recovery times, increasing the chances of post-surgical complications and making scarring more extensive. Embodiments of the present invention provide for a configuration of the wells and lumens of a port device that allow a narrower cross section of the device, and therefore allows for a smaller incision through which the port device is implanted.

[0011] According to exemplary embodiments of the present invention, a dual well port device is provided which comprises a pair of independent lumens, each extending from a corresponding one of the wells to the periphery of a well housing. The housing lumens are shaped and oriented to reduce a width of the port device itself and are independent so that the fluid in one lumen does not mix with that in the other lumen. A substantially F-shaped flow element, a proximal end of which attaches to the housing, comprises a pair of independent lumens each of which fluidly connects to a corresponding one of the housing lumens. A distal end of the F-shaped flow element connects to the proximal end of a dual lumen catheter (or to the proximal ends of two independent catheters) the distal end of which extends to the patient's vascular system. The configuration of the F-shaped flow element also reduces a frontal area of the dual

well port device without sacrificing the flow carrying capacity of the port device. To reduce a width of the port device, the housing lumens are preferably angled relative to an axis of the port along which the two wells are disposed so that the F-shaped flow element may be placed in close proximity to a side surface of the port housing.

[0012] In the exemplary embodiment shown in the drawings, the housing's lumens are separate from the lumens defined by the F-shaped flow element. In this example, the F-shaped flow element is a separate component, such as a connector that can be attached to the housing of the port device before or during surgical procedure to implant the port. In a different embodiment, the F-shaped flow element may be an integral part of the port's housing, such that a single lumen may extend from each of the wells to the dual lumen catheter or pair of catheters. The F-shaped flow element thus may be a connector separate and independent from the housing of the port device, or may be an integral part of the housing, depending on the requirements of the situation being addressed and on the construction details of the dual well port device.

[0013] The exemplary dual well port according to the present invention comprises two separate wells and two separate septa that form independent flow chambers within the dual well port housing. Likewise, the lumens extending through the housing from each of the wells and through the F-shaped flow element form flow passages that are independent and isolated from one another, so fluids injected into the wells do not mix until the fluids have left the distal end of a catheter coupled to the port device. As described, the disposition of the individual lumens extending from the wells and of the F-shaped flow element are preferably selected to minimize the cross-sectional profile of the port device. For instance, the lumens may extend at a selected angle from the wells as described below, to reduce the profile area of the port device and to maintain the flow carrying capacity of the lumens. Similarly, the length and orientation of the F-shaped flow element may be varied to optimize the size and flow carrying capacity of

the port device while providing a simple connection to the catheter(s) leading to the patient.

[0014] As shown in Figures 1 and 2, an exemplary dual well port device 100 comprises a housing 102 which defines two wells – a first well 104 and a second well 106. Each of the wells 104, 106 includes an opening on its top side through which a fluid may be introduced into the corresponding well. Septums 108, 110, respectively seal the openings of the wells 104, 106 and prevent fluid therein from leaking out of the port device 100. As would be understood by those skilled in the art, the septums 108, 110 are preferably formed of a flexible, self sealing material which can be punctured repeatedly by a syringe's needle while retaining the ability to self-seal the puncture opening once the needle has been removed. This allows the septums 108, 110 to be punctured repeatedly for injections of fluid thereto while maintaining an effective seal so that the port device 100 may be used for multiple injections of fluid. Each of the septums 108, 110 also forms a seal around the needle used to inject the fluids, so that a positive pressure may be applied through the needle to the fluid, e.g., to drive the fluid from the port device 100 into a catheter attached thereto and into the bloodstream.

[0015] As shown in the drawings, a first lumen 112 extends from and is in fluid connection with the first well 104 and a second lumen 114 extends from and is in fluid communication with the second well 106. The first and second lumens 112, 114 are separate and independent of one another and the first and second wells 104, 106 are separate and independent from one another so that there is no fluid communication between the combination of the first lumen 112 with the first well 104 and the combination of the second lumen 114 and the second well 106. The location of the openings 124 of each of the first and second lumens 112, 114 into the corresponding one of the first and second wells 104, 106 and the angle at which these lumens 112, 114 meet their corresponding wells 104, 106 are preferably selected to provide a small profile to the port device 100. For example, the lumens 112, 114 are preferably

disposed at an angle of between approximately 30° to approximately 60° from a longitudinal axis A-A of the port device 100. The axis A-A may also be the axis along which the wells 104, 106 are disposed. For a selected angular orientation of the lumens 112, 114, the location of the openings 124 may be optimized so that flow from inside the wells 104, 106 to the corresponding one of the first and second lumens 112, 114 is not impeded. As would be understood by those skilled in the art, the diameter of the lumens 112, 114 is preferably selected to provide a sufficient flow of fluid therethrough based on, for example, the flow requirement of the treatments for which the port device 100 is intended. Although larger diameter lumens handle higher flow rates, those skilled in the art will understand that the desired diameter may be limited by structural considerations related to, for example, the required strength of the housing 102 and by size constraints placed on the device 100.

[0016] Fluid injected into the well 104 passes through the corresponding lumen 112 to the catheter via the F-shaped flow element 120. Similarly, fluid injected into the well 106 passes through the lumen 114 to a catheter via the F-shaped flow element 120. The F-shaped flow element 120 includes a pair of arms 128, 130 extending from a trunk 132. Those skilled in the art will understand that the substantial F-shape of the F-shaped flow element 102 does not require that this element precisely mimic the letter F. Rather, the F-shape of the flow element 102 refers more generally to a configuration where 2 arms project from a common trunk substantially parallel to one another at an angle (e.g., of between 15° and 75°) with respect to a longitudinal axis of the trunk. Each of the arms 128, 130 connects to a corresponding one of the lumens 112, 114 so that fluid from each of the lumens 112, 114 passes from the port device 100 into a corresponding one of two flow passages (lumens) formed in the trunk 132 to an outlet 122 while remaining separate from one another. As would be understood by those skilled in the art, the outlet 122 may comprise an adapter designed to connect with an inlet of a catheter, for example, a dual lumen catheter.

[0017] The length of the arms 128, 130 may be selected to reduce the profile of the port device 100, for example by selecting a length of the trunk 132 to be a minimum distance which avoids interference with the housing 102. (More details on the interference to be avoided please) The angle at which the arms 128, 130 project from the trunk 132 is also preferably selected to achieve the same goal. In one example, each of the arms 128, 130 extends along an axis substantially aligned with an axis of the corresponding one of the lumens 112, 114 to reduce flow resistance within the F-shaped flow element 120. However, variations from that orientation may be desirable to construct a more compact port device 100. For example, the arms 128, 130 (and in some cases the lumens 112, 114) may be curved or may have a varying angular orientation to minimize the width of the port device 100. The trunk 132 may be substantially parallel to the longitudinal axis A-A of port 100, or alternatively may be disposed at an angle thereto, as dictated by the requirements of the port device 100.

[0018] According to the exemplary embodiment shown in Figs. 1 and 2, the outlets 116, 118 are disposed at the ends of lumens 112, 114, respectively, at the periphery of the housing 102. In this embodiment, the outlets 116, 118 may be used as adapters to connect the arms 128, 130 respectively to the lumens 112, 114. These connections may be releasable or may be permanent, depending on the specific requirements of the port device 100. The manufacturing of the port device 100 may be simplified by using the F-shaped flow element 120 as a separate connector which attaches to the outlets 116, 118. In this case, the housing 102 and the F-shaped flow element 120 may be formed separately and assembled later in a finishing operation. The ability to form the housing 102 and the F-shaped flow element 120 separately also simplifies tailoring the port device 100 to different applications, since an F-shaped flow element 120 for a particular application (e.g., assembly with a particular housing 102) may be selected from a group including an assortment of lengths and arm orientations to achieve a desired.

[0019] In the described embodiment, valves 126 may be included in each of outlets 116, 118. Each valve 126 may be, for example, a pressure actuated safety valve (PASV) which restricts flow through the outlets under certain conditions and allows flow therethrough under preselected flow conditions. For example, when the pressure of the fluid is below a predetermined threshold level, a flow control membrane in the PASV prevents the fluid from flowing therethrough. However, when the fluid pressure is increased above the threshold level, the membrane opens and lets the flow pass. Alternatively, the valves 126 may be of types other than PASV's. For example, a check valve, a spring loaded valve or other type of flow control device may be used, to prevent fluid leakage, to control a direction of fluid flow and/or to control fluid pressure and flow rate. In a different embodiment, one or more flow control devices, such as a valve 126, may be disposed at one or more locations within the F-shaped flow element 120, such as, for example, near the outlet 122.

[0020] Figure 3 shows a detail perspective view of an F-shaped flow element 120 according to an embodiment of the invention. As shown, a first arm 128 defines a lumen adapted to fluidly connect with the well 104 of the port device 100 via the corresponding housing lumen 112 such that fluid injected into the well 104 travels to the outlet 122. Similarly, the second arm 130 defines another lumen connected to the second well 106 of the port device 100. As described above, the trunk 132 is divided into two independent lumens so that fluid from each of the wells 104, 106 reaches the outlet 122 without mixing with the fluid from the other well. For example, a partition 204 extends across an interior space of the trunk 132 to separate this space into independent lumens 200 and 202. The lumen 200 couples to the lumen in the arm 128 while the lumen 202 couples to the lumen in the arm 130. As would be understood by those skilled in the art, the partition 204 may be streamlined to minimize blockage and the turbulence imparted to flow through the lumens 200, 202.

[0021] In the embodiment shown in Fig. 3, the F-shaped flow element 120 comprises a trunk 132 that has a substantially circular cross section. Here, the partition 204 divides the trunk 132 into two lumens having substantially semi-circular cross sections. In other embodiments, the cross-section of the trunk 132 and of the individual lumens may be modified, to obtain desired cross sectional area and flow characteristics of the port device 100. For example, the lumens 200, 202 may be substantially elliptical, oval or of any other shape suitable to pass a desired flow rate of fluid therethrough. Of course, those skilled in the art will understand that manufacturing an F-shaped flow element with a more complex lumen in the trunk thereof may increase the difficulty and cost of construction relative to the simpler circular trunk described above.

[0022] Figure 4 shows an exemplary alternate embodiment of an F-shaped flow element 320, where the trunk 332 has a substantially semi-circular cross section. In this example, a partition 304 defines two independent lumens 300, 302 each of which has a substantially quarter circle cross-sectional shape. This configuration may be advantageous in cases where the overall thickness of the F-shaped flow element 320 is restricted to a predetermined level and/or where special packaging considerations of the port device 100 dictate such a shape or thickness.

[0023] A different exemplary embodiment of the present invention is shown in Figure 5. Here, a dual well port device 400 comprises two wells 402, 404 that are fluidly connected to an F-shaped flow element 410 which is integral with a housing 412 of the port device 400. In this exemplary embodiment, arms 406, 408 are also integrally formed with the housing 412 with each extending from a respective one of the wells 402, 404 to the trunk 418. A partition 420 may be used to divide the trunk 418 into independent lumens 414, 416, which maintain the fluids injected into the two wells 402, 404 separate at least until reaching an outlet 422 of the F-shaped flow element 410. As in the embodiments discussed above, the outlet 422 may be adapted to fluidly connect to a dual lumen catheter (not shown) or to two separate catheters, each carrying the

fluid injected into one of the wells 402, 404 to an outlet in the bloodstream. Those skilled in the art will understand that forming the F-shaped flow element 410 integrally with the housing 412 of the port device 400 may achieve an additional reduction in the profile dimensions of the port device 400. However, the more complex shape of the housing 412 may increase the cost and/or difficulty of manufacturing the port device 400.

[0024] As indicated above, various configurations of the dual well port device comprising an F-shaped flow element used to connect two wells of the port to the lumens of a catheter or to two separate catheters may be employed. In one aspect, the the angular orientation and/or the length of the arms of the F-shaped flow element may be varied to achieve a desired port device profile. In addition, further variations may be made to achieve a desired flow rate through the port device, for example by varying the width and/or cross-sectional shape of the various lumens of the port device and/or F-shaped flow element. The size of the dual well port device and of the F-shaped flow element may also be adjusted by varying the parameters described above, so that the port device may be placed subcutaneously with minimal discomfort to the patient.

[0025] The present invention has been described with reference to specific embodiments, and more specifically to a two well port for use with a central venous catheter. However, other embodiments may be devised that are applicable to different medical devices and procedures without departing from the scope of the invention. Accordingly, various modifications and changes may be made to the embodiments, without departing from the broadest spirit and scope of the present invention as set forth in the claims that follow. The specification and drawings are accordingly to be regarded in an illustrative rather than restrictive sense.

What is claimed is:

1. A port for subcutaneous implantation, comprising:
a housing including first and second wells formed therein; and
a substantially F-shaped flow element including first and second lumens extending therethrough wherein, when in an operative configuration the F-shaped flow element is coupled to the housing with a proximal end of each of the lumens in fluid communication with a respective one of the first and second wells for receiving fluid therefrom, and wherein distal ends of each of the lumens form outlets, each outlet being coupleable to a lumen of a medical catheter, the F-shaped flow element including first and second arms extending from a trunk with the first lumen extending through the first arm to the trunk and the second lumen extending through the second arm to the trunk, the first and second lumens being separated from one another within the trunk.
2. The port according to claim 1, wherein the first and second lumens are separated from one another in the trunk by a partition extending across an interior space thereof.
3. The port according to claim 1, wherein the first and second wells are positioned along an axis of the housing and wherein the first and second arms extend from the trunk at an angle relative to an axis.
4. The port according to claim 3, wherein, when in the operative configuration, the trunk extends substantially parallel to the axis.
5. The port according to claim 4, wherein the first and second arms extend from the trunk at an angle of between about 30 degrees and about 60 degrees relative thereto.

6. The port according to claim 1, wherein the first and second arms have a substantially circular cross-sectional shape.
7. The port according to claim 1, wherein the trunk has a substantially circular cross-sectional shape.
8. The port according to claim 1, wherein the first and second arms have a substantially semi-circular cross section.
9. The port according to claim 1, wherein the trunk has a substantially semi-circular cross section.
10. The port according to claim 1, further comprising at least one flow control valve located between a first one of the wells and the corresponding outlet.
11. The port according to claim 1, wherein the F-shaped flow element is integrally formed with the housing.
12. The port according to claim 1, wherein the F-shaped flow element is formed separately from the housing.
13. A dual well port device comprising:
a housing defining first and second wells disposed along an axis of the housing;
and
an F-shaped flow element including first and second lumens independent of one another, the first lumen, when the flow element is in an operative configuration coupled to the housing, being fluidly connected to the first well and having an arm portion extending at a first angle relative to the axis and wherein, when in the operative

configuration, the second lumen is fluidly connected to the second well and includes an arm portion extending at a second angle relative to the axis, the F-shaped flow element including a trunk enclosing trunk portions of the first and second lumens.

14. The dual well port device according to claim 13, further comprising a partition of the trunk separating the trunk portions of the first and second lumens.
15. The dual well port device according to claim 13, wherein the first angle is substantially the same as the second angle.
16. The dual well port device according to claim 13, wherein, when the F-shaped flow element is in the operative configuration, the trunk is disposed substantially parallel to the axis.
17. The dual well port device according to claim 13, wherein the F-shaped flow element is integrally formed with the housing.
18. The dual well port device according to claim 13, wherein a flow control valve is disposed between the first well and an outlet of the first lumen.
19. A method of infusing fluids into a patient, comprising:
 - implanting distal ends first and second catheter lumens into a blood vessel;
 - fluidly connecting each of the first and second catheter lumens to first and second flow element lumens of an F-shaped flow element, the first flow element lumen extending through the trunk and through the first arm to fluidly connect to a first well of a dual well port and the second flow element lumen extending through the trunk and the second arm to a second F arm to fluidly connect to a second well of the port, wherein the first and second flow element lumens are separated from one another in the trunk;
 - introducing a first fluid into the first well; and

introducing a second fluid into the second well so that the first and second fluids are passed to the blood vessel without intermingling with one another prior to leaving the distal ends of the first and second catheter lumens.

20. The method according to claim 19, further comprising injecting each of the first and second fluids into the corresponding ones of the first and second wells through a corresponding septum.
21. The method according to claim 19, further comprising connecting the F-shaped flow element to the dual well port.
22. An F-shaped connector for a dual well port, comprising:
 - a trunk including first and second connector lumens extending therethrough, distal ends of each of the first and second connector lumens being connectable to proximal ends of separate catheter lumens;
 - a first arm of the trunk extending from the trunk at an angle relative thereto and including an arm portion of the first connector lumen, a proximal end of the arm portion of the first connector lumen being fluidly connectable to a first well of the dual well port; and
 - a second arm of the trunk extending from the trunk at an angle relative thereto and including an arm portion of the second connector lumen, a proximal end of the arm portion of the second connector lumen being fluidly connectable to a second well of the dual well port, wherein the first and second connector lumens are separate from one another so that fluid from the first well does not mix with fluid from the first well before reaching the distal ends of the first and second connector lumens.
23. The connector according to claim 22, further comprising a partition of the trunk separating trunk portions of the first and second lumen connector lumens from one another.

24. The connector according to claim 22, further comprising an attachment for a flow control valve at an inlet of at least one of the first and second arms.
25. The connector according to claim 22, wherein the first and second arms are connectable to the port at an angle relative to an axis of the port.
26. The connector according to claim 25, wherein the angle relative to the axis is between about 30 degrees and about 60 degrees.
27. The connector according to claim 22, wherein the trunk is adapted to be disposed when connected to the dual well port at an angle selected to minimize a width of the dual well port.
28. The connector according to claim 22, wherein the trunk has one of a substantially circular and substantially semi-circular cross-sectional shape.

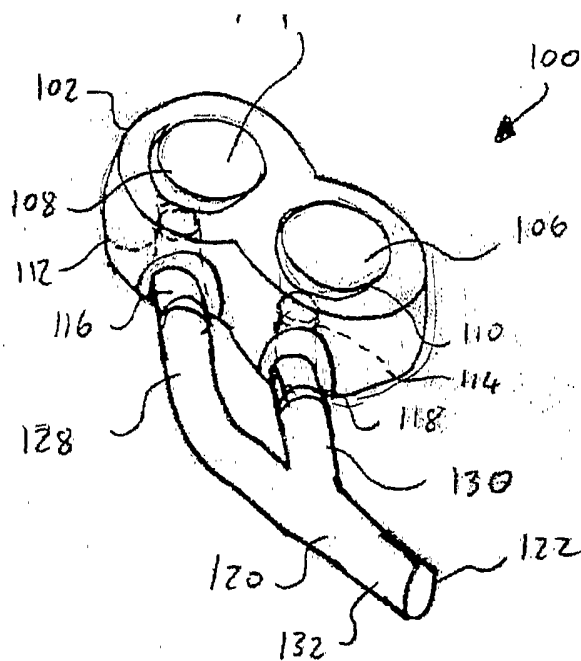


FIGURE 1

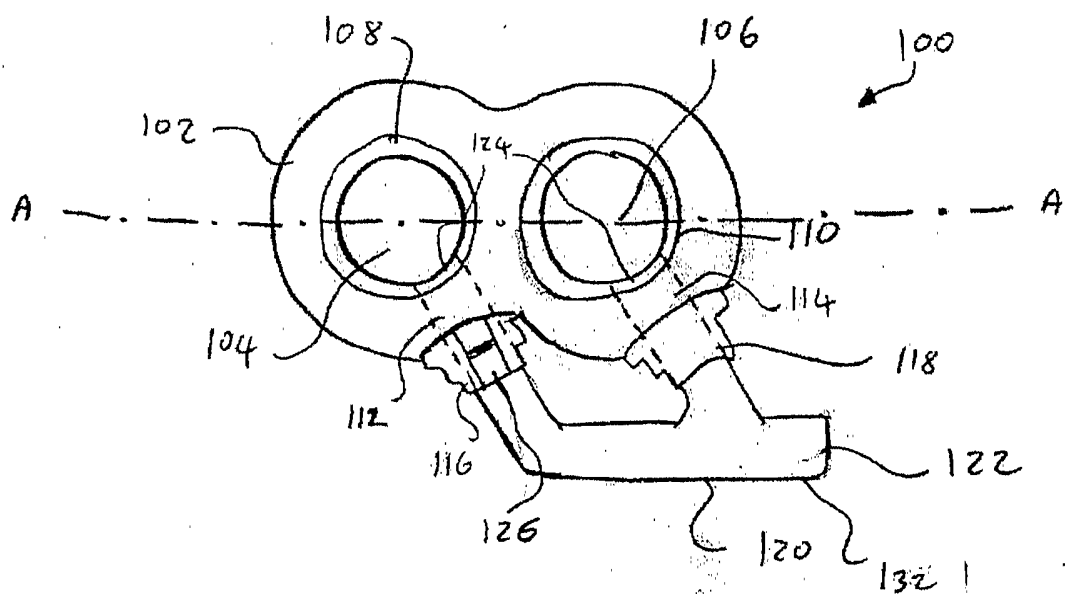


FIGURE 2

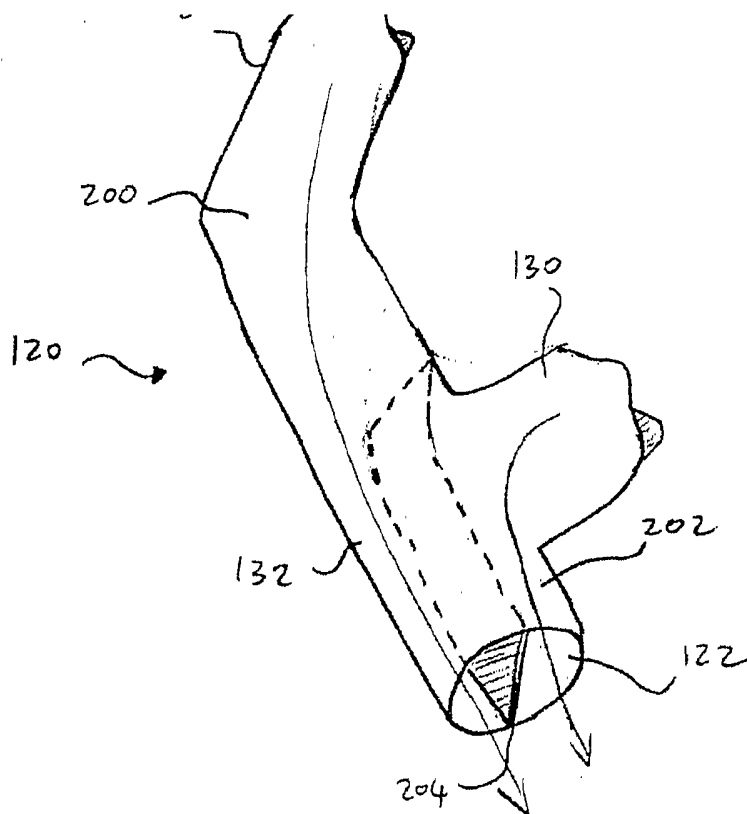


FIGURE 3

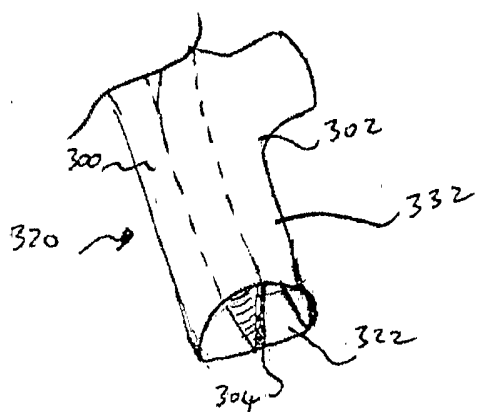


FIGURE 4

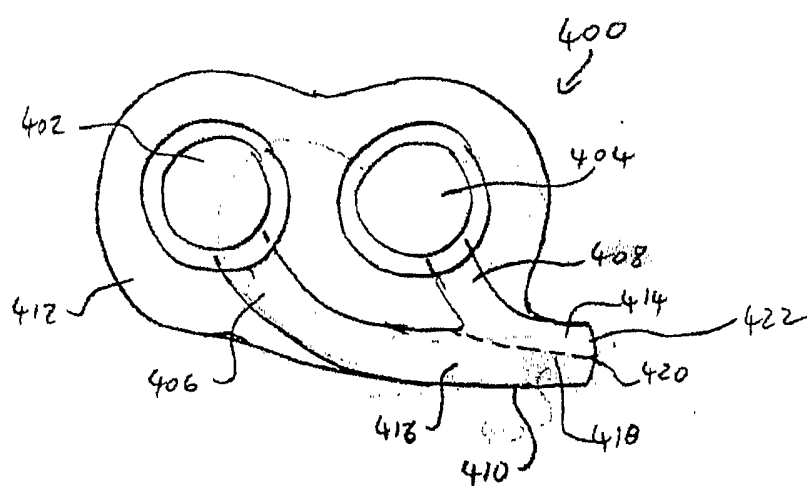


FIGURE 5

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US2004/043752

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61M39/02 A61M39/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 892 518 A (CUPP ET AL) 9 January 1990 (1990-01-09) column 4, line 66 - column 5, line 52 column 6, line 9 - line 58	1-17, 22-28
Y	figures 1-11A -----	18
X	US 5 350 360 A (ENSMINGER ET AL) 27 September 1994 (1994-09-27) figure 4 -----	1-17, 22-28
X	EP 0 343 910 A (SHILEY INFUSAID INC; INFUSAID, INC) 29 November 1989 (1989-11-29) figure 5 -----	1-17, 22-28
X	US 6 527 754 B1 (TALLARIDA STEVEN J ET AL) 4 March 2003 (2003-03-04) column 7, line 55 - line 64; figures 1b,4 ----- -/--	1-17, 22-28

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

21 April 2005

Date of mailing of the international search report

02/05/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Björklund, A

INTERNATIONAL SEARCH REPORT

Intern. Application No
PCT/US2004/043752

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 814 016 A (VALLEY ET AL) 29 September 1998 (1998-09-29) figure 5A	22
Y	US 5 755 780 A (FINCH, JR. ET AL) 26 May 1998 (1998-05-26) column 5, line 22 - line 37; figure 7	18
A	US 5 312 337 A (FLAHERTY ET AL) 17 May 1994 (1994-05-17) figures 5,13A-13C	1-18, 22-28

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2004/043752

Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 19-21
because they relate to subject matter not required to be searched by this Authority, namely:
see FURTHER INFORMATION sheet PCT/ISA/210
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

Continuation of Box II.1

Claims Nos.: 19-21

Claims 19-21 define methods for infusing fluids into a patient comprising the step of infusing fluids into a blood vessel. This represents a method for treatment of the human or animal body by therapy (Rule 39.1(iv) PCT). Furthermore, the method comprises the step of implanting catheter lumens into a blood vessel. This represents a method for treatment of the human or animal body by surgery (Rule 39.1(iv) PCT). Consequently, claims 19-21 have not been searched.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International Application No
PCT/US2004/043752

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4892518	A	09-01-1990	NONE	
US 5350360	A	27-09-1994	US 5057084 A	15-10-1991
			US 5053013 A	01-10-1991
			US 5180365 A	19-01-1993
			US 5226879 A	13-07-1993
			US 5281199 A	25-01-1994
			US 5417656 A	23-05-1995
			US 5476451 A	19-12-1995
			US 5554117 A	10-09-1996
			US 5556381 A	17-09-1996
			US 5527278 A	18-06-1996
			US 5531684 A	02-07-1996
			US 5520643 A	28-05-1996
			US 5527277 A	18-06-1996
			US 5503630 A	02-04-1996
			US 5542923 A	06-08-1996
			US 5607393 A	04-03-1997
			US 5792123 A	11-08-1998
			AT 147644 T	15-02-1997
			AU 645803 B2	27-01-1994
			AU 7674791 A	18-09-1991
			CA 2053251 A1	02-09-1991
			DE 69124164 D1	27-02-1997
			DE 69124164 T2	07-08-1997
			EP 0471837 A1	26-02-1992
			ES 2099745 T3	01-06-1997
			JP 3152435 B2	03-04-2001
			JP 5506591 T	30-09-1993
			WO 9112838 A1	05-09-1991
			US 5352204 A	04-10-1994
			US 5356381 A	18-10-1994
			US 5263930 A	23-11-1993
			IE 912287 A1	26-08-1992
			AU 653662 B2	06-10-1994
			AU 3050492 A	15-07-1993
			CA 2086484 A1	11-07-1993
			DE 69224892 D1	30-04-1998
			DE 69224892 T2	17-09-1998
			EP 0551017 A1	14-07-1993
			ES 2113930 T3	16-05-1998
			JP 6142210 A	24-05-1994
			AU 2358197 A	14-08-1997
			AU 675976 B2	27-02-1997
			AU 5100193 A	29-03-1994
			CA 2143873 A1	17-03-1994
			CA 2281950 A1	17-03-1994
			DE 69329660 D1	14-12-2000
			DE 69329660 T2	21-06-2001
			DE 69333562 D1	29-07-2004
			EP 1016431 A1	05-07-2000
			EP 0746381 A1	11-12-1996
EP 0343910	A	29-11-1989	US 4929236 A	29-05-1990
			AT 90579 T	15-07-1993
			AU 618093 B2	12-12-1991
			AU 3519589 A	30-11-1989
			CA 1302822 C	09-06-1992

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US2004/043752

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0343910	A		DE 68907128 D1	22-07-1993
			DE 68907128 T2	30-09-1993
			DK 253989 A	27-11-1989
			EP 0343910 A2	29-11-1989
			ES 2041000 T3	01-11-1993
			JP 1736045 C	26-02-1993
			JP 2029269 A	31-01-1990
			JP 4010832 B	26-02-1992
US 6527754	B1	04-03-2003	US 2003181878 A1	25-09-2003
			AU 2039900 A	26-06-2000
			EP 1137451 A1	04-10-2001
			WO 0033901 A1	15-06-2000
US 5814016	A	29-09-1998	US 5766151 A	16-06-1998
			US 5584803 A	17-12-1996
			US 5370685 A	06-12-1994
			US 5433700 A	18-07-1995
			US 5571215 A	05-11-1996
			US 5452733 A	26-09-1995
			US 5458574 A	17-10-1995
			AU 723379 B2	24-08-2000
			AU 5956596 A	30-12-1996
			CA 2222218 A1	19-12-1996
			DE 69626822 D1	24-04-2003
			DE 69626822 T2	04-03-2004
			EP 0836501 A1	22-04-1998
			JP 2001518808 T	16-10-2001
			WO 9640347 A1	19-12-1996
			US 6251093 B1	26-06-2001
			US 5795325 A	18-08-1998
			US 5863366 A	26-01-1999
			US 2001001812 A1	24-05-2001
			US 6482171 B1	19-11-2002
			US 2001010247 A1	02-08-2001
			US 5913842 A	22-06-1999
			US 2003040736 A1	27-02-2003
			US 5695457 A	09-12-1997
			US 5558644 A	24-09-1996
			US 5702368 A	30-12-1997
			US 5885238 A	23-03-1999
			US 5792094 A	11-08-1998
			US 5807318 A	15-09-1998
			US 6029671 A	29-02-2000
			US 5916193 A	29-06-1999
			US 5769812 A	23-06-1998
			US 2001044591 A1	22-11-2001
			US 5738652 A	14-04-1998
			US 5868702 A	09-02-1999
			US 6152141 A	28-11-2000
			AU 691854 B2	28-05-1998
			AU 1175995 A	19-06-1995
			AU 8613098 A	23-03-2000
			CA 2177491 A1	08-06-1995
			DE 69430382 D1	16-05-2002
			DE 69430382 T2	12-12-2002
			EP 1129744 A1	05-09-2001
			EP 0731720 A1	18-09-1996

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US2004/043752

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5814016	A		JP 9509074 T	16-09-1997
			JP 3618754 B2	09-02-2005
			WO 9515192 A1	08-06-1995
			AU 685161 B2	15-01-1998
			AU 7719794 A	10-04-1995
			CA 2171097 A1	30-03-1995
US 5755780	A	26-05-1998	US 5562617 A	08-10-1996
			US 6056717 A	02-05-2000
			AU 1683295 A	01-08-1995
			EP 0740561 A1	06-11-1996
			JP 9510885 T	04-11-1997
			US 6042569 A	28-03-2000
			US 2002087127 A1	04-07-2002
			WO 9519200 A1	20-07-1995
			US 6398764 B1	04-06-2002
			US 5807356 A	15-09-1998
			US 5713859 A	03-02-1998
			US 6053901 A	25-04-2000
US 5312337	A	17-05-1994	US 5129891 A	14-07-1992
			AT 146577 T	15-01-1997
			AU 655611 B2	05-01-1995
			AU 8925291 A	20-05-1992
			CA 2091568 A1	11-04-1992
			DE 9190145 U1	03-06-1993
			DE 69123752 D1	30-01-1997
			DE 69123752 T2	03-04-1997
			DK 553254 T3	09-06-1997
			EP 0553254 A1	04-08-1993
			ES 2094826 T3	01-02-1997
			GR 3022422 T3	30-04-1997
			HK 1008066 A1	30-04-1999
			JP 7081662 B	06-09-1995
			JP 5507342 T	21-10-1993
			WO 9207215 A1	30-04-1992