

# UK Patent Application (12) GB (19) 2 425 166 (13) A

(43) Date of A Publication 18.10.2006

(21) Application No:	0604515.7	(51) INT CL: B67D 3/00 (2006.01) F25D 15/00 (2006.01)
(22) Date of Filing:	21.01.2003	
Date Lodged:	07.03.2006	(52) UK CL (Edition X ): F4H H3
(62) Divided from Application No 0301372.9 under Section 15(4) of the Patents Act 1977		(56) Documents Cited: WO 1994/007793 A1 US 6092381 A
(71) Applicant(s): <b>Ebac Limited</b> (Incorporated in the United Kingdom) St Helen Trading Estate, BISHOP AUCKLAND, Co Durham, DL19 9AL, United Kingdom		(58) Field of Search: UK CL (Edition X ) F4H INT CL B65D, B67D, F25D Other: Online: WPI, EPODOC
(72) Inventor(s): <b>Philip Andrew Walton</b>		
(74) Agent and/or Address for Service: <b>Craske &amp; Co</b> Patent Law Chambers, 15 Queens Terrace, EXETER, Devon, EX4 4HJ, United Kingdom		

(54) Abstract Title: **A cooler for use with bag in box liquid containers**

(57) A cooling apparatus comprises a horizontal support surface 21 for supporting a bag in box liquid container 1 and a cooling probe 23 for insertion into the container 1 between the bag 15 and the box 10. The cooling probe 23 may be cooled by a refrigerant cooling system or a thermoelectric cooling system and may be inserted into at least one opening 18 adjacent a bottom wall 12 of the container 1. Probe 23 may be a flat plate (fig 3) may be with a bifurcated leading end (fig 4), may be a single cooling element bent into a serpentine manner (fig 5), or a plate divided into a group of two or more separate probes (figs 6 and 7). Opening 18 may be a single slot (fig 8), a row of separate openings to receive a group of separate probes (figs 9 and 10), or perforations defining openings which are burst though (fig 11) by the leading end of the probe 23 and may be of H or U configuration (figs 12 and 13). The leading end of the probe 23 may be smoothly curved with a chamfered edge (24, fig 15) to prevent damage to the bag 15. Bag 15 may also be protected by a hinged flap (25) moved upward by the probe 23 and thereby pushes the bag 15 out of the way.

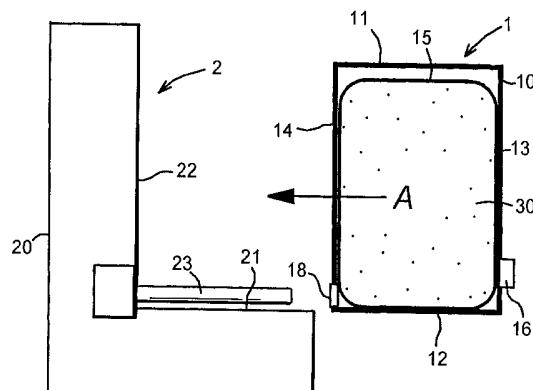


Fig. 1

GB 2 425 166 A

1/4

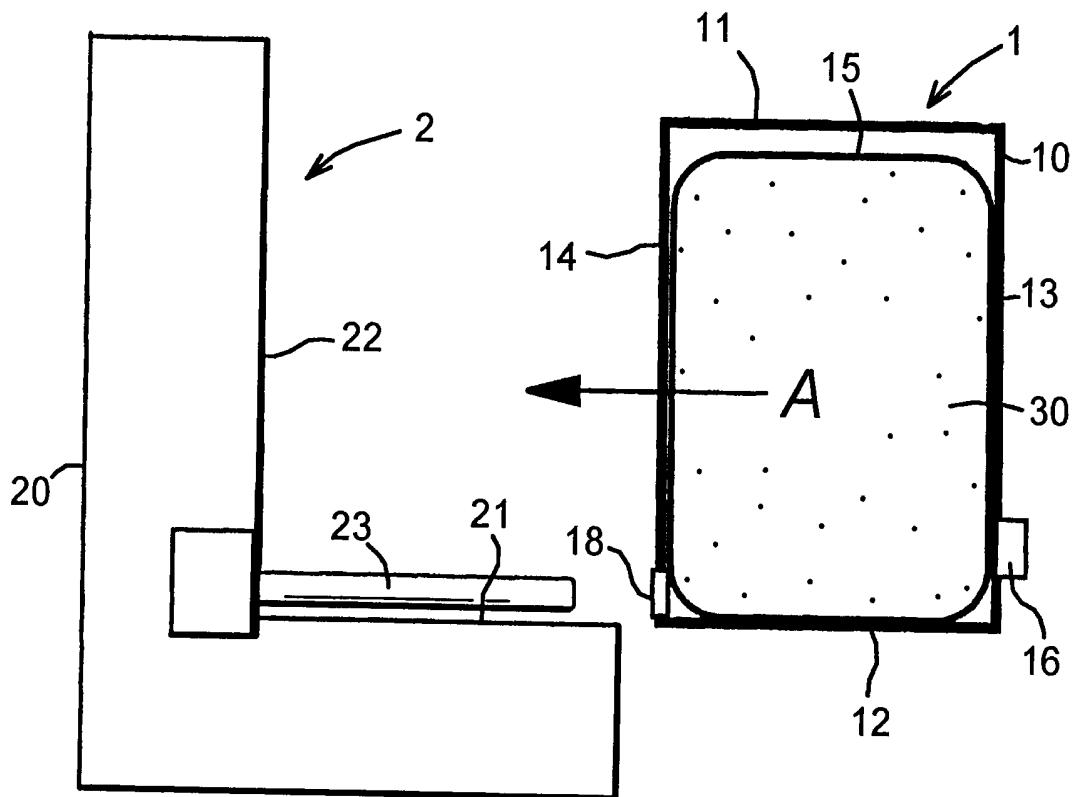


Fig. 1

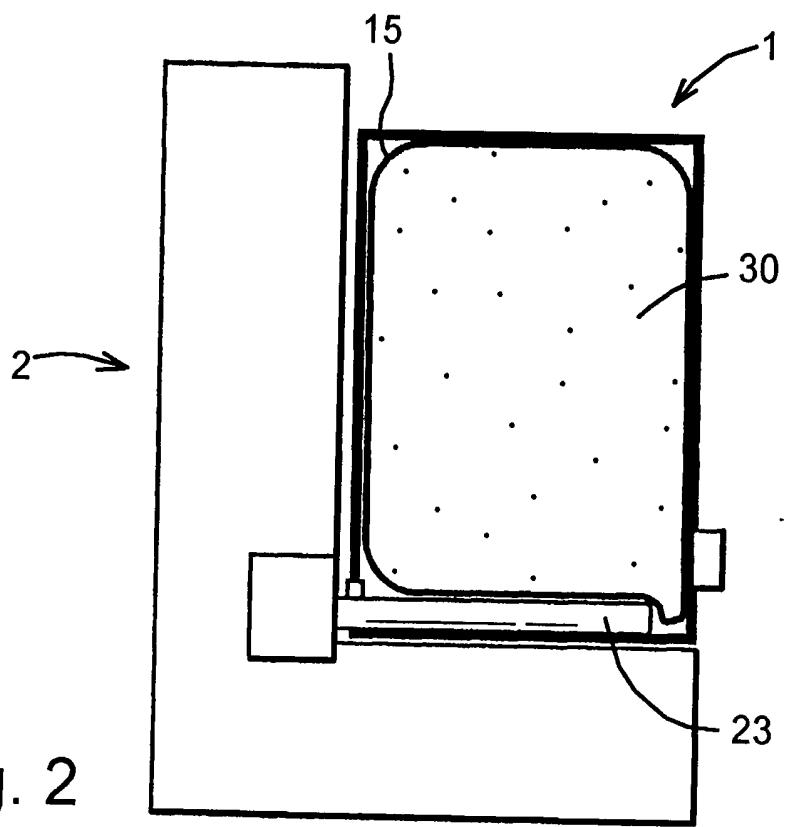


Fig. 2

2/4

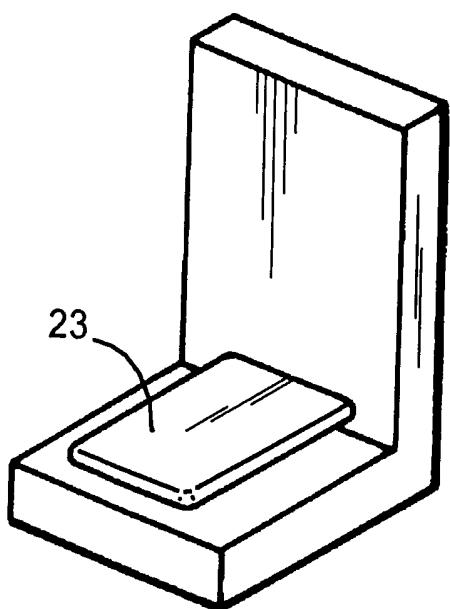


Fig. 3

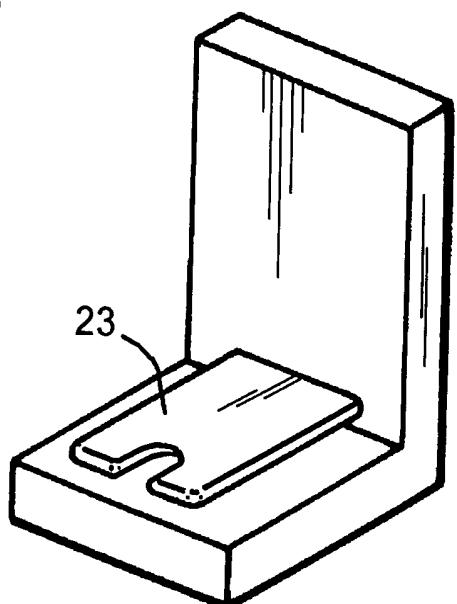


Fig. 4

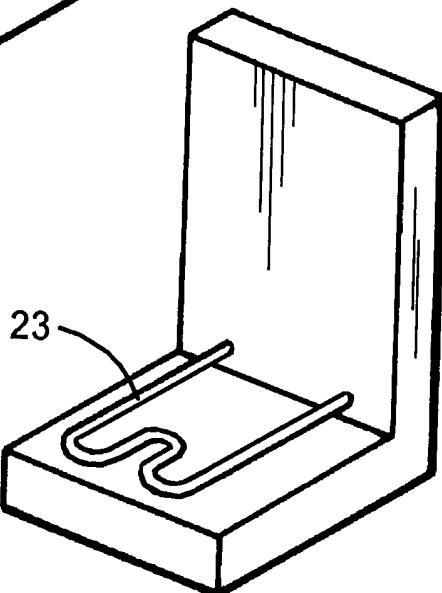


Fig. 5

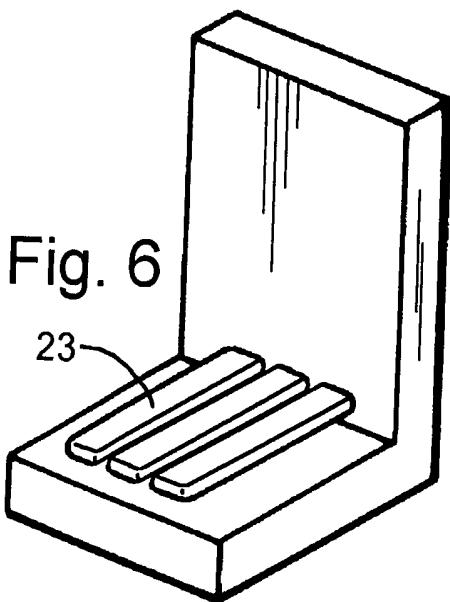


Fig. 6


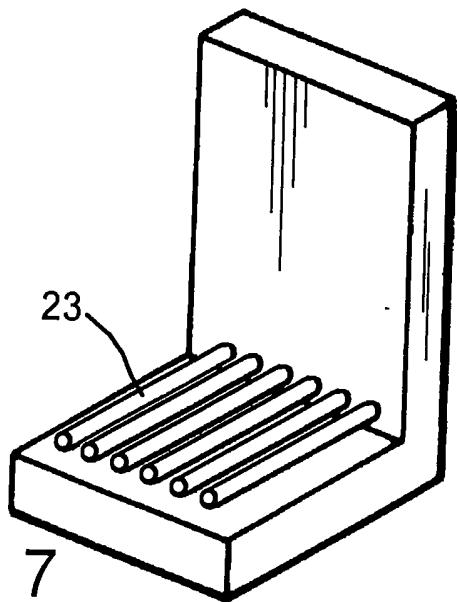


Fig. 7

3/4

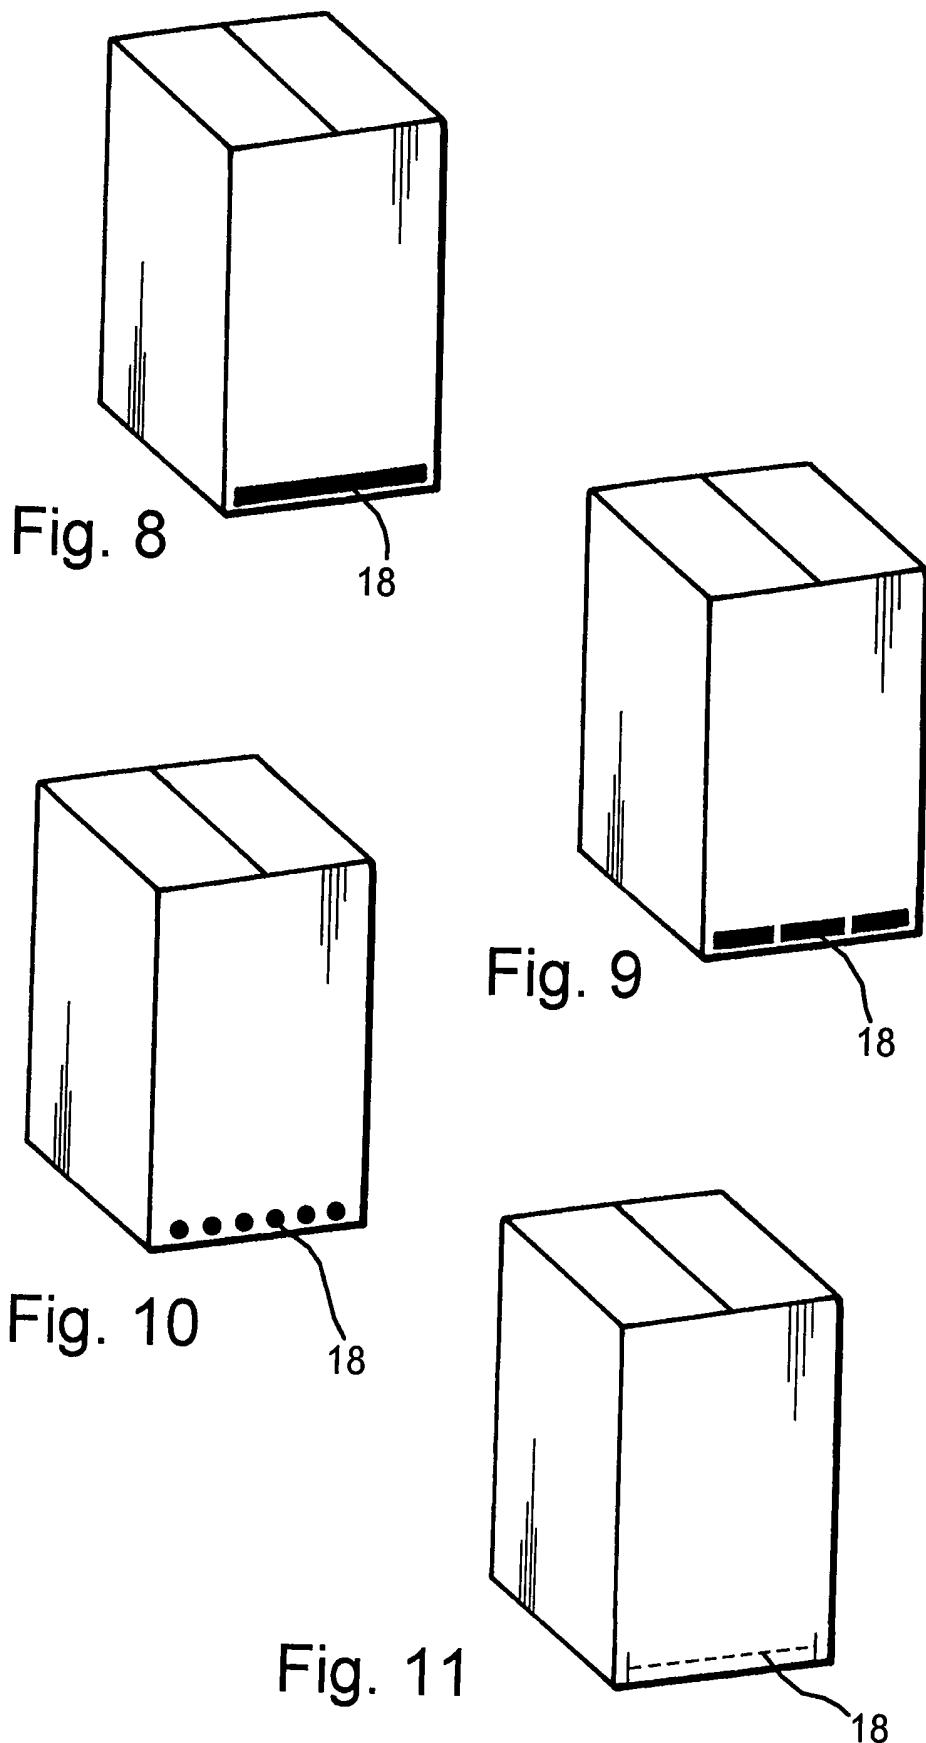

4/4

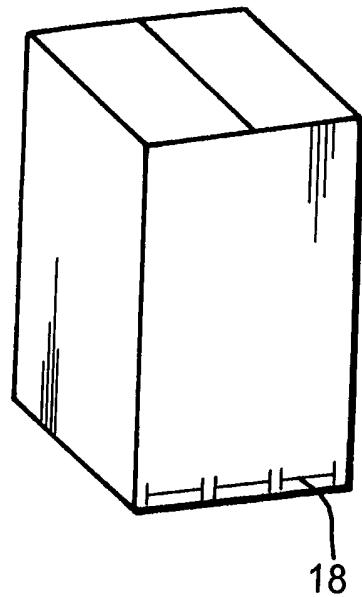


Fig. 12

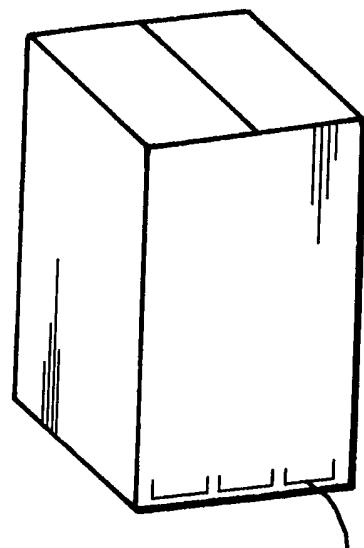


Fig. 13

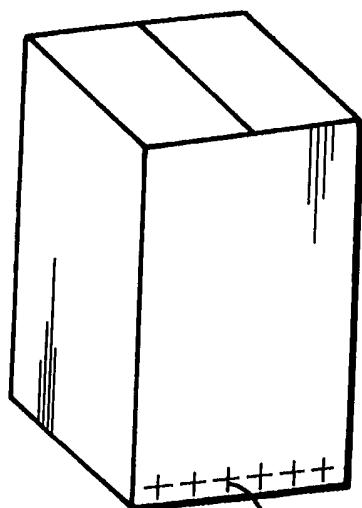


Fig. 14

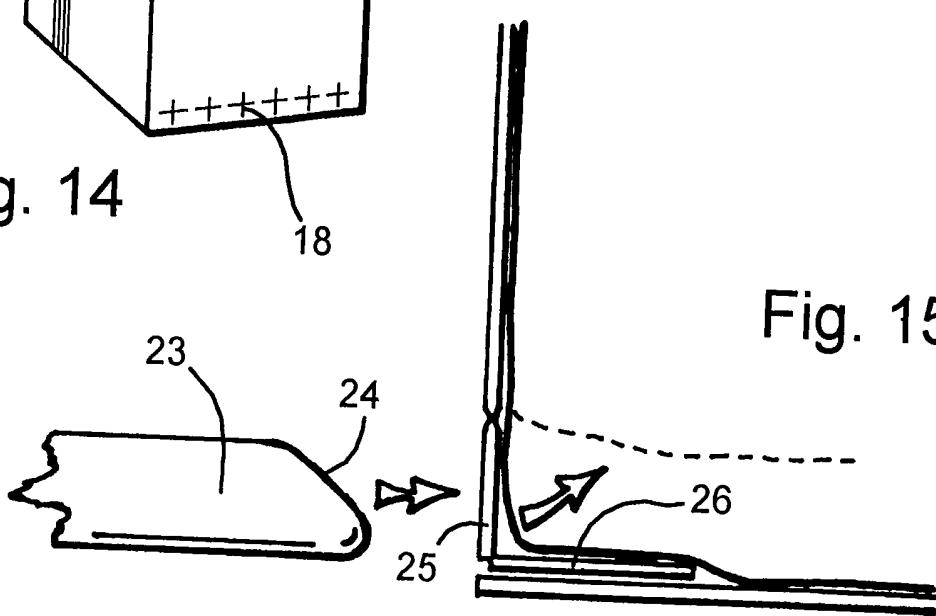


Fig. 15

## **BAG-IN-BOX CONTAINERS AND COOLERS**

---

### **TECHNICAL FIELD OF THE INVENTION**

This invention relates to bag-in-box liquid containers and coolers for use with such containers.

### **BACKGROUND**

Many liquids are distributed in a kind of container which is generally known as a bag-in-box container. Common examples include wine, water, milk, juices, blood and other medical products. Such containers have an outer protective casing (the box) which is generally formed of cardboard or another relatively rigid material, and the liquid is held within an impermeable inner liner (the bag) which is formed of a flexible material such as plastic. The bag is often provided with a dispensing valve which projects through an opening in the box to allow the contents to be removed from the bag. Such containers have many advantages over other forms of container. They are robust, lightweight and inexpensive, and since the bag collapses as the liquid is removed, the contents are protected from contact with air until the container is almost empty. Many products deteriorate on contact with air so that the product has a longer shelf life in a bag-in-box container.

Furthermore, if the liquid is sealed into the bag under sterile conditions there is minimal risk of contamination with dirt or bacteria prior to use.

Some liquid products need to be stored and/or dispensed at a temperature which is below ambient. The cooling of products in bag-in-box containers presents somewhat of a problem since the most suitable materials for the box are generally good heat insulators. Furthermore, when a proportion of the liquid is removed the increasing air space between the bag and the box also forms an additional layer of heat insulation. A common method of chilling the contents of a bag-in-box container is to place the entire container into a chilled enclosure, but this requires considerable time and heat energy to chill the liquid to the required level. A more efficient method is to remove a portion of the box to expose an area of the bag to a chilled heat exchange surface, but this entails a considerable risk of damaging the bag, and also inconveniences the user.

The present invention seeks to provide a new and inventive form of bag-in-box container and a new and inventive cooling apparatus for use with the container which entail a minimum of inconvenience for the user and provide more rapid and effective cooling of the contents.

#### SUMMARY OF THE INVENTION

The present invention provides a bag-in-box container having a box forming a relatively rigid outer casing with top, bottom and side walls, and an inner liner providing a bag formed of a flexible material with a liquid outlet extending through an opening in the outer casing, in which the side walls are

formed to provide at least one second opening adjacent to the bottom of the container through which a cooling probe can be inserted between the casing and the liner.

The invention also provides liquid cooling apparatus which includes a support surface for supporting a bag-in-box liquid container and a cooling system which includes at least one cooling probe which is mounted to project generally parallel to said support surface spaced a short distance thereabove for insertion into said container between the bottom of the bag and the bottom of the box.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

The following description and the accompanying drawings referred to therein are included by way of non-limiting example in order to illustrate how the invention may be put into practice. In the drawings:

Figure 1 is a side view of a bag-in-box container and cooler in accordance with the invention;

Figure 2 is a similar view to Fig. 1 showing the container installed on the cooler;

Figures 3 to 7 are general views of five different forms of the cooler;

Figures 8 to 14 are general views of seven different forms of

the container; and

Figure 15 is a vertical sectional detail of the container.

#### DETAILED DESCRIPTION OF THE DRAWINGS

Referring firstly to **Fig. 1**, a bag-in-box container is indicated generally at 1 and a cooler for use with the container is indicated generally at 2.

The container 1 includes a box 10 forming a relatively rigid outer casing formed of cardboard, sheet plastic or other suitable material. The box has rectangular top and bottom walls 11 and 12, joined by four upstanding rectangular side walls, only the front and rear walls 13 and 14 being visible in the drawings. The box has an inner liner 15 of a flexible material forming a bag which is substantially filled with liquid 30 and held free within the box. The bag has a liquid outlet 16 which extends through an opening in the box 10 towards the bottom of the front wall 13. The outlet may incorporate a discharge valve, but it may also be connected by a length of tubing to a remote discharge valve. The outlet could also be located at the top of the box with a dip tube extending inside the bag to remove liquid from the bottom of the container. The box has at least one second opening 18 provided in the side walls immediately above the bottom wall 12. In this case the opening is formed in the rear wall 14. The form of the or each second opening is described in more detail below.

The cooler 2 includes a housing 20 forming a horizontal platform 21, configured to support the container 1, and an upstanding rear wall 22. A

cooling probe 23 projects from the rear wall 22 generally parallel to the support platform 21 and spaced a short distance above the platform. The probe can be cooled by known means such as condenser coils included in a refrigerant cooling system of the kind including a compressor, an expansion valve and an evaporator. A thermoelectric cooling system could also be used, if desired.

The box is slid onto the platform 21 in the direction of the arrow A shown in **Fig. 1**, so that the cooling probe 23 enters the opening or openings 18 and passes into the container between the bag 15 and the bottom wall 12, as shown in **Fig. 2**, slightly displacing the bag upwardly within the box. Since the probe is disposed between the box and the liner the probe is in close heat exchange contact with the liquid 30 through the wall of the liner, ensuring that the contents are cooled very quickly and efficiently.

To ensure maximum efficiency the cooling probe is preferably of a generally planar configuration, but it may take various forms. For example, the probe 23 may be a flat plate as shown in **Fig. 3**, possibly with a bifurcated leading end as in **Fig. 4**. Another possibility is a single cooling element bent into a planar serpentine configuration as in the simple example shown in **Fig. 5**. The plate may also be divided to form a group of two or more separate probes as shown in **Fig.s 6 and 7**.

The box may have a single slot-like opening 18 to receive a single cooling probe as shown in **Fig. 8**, but to avoid weakening the box it is preferable to provide a row of separate openings to receive a group of separate probes as shown in **Fig.s 9 and 10** which are suitable for use with the coolers of **Fig.s 6 and 7** respectively. Rather than having one or more discrete openings the

box may have perforations to define openings which are burst-through by the leading end of the cooling probe 23. Thus, a single row of perforations may be provided as in **Fig. 11**, preferably with perpendicular rows of perforations at each end to form one or more flaps which move inwards as the probe is inserted. Separate probes may have respective groups of perforations provided in an H or U configuration as in **Fig.s 12 and 13**, and when the cross-sectional area of the individual probes is small the perforations may be in a cruciform configuration as in **Fig. 14**.

In order to ensure smooth insertion of the cooling probe 23 beneath the bag 15 its leading end may be smoothly curved, preferably with a chamfered upper edge 24 as shown in **Fig. 15**. The risk of damaging the bag may be further reduced by providing an internal hinged flap 25 which is moved upwardly by the probe to push the bag out of the way, as indicated by dashed lines. The flap may have two or more additional hinged sections 26, and it may be formed by the wall of the box 10 as shown or provided as a separate element fixed within the box.

As the container is emptied the bag 15 slowly collapses in known manner, but the weight of the liquid maintains effective cooling contact with the probe 23.

Although it is preferred to insert the cooling probe beneath the bag for most efficient cooling it would also be possible to insert a probe alongside the bag towards the bottom of the container.

It will be appreciated that the features disclosed herein may be present in any feasible combination. Whilst the above description lays emphasis on those

areas which, in combination, are believed to be new, protection is claimed for any inventive combination of the features disclosed herein.

\* \* \* \* \*

**CLAIMS**

---

1. Liquid cooling apparatus which includes a support surface for supporting a bag-in-box liquid container and a cooling probe for insertion into the container between the bag and the box.
2. Liquid cooling apparatus according to Claim 1 in which the cooling probe is mounted to project generally parallel to the support surface.
3. Liquid cooling apparatus according to Claim 1 or 2 which includes a plurality of cooling probes.
4. Liquid cooling apparatus according to any preceding claim in which the cooling probe or probes have a generally planar configuration.
5. Liquid cooling apparatus substantially as described with reference to the drawings.

\* \* \* \* \*



For Innovation

9

**Application No:** GB0604515.7

**Examiner:** Stephen Hart

**Claims searched:** 1 - 4

**Date of search:** 14 August 2006

## Patents Act 1977: Search Report under Section 17

### Documents considered to be relevant:

Category	Relevant to claims	Identity of document and passage or figure of particular relevance
A		WO 94/07793 A1 (EBTECH) see figs 6, 7 & 10 - 12.
A		US 6092381 A (HSINLON) see figs 2 & 4.

### Categories:

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

### Field of Search:

Search of GB, EP, WO & US patent documents classified in the following areas of the UKC<sup>X</sup> :

F4H

Worldwide search of patent documents classified in the following areas of the IPC

B65D; B67D; F25D

The following online and other databases have been used in the preparation of this search report

Online: WPI, EPODOC