



(19) **United States**

(12) **Patent Application Publication**

Trepka

(10) **Pub. No.: US 2003/0117109 A1**

(43) **Pub. Date:**

Jun. 26, 2003

(54) **PARALLEL BATTERY CHARGING DEVICE**

(52) **U.S. Cl.** 320/126

(76) Inventor: **Ron Trepka**, Cleveland, OH (US)

Correspondence Address:

John J. Del Col
Renner, Otto, Boisselle & Sklar, LLP
Nineteenth Floor
1621 Euclid Avenue
Cleveland, OH 44115-2191 (US)

(21) Appl. No.: **10/028,464**


(22) Filed: **Dec. 21, 2001**

Publication Classification

(51) **Int. Cl.⁷** **H02J 7/00**

(57) **ABSTRACT**

A battery charging device for simultaneously charging the cells of a multi-cell battery in parallel wherein an induction coil distributes and isolates the charging energy to each cell. The parallel battery charger may be used with any battery having common two-electrode cells without breaking the inter-cell connections. Additionally, each cell may include a third or charging electrode that is used exclusively for charging. Each cell of this type of battery is charged by coupling a third electrode and a bifunctional electrode in parallel with the battery charger.

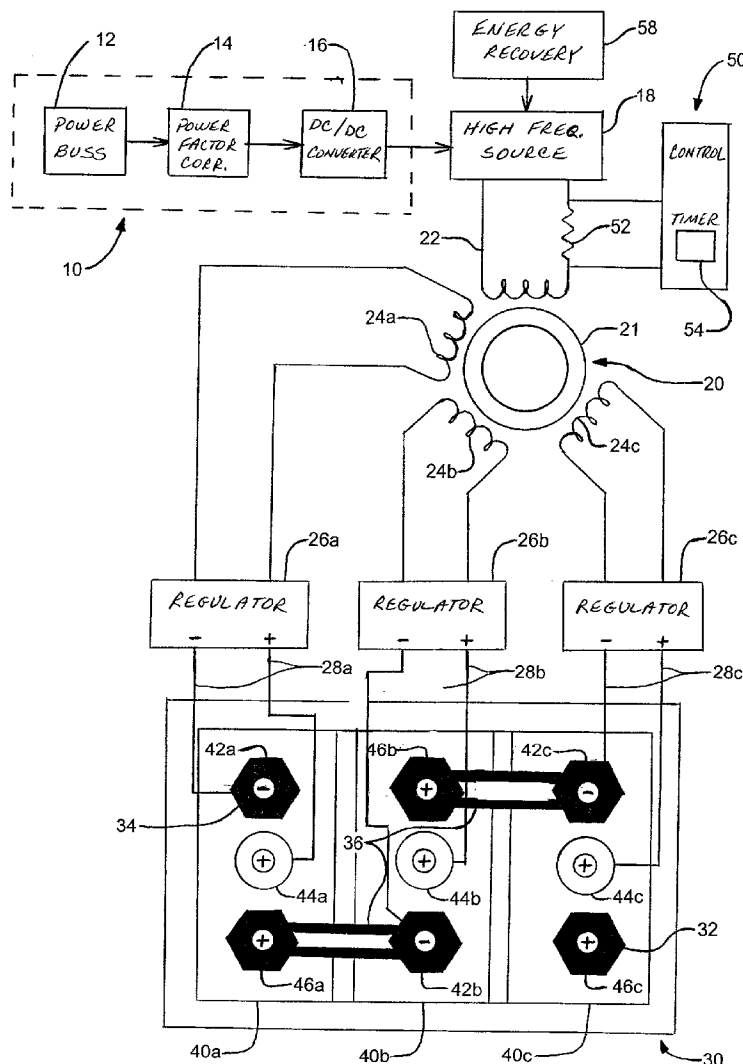

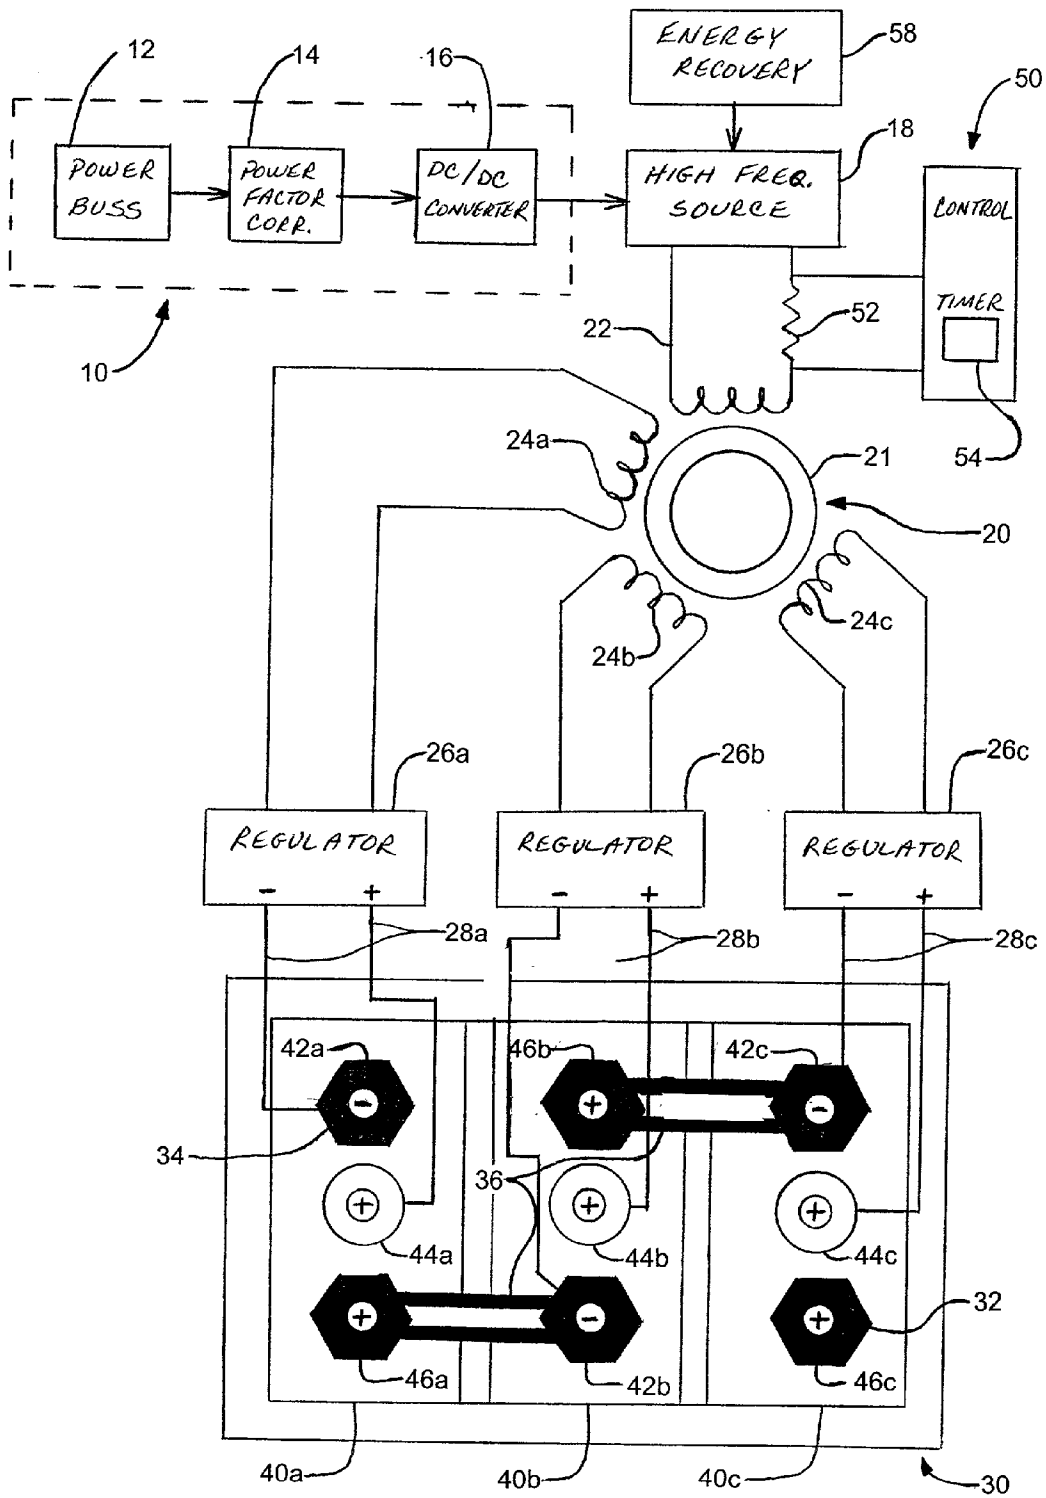


FIGURE 1

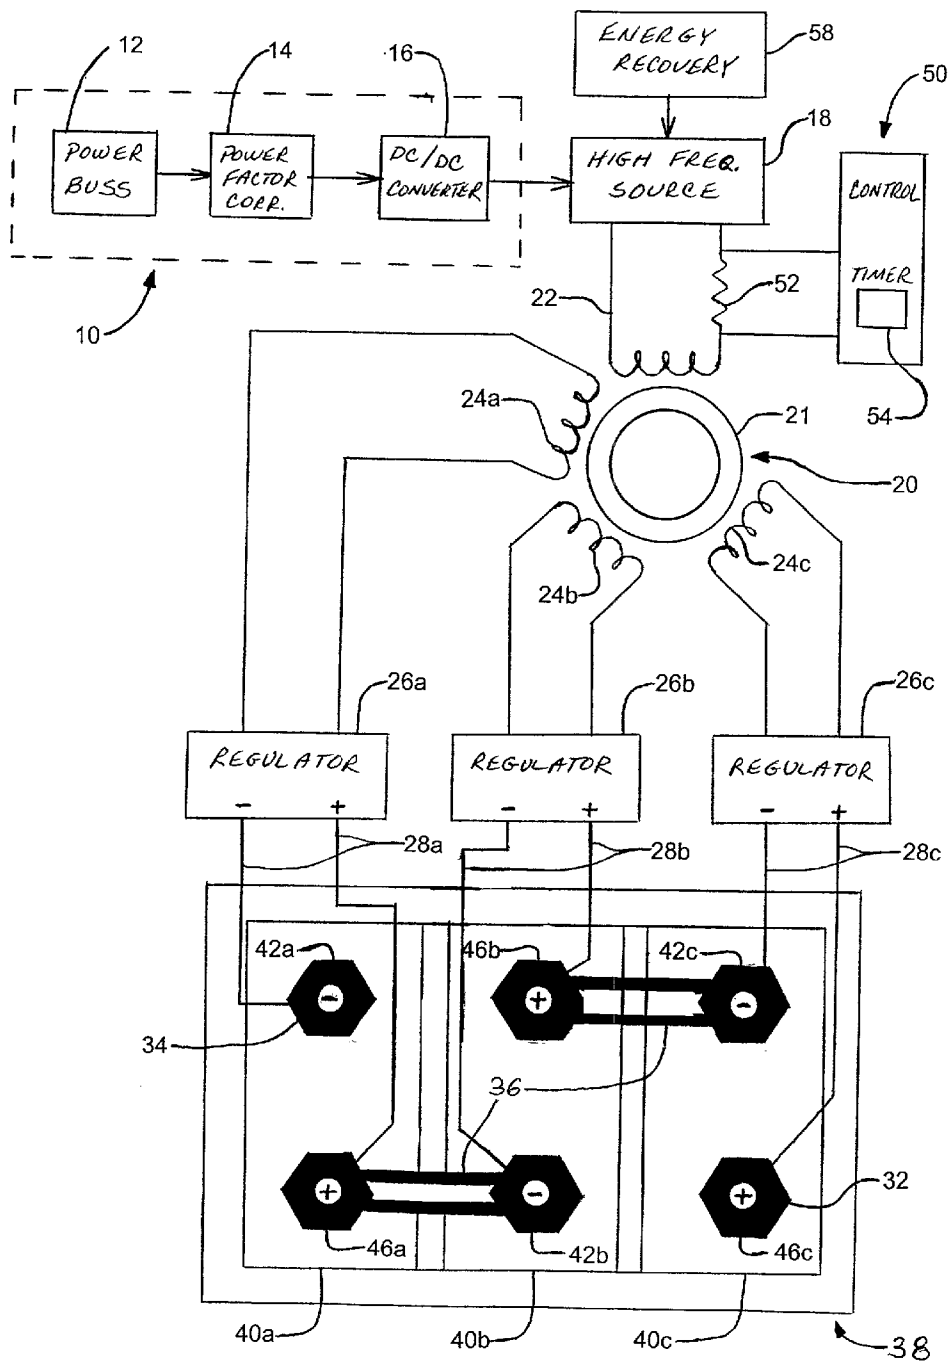


FIGURE 2

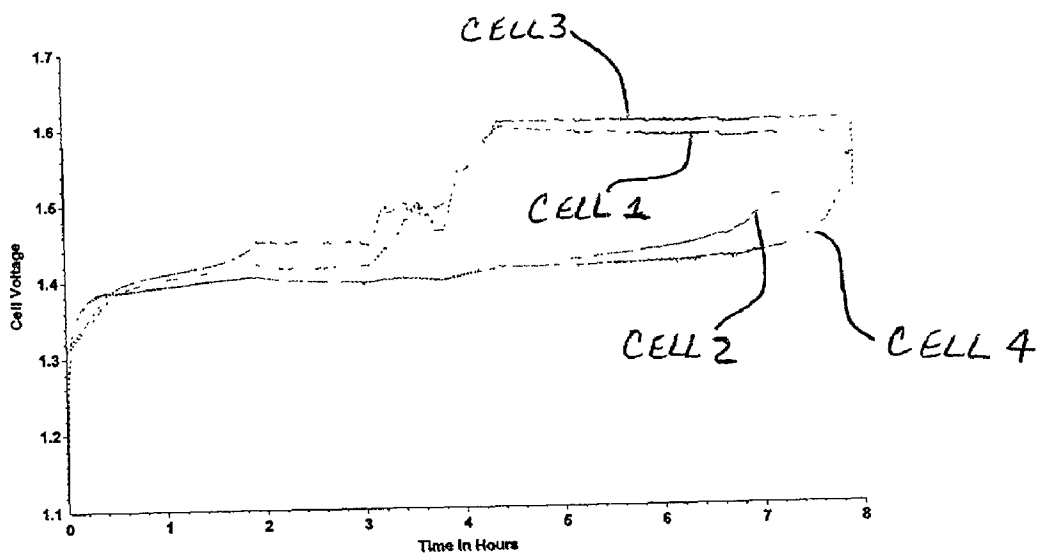


FIGURE 3A

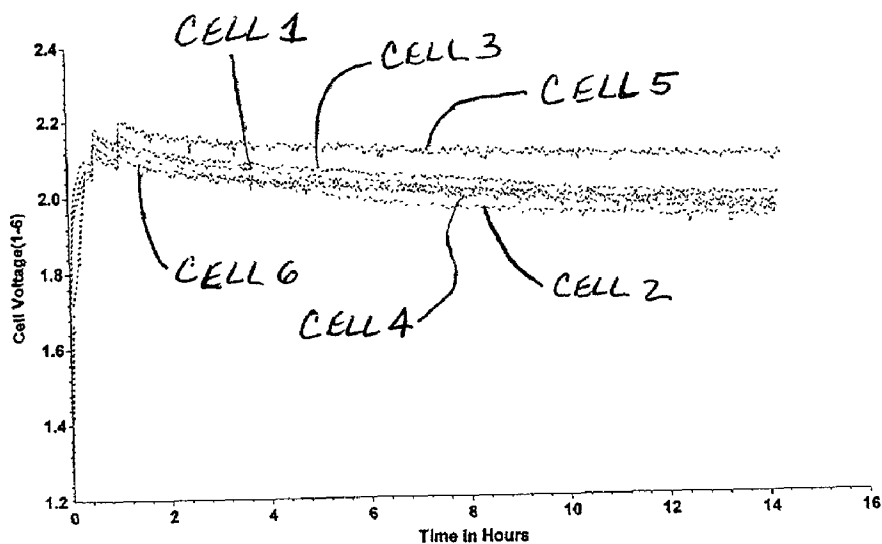


FIGURE 3B

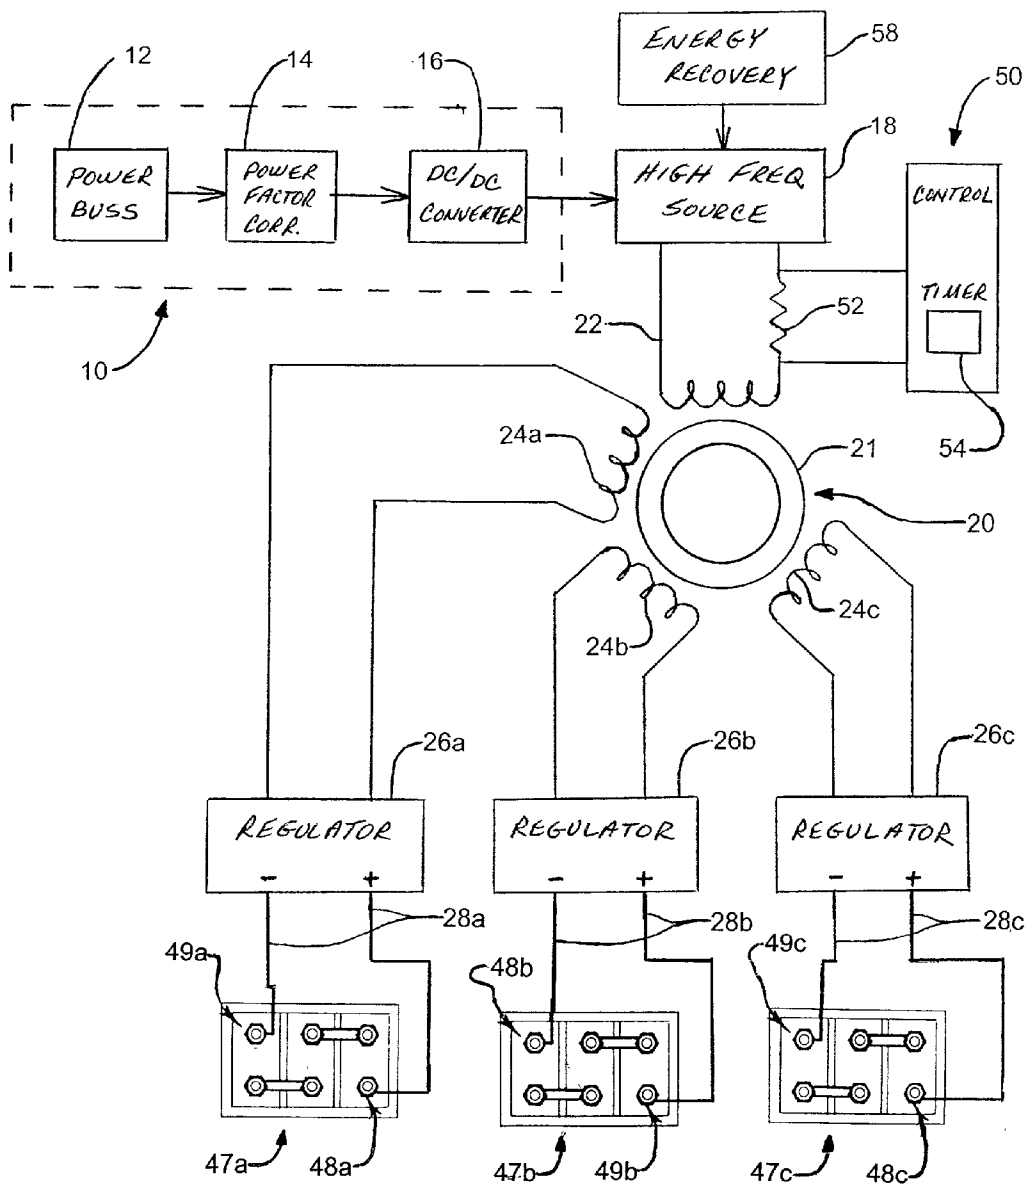


FIGURE 4

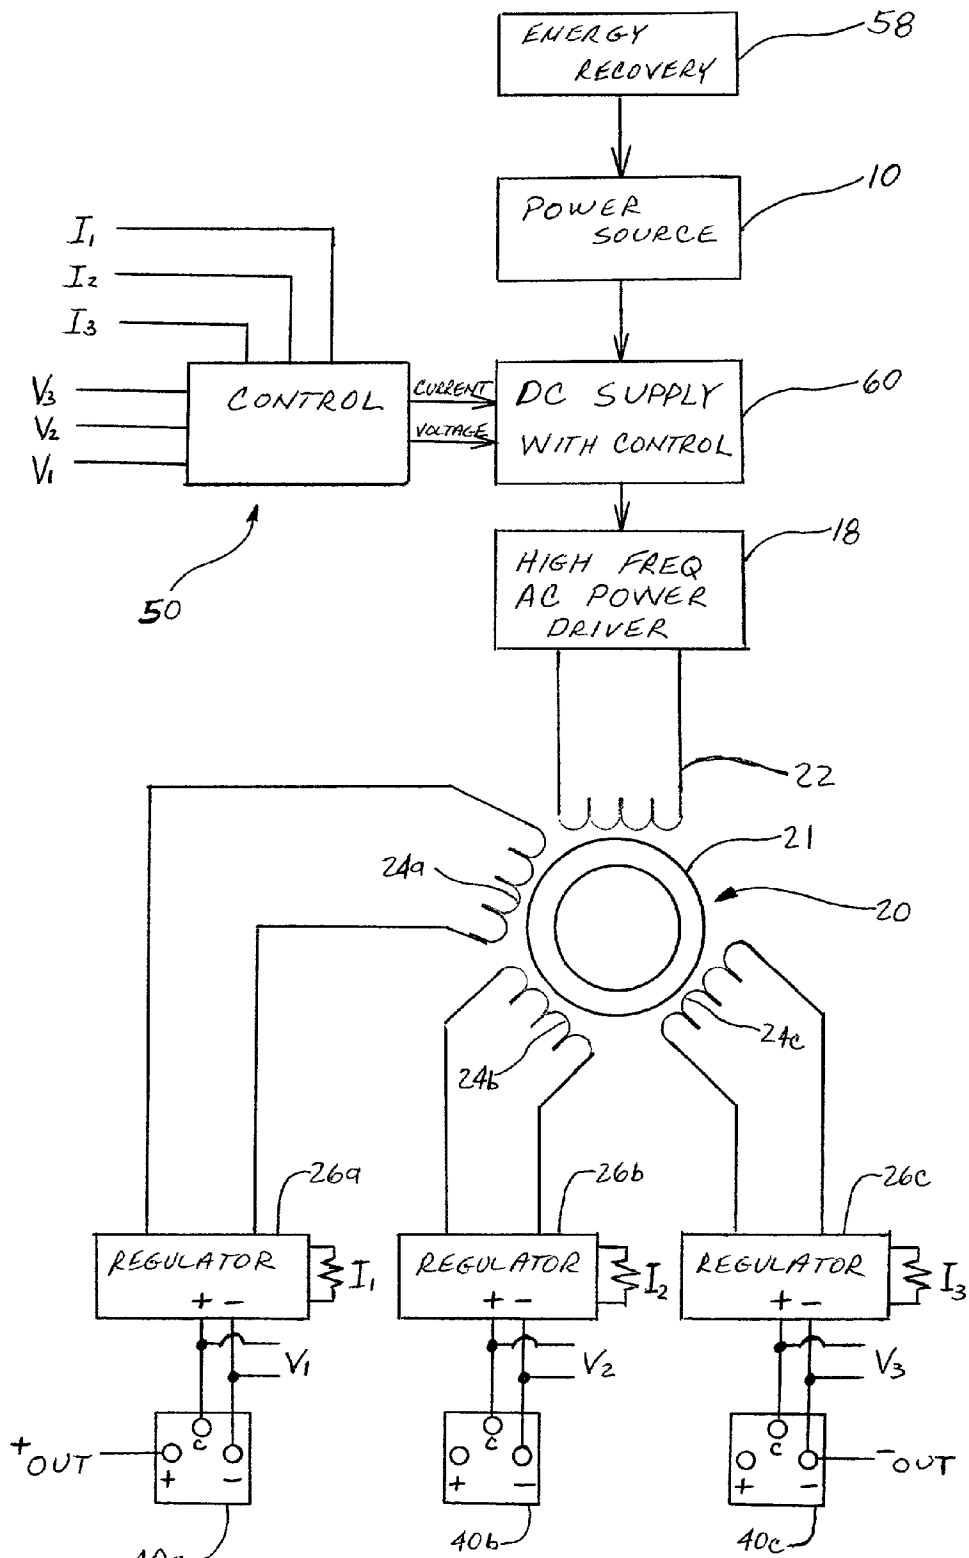


FIGURE 5

PARALLEL BATTERY CHARGING DEVICE

FIELD OF THE INVENTION

[0001] The present invention generally relates to a device and method for charging electrochemical cells of a multi-cell battery or the simultaneous charging of multiple batteries. In particular, the invention relates to charging a battery with multiple cells wherein each cell includes a third or charging electrode that is used exclusively for charging. Each cell of the battery is charged simultaneously by coupling a third electrode and a bifunctional electrode in parallel with the battery charger. An induction coil distributes and isolates the charging energy to each cell. The cells of the battery, typically wired in series, require no disassembly for charging. The battery charger is used with a metal-air battery to prolong the life of the cathode but may also be used to charge common two-electrode multi-cell batteries in parallel without breaking the inter-cell connections. It may also be used to charge a plurality of conventional two-terminal batteries wired in parallel.

BACKGROUND OF THE INVENTION

[0002] Generally, battery packs include several battery cells connected in series. Ideally, each of the battery cells within a battery pack will have similar charging, discharging, and efficiency characteristics. However, this ideal scenario is not normally encountered. Thus, a battery pack ordinarily contains several multiple battery cells with each battery cell having different charging characteristics. This condition may produce many problems related to the overcharging and undercharging of the battery cells. For instance, fully charging one battery cell in a battery pack and continuing to charge it may result in overcharging and damage to the fully charged cell. Likewise, ending a charge cycle when only one battery cell is fully charged may result in undercharging one or more of the other battery cells in the battery pack. Therefore, there is a need for a system to provide an isolated charging cycle that accommodates multiple battery cells having varying charging characteristics.

[0003] The present invention relates generally to a method and apparatus for rapidly and safely charging a plurality of battery cells from a single power supply. Given the anticipated proliferation of electric vehicles including electric scooters, it will be necessary to have a reasonably standardized recharging apparatus located at, for instance, the vehicle operator's residence, place of business, parking garage, recharge station, and the like. Additionally, the same design may be used to simultaneously charge multiple batteries for portable devices such as personal computers, cellular phones, and the like.

[0004] Generally, there are two types of battery cells. Cells that are useful for only a single discharge cycle are called primary cells, and cells that are rechargeable and useful for multiple discharge cycles are called secondary cells. There are many varieties of secondary cells including the common lead-acid and nickel-cadmium (ni-cad) batteries and the less common metal-air batteries such as the zinc-air battery disclosed in patent application Ser. No. 09/552,870, herein incorporated by reference.

[0005] Battery packs comprised of metal-air cells provide a relatively light-weight power supply. Metal-air cells utilize oxygen from ambient air as a reactant in an electrochemical

reaction. Metal-air cells include an air permeable electrode as the cathode and a metallic anode surrounded by an aqueous electrolyte and function through the reduction of oxygen from the ambient air which reacts with the metal to generate an electric current. For example, in a zinc-air cell, the anode contains zinc, and during operation, oxygen from the ambient air along with water and electrons present in the cell are converted at the cathode to hydroxyl ions. Conversely, at the anode zinc atoms and hydroxyl ions are converted to zinc oxide and water, which releases the electrons used at the cathode portion of the cell. Thus, the cathode and anode act in concert to generate electrical energy.

[0006] Metal-air batteries may be charged mechanically and electrically. Mechanical charging is accomplished by physically replacing the electrolyte, the electrodes, or a combination thereof. (For example, see U.S. Pat. Nos. 5,569,555; 5,418,080; 5,360,680; and 5,554,918). Such a charging method requires special equipment, special skills, an inventory of electrolyte and electrodes, and a plan for storing and disposing of hazardous chemicals. Conversely, electrical recharging avoids these disadvantages. The electrically rechargeable metal-air cell is recharged by applying a charging voltage between the anode and cathode of the cell and reversing the electrochemical reaction. During recharging, the cell discharges oxygen to the atmosphere through a vent.

[0007] While clean and efficient, electrical charging of a conventional multi-cell battery does have some other disadvantages. In particular, most multi-cell batteries are designed such that the cells are connected in "series" such that the discharge voltage between the battery terminals may be increased. For example, a 12-volt battery is normally comprised of 6 battery cells, each producing 2 volts, wired end-to-end in "series" to provide 12 volts across the two battery terminals. Such a configuration may be electrically recharged by applying a charging voltage across the two battery terminals to reverse the electrochemical process that occurs on discharge. When connected for charging in this fashion, each battery cell wired in series, necessarily receives the identical current flow regardless of its current state of charge and ability to convert this energy to electrochemical storage.

[0008] By forcing the same charging current to each cell, charging the battery cells in series is disadvantageous. During the electrochemical recharge cycle of a battery cell, the cell passes through several stages of charging. It is well known that during charging, a phenomenon known as "gassing" occurs, that is to say, the battery electrolyte dissociates into gaseous components which may emanate as bubbles. It is usually desirable to reduce the battery charging current during "gassing" so as to avoid damage to the electrode which would otherwise be caused by maintaining the charging current at the higher levels permissible in the "pre-gassing" or "bulk-charge" phase of charging. Thus, it is desired that the battery charger provide a separate charging circuit to each battery cell such that the charging current may be optimized for each stage of a cell's charging cycle.

[0009] It remains that the two-electrode cells of conventional batteries, connected in "series," cannot be charged "conventionally" through separate charging circuits as the cells are linked end-to-end. Such batteries may be charged in

parallel by a conventional battery charger only if the inter-cell connections or links are broken or disconnected. In this manner, each cell is independent and separate charging circuits may be attached to each cell.

[0010] In the metal-air battery arena, there are two main types of electrically rechargeable batteries. One type includes those with three electrodes for each cell, namely, a bifunctional anode, a discharge cathode, and a charging-electrode (i.e. a third electrode). The discharge cathode is designed to optimize the discharge cycle of the metal-air cell and may be incapable of recharging the cell. Instead, the charging-electrode is used to recharge the metal-air cell. Another type of metal-air cell includes two electrodes, both electrodes being bifunctional. The bifunctional electrodes function in both the discharge mode and the charge mode of the cell, thus eliminating the need for a third electrode. Bifunctional electrodes, however, suffer from a major drawback; they do not last long because the charging cycle deteriorates the discharge system (i.e., bifunctional electrodes suffer from decreasing performance as the number of discharge/charge cycles increase). In some cases as the voltage creeps up the cell may develop a short circuit as a result of a zinc dendrite forming a metallic bridge to the positive electrode, and will consequently cease to function even though the cathode is in good condition and capable of further service.

[0011] Thus, tri-electrode cells are advantageous when compared to two-electrode cells in that they offer more stable performance over a greater number of discharge/recharge cycles. In view of the above and the increased availability of tri-electrode batteries, there is a need in the art for an improved battery charging device and method for charging each of the battery cells independently and simultaneously.

[0012] The need for an improved battery charging device with cell balancing is illustrated by the following scenario. For example, a battery with four cells intended to be identical typically are not identical for many reasons. In a metal-air cell, the electrolyte may not wet the entire anode thereby leaving useable material isolated. Through cycling, the zinc can become detached from the current collector and become isolated. The resulting parasitic loss may not be equal and some cells will self discharge differently. During discharge, one or more cells will determine the end of discharge. The remaining cells will have some residual energy but cannot be discharged in series as that would damage the empty cell(s). On the next charge cycle, the cell with the most residual charge will be fully charged prior to the other cells, if the cells are charged in series. Further series charging may damage the fully charged cell and the remaining cells are denied a full charge. As the process continues, the cells unbalance further and each cycle capacity is reduced. **FIG. 3A** shows a set of nickel cadmium cells that are unbalanced by 10 ampere-hours. In this case, 3 ampere-hours is restored to the unbalance after charging.

SUMMARY OF THE INVENTION

[0013] This invention relates to a parallel charging system for a multi-cell battery wherein each battery cell may or may not include a third charging electrode. The charging electrode eliminates the need to disconnect cells for parallel charging. The parallel charging system disclosed herein can

provide the same function. The invention allows for cell charging via the respective charging electrodes without breaking inter-cell connections. Further, the invention provides for isolation of each charging circuit and battery cell by employing an induction core operatively coupled to each cell. Each cell may be connected to the induction core such that the charging current is provided to each cell independent of the other cells via a separate circuit. The induction core automatically balances the current to each cell based on the cell's ability to draw current. More current is provided to the cells with a lower charge level and voltage.

[0014] In the simplest form, cell balancing is achieved using transformer theory. A load on a secondary winding is reflected to the primary winding by the transformer's turn ratio. Each secondary winding reflects its load and if the transformer is tightly coupled, each secondary winding appears as if it were connected in parallel. Each secondary winding draws power as if it was connected to a single supply. This configuration does not require a regulator but just a diode set and a shunt for current measurement. This simple configuration is useful and cost effective as it requires no extra components and performs the required cell balance.

[0015] For example, as shown in **FIG. 1**, the invention allows for parallel charging of a multi-cell battery wherein the battery cells incorporate a separate or third charging electrode in addition to conventional positive and negative discharge electrodes.

[0016] The present invention affords for such charging through a charging electrode without the breaking of inter-cell connections. This is accomplished by providing the charging energy through an induction coil so as to provide electrical isolation of each cell. In addition, the present invention may be employed to charge several two-terminal batteries simultaneously regardless of whether they are multi-cell batteries or single cell batteries.

[0017] The present invention may also be employed to parallel charge the cells of a conventional two-electrode cell battery without requiring disconnection of the battery cells. As described herein, the isolation of the secondary windings of the transformer allows the parallel battery charger disclosed to be used where a conventional parallel charger would fail.

[0018] The present invention also provides a battery charger for charging through a third electrode (i.e. a charging-electrode) used in metal-air cell batteries. Such third electrodes may be formed from a mixture of an lanthanum nickel compound and at least one metal oxide, and support structure. The present invention provides a charging system and method for metal-air cells that provides stable performance over a large number of charge/discharge cycles. The result is improved metal-air battery performance and improved battery life.

[0019] Additionally, when employed in vehicular applications, a braking energy recovery device may be included in the charging system to allow for conversion of kinetic energy back into electrochemical storage in an electrochemical/mechanical system.

[0020] In one embodiment, the present invention relates to a battery charging system that isolates the parallel charging of each individual cell using an induction coil.

[0021] In another embodiment, the present invention relates to a battery charging system that balances the parallel charging of each individual cell using an induction coil and incorporates a current sensor to determine the end charge of each cell and further may include a top-off timer.

[0022] In another embodiment, the present invention relates to a battery charger that allows balanced parallel charging to each cell of a conventional multi-cell battery with two-electrode cells without breaking the intercell connections.

[0023] In another embodiment, the present invention relates to a battery charging system that balances the parallel charging of each individual cell using an induction coil and recaptures the braking energy for use in battery charging.

[0024] In another embodiment, the present invention relates to the parallel battery charging system for simultaneously charging several conventional two terminal batteries in parallel.

[0025] In another embodiment, the present invention relates to a parallel battery charging system wherein current and voltage sensors are applied to each charging circuit and are used to control the charging cycle.

[0026] In another embodiment, the present invention relates to a method of charging any battery by parallel charging of each individual cell using an induction coil.

BRIEF DESCRIPTION OF DRAWINGS

[0027] **FIG. 1** is a schematic view of the structure of a parallel battery charger and an associated tri-electrode multicell battery in accordance with the present invention;

[0028] **FIG. 2** is a schematic view of the structure of a parallel battery charger and an associated two-electrode multi-cell battery in accordance with the present invention;

[0029] **FIGS. 3A and 3B** are typical graphs representing the charge and discharge performance of battery cells as detailed in the specification;

[0030] **FIG. 4** is a schematic view of the structure of a parallel battery charger used to charge conventional two-terminal batteries simultaneously in accordance with the present invention; and

[0031] **FIG. 5** is a schematic view of the structure of another embodiment of the parallel battery charger where the current and voltage is sensed at each cell in accordance with the present invention.

DETAILED DESCRIPTION

[0032] The present invention involves a system and method for charging multi-cell batteries using a parallel battery charger individually connected to each cell of a multi-cell battery. Such batteries may include metal-air batteries or any conventional multi-cell batteries without disconnecting the conductors that link the cells in series. Additionally, the parallel charging system may be used wherever several conventional batteries are to be charged and the isolation provided to each charging circuit by the induction loop is beneficial.

[0033] Referring initially to **FIG. 1**, **FIG. 1** shows a diagrammatic view of the structure of a parallel battery

charging device **20** and an associated tri-electrode multi-cell battery **30** in accordance with the present invention. The first portion of the circuit, which is independent of the battery charging circuit, is a power source **10**. The power source **10** includes an electrical energy supply such as an alternating current power buss **12**. The source of alternating current could be a typical 110 volt, 60 hertz power outlet as is commonly available in the United States or could be a large power buss for charging cells in bulk. The power buss **12** is linked to a high power factor corrector **14** which may be a large coil or active corrector to bring the power factor to 1. For example, one may use a uc3854 manufactured by Texas Instruments or any similar device. The power is then supplied to an DC to DC converter **16** such as a uc3825 manufactured by Texas Instruments to prepare the DC power for use by the charging circuit.

[0034] Should the parallel battery charging device **20** be intended for use on a mobile vehicle, the components of the power source **10** may all be disposed separate from the vehicle. Such a configuration would reduce the overall weight of the vehicle and allow any properly chosen direct current source, including an offboard battery or solar energy source, to be used to charge the onboard batteries.

[0035] Alternatively, should ground support equipment be unavailable, the high power factor corrector **14** and an DC to DC converter **16** may be disposed in the vehicle to allow charging from any proper source of alternating current as noted above.

[0036] The power source **10** is connected to a high frequency source **18** to generate a high frequency waveform for use by a transformer. The waveform may be a pulse or square-wave generated by a LT 1162 Pulse Width Modulator and LT 1846 Integrated Circuit manufactured by Linear Technologies or equivalent. The operating frequency of the high frequency source may range from 20 KHZ. to 1,000 KHZ.

[0037] The high frequency source **18** supplies a multi-winding transformer for distribution to several battery cells for charging. A transformer is an electrical device that is used for the transmission and distribution of electrical energy. In principle, a transformer consists of a plurality of coils magnetically coupled to each other. One of the coils, known as a primary winding, receives electrical energy, which is converted to purely magnetic energy; the energy is continuously being delivered to the other coil, known as a secondary winding, in electrical form. A multi-winding transformer has two or more secondary windings on the same core. A four-winding transformer (shown in **FIG. 1**), for example, has a primary winding **22** and three secondary windings **24a**, **24b**, and **24c**.

[0038] The primary winding or input coil **22** provides the electrical energy to create the magnetic flux in an induction core **21**. Due to the magnetic coupling, a time-varying excitation applied to the primary winding **22** induces a similar time varying response in the secondary windings **24a-c**. The transformer used for this application is a prototype design produced by Zinc Air Power Corporation of Strongsville, Ohio using common ferrite materials and conventional means as known in the art. Each secondary winding **24a**, **24b**, and **24c** is isolated from one another and from the input coil **22**. This isolation permits each battery cell charging circuit to draw the proper current for each of a

plurality of battery cells **40a**, **40b**, and **40c**. The three circuits are isolated so that the current draw of each battery cell does not affect the charging of the other cells.

[0039] The output coils **24a**, **24b**, and **24c** are connected to a number of regulators **26a**, **26b**, and **26c** respectively. The regulators **26a-c** each convert the high frequency electrical energy back to a DC supply current at a voltage between 1.00 and 2.5 volts and regulate the current as required by each battery cell **40a-c**. The isolation between the charging circuits allows independent control of the battery charging current and voltage. The regulators may be as simple as a diode placed between the output coil and the charging electrode or may be an active circuit. Using the simple diode form, cell charge balance is possible where each cell will draw its portion of magnetic energy inversely proportional to its state of charge. Each regulator **26a**, **26b**, and **26c** is connected to the each of the battery cells **40a**, **40b**, and **40c** via a number of cables **28a**, **28b**, and **28c** wired in parallel. The positive output of each respective regulator **26a-c** is attached to a charge electrode **44a-c** of each of the three battery cells **40a-c**. The negative or common lead of each respective regulator **26a-c** is attached to a negative or common electrode **42a-c** of each of the three battery cells **40a-c**.

[0040] FIG. 1 also includes a diagrammatic view of a tri-electrode battery **30** incorporating three independent battery cells **40a**, **40b**, and **40c** connected in series using two series connectors **36**. While the tri-electrode battery **30** shows three cells, any number of cells may be used to fit the application. Each cell **40a**, **40b**, and **40c** of the tri-electrode battery **30** incorporates three electrodes. Referring specifically to battery cell **40a**, a first or common electrode **42a** is identified as synonymously with a negative terminal **34**. The common electrode **42a** is used for both charging in "parallel" and discharging in "series." In addition to the common electrode **42a**, battery cell **40a** includes a discharge electrode **46a**. The discharge electrode **46a** performs the normal electrochemical discharge function as in a conventional bi-electrode battery; it plays no role in electrochemical charging, thereby enhancing its life.

[0041] Unique to cell **40a** of the tri-electrode battery **30** is an independent charge electrode **44a**, which may be made in accordance with the metal-air battery invention disclosed in U.S. patent application Ser. No. 09/552,870. In that patent application, the third electrode of the battery cell may be positioned between the air electrode and the metal electrode. Alternatively, the metal electrode of the battery cell may be positioned between the air electrode and the third electrode to further increase in the power output of the battery cell by permitting an open separator to be used between the air electrode and the metal electrode.

[0042] The remaining structure of a typical tri-electrode battery cell is conventional in nature and is known to those skilled in the art. For example, see: *Metal-Air Batteries* by D P Gregory, BSG, PhD, published by Mills & Boon Limited, copyright 1972, which discloses secondary metal-air cells and is incorporated herein by reference.

[0043] The third electrode of the tri-electrode battery **30** contains numerous openings which permit the free flow of ions from the electrolyte between the air electrode and the metal electrode during the discharge cycle.

[0044] By charging any conventional battery using the parallel battery charging device **20**, the need to disconnect

the series connectors **36** is eliminated. Such a configuration is shown in FIG. 2 where the parallel battery charging device **20** is used to charge a conventional two-electrode, multi-cell battery **38** with series connections **36** connected. The parallel battery charging device **20** saves operator time (the series connections do not have to be disconnected) and reduces mechanical wear on the intra-battery terminals **42abc** and **46abc**.

[0045] Further, each battery cell **40abc** may draw its optimum electrical current during the charging cycle independent of the other battery cells being charged. The present invention eliminates one of the major drawbacks of electrochemical charging the battery cells in series; they all receive the same current throughout the charging cycle.

[0046] FIGS. 3A and 3B show typical graphs representing the charge cycles of two different multi-cell batteries. FIG. 3A shows a 32 ampere-hour nickel-cadmium set of cells that are unbalanced by 10 ampere-hours. Cells labeled 1 and 3 have a 10 ampere-hour charge at the beginning of the charge cycle. Cells labeled 2 and 4 are essentially discharged at the beginning of the charge cycle. The parallel battery charging device **20** provides balanced charging current to each cell during the charging cycle.

[0047] FIG. 3B shows a typical charging cycle of the parallel battery charging device **20** being used to charge six zinc-air cells incorporating a third electrode in accordance with the present invention. Specifically, this multi-cell battery containing the third electrode was subjected to 3 complete charge/discharge cycles. Each of the six charging curves in FIG. 3B show the charging voltage during the charge cycle.

[0048] In operation, while the induction core **21** isolates each battery charging circuit and the regulators **26abc** monitor the voltage in each circuit, overall control of the charging device **20** is governed by a charge controller **50**. The charge controller **50** may include two features: a top-off timer **54** and a current sensor **52**. The top-off timer **54** provides an upper limit on the time for which the charger is applied to the battery cells. After the charge cycle proceeds for a predetermined period, the top-off timer **54** can terminate the charging process to prevent battery cell damage. Further, the current sensor **52** can monitor the total current provided to the input coil **22** and the charge controller **50** can terminate the charging process when the current draw required to the input coil **22** falls below a predetermined level.

[0049] In addition to the capability of parallel charging of individual battery cells of a tri-electrode battery, the present invention may be used to charge separate conventional batteries in parallel. As shown in FIG. 4, the parallel battery charging device **20** may be used to charge conventional two-terminal batteries **47abc**, regardless of the number of cells comprising the battery. Each battery may be coupled via an individual regulator **26** and cable **28** in the same manner as the battery cells **40a-c** of FIG. 1. The charging method maintains the same isolation properties to each charging circuit as are obtained when charging the tri-electrode battery cells.

[0050] Moreover, if the battery charging device is incorporated onto a vehicle, the system may further include a braking energy recovery device **58**. Such a device converts the vehicle's kinetic energy into electrical energy by

mechanically or electrically engaging a generator to the vehicle's drive-train upon application of the brakes. Typically, such a device is the vehicle's drive motor operated in reverse. Such a device assists the vehicle braking with the mechanical load of the generator while providing an electric current to the high frequency source 18 or into the DC to DC converter 16 if the device's output is alternating current. In any event, the device operates to recycle kinetic energy into electrochemical storage in the battery rather than to allow the energy to dissipate as heat.

[0051] In another embodiment shown in FIG. 5, the current levels I_1 , I_2 , and I_3 and the voltages V_1 , V_2 , and V_3 are detected at each cell 40a, 40b, and 40c. The voltage and current levels provide feedback input to the controller 50 that controls the DC supply 60 to the high frequency source 18. This configuration provides an extensive number of ways to control the charging including statistical analysis on the cells' comparative health. If the characteristic voltage and current levels of a damaged cell are known, the damaged cell may be identified and the charging level is controlled accordingly or the cell is replaced as necessary. Additionally with such a configuration, it is possible to simultaneously charge and discharge individual cells.

[0052] Although the invention has been shown and described with respect to a certain preferred embodiment or embodiments, it is obvious that equivalent alterations and modifications will occur to others skilled in the art upon the reading and understanding of this specification and the annexed drawings. In particular regard to the various functions performed by the above described components (assemblies, devices, circuits, etc.), the terms used to describe such components are intended to correspond, unless otherwise indicated, to any component which performs the specified function of the described component. In addition, while a particular feature of the invention may have been disclosed with respect to only one of several embodiments, such feature may be combined with one or more other features of the other embodiments as may be desired and advantageous for any given or particular application.

What is claimed is:

1. A battery charging system comprising:
 - a parallel battery charging device comprising:
 - an induction core;
 - an input coil magnetically coupled to the induction core; and
 - a plurality of output coils magnetically coupled to the induction core;
 - a plurality of regulators in communication with the plurality of output coils; and
 - a plurality of cables extending in parallel between the plurality of regulators and a number of battery cells.
2. The battery charging system of claim 1 further comprising a high frequency source.
3. The battery charging system of claim 1 further comprising a charge controller.
4. The battery charging system of claim 3 wherein the charge controller includes a current sensor.
5. The battery charging system of claim 3 wherein the charge controller includes a top-off timer.

6. The battery charging system of claim 1 further comprising a power source.

7. The battery charging system of claim 6 further comprising a high frequency source and wherein the power source includes a high power factor corrector.

8. The battery charging system of claim 2 further comprising a braking energy recovery device.

9. The battery charging system of claim 1 further comprising a tri-electrode multi-cell battery.

10. The battery charging system of claim 7 further comprising a charge controller having a current sensor.

11. The battery charging system of claim 10 wherein the charge controller includes a top-off timer.

12. A parallel battery charging system comprising:

a power source;

a high frequency source;

a charge controller;

a transformer; and

a plurality of charging circuits coupling the transformer to a plurality of battery cells in parallel.

13. The battery charging system of claim 12 further including voltage and current sensors in each charging circuit.

14. The battery charging system of claim 12 wherein the plurality of charging circuits include a plurality of regulators and a plurality of cables for connection to the plurality of battery cells.

15. The battery charging system of claim 12 wherein the transformer includes an input coil, an induction core, and a plurality of output coils.

16. The battery charging system of claim 13 wherein the charge controller regulates a DC supply source using the voltage and current values from each charging circuit.

17. The battery charging system of claim 12 wherein the power source includes a high power factor corrector and an DC to DC converter; wherein the charge controller includes a current sensor and a top-off timer; wherein the transformer includes an input coil, an induction core, and a plurality of output coils; and wherein the plurality of charging circuits include a plurality of regulators and a plurality of cables for connection to the plurality of battery cells.

18. A rechargeable power system for an electric vehicle comprising:

a high frequency source;

a transformer;

a tri-electrode multi-cell battery;

a plurality of charging circuits in parallel connection between the transformer and a plurality of cells of the tri-electrode multi-cell battery; and

a braking energy recovery device.

19. The rechargeable power system of claim 18 further comprising a charge controller that uses current and voltage feedback from each charging circuit to regulate the power to the transformer.

20. The rechargeable power system of claim 19 wherein the transformer includes: an input coil, an induction core, and a plurality of output coils coupled to the plurality of charging circuits.

* * * * *