

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2013/179251 A1

(43) International Publication Date
5 December 2013 (05.12.2013)

WIPO | PCT

(51) International Patent Classification:

C08L 97/02 (2006.01) *C08G 18/40* (2006.01)
C08G 18/00 (2006.01) *C08H 7/00* (2011.01)

(21) International Application Number:

PCT/IB2013/054464

(22) International Filing Date:

30 May 2013 (30.05.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1250569-9 1 June 2012 (01.06.2012) SE

(71) Applicant: STORA ENSO OYJ [FI/FI]; Kanavaranta 1, FI-00101 Helsinki (FI).

(72) Inventor: GRÜNBAUER, Dr. Henri J.M.; C/o Nimaro Ageno Consult, Schorpioen 45, NL-4501 HC Oostburg (NL).

(74) Agent: LINDBERG, Åke; Stora Enso AB, Group IP, Box 9090, S-65009 Karlstad (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: A COMPOSITION IN THE FORM OF A DISPERSION COMPRISING A LIGNIN, A METHOD FOR THE MANUFACTURING THEREOF AND USE THEREOF

Figure 1

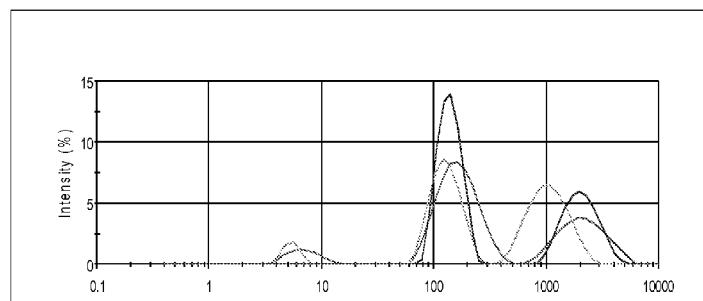


Figure 1: size distribution by Intensity for Kraft lignin dispersed in ethylene glycol

(57) Abstract: The present invention relates to a composition in the form of a dispersion, a method for the manufacturing of said composition and uses thereof.

WO 2013/179251 A1

A composition in the form of a dispersion comprising a lignin, a method for the manufacturing thereof and use thereof

5 Field of invention

The present invention relates to a composition in the form of a dispersion a method for the manufacturing of said composition and use thereof in different application areas, 10 such as in adhesives, binders, castings, foams (such as rigid polyurethane and polyisocyanurate foams for thermal insulation in refrigerators and freezers and in building and construction applications, semi-rigid polyurethane foams, spray foams, flexible polyurethane foams moulded as well as 15 laminated, microcellular foams and viscoelastic foams), fillers, glues, sealants, elastomers and rubbers.

The present invention also relates to a method for the manufacturing of a foam and use of this foam.

20 Background

In recent years, lignin and lignin-based products have become increasingly important in the search for sustainable alternatives to current mineral-oil based products that are 25 known to impact our world's ecological balance in a negative way. An important area that has received attention in this context has been the use of lignin as re-inforcement fillers for a multitude of polymeric materials such as e.g. rubbers, epoxy and urethane-based networks and polymers.

30 Further, US 3,223,697 discloses powders of lignin and US 5,008,378 discloses lignin dispersions. Additionally, CN1462760

discloses a lignin polyurethane foam and JP2011-184643 a foam using a lignin-based substance.

However none of these documents discloses dispersions of lignin with a particle size enabling use of said dispersions in 5 an efficient method for incorporation of these particles in thermoset and thermoplastic industrial products where the lignin may exert desirable influences as part of the polymeric backbone of such products.

10 Additionally, there also exists a need for a simple, cost-effective process for the production of lignin particles of submicron and/or nanometer size that are amenable to the production of a multitude of industrial products where these powders may be effective.

Summary of the invention

15

The present invention solves one or more of the above problems, by providing according to a first aspect a composition in the form of a dispersion, comprising one or more dispersants, and lignin, preferably alkaline lignin, wherein 20 said lignin has an average particle size of from about 100 nm to about 2000 nm, preferably in a range from about 100 to about 1000 nm, most preferred from about 200 to about 600 nm, and wherein said dispersants has a solubility parameter of from about 18 to about 30 MPa^{1/2} and a viscosity of from about 15 25 mPas to about 20,000 mPas, more preferably from about 15 mPas to about 10,000 mPas, especially preferred from about 20 mPas to about 1000 mPa, most preferred from about 20 mPas to about 500 mPas. The values for the solubility parameters and viscosity are measured or calculated at room temperature.

The present invention also provides according to a second aspect use of a composition according to the first aspect in making foams, rubbers, adhesives, reactive fillers or for use as a filling agent. Said dispersion may e.g. be used in I 5 appliances (such as house hold appliances; e.g. refrigerators and freezers) or building and constructing applications. It may also be used in applications where thermal insulation is required such in refrigerators and freezers. It may also be used in foams (such as spray-foam, rigid-faced and flexible- 10 faced panels produced by double-band lamination, discontinuous panels, block foams, pour-in-place foams and foams for pipe insulation). The foams in these latter panels may be of the polyurethane or the polyisocyanurate type. Said dispersions may also be used in microcellular foams and viscoelastic foams, 15 flexible slabstock and flexible molded polyurethane foams, such as the foams applied in bedding, furniture, footwear (e.g. shoe soles) and automotive applications. Said dispersions may also be used in composites, coatings, binders, sealants, rubbers, adhesives, reactive fillers or may be used as a filling agent. 20 Said dispersions may also be used as reactive fillers/filling agents in polymer castings, such as in epoxy casting or in polyolefin casting.

The present invention also provides according to a third aspect a method for the manufacturing of a composition in the 25 form of a dispersion according to the first aspect comprising the following steps:

- i) providing a lignin, preferably an alkaline lignin,
- ii) adding one polyol or a mixture of polyols, and
- iii) mixing said components thus providing said composition.

5 The present invention also provides according to a fourth aspect, a composition in the form of a dispersion obtainable by the method according to the third aspect.

The present invention also provides according to a fifth aspect a method for the manufacturing of a foam comprising the following steps:

- 10 a) providing a composition according to the first or fourth aspect,
- 15 b) adding one or more blowing agents to said composition,
- c) optionally adding one or more additives,
- d) adding isocyanate to said composition,
- e) stirring the mixture obtained in step d) and
- f) conveying the stirred mixture in step e) into a mould to provide a foam continuously or discontinuously (i.e. batch-wise).

20 The present invention also provides according to a sixth aspect, a foam obtainable by the method according to the fifth aspect.

25 The present invention also provides according to a seventh aspect use of the foam according to the fifth aspect. Said foam may be used in the building and construction segment, in appliances (such as household appliances, e.g. refrigerators and freezers), for thermal insulation, in automotive applications or in furniture or bedding applications. It may also be used in applications where thermal insulation is

required such in refrigerators and freezers, in spray-foam, rigid-faced and flexible-faced panels produced by double-band lamination, discontinuous panels, block foams, pour-in-place foams and foams for pipe insulation. The foams in these latter 5 panels may be of the polyurethane or the polyisocyanurate type. Said foams may also as mentioned be used in bedding, furniture and automotive applications (e.g. car seats). Said foams may further be used in footwear (e.g. shoe soles).

10 **Detailed description of the invention**

It is intended throughout the present description that the expression "lignin" embraces any lignin which may be used for making dispersions. Preferably the lignin is an alkaline 15 lignin. It may e.g. be a Kraft lignin. The lignin may preferably be obtained by using the process disclosed in EP 1794363.

It is intended throughout the present description that the expression "isocyanate" embraces any isocyanate compound 20 suitable for use in foam applications. The isocyanate may be a monomeric diisocyanate, polymeric or it may also be an isocyanate prepolymer.

It is intended throughout the present description that the expression "submicron" embraces anything below 2000 nm and down 25 to 1 nm.

It is intended throughout the present description that the expression "flame retardant" embraces any flame retardant useful in foam or filler applications. The flame retardant may

be liquid organophosphorous, organohalogen and halogenated organophosphorous flame retardants. TCPP and DEEP are preferred examples.

It is intended throughout the present description that the 5 expression "mould" encompasses any mould which may be used in rigid foam manufacturing. Said mould may e.g. be a mould for in-situ foams (whereby you may use spray technology to convey the material to be moulded; this is a discontinuous technology), a mould for providing a block (which may be both discontinuous 10 and continuous), a mould for making an insulation board (which may be both discontinuous and continuous), a double bend laminator (e.g. for making metal faced sandwich panels; this is further a continuous technology). The above technologies are further described in "The polyurethane book", 2010, editors 15 David Randall and Steve Lee.

It is intended throughout the present description that the term solubility parameter refers to a property, represented by δ , used within the art of organic, physical and polymer chemistry to describe the solubility of organic compounds in 20 other organic compounds or solvents. Calculate δ from fragment contributions published in the art. [see, for example, Handbook of Solubility Parameters and other Cohesion Parameters, Barten, A., CRC Press, Florida (1984) and Properties of Polymers: their Estimation and Correlation with Chmical Structure, van 25 Krevelen, D.W.; Hoftijzer, P.J., Elsevier, Amsterdam 2nd. edn (1976)]

According to a preferred embodiment of the first aspect of the invention said lignin is a Kraft lignin.

According to a preferred embodiment of the first aspect of 30 the invention said dispersant is a polyol, preferably an ethylene glycol or polyethylene glycol or a combination thereof, most preferred selected from the group comprising PEG

(polyethylene glycol), DEG (diethylene glycol), TEG (triethylene glycol) and MEG (monoethylene glycol) or combinations thereof.

According to a preferred embodiment of the first aspect of the invention the polyol is PEG and preferably the PEG has a molecular weight of from about 100 to about 5000, especially preferred from about 100 to about 600, most preferred about 400.

According to a preferred embodiment of the first aspect of the invention said polyol comprises a mixture of different PEGs, wherein said mixture preferably comprises one PEG having a molecular weight of about 400 and one PEG having a molecular weight of about 600.

According to a preferred embodiment of the first aspect of the invention there is provided that said composition also comprises one or more alkanolamines, such as ethanolamine, diethanolamine, propanolamine, monoethanolamine (MEA) or combinations thereof, preferably MEA.

According to a preferred embodiment of the first aspect of the invention there is provided a composition also comprising one or more flame retarding agents, preferably TCPP (Tris (1-chloro-2-propyl) phosphate) or DEEP (diethyl ethyl phosphonate) or a combination of both.

According to a preferred embodiment of the third aspect of the invention one or more flame retarding agents are added before mixing.

According to a preferred embodiment of the third aspect of the invention said mixing is a high shear mixing of at least about 1000 rpm, preferably at least about 5000 rpm, most preferred at least about 20000 rpm.

According to a preferred embodiment of the fifth aspect of the invention said one or more additives may be selected from

the group consisting of one or more surfactants, preferably one or more polydimethylsiloxane co-polymers (such as PDMS), one or more polyurethane catalysts, preferably one or more tertiary amines or one or more triamines, one or more flame retarding agents, or combinations thereof.

According to a preferred embodiment of the fifth aspect of the invention one or more hydroxyl-containing compounds and/or one or more catalysts are added before addition of said one or more blowing agents, preferably one or more polyester polyols and/or one or more polyether polyols and as a catalyst a trimer catalyst (such as an alkali octoate) are added.

According to a preferred embodiment of the fifth aspect of the invention said one or more blowing agents are one or more hydrocarbon compounds, or other blowing agents known in the art, preferably selected from n-pentane, i-pentane and cyclopentene or a combination thereof.

As set out above in one preferred embodiment, the present invention relates to stable submicron dispersions of Kraft lignin in suitable non-aqueous liquid dispersants and a process for their production.

As set out above the present invention also provides a ready-to-use liquid composition comprising submicron dispersions of Kraft lignin in non-aqueous dispersants that are amenable to further processing steps to produce end-products without the need for further solids handling and tedious solid-liquid wetting and mixing procedures.

The present invention thus provides according to preferred embodiments set out above:

- a relatively simple mixing process whereby a Kraft lignin is mixed at sufficient shear rates with suitable dispersants to provide a dispersion,

- these dispersants are characterized by their viscosity and solubility parameters only, which enables them to be tuned towards the intended production process whereby the lignin particles are incorporated in the target end-product,
- 5 - the lignin particles involved are largely of submicron and/or nanometer size which makes them effective as participants in the production process of the end-product.
- Thus said process according to the third aspect of the invention delivers these particles in the form of a non-10 aqueous dispersion that is compatible with the materials taking part in the targeted production process.

Preferred features of each aspect of the invention are as for each of the other aspects mutatis mutandis. The prior art documents mentioned herein are incorporated to the fullest 15 extent permitted by law. The invention is further described in the following examples, together with the appended figure, which do not limit the scope of the invention in any way. Embodiments of the present invention are described as mentioned in more detail with the aid of examples of embodiments, 20 together with the appended figures, the only purpose of which is to illustrate the invention and are in no way intended to limit its extent.

Figures

25 Figure 1 discloses size distribution by Intensity for Kraft lignin dispersed in ethylene glycol

Figure 2 discloses size distribution by Intensity for Kraft lignin dispersed in Polyethylene glycol 400.

30 Figure 3 discloses Size distribution by Intensity for Kraft lignin dispersed in Polyethylene glycol 600

Figure 4 discloses Size distribution by Intensity for Kraft lignin dispersed in 1-Hexanol supernatant

Examples

5

Example 1

Dispersions at 5, 10 and 15% w/w loading of Kraft lignin in ethylene glycol were prepared using a Heidolph DIAx 900 disperser operated at two rates, initially at 18800 rpm/min for at least 1 minute to disperse the dry lignin, followed by one minute at 25000 rpm to ensure maximum dispersability. Samples taken from these dispersions were about 50-fold diluted prior to measurement of particle size and particle size distribution with a Malvern Zetasizer Nano ZS. This instrument measures the diffusion of particles moving under Brownian motion and converts this to size and size distribution using the Stokes-Einstein relationship. Each sample was scanned 3-5 times. A typical result at 10% w/w loading, given by Figure 1, shows large fluctuations, suggesting a continuous agglomeration and de-agglomeration process amongst the particles. This behavior is loosely classified as 'class 1' in table 1. For each sample, mean particle diameters were calculated by weighed averaging over all measured intensity distributions of each scan, as reported in table 1 which also gives mean diameter values averaged over all samples.

Example 2

Dispersions at 5, 10 and 15% w/w loading of Kraft lignin in diethylene glycol were prepared by means of the procedure outlined in example 1. Particles sizes and their distributions were fluctuating as in example 1. Classification and values for 5 mean particle diameters are given in table 1.

Example 3

Dispersions at 5, 10 and 15% w/w loading of Kraft lignin in 10 polyethylene glycol 200 were prepared by means of the procedure outlined in example 1. Particles sizes and their distributions were fluctuating as in example 1. Classification and values for mean particle diameters are given in table 1.

15 Example 4

Dispersions at 5, 10 and 15% w/w loading of Kraft lignin in polyethylene glycol 400 were prepared by means of the procedure outlined in example 1. Particles sizes and their distributions 20 exhibited a biphasic pattern which is shown by figure 2. This behavior is indicated as 'class 2' in table 1 which also gives values for mean particle diameters.

Example 5

25 Dispersions at 5, 10 and 15% w/w loading of Kraft lignin in polyethylene glycol 600 were prepared by means of the procedure outlined in example 1. Particles sizes and their distributions revealed a monodisperse behavior which is shown by figure 3. 30 This behavior is indicated as 'class 3' in table 1 which also gives values for mean particle diameters.

Example 6

5 Dispersions at 5 and 10 % w/w loading of Kraft lignin in ethanolamine were prepared by means of the procedure outlined in example 1. Particles sizes and their distributions revealed a monodisperse behavior which was accordingly classified in table 1 which also gives values for mean particle diameters.

Example 7

10

10 Dispersions at 5, 10 and 15 % w/w loading of Kraft lignin in VoranolTM P1010 (a 1000 MW polypropylene glycol of the Dow Chemical Company) were prepared by means of the procedure outlined in example 1. Particles sizes and their distributions 15 could not be measured due to the turbidity of the dispersions caused by slow precipitation of lignin. This behavior was classified as 'class 4' in table 1.

Example 8

20

20 Dispersions at 5 and 10 % w/w loading of Kraft lignin in 1-Hexanol were prepared by means of the procedure outlined in example 1. Particles sizes and their distributions could not be measured due to the turbidity of the dispersions caused by fast 25 precipitation (class 4 in table 1). After precipitation, a coloured supernatant was left over which was measured without further dilution. The result is shown by figure 4 where very large particle sizes beyond the detection limit of the instrument are observed.

30

Example 9

Dispersions at 5 and 10 % w/w loading of Kraft lignin in Cyclopentane were prepared by means of the procedure outlined in example 1. Particles sizes and their distributions could not be measured due to the turbidity of the dispersions caused by fast precipitation (class 4 in table 1). After precipitation, a clear supernatant was left over which was measured without further dilution but particles could not be detected.

Table 1 gives a summary of all data, including viscosities of dispersants obtained from literature or from suppliers.

10 Solubility parameters were obtained from the 'Handbook of solubility parameters and other cohesion parameters' by A.F.M. Barton, (CRC Press Inc., 1983), or calculated from molecular fragment values using the Hoy-van Krevelen method as described in the same reference.

15

Dispersant	Solubility Parameter (Mpa ^{1/2})	Viscosity (mPa.s)	Nr. of samples tested	Class	Mean Diameter per run (nm)	Overall mean diameter (nm)
Ethylene Glycol	29.90 ¹	16.1	3	1	702, 837, 1504	1014
Diethylene Glycol	28.65 ¹	30.2	3	1	866, 990, 1440	1099
Polyethylene Glycol 200	22.67 ²	50.0	3	1	403, 302, 332	346
Polyethylene Glycol 400	20.56 ²	91.0	4	2	351, 332, 207, 148	260
Polyethylene Glycol 600	19.88 ²	135.0	2	3	422, 427	425
Ethanolamine	27.54 ¹	21.1	2	3	440, 488	444
Voranol TM P1010	17.40 ²	150.0	3	4	> 1000 (3x)	n.d.
1-Hexanol	18.91 ¹	4.58	2	4	> 1000 (2x)	n.d.
Cyclopentane	16.57 ¹	0.416	2	4	> 1000 (2x)	n.d.

Table 1: summary of data from example. Key: 1=value from Barton, 2=calculated by Hoy-van Krevelen method.

The Ethylene glycol (or monoethylene glycol (MEG)) was obtained from ABCR Chemicals

5 The ethanolamine, 2-aminoethanol or monoethanolamine (MEA) was obtained from Riedel-de Haen

The diethylene glycol (DEG) was obtained from Merck

The Polyethylene glycol 200 (PEG200 or E200) was obtained from 10 Merck. (see PEG 400 and PEG 600 below)

1-Hexanol was obtained from Fluka Chemicals

15

Examples of polyisocyanurate foams

The applicability of the invention is further demonstrated by examples 10-17, comprising the preparation of

20 polyisocyanurate foams by handmix foaming (which thus was a discontinuous, batch-wise, process). To this end, lignin containing polyol compositions were prepared by weighing a target amount of lignin in a cardboard beaker, addition of the dispersant selected, followed by addition of all other polyol 25 components and additives, except the blowing agent(s). This mixture was subsequently dispersed using a Heidolph DIAx 900 disperser which was operated at two rates, initially at 18800 rpm/min for at least 1 minute to disperse the dry lignin, followed by at least one minute at 25000 rpm to ensure maximum 30 dispersability. The blowing agent was always added last, using the Heidolph stirrer described below, just before mixing the

polyol blend with Lupranat M20S from BASF which was invariably used as PMDI.

Handmix foams were prepared using a Heidolph lab. stirrer fitted with timer and rpm counter as follows. After preparing 5 the polyol blends in a carboard beaker, a weighed amount of Lupranat M20S was poured in the beaker. Subsequently, the mixture was stirred for 10 seconds at 4000 rpm, after which the reacting mass was poured into a 20x20x20 cm³ cardboard box where it was allowed to rise freely and cure. Nucleation was 10 recorded in the usual way by visually inspecting the transition to a creamy mass in the box (cream time). The fully developed foam was then probed by a disposable (wooden) spatula to check the formation of strings in the foaming mass. The first appearance of these strings was recorded as 'string time'. 15 Finally, the same spatula was used to test 'tackiness' of the fully risen foam. The first disappearance of tackiness was recorded as 'tack free' time. Polyisocyanurate (PIR) foams were selected as the first target to demonstrate the capabilities of the invention which is however not limited to this particular 20 application.

Core density of the foam was measured on eight 5x5x5 cm³ samples cut from the central 10x10x10 cm³ cube of the foam by averaging over their weight : volume ratio. Corrections for buoyancy were not made. Compressive strength was measured 25 similarly on the same samples, by averaging over 4 perpendicular to rise and 4 parallel to rise measurements on a Zwick 1425 Dynamic Mechanical tester traveling at 5 mm/min. The average pressure in kPa needed for 10 % compression of the samples was recorded as the compressive strength of the foams. 30 Formulations used are given by table 1 where Polyethylene glycol 400 or mixtures thereof with Polyethylene glycol 600 was invariably used as the dispersant for lignin. Details of the

formulations, including various polyols, additives and hydrocarbon blowing agents are specified in table 2, together with data for a reference formulation without lignin.

Reactivities, core densities and compressive strength

5 performance of these foams, are given by table 3. They demonstrate that PIR foams of with excellent properties can be made using the lignin dispersions of this invention.

Lupraphen ® 8007 is a bifunctional polyesterpolyol based upon 10 dicarboxylic acid. Provider was BASF.

Stepanpol 2402 B is a bifunctional polyester polyol based upon dicarboxylic acid. Provider was Stepan.

The lignin was a kraft lignin obtained internally.

15 The polyethylene Glycol PEG 400 was Pluriol ® E 400 and the provider was BASF.

The Polyethylene Glycol PEG 600 was Pluriol ® E 600 and the provider was BASF.

20 KOSMOS ® 75 MEG is a medium viscous catalyst for use when manufacturing foams. It consists of potassium octoate dissolved in ethylene glycol. Provider was Evonik Industries AG.

TEGOAMIN ® PMDETA (pentamethyldiethylenetriamine) was provided through Evonik Industries AG.

TEGOAMIN ® DMCHA (N,N-dimethylcyclohexyl-amine) was also provided through Evonik Industries AG.

25 TEGOSTAB ® B 8491 is a hydrolysis-resistant polyether polydimethylsiloxane copolymer. Provider was Evonik Industries AG.

TCPP (trade name) is Tris (1-chloro-2-propyl) phosphate and the provider was ICL bearing the trademark Fyrol ® PCF for said 30 compound.

Lupranat ® M 20 S is a solvent-free product based upon 4,4'-diphenyl-methane-di-isocyanate (MDI) with high functional oligomers and isomers. Provider was BASF.

The cyclopentane and n-pentane were obtained from Alfa Aesar

5

Example nr.	10	11	12	13	14	15	16	17
% w/w Lignin in polyol	12,6	9,9	14,5	5,0	5,0	15,5	15,5	7,6
% w/w Lignin in dispersant	21,2	17,0	24,6	64,0	63,8	69,9	69,9	17,0
Polyols + Lupraphen 8007	34,04	34,04	33,96	75,40	75,22	60,84	60,78	
OH cpds Stepanpol 2402 B								43,78
TL018	10,51	8,08	12,04	4,09	4,05	12,09	12,09	6,00
PEG400	26,00	26,10	24,36	2,30	2,30	5,21	5,20	29,20
PEG600	13,06	13,32	12,46					
H2O	0,72	0,71	0,73	0,75	0,73	0,75	0,72	0,75
Kosmos 75 MEG	2,40	2,39	2,42	2,39	2,41	2,44	2,60	2,40
Additives	Tegoamin PMDETA	0,20	0,18	0,17	0,16	0,17	0,16	0,17
	Tegoamin DMCHA	0,31			0,15	0,15	0,52	0,52
	Tegostab B8491	1,81	1,88	1,87	1,62	1,60	1,64	1,68
	TCPP	16,02	16,04	16,02	15,96	16,00	16,01	16,03
Blowing agents	n-pentane	17,69	13,73	13,84	6,84	4,55	6,68	4,53
	Cyclopentane				6,84	4,55	6,68	4,53
pMDI	Lupranate M20S	156,79	128,71	155,56	158,37	160,77	159,2	159,82
	Isocyanate index	2,63	2,18	2,64	2,63	2,69	2,83	2,85
								2,60

10

Table 2: lignin-containing formulations for polyisocyanurate foams

15

Example nr.	10	11	12	13	14	15	16	17
Cream time (s)	14	< 10	24	8	7	8	9	9
String time time (s)	22	40	108	64	18	22	31	31
Tack-free time (s)	36	?	?	106	25	27	45	45
Core density (g/ltr)	26,8	30,0	30,1	29,1	37,8	29,7	35,7	
Compressive strength // (kPa)	162	202	199	228	309	214	261	
Compressive strength \perp (kPa)	56	57	56	73	108	74	104	
Lambda (10 deg.C, mW/mK)								23,85
Flame height DIN 4102 B2 (cm)								10,50

Table 3: physical properties of lignin-containing polyisocyanurate foams

Reactivities, core densities, compressive strength performance of foams from examples 10-16, are given by table 3. They demonstrate that PIR foams of excellent reactivity and

5 mechanical performance properties can be made using the lignin dispersions of this invention. Example nr. 17 is included in this table to demonstrate that thermal insulation performance as well as flame retardancy of the foams is comparable to the reference. The lambda value of 23.85 is better than reference

10 whilst the flame height of 10.50 cm in the DIN 4102 indicates that this foam satisfies the DIN B2 classification.

Various embodiments of the present invention have been described above but a person skilled in the art realizes

15 further minor alterations, which would fall into the scope of the present invention. The breadth and scope of the present invention should not be limited by any of the above-described exemplary embodiments, but should be defined only in accordance with the following claims and their equivalents. For example,

20 any of the above-noted compositions or methods may be combined with other known methods. Other aspects, advantages and modifications within the scope of the invention will be apparent to those skilled in the art to which the invention pertains.

Claims

1. A composition in the form of a dispersion, comprising
5 one or more dispersants, and lignin, preferably alkaline lignin, wherein said lignin has an average particle size of from about 100 nm to about 2000 nm, preferably in a range from about 100 to about 1000 nm, most preferred from about 200 to about 600 nm, and wherein said dispersants has a
10 solubility parameter of from about 18 to about 30 MPa^{1/2} and a viscosity of from about 15 mPas to about 20,000 mPas, more preferably from about 15 mPas to about 10,000 mPas, especially preferred from about 20 mPas to about 1000 mPa, most preferred from about 20 mPas to about 500 mPas.
- 15 2. A composition according to any one of the preceding claims wherein said lignin is a Kraft lignin.
- 20 3. A composition according to any one of the preceding claims wherein said dispersant is a polyol, preferably an ethylene glycol or polyethylene glycol or a combination thereof, most preferred selected from the group comprising PEG, DEG, TEG and MEG or combinations thereof.
- 25 4. A composition according to claim 3 wherein the polyol is PEG, preferably the PEG has a molecular weight of from about 100 to about 5000, especially preferred from about 100 to about 600, most preferred about 400.
- 30 5. A composition according to claim 3 wherein said polyol comprises a mixture of different PEGs, wherein said mixture preferably comprises one PEG having a molecular weight of about 400 and one PEG having a molecular weight of about 600.

6. A composition according to any one of the preceding claims also comprising one or more alkanolamines, preferably MEA.

5

7. A composition according to any one of the preceding claims also comprising one or more flame retarding agents, preferably TCPP or DEEP or a combination of both.

10

8. Use of a composition according to any one of the preceding claims for making foams, rubbers, adhesives, reactive fillers or for use as a filling agent.

15

9. A method for manufacturing a composition in the form of a dispersion, according to any one of the preceding claims 1 - 7, comprising the following steps:

- i) providing a lignin, preferably an alkaline lignin,
- ii) adding one polyol or a mixture of polyols, and
- iii) mixing said components thus providing said composition.

20

10. A method according claim 9 wherein one or more flame retarding agents are added before mixing.

25

11. A method according claim 9 wherein said mixing is a high shear mixing of at least about 1000 rpm, preferably at least about 5000 rpm, most preferred at least about 20000 rpm.

30

12. A composition in the form of a dispersion obtainable by a method according any one of claims 9 - 11.

13. A method for manufacturing a foam comprising the following steps:

- a)providing a composition according to any one of the preceding claims 1 - 7 or 12,
- b)adding one or more blowing agents to said composition,
- c)optionally adding one or more additives,
- 5 d)adding iso-cyanate to said composition,
- e)stirring the mixture obtained in step d) and
- f)conveying the stirred mixture in step e) into a mould to provide a foam continuously or discontinuously.

10 14. A method according to claim 13 wherein said one or more additives may be selected from the group consisting of one or more surfactants, preferably one or more polydimethylsiloxane co-polymers, one or more polyurethane catalysts, preferably one or more tertiary amines or one or more triamines, one or more 15 flame retarding agents, or combinations thereof.

15. A method according to claim 13 wherein said one or more blowing agents are one or more hydrocarbon compounds, preferably selected from i-pentane, n-pentane and cyclopentene 20 or a combination thereof.


16. A method according to claim 13 wherein one or more hydroxyl-containing compounds and/or one more catalysts are added before addition of said one or more blowing agents, 25 preferably one or more polyester polyols and/or one or more polyether polyols and as a catalyst a trimer catalyst are added.

17. A foam obtainable by the method according to any one of 30 claims 13 - 16.

18. Use of a foam according to claim 17 in the building and construction segment, for thermal insulation, in automotive applications, appliances, footwear, or in furniture or bedding applications.

1 / 4

Figure 1

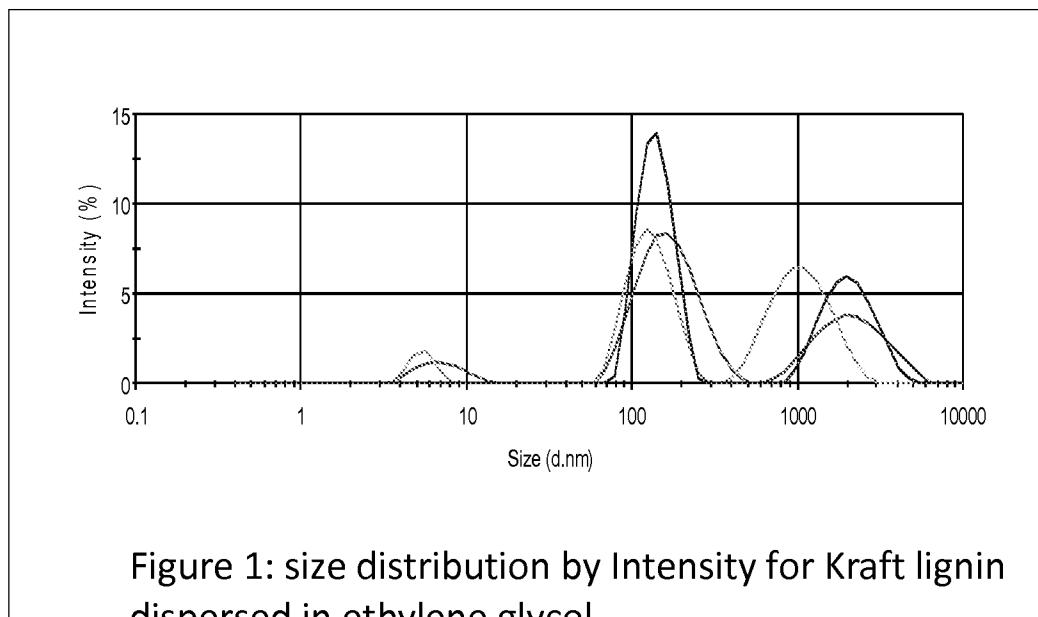

2 / 4

Figure 2


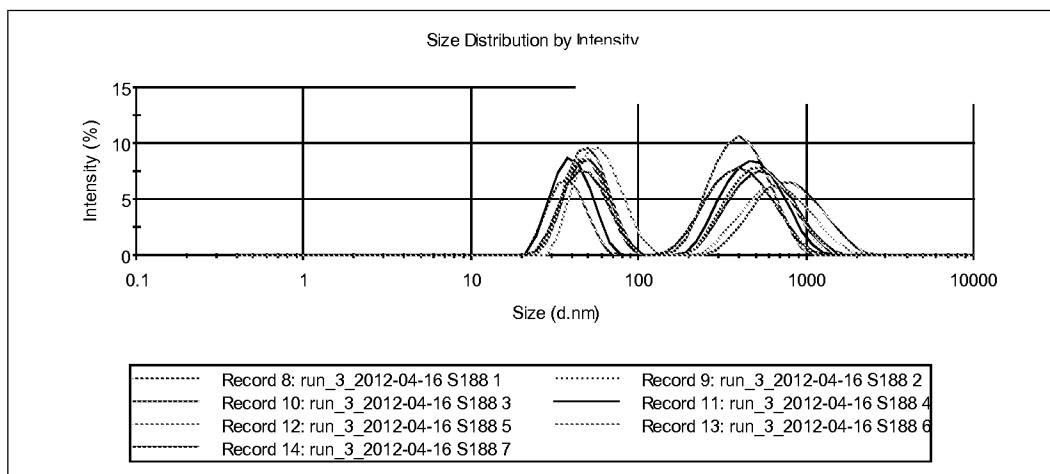


Figure 2: Size distribution by Intensity for Kraft lignin dispersed in Polyethylene glycol 400


3 / 4

Figure 3

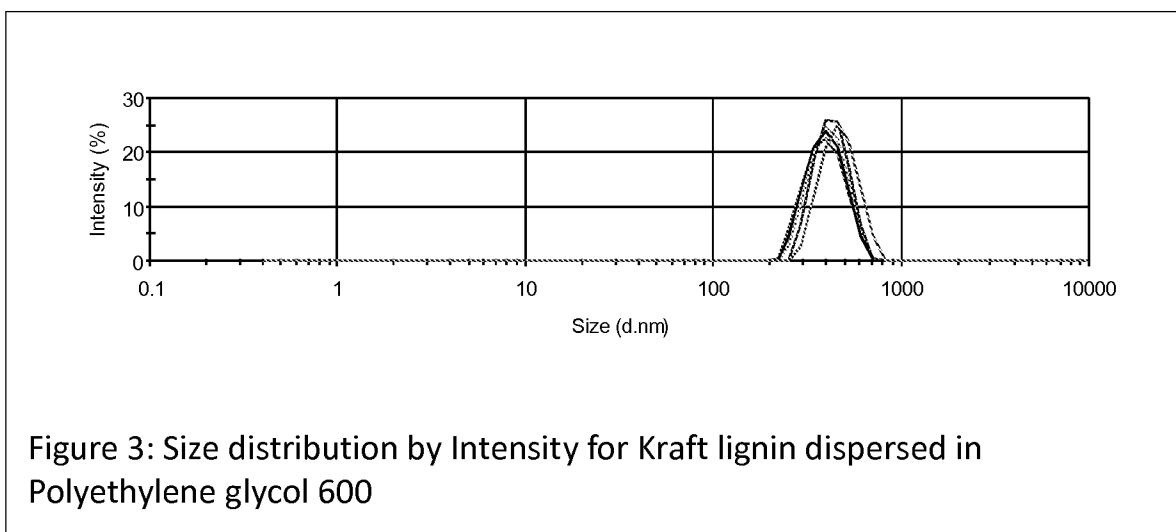

4 / 4

Figure 4

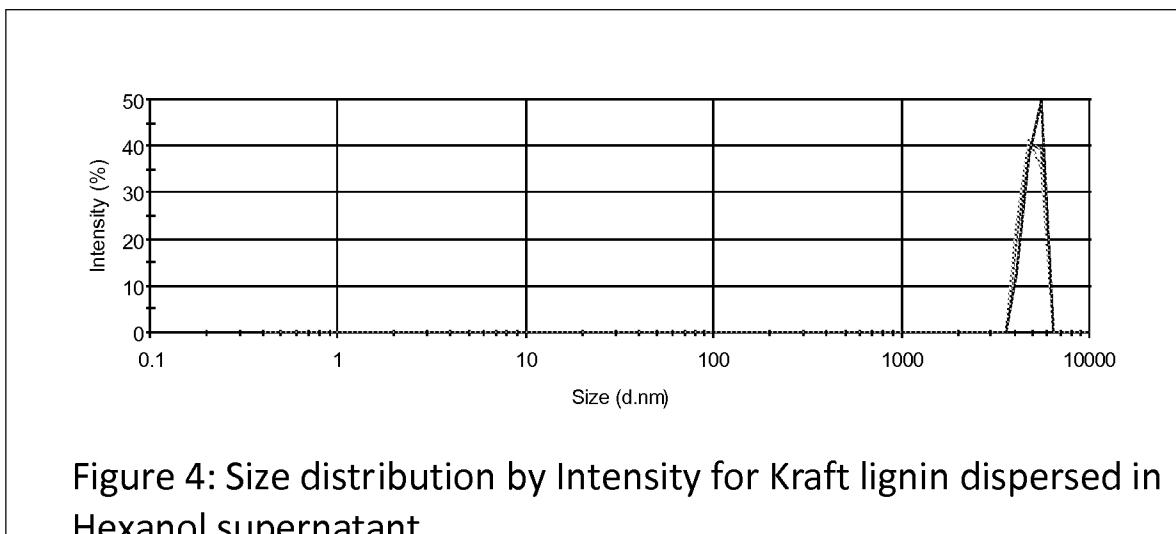

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB2013/054464

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: C08G, C08H, C08L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE, DK, FI, NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, PAJ, WPI data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2689366 A1 (BONO PIERRE ET AL), 8 October 1993 (1993-10-08); whole document; abstract; claims 1, 3; Example 1 --	1-12
X	JP S57190014 A (TOYO TIRE & RUBBER CO), 22 November 1982 (1982-11-22); whole document; abstract --	1-12
X	US 20090062516 A1 (BELANGER HELENE ET AL), 5 March 2009 (2009-03-05); whole document; abstract; paragraphs [0006], [0085] --	1-12



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
“A” document defining the general state of the art which is not considered to be of particular relevance	“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
“E” earlier application or patent but published on or after the international filing date	“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	“&” document member of the same patent family
“O” document referring to an oral disclosure, use, exhibition or other means	
“P” document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

24-09-2013

Date of mailing of the international search report

24-09-2013

Name and mailing address of the ISA/SE
Patent- och registreringsverket
Box 5055
S-102 42 STOCKHOLM
Facsimile No. + 46 8 666 02 86

Authorized officer
Erika Stenroos
Telephone No. + 46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB2013/054464

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 2011184643 A (KAWASAKI KASEI CHEM LTD), 22 September 2011 (2011-09-22); whole document; abstract; paragraph [0020] -- -----	1-12

Continuation of: second sheet

International Patent Classification (IPC)

C08L 97/02 (2006.01)

C08G 18/00 (2006.01)

C08G 18/40 (2006.01)

C08H 7/00 (2011.01)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB2013/054464

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.: **1-18 (in part)**
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

See extra sheet.

.../...

3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.

The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.

No protest accompanied the payment of additional search fees.

Continuation of: Box No. II

Present claims 1 relates to a product defined inter alia by reference to the following parameters:

P1: solubility parameter of 10-30 mPa^{1/2}

P2: viscosity of 15-10000 mPas

The use of these parameters in the present context is considered to lead to a lack of clarity within the meaning of Article 6 PCT. It is impossible to compare the parameters the applicant has chosen to employ with what is set out in the prior art. The lack of clarity is such as to render a meaningful complete search impossible. Consequently, the search has been restricted to the following:

A composition in the form of a dispersion comprising lignin with a particle size of 100 nm to 2000nm, where the dispersing agent is a polyol.

Thence it follows that a reasoned statement under Rule 43bis.1(a)(i) with regard to novelty, inventive step or industrial applicability only is established for those parts mentioned above.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/IB2013/054464

FR	2689366	A1	08/10/1993	NONE
JP	S57190014	A	22/11/1982	NONE
US	20090062516	A1	05/03/2009	US 20130012610 A1 10/01/2013
JP	2011184643	A	22/09/2011	NONE