



US009449740B2

(12) **United States Patent**
Eshima et al.

(10) **Patent No.:** **US 9,449,740 B2**
(45) **Date of Patent:** **Sep. 20, 2016**

(54) **ELECTRIC CABLE**
(71) Applicant: **HITACHI METALS, LTD.**, Tokyo
(JP)

2005/0211082 A1* 9/2005 Angeloni et al. 87/3
2013/0299211 A1* 11/2013 Pope 174/113 R
2014/0202756 A1 7/2014 Adachi et al.
2014/0348476 A1* 11/2014 Arao G02B 6/4403
385/103

(72) Inventors: **Hirota Eshima**, Hitachi (JP);
Fumihito Oka, Hitachi (JP); **Nobuyuki Yamashita**, Hitachi (JP); **Takahiro Futatsumori**, Mito (JP)

FOREIGN PATENT DOCUMENTS

JP S55-29065 8/1978
JP 8-315648 A 11/1996
JP 2006-031954 A 2/2006
JP 2006-164830 A 6/2006
JP 2006-351322 A 12/2006
JP 2013-74650 A 4/2013

(73) Assignee: **HITACHI METALS, LTD.**, Tokyo
(JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

OTHER PUBLICATIONS

(21) Appl. No.: **14/492,457**

Perumalraj et al. "Electromagnetic shielding Effectiveness of Copper Core Yarn Knitted Fabrics", Indian Journal of Fibre & Textile Research, vol. 34, Jun. 2009, pp. 149-154.*

(22) Filed: **Sep. 22, 2014**

Japanese Notification of Reason(s) for Refusal dated Aug. 2, 2016 received from Japanese Application No. 2013-200472, together with an English-language translation.

(65) **Prior Publication Data**

US 2015/0083482 A1 Mar. 26, 2015

(30) **Foreign Application Priority Data**

Sep. 26, 2013 (JP) 2013-200472

* cited by examiner

(51) **Int. Cl.**

H01B 11/04 (2006.01)
H01B 11/10 (2006.01)
H01B 7/18 (2006.01)
H01B 7/04 (2006.01)

Primary Examiner — Hoa C Nguyen

Assistant Examiner — Stanley Tso

(74) *Attorney, Agent, or Firm* — Scully, Scott, Murphy & Presser, P.C.

(52) **U.S. Cl.**

CPC **H01B 11/1033** (2013.01); **H01B 7/182** (2013.01); **H01B 7/04** (2013.01)

(58) **Field of Classification Search**

CPC H01B 11/04; H01B 7/17; H05K 9/009; H05K 9/0098
USPC 174/34, 393
See application file for complete search history.

(57) **ABSTRACT**

An electric cable includes a conductor core including conductors each covered with an insulation layer, and a braided layer formed on an outer periphery of the conductor core. The braided layer includes a braid of a first line group and a second line group. The first line group includes first metal lines and first fiber lines arranged along a longitudinal direction of the conductor core and is spirally wound around the outer periphery of the conductor core. The second line group includes second metal lines and second fiber lines arranged along the longitudinal direction of the conductor core and is spirally wound around the outer periphery of the conductor core in a direction opposite to the first line group.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,641,110 A 2/1987 Smith
5,414,211 A * 5/1995 Chan 174/36
7,288,494 B2 * 10/2007 Iwasaki H05K 9/0098
139/425 R

6 Claims, 4 Drawing Sheets

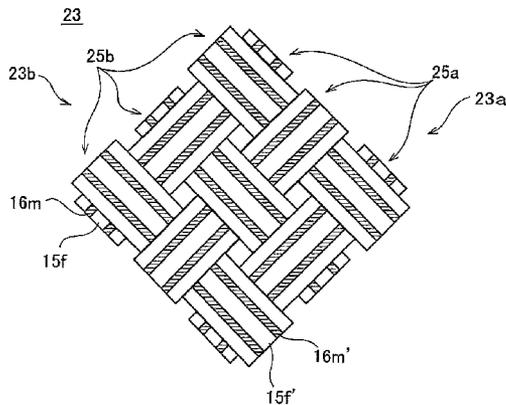


FIG.1A

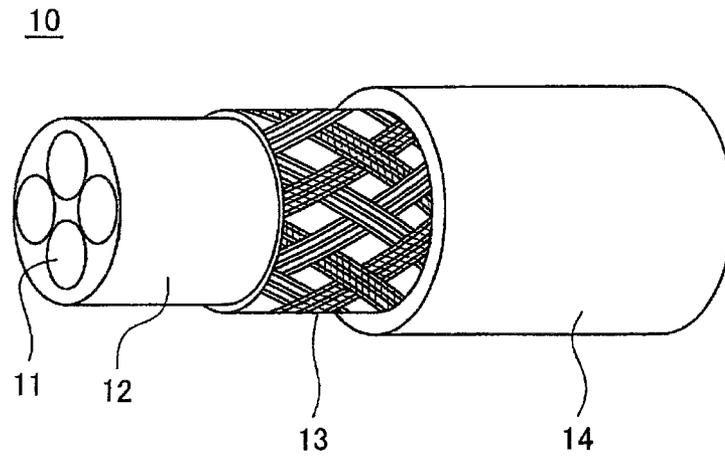


FIG.1B

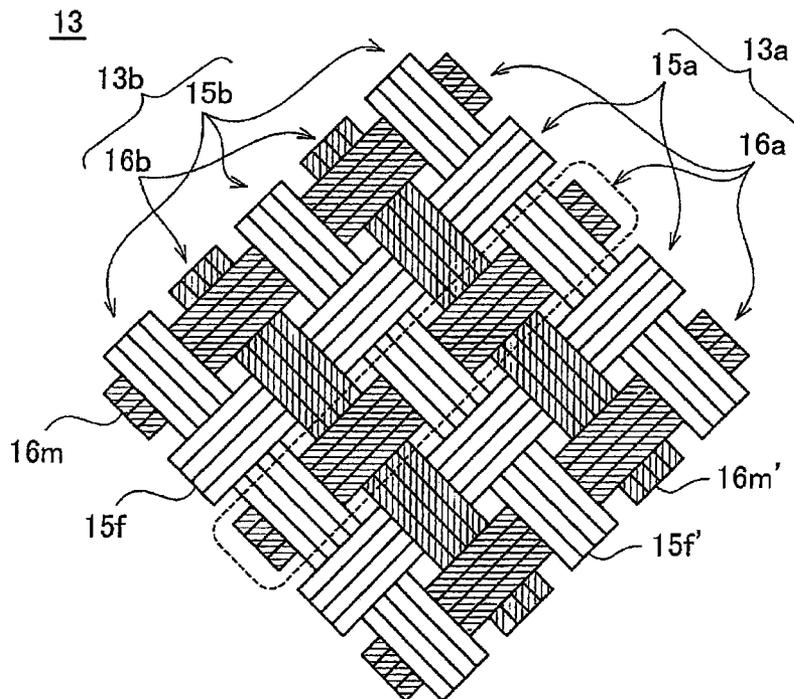


FIG. 2

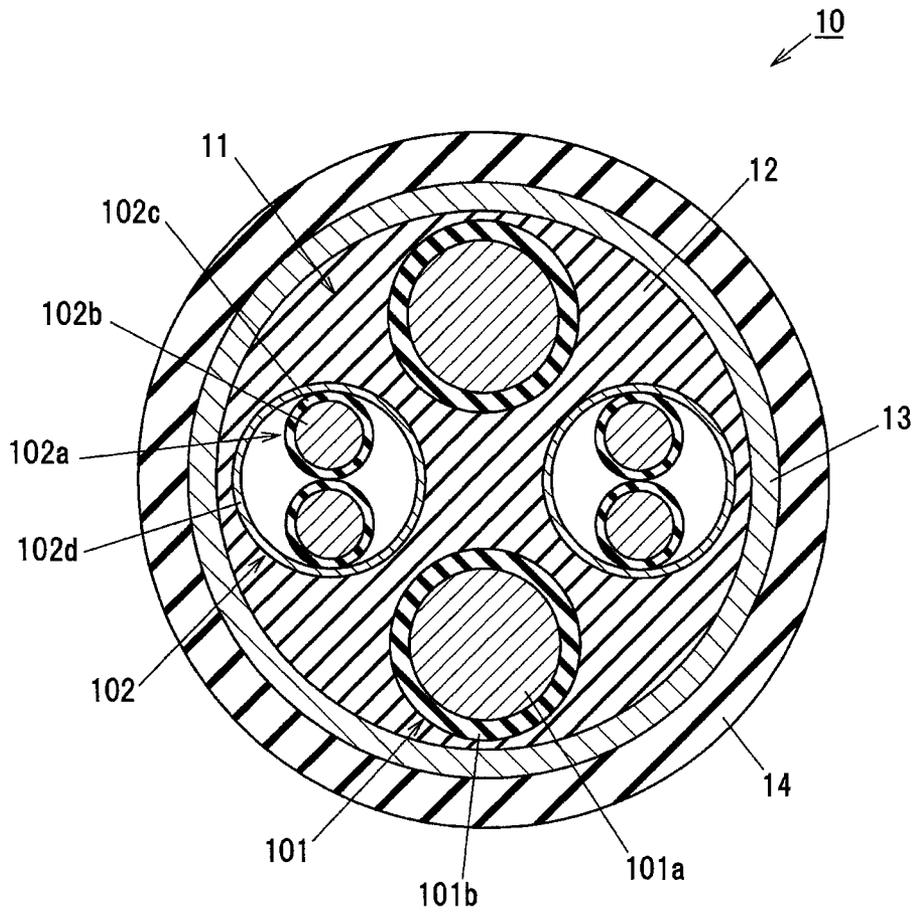


FIG.3A

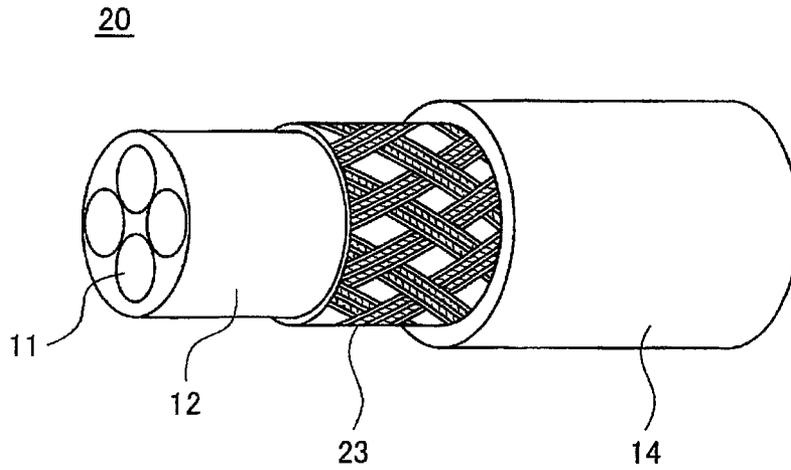


FIG.3B

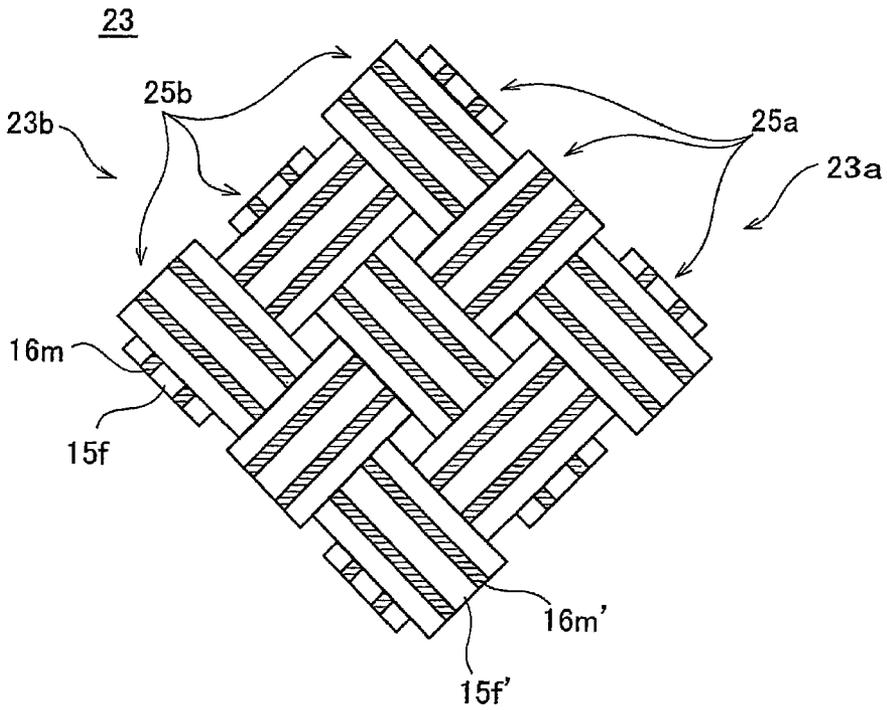


FIG.4A


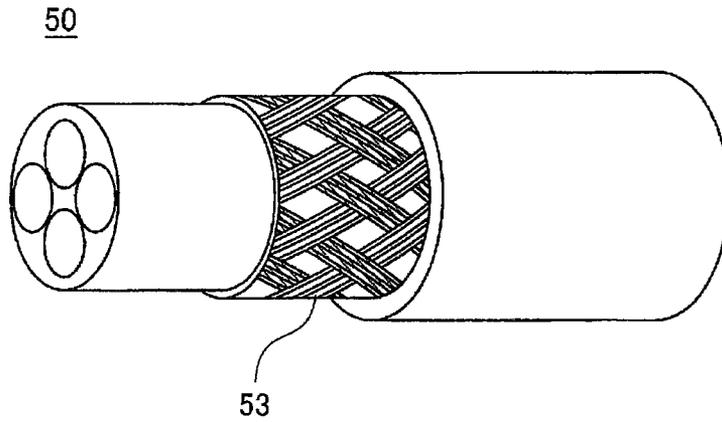


FIG.4B

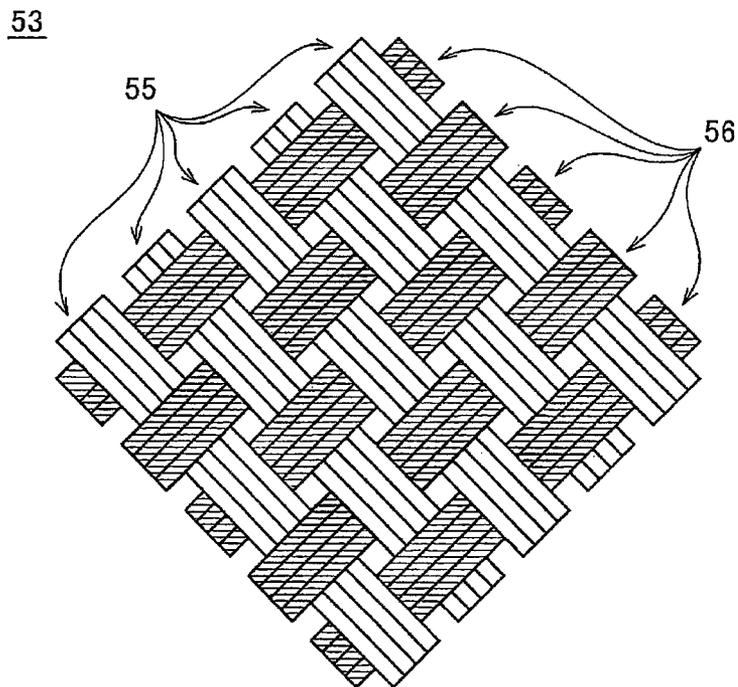

1

ELECTRIC CABLE

The present application is based on Japanese patent application No. 2013-200472 filed on Sep. 26, 2013, the entire contents of which are incorporated herein by refer-
5

BACKGROUND OF THE INVENTION

1. Field of the Invention

The invention relates to an electric cable and, in particu-
lar, to an electric cable used for automobiles etc.

2. Description of the Related Art

An electric cable provided with e.g. a conductor core and a shield layer formed by braiding metal wires to cover the outer periphery of the conductor core is known as an electric wire used for automobiles etc. (see JP-A-2006-031954). It is possible to improve the electrical shielding properties of the electric cable by using the shield layer. Another electric cable is also known which is provided with e.g. a conductor core and a hybrid braid layer formed by alternately weaving metal wires and fibers to cover the outer periphery of the conductor core (see JP-A-2006-351322). It is possible to improve the tensile strength and flex resistance of the electric cable by using the hybrid braid layer.

SUMMARY OF THE INVENTION

The electric cable disclosed in JP-A-2006-351322 may be better in tensile strength and flex resistance but be poorer in shielding properties than the electric cable disclosed in JP-A-2006-031954.

It is an object of the invention to provide an electric cable that meets the improved shielding properties as well as the excellent tensile strength and flex resistance.

(1) According to one embodiment of the invention, an electric cable comprises:

a conductor core comprising conductors each covered with an insulation layer; and

a braided layer formed on an outer periphery of the conductor core,

wherein the braided layer comprises a braid of a first line group and a second line group,

wherein the first line group comprises first metal lines and first fiber lines arranged along a longitudinal direction of the conductor core and is spirally wound around the outer periphery of the conductor core, and

wherein the second line group comprises second metal lines and second fiber lines arranged along the longitudinal direction of the conductor core and is spirally wound around the outer periphery of the conductor core in a direction opposite to the first line group.

In the above embodiment (1) of the invention, the following modifications and changes can be made.

(i) The first line group further comprises a first line bundle group that comprises first metal line bundles and first fiber line bundles alternately arranged along the longitudinal direction of the conductor core and is spirally wound around the outer periphery of the conductor core, the first metal line bundle being a bundle of a plurality of the aligned first metal lines and the first fiber line bundle being a bundle of a plurality of the aligned first fiber lines,

wherein the second line group further comprises a second line bundle group that comprises second metal line bundles and second fiber line bundles alternately arranged along the longitudinal direction of the conductor core and is spirally wound around the outer periphery of the conductor core in

2

the direction opposite to the first line bundle group, the second metal line bundle being a bundle of a plurality of the aligned second metal lines and the second fiber line bundle being a bundle of a plurality of the aligned second fiber lines, and

wherein the braided layer further comprises a braid of the first line bundle group and the second line bundle group.

(ii) The first line group further comprises a first composite line bundle group that comprises a plurality of first composite line bundles arranged along the longitudinal direction of the conductor core and is spirally wound around the outer periphery of the conductor core, the first composite line bundle being a bundle formed by aligning a plurality of the first metal lines and a plurality of the first fiber lines,

wherein the second line group further comprises a second composite line bundle group that comprises a plurality of second composite line bundles arranged along the longitudinal direction of the conductor core and is spirally wound around the outer periphery of the conductor core in the direction opposite to the first composite line bundle group, the second composite line bundle being a bundle formed by aligning a plurality of the second metal lines and a plurality of the second fiber lines, and

wherein the braided layer further comprises a braid of the first composite line bundle group and the second composite line bundle group.

(iii) The first fiber lines are arranged at both ends in a width direction of the first composite line bundle, and wherein the second fiber lines are arranged at both ends in a width direction of the second composite line bundle.

(iv) A diameter of the first fiber lines arranged at the both ends in the width direction of the first composite line bundle is larger than a diameter of the first metal lines arranged widthwise inside the first fiber lines, and wherein a diameter of the second fiber lines arranged at the both ends in the width direction of the second composite line bundle is larger than a diameter of the second metal lines arranged widthwise inside the second fiber lines.

(v) The first composite line bundle further comprises a plurality of the first metal lines and the first fiber lines are interposed therebetween, and wherein the second composite line bundle comprises a plurality of the second metal lines and the second fiber lines are interposed therebetween.

Effects of the Invention

According to one embodiment of the invention, an electric cable can be provided that meets the improved shielding properties as well as the excellent tensile strength and flex resistance.

BRIEF DESCRIPTION OF THE DRAWINGS

Next, the present invention will be explained in more detail in conjunction with appended drawings, wherein:

FIG. 1A is a perspective view showing an electric cable in a first embodiment of the present invention;

FIG. 1B is a partial enlarged view showing a braided layer in the electric cable of the first embodiment;

FIG. 2 is a cross sectional view of the electric cable shown in FIGS. 1A and 1B;

FIG. 3A is a perspective view showing an electric cable in a second embodiment of the invention;

FIG. 3B is a partial enlarged view showing a braided layer in the electric cable of the second embodiment;

FIG. 4A is a perspective view showing a conventional electric cable; and

FIG. 4B is a partial enlarged view showing a hybrid braid layer of the conventional electric cable.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

First Embodiment of the Invention

The configuration of the electric cable in the first embodiment will be described below in reference to the drawings.

As shown in FIG. 1A, an electric cable 10 in the first embodiment is provided with a conductor core 11 and a braided layer 13 formed on the outer periphery of the conductor core 11. An inclusion 12 is provided between the conductor core 11 and the braided layer 13. The inclusion 12 is formed of, e.g., silicon, ETTE (polytetrafluoroethylene) or plural staple fiber yarns, etc. The inclusion 12 may be, e.g., a filling material in the form of sponge or liquid. Alternatively, the space between the conductor core 11 and the braided layer 13 may be a cavity, in other words, the inclusion 12 may not be provided between the conductor core 11 and the braided layer 13.

The conductor core 11 has conductors each covered with an insulation layer. In detail, as shown in the cross section of FIG. 2, the conductor core 11 is formed by twisting plural (two in FIG. 2) power transmission lines 101 and plural (two in FIG. 2) signal transmission lines 102. The power transmission line 101 is configured as an insulation-coated wire which is provided with a center conductor 101a formed by twisting plural conductor strands (not shown) together and an insulation layer 101b formed on the outer periphery of the center conductor 101a. The signal transmission line 102 is configured as a shielded twisted pair cable which is provided with a twisted wire formed by twisting two signal line cores 102a and a braided shield 102d formed on the outer periphery of the twisted wires. The signal line core 102a is composed of a center conductor 102b formed by twisting plural conductor strands (not shown) together and an insulation layer 102c formed on the outer periphery of the center conductor 102b. The braided shield 102d is formed by braiding plural metal wires to cover the outer periphery of the twisted wires. The conductor strand constituting the center conductors 101a and 102b is formed of, e.g., a Sn-containing copper alloy (Sn-0.15 to 0.7 wt % Cu alloy), etc. The insulation layers 101b and 102c are formed of, e.g., cross-linked polyethylene, etc.

In the first embodiment, the braided layer 13 is formed by braiding a first line group 13a and a second line group 13b. The first line group 13a is composed of first metal lines 16m and first fiber lines 15f arranged in a predetermined order along the longitudinal direction of the electric cable 10, and spirally wound around the outer periphery of the conductor core 11. The second line group 13b is composed of second metal lines 16m' and second fiber lines 15f' arranged in a predetermined order along the longitudinal direction of the electric cable 10, and spirally wound around the outer periphery of the conductor core 11 in the direction opposite to the first line group 13a.

In detail, as shown in the partial enlarged view of FIG. 1B, the first line group 13a is configured as a first line bundle group provided with plural first metal line bundles 16a each formed in a belt shape by arranging plural (four in the first embodiment) first metal lines 16m in parallel and plural first fiber line bundles 15a each formed in a belt shape by arranging plural (four in the first embodiment) first fiber lines 15f in parallel. The first metal line bundles 16a and the first fiber line bundles 15a are alternately arranged along a

longitudinal direction of the conductor core 11. The first line group 13a is composed of the alternately arranged line bundles spirally wound around the outer periphery of the conductor core 11. Although the first metal line bundle 16a composed of plural first metal lines 16m and the first fiber line bundle 15a composed of plural first fiber lines 15f are described as an example in the first embodiment, the invention is not limited thereto. For example, the first metal line bundle 16a may be constituted by a single first metal line 16m or the first fiber line bundle 15a may be constituted by a single first fiber line 15f.

Meanwhile, the second line group 13b is configured as a second line bundle group provided with plural second metal line bundles 16b each formed in a belt shape by arranging plural (four in the first embodiment) second metal lines 16m' in parallel and plural second fiber line bundles 15b each formed in a belt shape by arranging plural (four in the first embodiment) second fiber lines 15f' in parallel. The second metal line bundles 16b and the second fiber line bundles 15b are alternately arranged along the longitudinal direction of the conductor core 11. The second line group 13b is composed of the alternately arranged line bundles spirally wound around the outer periphery of the conductor core 11 in the direction opposite to the first line group 13a, i.e., in the direction opposite to the first metal line bundles 16a and the first fiber line bundles 15a. Although the second metal line bundle 16b composed of plural second metal lines 16m' and the second fiber line bundle 15b composed of plural second fiber lines 15f' are described as an example in the first embodiment, the invention is not limited thereto. For example, the second metal line bundle 16b may be constituted by a single second metal line 16m' or the second fiber line bundle 15b may be constituted by a single second fiber line 15f'.

The braided layer 13 is formed by alternately braiding (weaving) the line bundles (the first metal line bundles 16a and the first fiber line bundles 15a) constituting the first line group 13a as, e.g., warps and the line bundles (the second metal line bundles 16b and the second fiber line bundles 15b) constituting the second line group 13b as, e.g., wefts.

“Alternately braiding” mentioned above means that, for example, a first metal line bundle 16a (see in a dashed line of FIG. 1B) is braided so as to pass under a second fiber line bundle 15b, then pass above a second metal line bundle 16b adjacent thereto and then pass under another second fiber line bundle 15b.

By configuring as described above, i.e., by braiding the plural first metal line bundles 16a and the plural second metal line bundles 16b while simultaneously winding in the opposite directions to each other around the outer periphery of the conductor core 11, it is possible to repeatedly cross the plural metal line bundles 16a and 16b at a predetermined angle (included angle). This allows shielding performance of the braided layer 13, i.e., shielding properties (noise resistance) of the electric cable 10 to be improved. One of the reasons for this is that the crossed metal line bundles 16a and 16b cause, e.g., magnetic flux generated by a current flowing through the first metal line bundle 16a and magnetic flux generated by a current flowing through the second metal line bundle 16b to cancel each other.

If the crossing angle (included angle) between the first metal line bundle 16a and the second metal line bundle 16b is too small, i.e., if a relation between the metal line bundles 16a, 16b and the conductor core 11 is close to parallel, a decrease in the shielding performance of the braided layer 13, i.e., a decrease in the shielding properties of the electric cable 10 is likely to occur. It is possible to sufficiently

increase the shielding performance of the braided layer **13** by adjusting the included angle between the first metal line bundle **16a** and the second metal line bundle **16b** to not less than 40°. It is possible to further increase the shielding performance of the braided layer **13** by adjusting the included angle between the first metal line bundle **16a** and the second metal line bundle **16b** to not less than 60°, preferably, not less than 80°.

On the other hand, if the crossing angle (included angle) between the first metal line bundle **16a** and the second metal line bundle **16b** is too large, i.e., if the relation between the metal line bundles **16a**, **16b** and the conductor core **11** is close to the right angle, a decrease in the speed of forming the braided layer **13** by braiding the metal line bundles **16a** and **16b**, i.e., a decrease in productivity of the electric cable **10** is likely to occur. It is possible to sufficiently increase the productivity of the electric cable **10** by adjusting the included angle between the first metal line bundle **16a** and the second metal line bundle **16b** to not more than 140°. It is possible to further increase the productivity of the electric cable **10** by adjusting the included angle between the first metal line bundle **16a** and the second metal line bundle **16b** to not more than 120°, preferably, not more than 100°.

Therefore, the angle (included angle) formed by crossing the first metal line bundle **16a** and the second metal line bundle **16b** is from 40° to 140°, preferably from 60° to 120°, more preferably from 80° to 100°.

As the first metal line **16m** and the second metal line **16m'**, it is possible to use a solid metal strand or a bundle of metal strands, etc. The metal strand is not specifically limited and it is possible to suitably use a wire rod conventionally used as a constituent material of a braided shield layer. As the metal strand, it is possible to use, e.g., a

Sn-plated copper wire and a copper alloy wire, etc. The cross sectional shape of the metal wire rod is not specifically limited and can be a circular shape, an oval shape or a rectangular shape etc.

As the first fiber line **15f** and the second fiber line **15f'**, it is possible to use natural fibers such as cotton threads and silk threads, or artificial fibers. Especially artificial fibers can be suitably used due to less characteristic variation than natural fibers. Considering tensile strength, flex resistance and resistance to environment, etc., of the electric cable **10**, it is preferable that the artificial fibers be materials proven for brake hose, e.g., polyvinyl alcohol, polyethylene terephthalate and polyethylene-2,6-naphthalate etc., and it is particularly preferable to use polyvinyl alcohol. The cross sectional shape of the fiber material is not specifically limited and can be a circular shape, an oval shape or a rectangular shape etc.

As a constituent material of a sheath **14**, it is preferable to use a material having good resistances to heat, weather, oil and water, e.g., materials conventionally used as rubber materials for brake hose. A preferable constituent material of the sheath **14** is, e.g., a rubber material such as ethylene-propylene-diene rubber, styrene-butadiene rubber, butyl rubber, nitrile rubber or chloroprene rubber, and it is particularly preferable to use ethylene-propylene-diene rubber. In addition, these rubber materials may appropriately contain agents such as reinforcing agent, filler, plasticizer, softener, processing aid, activator, anti-scorching agent and antioxidant as long as the purpose and functions of the sheath **14** are not impaired. These rubber materials may further appropriately contain other polymers as long as the purpose and functions of the sheath **14** are not impaired.

The first embodiment achieves one or more effects described below.

(a) By winding the plural first metal line bundles **16a** and the plural second metal line bundles **16b** in the opposite directions to each other around the outer periphery of the conductor core **11**, it is possible to repeatedly cross the plural metal line bundles **16a** and **16b** on the outer periphery of the conductor core **11** at a predetermined angle (included angle). As a result, it is possible to improve the shielding properties (noise resistance) of the electric cable **10**.

In FIG. **4**, a configuration of a conventional electric cable is shown for reference. An electric cable **50** shown in FIG. **4** is provided with a hybrid braid layer **53** formed by winding plural metal line bundles **56** and plural fiber line bundles **55** in the opposite directions to each other around the outer periphery of the conductor core **11**. The electric cable **50** shown in FIG. **4** has a shield layer (metal braid layer) formed by braiding metal wires and has better tensile strength and flex resistance but may have poorer shielding properties than general electric cables, i.e., electric cables not having a reinforcement layer formed by weaving fibers (a fiber braided layer). This is because the electric cable **50** shown in FIG. **4** is configured that all of the plural metal line bundles **56** are wound in the same direction and are thus not repeatedly crossed on the outer periphery of the conductor core. On the other hand, in the electric cable **10** of the first embodiment, the plural metal line bundles **16a** and **16b** are repeatedly crossed on the outer periphery of the conductor core **11** and this provides higher shielding properties than the electric cable **50** shown in FIG. **4**.

(b) By winding the plural fiber line bundles **15a** and **15b** together with the metal line bundles **16a** and **16b** around the outer periphery of the conductor core **11** so as to be integrally woven into the braided layer **13**, it is possible to obtain the braided layer **13** with excellent tensile strength. That is, the electric cable **10** in the first embodiment has higher tensile strength than general electric cables not having a reinforcement layer (fiber braided layer). Meanwhile, when fixing to an automobile, etc., the electric cable **10** is fixed by crimping metal fittings onto the outer periphery of the electric cable **10**, i.e., onto the outer periphery of the sheath **14**. At this time, the mesh of the braided layer **13** bites into the inner periphery of the sheath **14** and this allows a force of gripping the electric cable **10** to be improved. In addition, since the mesh of the braided layer **13** bites into the inner periphery of the sheath **14**, elongation of the sheath **14** alone can be suppressed when the electric cable **10** is pulled.

(c) The braided layer **13** formed by integrally weaving the metal line bundles **16a** and **16b** and the fiber line bundles **15a** and **15b** allows the electric cable **10** to have excellent flex resistance. The following is the reason. If a two-layer structure composed of a shield layer (metal braid layer) and a reinforcement layer (fiber braided layer) which are described above is adopted, friction is likely to occur between these layers when the electric cable is bent and this results in that breaking of especially metal line is likely to occur. In contrast, in the first embodiment in which the metal line bundles **16a** and **16b** and the fiber line bundles **15a** and **15b** are integrated by weaving together, friction between the metal line bundles **16a**, **16b** and the fiber line bundles **15a**, **15b** does not occur and, as a result, breaking of the first metal lines **16m** and the second metal lines **16m'** can be suppressed.

(d) The braided layer **13** formed by integrally weaving the metal line bundles **16a** and **16b** and the fiber line bundles **15a** and **15b** allows the outer diameter of the electric cable **10** to be reduced and weight reduction to be realized. In other words, in the first embodiment, the two-layer structure composed of a shield layer (metal braid layer) and a rein-

forcement layer (fiber braided layer) is not adopted but the functions of these two layers (shielding and reinforcement) can be simultaneously realized only by the braided layer 13. Therefore, it is possible to simplify the structure of the electric cable 10 and thus to reduce the outer diameter thereof and to realize weight reduction.

(e) If the electric cable 10 is used for e.g. automobiles or industrial robots, the reliability and safety of devices installed therein can be greatly improved. For example, an electric cable wired under spring for electrically connecting a device (power source, inverter, control unit, etc.) arranged on an automobile body side and a device (in-wheel motor, electric brake, sensors, etc.) arranged on a component below a suspension spring in a hybrid car, etc., is fixed to an automobile body and to a movable component such as suspension arm by using plural metal fittings. Therefore, the electric cable wired under spring is required to have not only shielding properties but also flex resistance to withstand repetitive bending as well as tensile strength to withstand pulling force. The electric cable 10 in the first embodiment can have the improved shielding properties as well as the excellent tensile strength and flex resistance so as to be suitably used in such an environment.

Second Embodiment of the Invention

An electric cable 20 in the second embodiment is different from the first embodiment only in the configuration of a braided layer 23. The remaining configuration is the same as the electric cable 10 in the first embodiment. The configuration of the braided layer 23 in the second embodiment will be described below in reference to FIGS. 3A and 3B.

In the second embodiment, the braided layer 23 is formed by braiding a first line group 23a and a second line group 23b. The first line group 23a is composed of plural first metal lines 16m and plural first fiber lines 15f arranged in a predetermined order along the longitudinal direction of the electric cable 20, and spirally wound around the outer periphery of the conductor core 11. The second line group 23b is composed of plural second metal lines 16m' and plural second fiber lines 15f' arranged in a predetermined order along the longitudinal direction of the electric cable 20, and spirally wound around the outer periphery of the conductor core 11 in the direction opposite to the first line group 23a.

In detail, as shown in the partial enlarged view of FIG. 3B, the first line group 23a is configured as a first composite line bundle group provided with plural first composite line bundles 25a each formed in a belt shape by arranging plural first metal lines 16m and plural first fiber lines 15f (by alternately arranging three first metal lines 16m and two first fiber lines 15f in the second embodiment) in a predetermined order. The first line group 23a is composed of the plural first composite line bundles 25a aligned along the longitudinal direction of the conductor core 11 and spirally wound around the outer periphery of the conductor core 11. Although the first composite line bundle 25a composed of plural first metal lines 16m and plural first fiber lines 15f is described as an example in the second embodiment, the invention is not limited thereto. For example, the first composite line bundle 25a may have only one first metal line 16m or only one first fiber line 15f.

Meanwhile, the second line group 23b is configured as a second composite line bundle group provided with plural second composite line bundles 25b each formed in a belt shape by arranging plural second metal lines 16m' and plural second fiber lines 15f' (by alternately arranging three second metal lines 16m' and two second fiber lines 15f' in the second

embodiment) in a predetermined order. The second line group 23b is composed of the plural second composite line bundles 25b aligned along the longitudinal direction of the conductor core 11 and spirally wound around the outer periphery of the conductor core 11 in the direction opposite to the first line group 23a, i.e., in the direction opposite to the first composite line bundle 25a. Although the second composite line bundle 25b composed of plural second metal lines 16m' and plural second fiber lines 15f' is described as an example in the second embodiment, the invention is not limited thereto. For example, the second composite line bundle 25b may have only one second metal line 16m' or only one second fiber line 15f'.

The braided layer 23 is formed by alternately braiding (weaving) the line bundles (the first composite line bundles 25a) constituting the first line group 23a as, e.g., warps and the line bundles (the second composite line bundles 25b) constituting the second line group 23b as, e.g., wefts. "Alternately braiding" mentioned above means that, for example, the middle of the three first composite line bundles 25a shown in FIG. 3B is braided so as to pass above a second composite line bundle 25b, then pass under another second composite line bundle 25b adjacent thereto, and then pass above still another second composite line bundle 25b.

By configuring as described above, i.e., by braiding the plural first composite line bundles 25a and the plural second composite line bundles 25b while simultaneously winding in the opposite directions to each other around the outer periphery of the conductor core 11, it is possible to repeatedly cross the plural composite line bundles 25a and 25b, i.e., to repeatedly cross the plural first metal lines 16m and the plural second metal lines 16m' included in the composite line bundles 25a and 25b, at a predetermined angle (included angle). This allows shielding performance of the braided layer 23, i.e., shielding properties (noise resistance) of the electric cable 20 to be improved. One of the reasons for this is that the crossed composite line bundles 25a and 25b cause, e.g., magnetic flux generated by a current flowing through (the first metal line 16m of) the first composite line bundle 25a and magnetic flux generated by a current flowing through (the second metal line 16m' of) the second composite line bundle 25b to cancel each other.

If the crossing angle (included angle) between the first composite line bundle 25a and the second composite line bundle 25b is too small, a decrease in the shielding properties of the electric cable 20 is likely to occur for the same reason as the first embodiment. It is possible to sufficiently increase the shielding properties of the electric cable 20 by adjusting the included angle between the composite line bundles 25a and 25b to not less than 40° and it is possible to further increase the shielding properties of the electric cable 20 by adjusting the included angle between the composite line bundles 25a and 25b to not less than 60°, preferably, not less than 80°.

On the other hand, if the crossing angle (included angle) between the first composite line bundle 25a and the second composite line bundle 25b is too large, a decrease in productivity of the electric cable 20 is likely to occur for the same reason as the first embodiment. It is possible to sufficiently increase the productivity of the electric cable 20 by adjusting the included angle between the composite line bundles 25a and 25b to not more than 140°. It is possible to further increase the productivity of the electric cable 20 by adjusting the included angle between the composite line bundles 25a and 25b to not more than 120°, preferably, not more than 100°.

Therefore, the angle (included angle) formed by crossing the first composite line bundle **25a** and the second composite line bundle **25b** is from 40° to 140°, preferably from 60° to 120°, more preferably from 80° to 100°.

The number, diameter and sequence, etc., of the first metal lines **16m**, the second metal lines **16m'**, the first fiber lines **15f** and the second fiber lines **15f'** constituting the first composite line bundle **25a** and the second composite line bundle **25b** can be appropriately determined based on the specification required for the electric cable **20**. For example, when the number of the first metal lines **16m** and that of the second metal lines **16m'** are increased respectively with respect to the number of the first fiber lines **15f** and that of the second fiber lines **15f'** in the composite line bundles **25a** and **25b**, it is possible to reduce impedance of the braided layer **23** and thus to improve the shielding performance, i.e., the shielding properties of the electric cable **20**. On the other hand, when the number of the first fiber lines **15f** and that of the second fiber lines **15f'** are increased respectively with respect to the number of the first metal lines **16m** and that of the second metal lines **16m'** in the composite line bundles **25a** and **25b**, it is possible to improve tensile strength of the braided layer **23**, i.e., tensile strength of the electric cable **20**.

In this regard, it is preferable that the first fiber lines **15f**, not the first metal lines **16m**, be arranged at both ends in a width direction of the first composite line bundle **25a**. In the same way, it is preferable that the second fiber lines **15f'**, not the second metal lines **16m'**, be arranged at both ends in a width direction of the second composite line bundle **25b**. In addition, in this case, a diameter of the first fiber lines **15f** arranged at the both ends in the width direction of the first composite line bundle **25a** is preferably larger than a diameter of the first metal lines **16m** arranged widthwise inside the first fiber lines **15f**. In the same way, a diameter of the second fiber lines **15f'** arranged at the both ends in the width direction of the second composite line bundle **25b** is preferably larger than a diameter of the second metal lines **16m'** arranged widthwise inside the second fiber lines **15f'**. Here, "the width direction" of the composite line bundles **25a** and **25b** means a direction in which the lines (the first metal lines **16m**, the second metal lines **16m'**, the first fiber lines **15f** and the second fiber lines **15f'**) constituting the composite line bundles **25a** and **25b** are aligned in parallel and also a direction orthogonal to a longitudinal direction of the composite line bundles **25a** and **25b**.

In addition, when the first composite line bundle **25a** includes plural first metal lines **16m**, it is preferable that the first fiber line **15f** be interposed each between the plural first metal lines **16m**. In the same way, when the second composite line bundle **25b** includes plural second metal lines **16m'**, it is preferable that the second fiber line **15f'** be interposed each between the plural second metal lines **16m'**. In other words, all the first metal lines **16m** constituting the first composite line bundle **25a** are sandwiched from both sides in the width direction of the composite line bundle **25a** by the first fiber lines **15f**. In the same way, all the second metal lines **16m'** constituting the second composite line bundle **25b** are sandwiched from both sides in the width direction of the composite line bundle **25b** by the second fiber lines **15f'**.

The second embodiment achieves one or more effects described below.

(a) By winding the plural composite line bundles **25a** and the plural composite line bundles **25b** in the opposite directions to each other around the outer periphery of the conductor core **11**, it is possible to repeatedly cross the plural composite line bundles **25a** and **25b** on the outer periphery

of the conductor core **11** at a predetermined angle (included angle). As a result, it is possible to improve the shielding properties (noise resistance) of the electric cable **20**. In other words, in the electric cable **20** of the second embodiment, the plural first metal lines **16m** and the plural second metal lines **16m'** are repeatedly crossed on the outer periphery of the conductor core **11** and this provides higher shielding properties than the electric cable **50** shown in FIG. 4.

(b) Since the braided layer **23** is formed by braiding the composite line bundles **25a** and **25b**, i.e., since the first metal lines **16m**, the second metal lines **16m'**, the first fiber lines **15f** and the second fiber lines **15f'** are integrally woven in the braided layer **23**, it is possible to impart excellent tensile strength to the braided layer **23**. That is, the electric cable **20** in the second embodiment has higher tensile strength than general electric cables not having a reinforcement layer (fiber braided layer). In addition, when fixing the electric cable **20** to an automobile, etc., by crimping the outer periphery of the sheath **14**, the mesh of the braided layer **23** bites into the inner periphery of the sheath **14** and this allows a force of gripping the electric cable **20** to be improved. In addition, since the mesh of the braided layer **23** bites into the inner periphery of the sheath **14**, elongation of the sheath **14** alone can be suppressed when the electric cable **20** is pulled.

(c) The braided layer **23** formed by braiding the composite line bundles **25a** and **25b**, i.e., the braided layer **23** formed by integrally weaving the first metal lines **16m**, the second metal lines **16m'**, the first fiber lines **15f** and the second fiber lines **15f'**, allows flex resistance of the electric cable **20** to be improved. That is, in the second embodiment, it is easy to avoid friction between the first metal lines **16m**, the second metal lines **16m'**, the first fiber lines **15f** and the second fiber lines **15f'** as compared to the case where the two-layer structure composed of a shield layer (metal braid layer) and a reinforcement layer (fiber braided layer) is adopted, which results in that breaking of the first metal lines **16m** and the second metal lines **16m'** can be suppressed.

Especially since the first fiber lines **15f** and the second fiber lines **15f'**, not the first metal lines **16m** and the second metal lines **16m'**, are arranged at the both ends in the width direction of the composite line bundles **25a** and **25b**, it is possible to obtain the electric cable **20** with excellent flex resistance. In general, friction is likely to occur between the both widthwise ends of the first composite line bundle **25a** and the main surface of the second composite line bundle **25b** crossing therewith when the electric cable **20** is bent. Likewise, friction is likely to occur also between the both widthwise ends of the second composite line bundle **25b** and the main surface of the first composite line bundle **25a** crossing therewith. Therefore, if the first metal lines **16m** and the second metal lines **16m'** are arranged at the both ends in the width direction of the composite line bundles **25a** and **25b**, the first metal lines **16m** and the second metal lines **16m'** arranged at the both ends in the width direction are likely to be broken due to friction. In contrast, when the first fiber lines **15f** and the second fiber lines **15f'** are arranged at the both ends in the width direction of the composite line bundles **25a** and **25b**, the first metal lines **16m** and the second metal lines **16m'** arranged widthwise inside the first fiber lines **15f** and the second fiber lines **15f'** are protected respectively by the first fiber lines **15f** and the second fiber lines **15f'** and, as a result, breaking of the first metal lines **16m** and the second metal lines **16m'** due to friction can be further suppressed.

In addition, since the diameter of the first fiber lines **15f** and the second fiber lines **15f'** arranged at the both ends in the width direction of the composite line bundles **25a** and

25b is larger than the diameter of the first metal lines **16m** and the second metal lines **16m'** arranged widthwise inside such first fiber lines **15f** and second fiber lines **15f'**, it is possible to further improve flex resistance of the electric cable **20**. In other words, by configuring the first fiber lines **15f** and the second fiber lines **15f'** arranged at the both ends in the width direction to have a diameter as described above, the first metal lines **16m** and the second metal lines **16m'** arranged widthwise inside such first fiber lines **15f** and second fiber lines **15f'** are reliably protected by the first fiber lines **15f** and the second fiber lines **15f'**. As a result, breaking of the first metal lines **16m** and the second metal lines **16m'** due to friction can be suppressed more reliably. If a material with good slipping properties, e.g., Teflon (trademark), etc., is used to form the first fiber lines **15f** and the second fiber lines **15f'** arranged at the both ends in the width direction of the composite line bundles **25a** and **25b**, breaking of wires due to friction can be suppressed further reliably and it is thus possible to further improve flex resistance of the electric cable **20**.

In addition, when the composite line bundles **25a** and **25b** respectively include the plural first metal lines **16m** and the plural second metal lines **16m'**, it is possible to further improve flex resistance of the electric cable **20** by interposing the first fiber lines **15f** and the second fiber lines **15f'** respectively between the plural first metal lines **16m** and between the plural second metal lines **16m'**. In other words, by sandwiching each metal line **16m** and each second metal line **16m'** from both sides respectively by the first fiber lines **15f** and the second fiber lines **15f'**, the first fiber lines **15f** and the second fiber lines **15f'** act as a buffer (cushioning material) to reduce pressure applied to the first metal lines **16m** and the second metal lines **16m'** when the electric cable **20** is bent. As a result, breaking of the first metal lines **16m** and the second metal lines **16m'** due to friction can be suppressed.

(d) The braided layer **23** formed by braiding the composite line bundles **25a** and **25b**, i.e., the braided layer **23** formed by integrally weaving the first metal lines **16m**, the second metal lines **16m'**, the first fiber lines **15f** and the second fiber lines **15f'**, allows the outer diameter of the electric cable **20** to be reduced and weight reduction to be realized. In other words, in the second embodiment, since the functions of the two layers (shielding and reinforcement) can be simultaneously realized only by the braided layer **23**, it is possible to simplify the structure of the electric cable **20** and thus to reduce the outer diameter thereof and to realize weight reduction.

(e) The electric cable **20** in the second embodiment has the improved shielding properties while being excellent in tensile strength and flex resistance, and thus can be suitably used as, e.g., an electric cable for automobile and industrial robot in the same manner as the electric cable **10** in the first embodiment. Especially when the electric cable **20** in the second embodiment is used as an electric cable which is wired under spring and is thus required to have all of shielding properties, flex resistance and tensile strength, it is possible to greatly improve reliability and safety of hybrid car, etc.

Other Embodiments of the Invention

Although the embodiments of the invention have been specifically described, the invention is not intended to be limited to the embodiments, and the various kinds of change can be made without departing from the gist thereof.

Although the example in which the first fiber lines **15f** and the second fiber lines **15f'** are arranged at the both ends in the width direction of the composite line bundles **25a** and **25b** has been described in the embodiment, the invention is not limited thereto. For example, only one of the composite line bundles **25a** and **25b** may be configured as such. It is possible to improve flex resistance of the electric cable **20** also in this case. However, it is more preferable that both of the composite line bundles **25a** and **25b**, not only one of them, be configured as described above since it is easy to improve the flex resistance of the electric cable **20**.

In addition, although the example in which the diameter of the first fiber lines **15f** and the second fiber lines **15f'** arranged at the both ends in the width direction of the composite line bundles **25a** and **25b** is larger than the diameter of the first metal lines **16m** and the second metal lines **16m'** arranged widthwise inside such first fiber lines **15f** and second fiber lines **15f'** has been described in the embodiment, the invention is not limited thereto. For example, even when only one of the composite line bundles **25a** and **25b** is configured as such, it is possible to improve flex resistance of the electric cable **20**. However, it is more preferable that both of the composite line bundles **25a** and **25b**, not only one of them, be configured as described above since it is easy to improve since the flex resistance of the electric cable **20**.

In addition, although the composite line bundles **25a** and **25b** which respectively include the plural first metal lines **16m** and the plural second metal lines **16m'** so that the first fiber lines **15f** and the second fiber lines **15f'** are interposed respectively between the plural first metal lines **16m** and between the plural second metal lines **16m'** have been described as an example in the embodiment, the invention is not limited thereto. For example, even when only one of the composite line bundles **25a** and **25b** is configured as such, it is possible to improve flex resistance of the electric cable **20**. However, it is more preferable that both of the composite line bundles **25a** and **25b**, not only one of them, be configured as described above since it is easy to improve the flex resistance of the electric cable **20**.

In addition, although the example in which the conductor core **11** is formed by twisting two power transmission lines **101** and two signal transmission lines **102** has been described in the embodiments, the invention is not limited thereto. The number of the power transmission lines **101** and that of the signal transmission lines **102** may be one, or three or more. Alternatively, the power transmission line(s) **101** and the signal transmission line(s) **102** may not be twisted. In addition, the power transmission line **101** is not limited to a single insulation-coated wire and may be, e.g., a litz wire obtained by twisting plural insulation-coated wires together. Similarly, the signal transmission line **102** is not limited to a shielded twisted pair cable and may be an unshielded twisted pair cable or a coaxial cable. In addition, such several types of power transmission lines and signal transmission lines may be combined, and electric wires other than power transmission lines and signal transmission lines may be included.

What is claimed is:

1. An electric cable, comprising:

a conductor core comprising conductors each covered with an insulation layer; and
a braided layer formed on an outer periphery of the conductor core,
wherein the braided layer comprises a braid of a first line group and a second line group,
wherein the first line group comprises first metal lines and first fiber lines arranged along a longitudinal direction

13

of the conductor core and is spirally wound around the outer periphery of the conductor core, and wherein the second line group comprises second metal lines and second fiber lines arranged along the longitudinal direction of the conductor core and is spirally wound around the outer periphery of the conductor core in a direction opposite to the first line group, wherein the first line group further comprises a first composite line bundle comprising a plurality of first composite line bundles arranged along the longitudinal direction of the conductor core and is spirally wound around the outer periphery of the conductor core, the first composite line bundle being a bundle formed by aligning a plurality of the first metal lines and a plurality of the first fiber lines, wherein the second line group further comprises a second composite line bundle that comprises a plurality of second composite line bundles arranged along the longitudinal direction of the conductor core and is spirally wound around the outer periphery of the conductor core in the direction opposite to the first composite line bundle, the second composite line bundle being a bundle formed by aligning a plurality of the second metal lines and a plurality of the second fiber lines, wherein the plurality of the first metal lines and the plurality of the first fiber lines are arranged in parallel in a width direction of the first composite line bundle, and

14

wherein the plurality of the second metal lines and the plurality of the second fiber lines are arranged in parallel in a width direction of the second composite line bundle.

2. The electric cable according to claim 1, wherein a diameter of the first fiber lines arranged at the both ends in the width direction of the first composite line bundle is larger than a diameter of the first metal lines arranged widthwise inside the first fiber lines, and wherein a diameter of the second fiber lines arranged at the both ends in the width direction of the second composite line bundle is larger than a diameter of the second metal lines arranged widthwise inside the second fiber lines.

3. The electric cable according to claim 1, wherein the first composite line bundle further comprises a plurality of the first metal lines and the first fiber lines are interposed therebetween, and wherein the second composite line bundle comprises a plurality of the second metal lines and the second fiber lines are interposed therebetween.

4. The electric cable according to claim 1, wherein an angle formed between the first metal lines and the second metal lines is between 40° and 140°.

5. The electric cable according to claim 4, wherein an angle formed between the first metal lines and the second metal lines is between 60° and 120°.

6. The electric cable according to claim 5, wherein an angle formed between the first metal lines and the second metal lines is between 80° and 100°.

* * * * *