

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|---|------------------|---|
| <p>(51) International Patent Classification ⁵ : G03G 15/16</p> | <p>A1</p> | <p>(11) International Publication Number: WO 92/08170</p> <p>(43) International Publication Date: 14 May 1992 (14.05.92)</p> |
| <p>(21) International Application Number: PCT/US91/07662</p> <p>(22) International Filing Date: 22 October 1991 (22.10.91)</p> <p>(30) Priority data: 603,068 25 October 1990 (25.10.90) US</p> <p>(71) Applicant: EASTMAN KODAK COMPANY [US/US]; 343 State Street, Rochester, NY 14650-2201 (US).</p> <p>(72) Inventors: RIMAI, Donald, Saul ; P.O. Box 1001, Webster, NY 14580 (US). BAXTER, Carlton, Dorr ; 1133 South Clinton Avenue, Rochester, NY 14620 (US). ZARETSKY, Mark, Cameron ; 30 Shalimar Drive, Rochester, NY 14618 (US). JUDKINS, Larry, Howard ; 108 Southridge Drive, Rochester, NY 14626 (US).</p> | | <p>(74) Agent: TREASH, Leonard, W., Jr.; 343 State Street, Rochester, NY 14650-2201 (US).</p> <p>(81) Designated States: AT (European patent), BE (European patent), CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, LU (European patent), NL (European patent), SE (European patent).</p> <p>Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p> |
| <p>(54) Title: INTERMEDIATE TRANSFER METHOD AND ROLLER</p> | | |
| | | |
| <p>(57) Abstract</p> <p>A small particle toner image is formed on a primary image member (1), such as a photoconductor, and electrostatically transferred to an intermediate image member (2) and then electrostatically transferred to a receiving sheet. The intermediate image member is chosen to have characteristics making the toner less attractive to the primary image member, but more attractive to the receiving sheet than the intermediate. The intermediate transfer member can include a base (30) of a relatively compliant material having a Young's modulus 10^7 Newtons per square meter or less with a very thin outer skin (20) of a harder material having a Young's modulus of 5×10^7 Newtons per square meter or more.</p> | | |

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | |
|-----|--------------------------|----|--|-----------------|--------------------------|
| AT | Austria | ES | Spain | MG | Madagascar |
| AU | Australia | FI | Finland | ML | Mali |
| BB | Barbados | FR | France | MN | Mongolia |
| BE | Belgium | GA | Gabon | MR | Mauritania |
| BF | Burkina Faso | GB | United Kingdom | MW | Malawi |
| BG | Bulgaria | GN | Guinea | NL | Netherlands |
| BJ | Benin | GR | Greece | NO | Norway |
| BR | Brazil | HU | Hungary | PL | Poland |
| CA | Canada | IT | Italy | RO | Romania |
| CF | Central African Republic | JP | Japan | SD | Sudan |
| CG | Congo | KP | Democratic People's Republic of Korea | SE | Sweden |
| CH | Switzerland | KR | Republic of Korea | SN | Senegal |
| CI | Côte d'Ivoire | LI | Liechtenstein | SU ⁺ | Soviet Union |
| CM | Cameroon | LK | Sri Lanka | TD | Chad |
| CS | Czechoslovakia | LU | Luxembourg | TG | Togo |
| DE* | Germany | MC | Monaco | US | United States of America |
| DK | Denmark | | | | |

⁺ Any designation of "SU" has effect in the Russian Federation. It is not yet known whether any such designation has effect in other States of the former Soviet Union.

-1-

INTERMEDIATE TRANSFER METHOD AND ROLLERField of the Invention

This invention relates to the transfer of
5 electrostatically formed toner images using an
intermediate transfer member. It is particularly
useful in creation of multi-color toner images with
small particle toners.

10 BACKGROUND OF THE INVENTION

The use of toner transfer intermediates has
been suggested for a number of reasons in
electrophotography including simplified receiving
sheet handling, doing single pass duplexing, saving
15 wear on photoconductors and superposition of images,
e.g., to form multi-color images. Typically, a toner
image is created on a photoconductive member
electrophotographically and is transferred by
conventional, electrical field assisted transfer to
20 an intermediate roller or web. For example, a
negatively charged toner image is transferred from a
photoconductor having a grounded backing electrode to
an intermediate web or roller biased to a strong
positive polarity. The toner image is then
25 transferred from the intermediate member to a
receiving sheet under the influence of a second
electric field which can be created without changing
the field on the intermediate member by placing a
roller (or corona) behind the receiving sheet biased
30 still stronger in a positive direction.

Although other reasons mentioned above for
using intermediate transfer are still valid, it
appears the most desirable use of it in the future
may be for creating multi-color images. When an
35 intermediate transfer member is used, two, three, or

-2-

four separate images of different color can be transferred in registration to the intermediate to create a multi-color image and then the multi-color image can be transferred in one step to the receiving
5 sheet. This system has a number of advantages over the more conventional approach to making multi-color images in which the receiving sheet is secured to the periphery of a roller and rotated repeatedly into transfer relation with the photoconductor to receive
10 the color images directly. Probably the most important advantage is that the receiving sheet itself does not have to be attached to a roller. This has turned out to be a source of misregistration of images as well as complexity in apparatus. Other
15 advantages associated with wear and tear on the photoconductive member and a straight and simple receiving sheet path are also important.

As color electrophotography improves, especially electrophotographic color printing, higher
20 and higher resolutions are desired. In order to obtain higher resolution in color electrophotography, fine toners are necessary. Toners less than 20 microns, and especially toners less than 10 microns in size, give substantially improved resolution in
25 color imaging with high quality equipment.

Unfortunately, fine toners are more difficult to transfer electrostatically than are traditional coarse toners. This is a problem in conventional electrophotography utilizing a single
30 transfer with fine toner particles. It is considerably more of a problem using intermediate transfer members where two transfers are necessary.

Many transfer materials have been suggested for intermediate transfer systems. The most common
35 are relatively soft materials, such as silicone

-3-

rubber, polyurethane, or fluoroelastomers; see, for example, U.S. Patents 3,893,761; 4,453,820; 3,923,392; 4,455,079; 4,453,820; 4,068,937; or 3,697,171.

5 U.S. Patent 4,430,412 is typical of a number of patents in which the first transfer is made with or without the benefit of an electrical field by choice of materials and the second transfer to the receiving sheet is aided by heating the toner to its
10 softening point which both aids the transfer and provides an at least partially fixed image on the receiving sheet. This patent suggests that certain silicone rubber materials are soft enough to "seize" the toner from the photoconductor, but still permit
15 transfer with the aid of the heat at the second transfer. Although the materials suggested in this patent may work well in a system which utilizes heat at the second transfer, when used with dry materials in the absence of heat and utilizing electrostatics
20 for both transfers, they are effective to receive the image from most photoconductive members, but are too soft to pass it well to the usual receiving sheet. The role of soft materials on adhesion is discussed in a paper by D.S. Rimai, L.P. DeMejo and R.C. Bowen,
25 J. Appl. Phys. 66, 3574-3578 (1989). In brief, the soft substrate allows the particles to embed, thereby increasing the force of adhesion and making removal difficult.

When transferring toners having a mean
30 particle size less than 20 microns and using electrostatics at both transfers, a number of transfer artifacts occur. For example, a well known artifact called "hollow character" causes insufficient transfer in the middle of high density
35 toned areas, e.g., in alphanumeric. Another

-4-

artifact, "halo" is experienced when toner fails to transfer next to a dense portion of an image. Use of the materials suggested in the prior art tends to give these artifacts and others when using two
5 electrostatic transfer steps. These problems cannot be eliminated merely by increase of the transfer field, since that expedient is limited by electrical breakdown.

Studies have been done of the forces causing
10 adherence of toner to photoconductive and other surfaces as toner particles become smaller. These studies indicate that forces such as van der Waals forces holding toner to the surface of a photoconductive element have greater holding effect
15 compared to electrostatic image forces as toner particles become smaller. For example, it is believed that, as toner particle size is reduced to 10 microns, the electrostatic force of the electrostatic image may be less than 10% of the total
20 forces holding toner to the surface. See Rimai and Chowdry, U.S. Patent 4,737,433. See, also, Dessauer and Clark, Xerography And Related Processes, page 393, Focal Press (NY), N. S. Goel and P. R. Spencer, Polym. Sci. Technol. 9B, pp 763-827 (1975).

25

SUMMARY OF THE INVENTION

We have found that careful choice of materials with respect to these non-image forces affecting toner particles can greatly improve the
30 final transferred image.

It is the object of the invention to provide a method of transferring toner images electrostatically from a first image member to an intermediate image member and then electrostatically
35 from the intermediate image member to a receiving

-5-

sheet with a minimum of image defects and a maximum of utilized toner transferred.

It is also an object of the invention to provide an intermediate transfer roller usable in the
5 above method.

The above and other objects are accomplished by a method of forming a toner image on a receiving sheet in which an electrostatic image is first formed on a primary image member, the electrostatic image is
10 toned with a dry toner to form a toner image and the toner image is transferred from the primary image member to an intermediate image member in the presence of an electric field urging toner particles from the primary image member to the intermediate
15 image member. The toner image is then transferred from the intermediate image member to a receiving sheet in the presence of an electric field urging the toner particles from the intermediate image member to the receiving sheet. The method is characterized by
20 a careful choice of materials for the image member and the intermediate image member. That is, the release characteristics of both the primary image member and the intermediate image member and the proposed receiving sheet with respect to the toner
25 particles are such that the toner more readily adheres to the intermediate image member than the primary image member and more readily adheres to the receiving sheet than the intermediate image member (ignoring the effect of the transfer field).

30 The intermediate member must be picked to have good release characteristics when transferring toner to the receiving sheet, but not so good that it is unable to effect thorough and complete transfer from the primary image member. This window can be
35 widened by increasing the release characteristics of

-6-

the primary image member, e.g., by utilizing a photoconductor having a fluorinated hydrocarbon as part of its outer surface or by applying zinc stearate or another similar release material to the image carrying surface of the primary image member. With such materials, an intermediate image member can be used with release characteristics that are good compared to the final receiving sheet, thereby obtaining effective transfer in both transfers.

Thus, according to a preferred embodiment, the intermediate should be relatively hard material, e.g., having a Young's modulus in excess of 5×10^7 Newtons per square meter. The hardness of the material is important in effecting release to the receiving sheet at the second transfer.

When the process is used for superposition of color images, registration is easier maintained when the intermediate is a roller or drum. Effective electrostatic transfer at both the transfer to the intermediate and away from the intermediate is best effected with a nip of some width which can be effected by some compliance in the transfer roller. The roller also has to participate in establishment of both transfer fields. According to a preferred embodiment, we have found that the combined requirements of such a transfer roller are best met with a transfer roller of multi-layer design. It should have a core or base of a material having the appropriate conductivity necessary for creation of an electric field and appropriate compliance for formation of transfer nips, both of which characteristics are well known attributes of appropriately treated polyurethane. Preferably the core or base has a Young's modulus of 10^7 Newtons per square meter or less. Around the core is placed

-7-

or coated an extremely thin skin of another material which cooperates with the primary image member surface, the receiver surface and the toner to satisfy the release characteristics of this invention. Preferably, the thin skin has a Young's modulus of 5×10^7 Newtons per square meter or more.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a side schematic of a color printer apparatus utilizing the invention.

FIG. 2 is a cross-section of a portion of an intermediate transfer roller or drum constructed according to the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

FIG. 1 illustrates an apparatus in which the invention is intended to be used. A primary image member, for example, a photoconductive web 1 is trained about rollers 17, 18, and 19, one of which is drivable to move image member 1 past a series of stations well known in the electrophotographic art. Primary image member 1 is uniformly charged at a charging station 3, image-wise exposed at an exposure station 4, e.g., an LED print head or laser electronic exposure station, to create an electrostatic image. The image is toned by one of toner stations 5, 6, 7, or 8 to create a toner image corresponding to the color of toner in the station used. The toner image is transferred from primary image member 1 to an intermediate image member, for example, intermediate transfer roller or drum 2 at a transfer station formed between roller 18, primary image member 1, and transfer drum 2. The primary image member 1 is cleaned at a cleaning station 14 and reused to form more toner images of different

-8-

color utilizing toner stations 5, 6, 7, and 8. One or more additional images are transferred in registration with the first image transferred to drum 2 to create a multi-color toner image on the surface of transfer drum 2.

The multi-color image is transferred to a receiving sheet which has been fed from supply 10 into transfer relationship with transfer drum 2 at transfer station 25. The receiving sheet is transported from transfer station 25 by a transport mechanism 13 to a fuser 11 where the toner image is fixed by conventional means. The receiving sheet is then conveyed from the fuser 11 to an output tray 12.

The toner image is transferred from the primary image member 1 to the intermediate transfer drum 2 in response to an electric field applied between the core of drum 2 and a conductive electrode forming a part of primary image member 1. The multi-color toner image is transferred to the receiving sheet at transfer station 25 in response to an electric field created between a backing roller 26 and the transfer drum 2. Thus, transfer drum 2 helps establish both electric fields. As is known in the art, a polyurethane roller containing an appropriate amount of anti-static material to make it of at least intermediate conductivity can be used for establishing both fields. Typically, the polyurethane is a relatively thick layer, e.g., twenty-five mm. thick, which has been formed on an aluminum base. Typically, the electrode buried in primary image member 1 is grounded for convenience in cooperating with the other stations in forming the electrostatic and toner images. If the toner is a positively-charged toner, an electrical bias applied to intermediate transfer drum 2 of typically -1,000

-9-

to -1,500 volts will effect substantial transfer of toner images to transfer drum 2. To then transfer the toner image onto a receiving sheet at transfer station 25, a bias, e.g., of -2,000 volts, is applied
5 to backing roller 26 to again urge the positively charged toner to transfer to the receiving sheet. Schemes are also known in the art for changing the bias on drum 2 between the two transfer locations so that roller 26 need not be at such a high potential.

10 Unfortunately, with small toners, utilizing a polyurethane roller and transferring the toners directly to the polyurethane surface, and then to the receiving sheet, transfer artifacts are observed on the receiving sheet. This is due to insufficient
15 transfer under the urging of the electrostatic fields at one of the two transfer stations. We believe these artifacts to be due to the electrostatic field in a given area to be unable to overcome non-electrostatic forces between the toner and the
20 surfaces involved. Increasing the electric field risks electrical breakdown.

We have found that if the intermediate member has a surface of material having release characteristics that are such that the toner prefers
25 or adheres more readily to such surface than to that primary image member 1 and less readily to the surface than the receiving sheet, image artifacts of the nature described are greatly reduced.

A partial cross-section of a preferred
30 embodiment of such an intermediate member is shown in FIG. 2 in which a roller or drum 2 having a polyurethane base 30 has a thin skin 20 coated or otherwise formed on it having the desired release characteristics. The polyurethane base has an
35 aluminum core 40.

-10-

Since the invention is dependent upon relative release characteristics with respect to toner, four parameters may be worked with, that is, the characteristics of the toner and the respective characteristics of the surfaces of the image member, the intermediate member, and the receiving sheet. In some special applications, a particular receiving sheet could be specified. However, for most applications it is plain paper which has a fairly strong attraction for most toners. As the paper gets more finely finished, or transparency stock is substituted, it may have better release properties and may increase the problems of choosing the material for the intermediate and for the primary image member. The toner may also be varied somewhat. However, it has certain requirements for both development and fusing that greatly restrict its formulation and in most instances that formulation will not be conveniently variable when designing the transfer materials. Thus, the two parameters left are the release characteristics of the primary image member and the release characteristics of the intermediate image member.

Adding a fluoropolymer or a silicone to the formulation of the surface layer in primary image member 1 or applying a substance such as zinc stearate to the surface of image member 1 is a known expedient in conventional electrophotography and increases release characteristics of the primary image member as to all toners. When applied to this invention, it widens the window available when picking material for the intermediate image member.

We have also found that the surface of the intermediate member should be relatively hard, preferably having a Young's modulus in excess of

-11-

5x10⁷ Newtons per square meter, to facilitate release of the toner to ordinary paper or another type receiving sheet. As will be seen from the examples, the intermediate preferably has a base or
5 core having a Young's modulus 10⁷ Newtons per square meter or less to assure good compliance for each transfer.

EXAMPLE 1

A primary image member, having an aggregated
10 organic photoconductor as a charge transport layer was treated with a fluoronated polymer, Fluo-HT (a trademark of Micropowders, Inc.) to enhance its release characteristics and a series of different color images were formed on it using cross-linked
15 polyester toners having a mean particle size less than 15 microns. The images were transferred to an intermediate consisting of a similar material which had been coated with zinc stearate to increase its release characteristics and the image was then
20 transferred to paper. The intermediate was wrapped around a polyurethane roller having a Young's modulus of approximately 5x10⁶ Newtons per square meter and a resistivity of 10¹⁰ ohm-cm. The Young's modulus of the primary image member was approximately 10⁹
25 Newtons per square meter. In each instance the transfers were carried out in the presence of a potential of approximately 1,000 volts urging the transfer. Severe hollow characters were observed in the final print. Examination of the primary image
30 member and the intermediate showed that the hollow characters occurred due to a failure to transfer from the primary image member to the intermediate, illustrating the problem of having an intermediate with release characteristics (due to the zinc
35 stearate) superior to that of the primary image

-12-

member with respect to the toner. These defects occur despite the force of the electrostatic field.

EXAMPLE 2

5 In Example 2 the same photoconductor treated with Fluo-HT was used, but the intermediate included an outer layer of Kapton-H (a trademark of DuPont applied to high surface energy polyamides). Kapton-H has good release characteristics, a Young's modulus
10 in excess of 10^9 Newtons per square meter, but its release characteristics are not as good as that of the Fluo-HT treated photoconductor. Reasonably good transfer was observed in the final print onto plain paper with no hollow characters indicating that both
15 transfers were effective.

EXAMPLE 3

 In this example, Kapton-F (also a trademark of DuPont) was used as an intermediate with the image
20 member of Example 1. This material is a polyamide similar to Kapton-H except that it has greater release characteristics because of the presence of fluorocarbons. Because of the release characteristics of the intermediate member, toner transfer from the
25 photoconductor resulted in severe hollow character in the final image transferred to the receiving sheet.

EXAMPLE 4

 In this example Kapton-H was used as the
30 intermediate, but the aggregated organic photoconductor is treated with zinc stearate. The zinc stearate treated photoconductor has superior release characteristics to even the Fluo-HT treated photoconductor and the final image after two
35 transfers was good without hollow characters.

-13-

Transfer was slightly better than Example 2.

EXAMPLE 5

The zinc stearate treated photoconductor
5 from the previous example was used with Kapton-F as
an intermediate. Because of the release
characteristics of the photoconductor treated with
zinc stearate, transfer was substantially improved
over Example 3 where Kapton-H was used with a Fluo-HT
10 treated photoconductor, but transfer was not quite as
good as Examples 2 and 4.

EXAMPLE 6

The original photoconductor from Example 1
15 was used with an intermediate of Kapton-H, in this
instance, the Kapton-H was in the form of a blanket
0.05 mm.(2 mils) thick wrapped around a polyurethane
roller. Transfer was reasonably good with hollow
character absent, but a bit of halo defect was
20 observed.

EXAMPLE 7

The same materials were used as in Example 6
except that 0.025 mm.(1 mil) Kapton-H was used as the
25 skin of the intermediate instead of 0.05 mm.
Kapton-H. In this instance halo was greatly reduced.

EXAMPLE 8

This example is the same as Example 6 except
30 that 0.125 mm.(.5 mil) Kapton-H was used. Halo was
virtually eliminated.

The improvement as a result of the thinness
of the skin of the Kapton-H is an interesting result
of the examples. The polyurethane base has a Young's
35 modulus of about 10^6 Newtons per square meter. We

-14-

believe that this result is due to the compliance of the polyurethane being more effective in providing good contact with the primary image member through the thin Kapton-H skin, while the skin provides good
5 release characteristics for transfer to the paper receiver.

EXAMPLE 9

A 5 mm. polyurethane base on an aluminum
10 core was coated with an overcoat of a siloxane/urethane block copolymer having approximately 10% siloxane by weight to produce an intermediate image member. The overcoat was approximately 2 microns thick and had a volume
15 resistivity of 10^{12} ohm-cm and a Young's modulus of approximately 10^8 Newtons per square meter. The polyurethane base had sufficient anti-static material to have a volume resistivity of 10^{10} ohm-cm. It had a Young's modulus of 10^6 Newtons per square
20 meter.

Using a primary image member similar to Example 1, polyester toners having a mean volume diameter of 12 microns and 7 microns were effectively transferred to 20 pound bond paper, Vintage Velvet
25 Offset paper and transparency stock.

EXAMPLE 10

This example is the same as Example 9 except that the intermediate overcoat was a 5 micron coating
30 of a hard urethane resin sold under the tradename Permuthane by Permuthane, Inc., a division of ICI Inc., and having a Young's modulus of 10^8 Newtons per square meter and a volume resistivity of approximately 10^{12} ohm-cm.

35 Again, effective transfers were achieved

-15-

with the same materials as in Example 9.

EXAMPLE 11

This example is the same as Examples 9 and 10 except that the intermediate image member overcoat was a 5 micron overcoat of a high molecular weight polycarbonate having a Young's modulus of 10^8 - 10^9 Newtons per square meter and a volume resistivity of 10^{12} ohm-cm. Effective transfer was again achieved with the materials of Examples 9 and 10.

10

Thus, in a preferred embodiment, the intermediate image member is a drum, roller or other endless member having a base material, for example, polyurethane, having enough anti-static material added to have at least overall intermediate conductivity, with a Young's modulus 10^7 Newtons per square meter or less and a thin skin of harder material, having a Young's modulus greater than 5×10^7 Newtons per square meter and preferably in excess of 10^8 Newtons per square meter. The thin skin should be 0.025 mm. or less in thickness, preferably, less than 10 microns. Preferably, the skin should be also of intermediate conductivity, although if it is very thin, it can be less conductive than the base.

25

The excellent results with 7 micron toner was especially remarkable considering the usual difficulties in electrostatically transferring such fine toners.

30

The invention has been described in detail with particular reference to a preferred embodiment thereof, but it will be understood that variations and modifications can be effected within the spirit and scope of the invention as described hereinabove and as defined in the appended claims.

35

-16-

We Claim:

1. A method of forming a toner image on a receiving sheet, which method comprises:
 - forming an electrostatic image on a
5 primary image member,
toning said image with a dry toner to
form a toner image,
transferring said toner image from said
primary image member to an intermediate image member
10 in the presence of an electric field urging toner
particles from said primary image member to said
intermediate image member, and
transferring said toner image from said
intermediate image member to a receiving sheet at a
15 temperature below the glass transition temperature of
said toner in the presence of an electric field
urging toner particles from said intermediate image
member to said receiving sheet,
characterized in that the surfaces of
20 the primary image member, the intermediate image
member and the receiving sheet that carry toner
images have release characteristics with respect to
the toner particles of said images such that the
toner more readily adheres to the intermediate image
25 member than the primary image member and more readily
adheres to the receiving sheet than the intermediate
image member.
2. The method according to Claim 1 wherein
30 the surface of the intermediate member has a Young's
modulus in excess of 5×10^7 Newtons per square meter.
3. The method according to claim 1 wherein
the image carrying surface of the primary image
35 member has been treated with a fluorocarbon to

-17-

enhance its release characteristics.

4. The method according to claim 1 wherein the image carrying surface of the primary image member has been treated with zinc stearate to enhance its release characteristics.

5. The method according to Claim 2 wherein said transferring steps are accomplished with an intermediate image member which has a relatively compliant base, and a thin, hard outer skin defining the outside surface of said intermediate which surface has release characteristics making it more attractive to said toner than the primary image member and less attractive than the receiving sheet.

6. The method according to Claim 1 wherein the step of toning the image is carried out by applying a dry toner having a mean particle size less than 20 microns to the electrostatic image to form a toner image.

7. The method according to Claim 5 wherein the step of toning the image is carried out by applying a dry toner having a mean particle size less than 15 microns and the compliant base has a Young's modulus of 10^7 Newtons per square meter or less and the outer skin is 0.025 mm. or less in thickness and has a Young's modulus of 5×10^7 Newtons per square meter or more.

8. The method according to claim 7 wherein said outer skin is less than 10 microns in thickness.

9. The method according to claim 7 wherein

-18-

said intermediate is a roller having a polyurethane base.

10. An intermediate image member usable in
5 the method of Claim 1 comprising a roller(2) having a
base(30) of compliant, at least intermediate
conductivity material having a Young's modulus of
10⁷ Newtons per square meter or less, and a thin
outer skin(20) having a Young's modulus of 5x10⁷
10 Newtons per square meter or more.

11. A member according to claim 10 wherein
the thickness of said outer skin is 0.025 mm. or less.

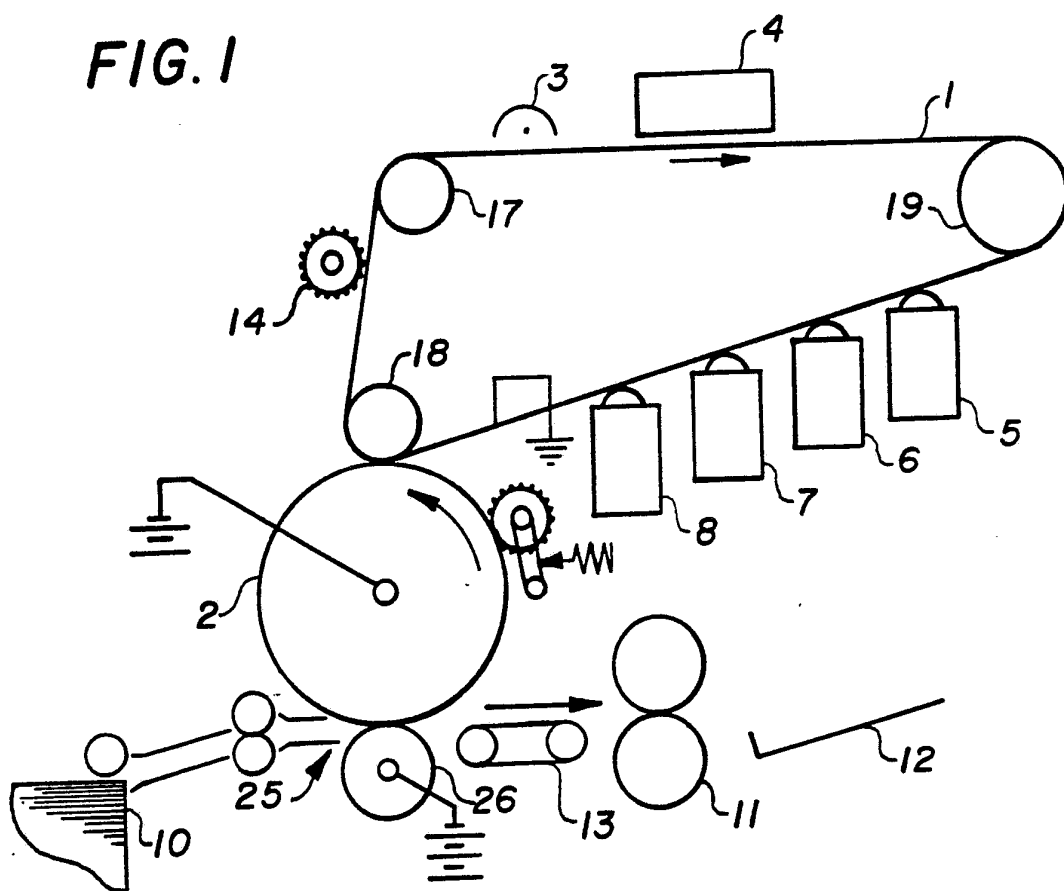
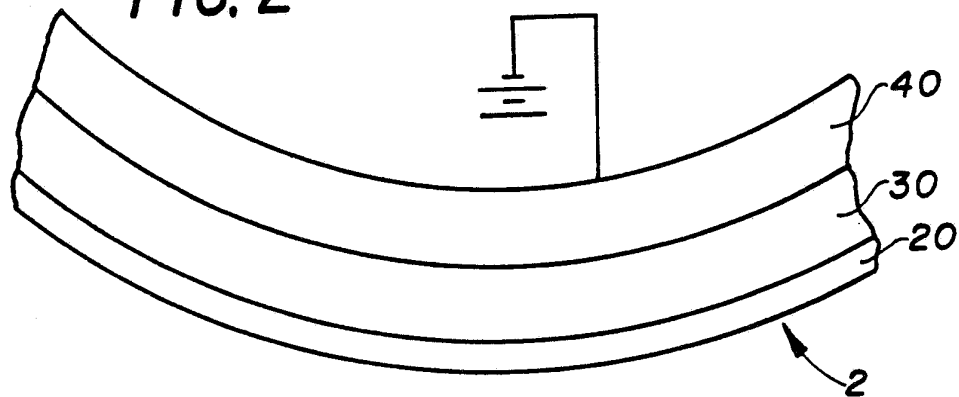
15 12. The member according to claim 10
wherein the thickness of said outer skin is 10
microns or less.

13. The member according to claim 10
20 wherein the base is polyurethane.

25

30

35

FIG. 1**FIG. 2**

INTERNATIONAL SEARCH REPORT

International Application No PCT/US 91/07662

| I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁵ According to International Patent Classification (IPC) or to both National Classification and IPC IPC5: G 03 G 15/16 | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|-------------------------------------|--|--|--|--|--|---|---|----|---------|---|--|-------|---|----|---------|---|---|-----|--|----|--|
| II. FIELDS SEARCHED <div style="text-align: right; margin-right: 100px;">Minimum Documentation Searched⁷</div> <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 20%; text-align: left; padding: 2px;">Classification System</th> <th style="text-align: left; padding: 2px;">Classification Symbols</th> </tr> <tr> <td style="padding: 5px;">IPC5</td> <td style="padding: 5px;">G 03 G</td> </tr> </table> <div style="text-align: center; margin-top: 5px;">Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in Fields Searched⁸</div> | | | Classification System | Classification Symbols | IPC5 | G 03 G | | | | | | | | | | | | | | | | | |
| Classification System | Classification Symbols | | | | | | | | | | | | | | | | | | | | | | |
| IPC5 | G 03 G | | | | | | | | | | | | | | | | | | | | | | |
| III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹ <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 10%; text-align: left; padding: 2px;">Category *</th> <th style="text-align: left; padding: 2px;">Citation of Document,¹¹ with indication, where appropriate, of the relevant passages¹²</th> <th style="width: 10%; text-align: left; padding: 2px;">Relevant to Claim No.¹³</th> </tr> <tr> <td style="vertical-align: top; padding: 5px;">X</td> <td style="padding: 5px;">JP, A, 1273076 (MINOLTA CAMERA CO LTD) 31 October 1989, see figures 8,9</td> <td style="vertical-align: top; padding: 5px;">1</td> </tr> <tr> <td style="vertical-align: top; padding: 5px;">Y</td> <td style="text-align: center; padding: 5px;">--</td> <td style="vertical-align: top; padding: 5px;">2-5,8,9</td> </tr> <tr> <td style="vertical-align: top; padding: 5px;">X</td> <td style="padding: 5px;">US, A, 3702482 (CHARLES DOLCIMASCOLO ET AL) 7 November 1972, see column 3, line 48 - column 4, line 20; figure 2; claims 9,10</td> <td style="vertical-align: top; padding: 5px;">10-13</td> </tr> <tr> <td style="vertical-align: top; padding: 5px;">Y</td> <td style="text-align: center; padding: 5px;">--</td> <td style="vertical-align: top; padding: 5px;">2,5,8,9</td> </tr> <tr> <td style="vertical-align: top; padding: 5px;">Y</td> <td style="padding: 5px;">US, A, 4869982 (WILLIAM J. MURPHY) 26 September 1989, see column 6, line 12 - line 24</td> <td style="vertical-align: top; padding: 5px;">3,4</td> </tr> <tr> <td style="vertical-align: top; padding: 5px;"></td> <td style="text-align: center; padding: 5px;">--</td> <td></td> </tr> </table> | | | Category * | Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹² | Relevant to Claim No. ¹³ | X | JP, A, 1273076 (MINOLTA CAMERA CO LTD) 31 October 1989, see figures 8,9 | 1 | Y | -- | 2-5,8,9 | X | US, A, 3702482 (CHARLES DOLCIMASCOLO ET AL) 7 November 1972, see column 3, line 48 - column 4, line 20; figure 2; claims 9,10 | 10-13 | Y | -- | 2,5,8,9 | Y | US, A, 4869982 (WILLIAM J. MURPHY) 26 September 1989, see column 6, line 12 - line 24 | 3,4 | | -- | |
| Category * | Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹² | Relevant to Claim No. ¹³ | | | | | | | | | | | | | | | | | | | | | |
| X | JP, A, 1273076 (MINOLTA CAMERA CO LTD) 31 October 1989, see figures 8,9 | 1 | | | | | | | | | | | | | | | | | | | | | |
| Y | -- | 2-5,8,9 | | | | | | | | | | | | | | | | | | | | | |
| X | US, A, 3702482 (CHARLES DOLCIMASCOLO ET AL) 7 November 1972, see column 3, line 48 - column 4, line 20; figure 2; claims 9,10 | 10-13 | | | | | | | | | | | | | | | | | | | | | |
| Y | -- | 2,5,8,9 | | | | | | | | | | | | | | | | | | | | | |
| Y | US, A, 4869982 (WILLIAM J. MURPHY) 26 September 1989, see column 6, line 12 - line 24 | 3,4 | | | | | | | | | | | | | | | | | | | | | |
| | -- | | | | | | | | | | | | | | | | | | | | | | |
| <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>* Special categories of cited documents:¹⁰</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div> | | | | | | | | | | | | | | | | | | | | | | | |
| IV. CERTIFICATION <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; padding: 5px;"> Date of the Actual Completion of the International Search 21st February 1992 </td> <td style="width: 50%; padding: 5px;"> Date of Mailing of this International Search Report 12 MAR 1992 </td> </tr> <tr> <td style="padding: 5px;"> International Searching Authority EUROPEAN PATENT OFFICE </td> <td style="padding: 5px;"> Signature of Authorized Officer <div style="text-align: center;"> Mme N. KUIPER </div> </td> </tr> </table> | | | Date of the Actual Completion of the International Search 21st February 1992 | Date of Mailing of this International Search Report 12 MAR 1992 | International Searching Authority EUROPEAN PATENT OFFICE | Signature of Authorized Officer <div style="text-align: center;"> Mme N. KUIPER </div> | | | | | | | | | | | | | | | | | |
| Date of the Actual Completion of the International Search 21st February 1992 | Date of Mailing of this International Search Report 12 MAR 1992 | | | | | | | | | | | | | | | | | | | | | | |
| International Searching Authority EUROPEAN PATENT OFFICE | Signature of Authorized Officer <div style="text-align: center;"> Mme N. KUIPER </div> | | | | | | | | | | | | | | | | | | | | | | |

| III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET) | | |
|--|---|-----------------------|
| Category * | Citation of Document, with indication, where appropriate, of the relevant passages | Relevant to Claim No. |
| A | EP, A2, 0367157 (CANON KABUSHIKI KAISHA) 9 May 1990, see figure 1 detail 2 -- | 1-13 |
| A | US, A, 3697171 (WILLIAM A. SULLIVAN) 10 October 1972, see figures 4-8 -- ----- | 1-13 |

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO. PCT/US 91/07662**

SA 53901

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on 30/12/91
The European Patent office is in no way liable for these particulars which are merely given for the purpose of information.

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|----------------------------|---------------------|
| JP-A- 1273076 | 31/10/89 | US-A- 4984026 | 08/01/91 |
| US-A- 3702482 | 07/11/72 | BE-A- 777017 | 21/06/72 |
| | | CA-A- 962890 | 18/02/75 |
| | | DE-A-B-C 2163531 | 13/07/72 |
| | | FR-A- 2119657 | 04/08/72 |
| | | GB-A- 1368500 | 25/09/74 |
| | | NL-A- 7117550 | 27/06/72 |
| US-A- 4869982 | 26/09/89 | NONE | |
| EP-A2- 0367157 | 09/05/90 | JP-A- 2120779 | 08/05/90 |
| | | US-A- 5010370 | 23/04/91 |
| US-A- 3697171 | 10/10/72 | AU-B- 461728 | 05/06/75 |
| | | AU-D- 3725471 | 28/06/73 |
| | | BE-A- 777016 | 21/06/72 |
| | | CA-A- 948267 | 28/05/74 |
| | | DE-A-B-C 2163608 | 13/07/72 |
| | | FR-A- 2119656 | 04/08/72 |
| | | GB-A- 1368456 | 25/09/74 |
| | | NL-A- 7117551 | 27/06/72 |
| | | SE-B- 366123 | 08/04/74 |

For more details about this annex : see Official Journal of the European patent Office, No. 12/82