



(51) International Patent Classification:

F42B 10/46 (2006.01) *H01Q 1/28* (2006.01)
F42B 15/00 (2006.01)

(21) International Application Number:

PCT/US2015/042391

(22) International Filing Date:

28 July 2015 (28.07.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/031,442 31 July 2014 (31.07.2014) US

(71) Applicant: **LOCKHEED MARTIN CORPORATION**
[US/US]; 6801 Rockledge Drive, Bethesda, MD 20817
(US).

(72) Inventors: **MCCARTY, Robert, J.**; 6421 Blacktree
Drive, Plano, TX 75903 (US). **LARSON, Don, A.**; 411
Coker Valley Drive, Suite 305, Kennedale, TX 76060
(US).

(74) Agent: **JENSEN, Eric, P.**; Withrow & Terranova,
P.L.L.C., 2530 Meridian Parkway, Suite 300, Durham, NC
27713 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: VARIABLE THICKNESS HOLLOW CONFORMAL NOSE CONE

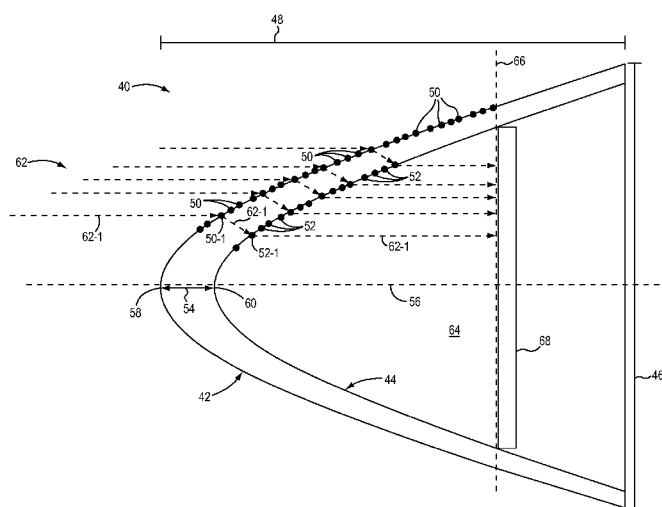


FIG. 4

(57) Abstract: The embodiments relate to a conformal, sometimes referred to as aerodynamic, nose cone, and in particular to a hollow conformal nose cone that is transparent to electromagnetic radiation of a predetermined wavelength, or wavelengths, and that comprises a variable thickness such that the electromagnetic radiation received on an outer surface of the nose cone forms a predetermined beam pattern within the nose cone. Also disclosed are mechanisms for generating such hollow conformal nose cones.



VARIABLE THICKNESS HOLLOW CONFORMAL NOSE CONE

RELATED APPLICATIONS

5 [0001] This application claims the benefit of provisional patent application serial number 62/031,442, filed on July 31, 2014, entitled "VARIABLE THICKNESS HOLLOW CONFORMAL NOSE CONE," the disclosure of which is hereby incorporated herein by reference in its entirety.

TECHNICAL FIELD

10 [0002] The embodiments relate to a conformal, sometimes referred to as aerodynamic, nose cone, and in particular to a hollow conformal nose cone that is transparent to electromagnetic radiation of a predetermined wavelength, or wavelengths, and that comprises a variable thickness such that the electromagnetic radiation received on an outer surface of the nose cone forms a
15 predetermined beam pattern within the nose cone.

BACKGROUND

[0003] Missiles and other munitions are often guided to a target responsive to electromagnetic radiation (EMR) received through a transparent window in a
20 nose cone of the missile. The shape of the nose cone plays a substantial role in the speed and range of a munition. Preferably, the shape of a nose cone is as aerodynamic as practicable to increase range and/or speed of the munition. Unfortunately, a conventional hollow conical nose cone induces substantial distortions in the EMR received through the window of the nose cone. These
25 distortions reduce the accuracy of the munition and, in some situations, can render an optical guidance system inoperable or impractical without complex corrective optics. Efforts have been made to design optical systems that correct such distortions in conical nose cones prior to passing the EMR to guidance components, such as a detector, but such optical systems are complex,
30 increasing cost, adding weight to the munition, decreasing munition range and speed, and increasing the number of components that can fail in the munition.

[0004] Consequently, to avoid the issues associated with hollow conical nose cones, the window of a conventional laser-guided munition has a relatively thin spherical surface to reduce the distortion of the EMR passing through the window into the munition. Unfortunately, a spherical surface is not an efficient
5 aerodynamic shape and negatively impacts range and speed of the munition.

SUMMARY

[0005] The embodiments relate to methods for designing a hollow conformal nose cone having a variable thickness, computing devices for designing a hollow
10 conformal nose cone having a variable thickness, and hollow conformal nose cones having a variable thickness. The embodiments facilitate an aerodynamic nose cone that is configured to receive electromagnetic radiation (EMR) from the environment on an outer surface of the nose cone, pass the EMR to an inner surface of the nose cone, and form a desired EMR beam pattern within a void of
15 the hollow nose cone. The EMR may be processed, such as by a detector, or detector array, and utilized, for example, for guidance and/or imaging purposes.

[0006] In one embodiment, a method for generating a functional definition of a surface of a hollow nose cone shell comprising a transparent material and having an interior void is provided. A computing device comprising a processor
20 accesses a first functional definition of a first surface that comprises one of an outer nose cone surface and an inner nose cone surface. A desired beam pattern of light that is transmitted through the hollow nose cone shell is determined at a plane in the interior void. An optical prescription of a second surface that comprises one of the outer nose cone surface and the inner nose
25 cone surface is determined. The optical prescription provides the desired beam pattern of light at the plane in the interior void based on the first functional definition. A second functional definition that identifies the optical prescription is determined. The second functional definition is stored in a storage device.

[0007] In one embodiment, the first surface is an outer conformal surface of
30 the hollow nose cone shell and the second surface is an inner surface of the hollow nose cone shell. In another embodiment, the second surface is an outer

conformal surface of the hollow nose cone shell and the first surface is an inner surface of the hollow nose cone shell.

[0008] In one embodiment, the desired beam pattern of light is one of a converging beam pattern, a diverging beam pattern, and a collimated beam pattern.

[0009] In another embodiment, a nose cone shell that forms a void is provided. The nose cone shell includes a conformal outer nose cone surface and an inner nose cone surface that defines the void and is configured to direct light received at a plurality of different points on the conformal outer nose cone surface into a predetermined output beam pattern toward a plane that is perpendicular to a longitudinal axis of the nose cone shell.

[0010] In one embodiment, the plane is within the void.

[0011] In one embodiment, a detector is positioned in the void.

[0012] In one embodiment, an optical receiver is positioned at an upstream location with respect to the detector.

[0013] In another embodiment, a method for defining an inner nose cone surface of a hollow nose cone comprising an outer nose cone surface is provided. A functional definition of the outer nose cone surface of the hollow nose cone is accessed. A plurality of first light ray locations on the outer nose cone surface is identified. For each of the plurality of first light ray locations a corresponding plurality of inner surface light ray locations on the inner nose cone surface is determined. A plurality of inner surface slopes is determined, wherein each inner surface slope defines a slope of the inner nose cone surface at a corresponding inner surface light ray location. The plurality of inner surface slopes are determined by determining a path through the transparent material that a light ray travels given a predetermined angle of incidence of the light ray on the outer nose cone surface at the first light ray location, determining the corresponding second light ray location on the inner nose cone surface at which the light ray will exit the inner nose cone surface given the path, and determining the inner surface slope of the corresponding second light ray location required to direct the light ray in a desired direction into a void of the hollow nose cone. The

inner nose cone surface is defined based on the plurality of inner surface light ray locations.

[0014] Those skilled in the art will appreciate the scope of the disclosure and realize additional aspects thereof after reading the following detailed description of the preferred embodiments in association with the accompanying drawing figures.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] The accompanying drawing figures incorporated in and forming a part of this specification illustrate several aspects of the disclosure, and together with the description serve to explain the principles of the disclosure.

[0016] Figure 1 is a block diagram of a missile utilizing a hollow, variable thickness nose cone according to one embodiment;

[0017] Figure 2 is a block diagram of a computing device according to one embodiment;

[0018] Figure 3 is flowchart of a method for generating a functional definition of a surface of a hollow nose cone shell comprising a transparent material and having an interior void according to one embodiment;

[0019] Figure 4 is a block diagram of a nose cone according to one embodiment;

[0020] Figure 5 is a flowchart of a method for designing a hollow nose cone shell having an outer conformal nose cone surface and an inner nose cone surface according to one embodiment;

[0021] Figure 6 is a block diagram of the nose cone illustrated in Figure 4; and

[0022] Figure 7 is a diagram illustrating a process for determining an inner nose cone surface according to another embodiment.

DETAILED DESCRIPTION

[0023] The embodiments set forth below represent the necessary information to enable those skilled in the art to practice the embodiments and illustrate the best mode of practicing the embodiments. Upon reading the following

description in light of the accompanying drawing figures, those skilled in the art will understand the concepts of the disclosure and will recognize applications of these concepts not particularly addressed herein. It should be understood that these concepts and applications fall within the scope of the disclosure and the accompanying claims.

[0024] Any flowcharts discussed herein are necessarily discussed in some sequence for purposes of illustration, but unless otherwise explicitly indicated, the embodiments are not limited to any particular sequence of steps. The use herein of ordinals in conjunction with an element is solely for distinguishing what might otherwise be similar or identical labels, such as “first surface” and “second surface,” and does not imply a priority, a type, an importance, or other attribute, unless otherwise stated herein.

[0025] The embodiments relate to methods for designing a hollow conformal nose cone having a variable thickness, computing devices for designing a hollow conformal nose cone having a variable thickness, and hollow conformal nose cones having a variable thickness. The embodiments facilitate an aerodynamic nose cone that is configured to receive electromagnetic radiation (EMR) from the environment on an outer surface of the nose cone, pass the EMR to an inner surface of the nose cone, and form a desired EMR beam pattern within a void of the nose cone. The EMR may be processed, such as by a detector, or detector array, and utilized, for example, for guidance and/or imaging purposes.

[0026] In particular, the embodiments relate to determining an optical prescription of a nose cone surface to generate a desired beam pattern inside a hollow nose cone. The optical prescription may be determined for an outer nose cone surface based on a definition of an inner nose cone surface, or may be determined for an inner nose cone surface based on the definition of the outer nose cone surface. However, because it may be desirable to design the outer surface of the nose cone strictly based on aerodynamic principles, the embodiments will generally be described in the context of determining an optical prescription for the inner nose cone surface based on the definition of an aerodynamic outer nose cone surface.

[0027] Before delving into the details of the embodiments, a high-level overview of a hollow nose cone having a variable thickness according to one embodiment will be discussed to provide context to the subsequent discussion. Figure 1 is a block diagram of a missile 10 utilizing a hollow, variable thickness nose cone 12 according to one embodiment. The nose cone 12 may be referred to synonymously herein as a nose cone shell, since the nose cone 12 is hollow and forms, or otherwise contains, a void 14. The nose cone 12 is transparent to EMR 16 at a predetermined wavelength, or at a predetermined band of wavelengths. The EMR 16 may be referred to synonymously herein as light, and the term “light” as used herein is not limited to EMR in the visible spectrum, but rather includes EMR of any predetermined wavelength, or predetermined band of wavelengths, including, by way of non-limiting example, infrared and ultraviolet wavelengths. The nose cone 12 may comprise any suitable material transparent to the EMR 16 at the wavelengths of interest. By way of non-limiting example, the nose cone 12 may comprise polycarbonate material, acrylic material, and/or more common optical glasses such as BK7 for the visible and near infrared (IR) bands; germanium, silicon, sapphire for the mid-wave IR band; and germanium, ZnS, or ZnSe for the long-wave IR (LWIR) band.

[0028] The EMR 16 passes into an outer surface 18 of the nose cone 12, travels through the nose cone 12, and is emitted out an inner surface 20 of the nose cone 12 to form an output beam 22. The output beam 22, in some embodiments, has a desired beam pattern, such as a converging beam pattern, a diverging beam pattern, or a collimated beam pattern. In some embodiments, the output beam 22 may be defined in terms of optical power. The output beam 22 may then impact one or more components, such as an optical receiver 23 and a detector 24 that is coupled to additional circuitry 26. The optical receiver 23 may comprise any lens or lenses, including, by way of non-limiting example, any combination of spectral filters, diffractive, refractive, reflective, and/or catadioptric lenses. The detector 24 may comprise a relatively simple detector, such as a quad detector as might be used in an active or semiactive guidance system, or may comprise a more sophisticated detector array of elements suitable for

generating images. The detector 24 is preferably sensitive to the particular wavelength or wavelengths of the EMR 16. The additional circuitry 26 may perform any desired function, such as missile guidance, image processing, and the like. The detector 24 may be fixed or “strapped down” and have a fixed but
5 relatively wide field of view, or may be coupled to a gimbal (not illustrated) and thereby cover a relatively large field of regard.

[0029] Because the inner surface 20, as described in greater detail herein, has been designed and manufactured to have a particular surface shape, such as a desired optical prescription, the output beam 22 has minimal aberrations,
10 and thus complex optical and/or electronic correction components that might otherwise be necessary to attempt to eliminate or reduce aberrations are not necessary and can be replaced with relatively simple conventional collection (receive) optics, thus reducing the cost, weight, and complexity of the missile 10. In some embodiments, the inner surface 20 is designed to provide the output
15 beam pattern of the output beam 22 at a particular location, or plane, within the void 14.

[0030] Figure 2 is a block diagram of a computing device 28 according to one embodiment. The computing device 28 includes a processing device 30 that is coupled to a memory 32. The processing device 30 may comprise any suitable
20 central processing unit, microprocessor, or the like capable of executing instructions to implement the functionality described herein. In other embodiments, the computing device 28 may include special-purpose firmware or circuitry for implementing the functionality described herein.

[0031] The computing device 28 includes, or is coupled to, a storage device
25 34. In one embodiment, the computing device 28 generates an outer surface functional definition 36 of an outer surface of a nose cone given an inner surface functional definition 38, or, alternatively, the computing device 28 generates the inner surface functional definition 38 of the inner surface of the nose cone given the outer surface functional definition 36. Collectively, the outer surface
30 functional definition 36 and the inner surface functional definition 38 compose a nose cone functional definition 39. The functional definitions 36, 38, 39 may also

be referred to herein as functional representations. The functional definitions 36, 38, 39 may comprise any information suitable to recreate a surface and may comprise, for example, information that identifies multiple points on the surface, coefficients of a polynomial that defines the surface, a math equation that defines the surface, or the like.

[0032] The outer surface functional definition 36 and the inner surface functional definition 38 define the respective outer and inner surfaces of a nose cone and may be used to manufacture the nose cone with the desired outer and inner surfaces. The precise protocol or format of the outer surface functional definition 36 and the inner surface functional definition 38 may differ depending on a particular CAD/CAM module or other component used to generate the functional definitions, but, generally, in one embodiment the outer surface functional definition 36 defines the attributes of the outer surface of the nose cone in terms of X, Y, and Z coordinates at a particular resolution, and the inner surface functional definition 38 defines the attributes of the inner surface of the nose cone in terms of X, Y, and Z coordinates at a particular resolution.

[0033] All or a portion of the embodiments may be implemented as a computer program product stored on a transitory or non-transitory computer-usable or computer-readable storage medium, such as the storage device 34.

The computer program product includes complex programming instructions, such as complex computer-readable program code, configured to cause the processing device 30 to carry out the steps described herein. Thus, the computer-readable program code can comprise software instructions for implementing the functionality of the embodiments described herein when executed on the processing device 30.

[0034] Figure 3 is a flowchart of a method for generating a functional definition of a surface of a hollow nose cone shell comprising a transparent material and having an interior void according to one embodiment. The computing device 28 accesses a first functional definition of a first surface of the hollow nose cone shell (Figure 3, block 100). The first functional definition may comprise the outer surface functional definition 36 of the outer surface, in order to generate the inner

surface functional definition 38 of the inner surface, or may comprise the inner surface functional definition 38 of the inner surface in order to generate the outer surface functional definition 36 of the outer surface.

[0035] A desired beam pattern of light is determined at a plane in the void of the nose cone shell (Figure 3, block 102). For example, the desired beam pattern of light may be a collimated beam pattern, a diverging beam pattern, a converging beam pattern, or any other desired beam pattern. An optical prescription of a second surface that provides the desired beam pattern of light at the plane in the void is determined based on the first functional definition (Figure 3, block 104). The second surface is the surface that differs from the first surface discussed above with regard to block 100. Thus, if the first surface is the outer surface of the nose cone, the second surface is the inner surface of the nose cone. A second functional definition that identifies the optical prescription is determined (Figure 3, block 106). The second functional definition is stored in the storage device 34 (Figure 3, block 108). The first and second functional definitions may then be used to manufacture a nose cone.

[0036] Figure 4 is a block diagram of a nose cone 40 according to one embodiment. Figure 5 is a flowchart of a method for determining an optical prescription for a hollow nose cone shell having an outer conformal nose cone surface and an inner nose cone surface according to another embodiment. Figures 4 and 5 will be discussed together.

[0037] Referring first to Figure 4, assume that a definition of an outer conformal nose cone surface 42 has been created. The definition of the outer conformal nose cone surface 42 may have been generated by any suitable design software application or other design mechanism suitable for designing a surface of a nose cone with desired mechanical and aerodynamic drag characteristics and generating the definition of the outer conformal nose cone surface 42. By way of non-limiting example, one such design mechanism involves performing a computational fluid dynamics analysis of a solid model generated using a 3-D computer-aided design (CAD) package to optimize a nose cone shape for desired mechanical and aerodynamic characteristics. In this

embodiment, a definition of an inner nose cone surface 44 will be generated based on various factors, as discussed herein. However, the embodiments are not limited to generating a definition of an inner nose cone surface based on a definition of an outer nose cone surface, and can also generate a definition of an
5 outer nose cone surface based on a definition of an inner nose cone surface. As noted, the outer conformal nose cone surface 42 is conformal, sometimes referred to as aerodynamic. The outer conformal nose cone surface 42 can comprise any aerodynamic shape, but in some embodiments, a maximum diameter 46 is less than half of a maximum length 48 of the nose cone 40.

10 Moreover, although not illustrated in Figure 4, in some embodiments the outer conformal nose cone surface 42 is conical.

[0038] Initially, a computing device, such as the computing device 28 (Figure 2) accesses the definition of the outer conformal nose cone surface 42 (Figure 5, block 200). The computing device 28 identifies a plurality of first light ray
15 locations 50, 50-1 (generally, first light ray locations 50) on the outer conformal nose cone surface 42 (Figure 5, block 202). The first light ray locations 50 may also be referred to herein as points on the outer conformal nose cone surface 42. For purposes of illustration, only a subset of the first light ray locations 50 is depicted, and only a further subset of the first light ray locations 50 that are
20 depicted is labeled. The number of first light ray locations 50 that are identified may vary from nose cone to nose cone, and should generally be a number that allows the determination of a suitable number of light ray exit locations 52 on the inner nose cone surface 44 to ensure a sufficient resolution to generate a definition of the inner nose cone surface 44. In some embodiments, the
25 computing device 28 may identify hundreds of thousands of first light ray locations 50. Light ray exit locations 52 may also be referred to herein as points 52.

[0039] In one embodiment, the computing device 28 determines a desired, or nominal, thickness 54 of the nose cone 40 at a location of the nose cone 40. In
30 one embodiment, the location may be at the tip of the nose cone 40, such as along a longitudinal axis 56. The longitudinal axis 56 also defines an axis of

symmetry of the nose cone 40. In some embodiments, the thickness 54 may be expressed in terms of a distance from one location 58 on the outer conformal nose cone surface 42 to another location 60 on the inner nose cone surface 44 (Figure 5, block 204).

5 **[0040]** In one embodiment, the computing device 28 then, for each first light ray location 50, determines a path through the nose cone material that a light ray 62 travels given a predetermined angle of incidence of the light ray 62 on the outer conformal nose cone surface 42 at the respective first light ray location 50. The path that the light ray 62 travels will be in part based on the particular
10 material of the nose cone 40, since different materials have different indexes of refraction. The computing device 28 then determines a corresponding light ray exit location 52 of the light ray 62 at which the light ray 62 will exit the inner nose cone surface 44 given the path. The computing device 28 also determines an inner surface slope of the inner nose cone surface 44 at the corresponding light
15 ray exit location 52 that is required to direct the light ray 62 in a desired direction into a void 64 of the nose cone 40 (Figure 5, block 206). Collectively, the desired direction is based on a desired beam pattern of light rays 62, which may comprise, by way of non-limiting example, a converging beam pattern, a diverging beam pattern, or a collimated beam pattern. In the example illustrated
20 in Figure 4, the desired beam pattern is a collimated beam pattern.

[0041] In some embodiments, the inner surface slope determined at each light ray exit location 52 may be based on generating a beam pattern at a particular plane 66 that is perpendicular to the longitudinal axis 56 and which intersects the void 64. In some embodiments, in operation, one or more components 68 may
25 be placed at the plane 66, such as an optical receiver, a detector, or the like. The optical receiver may include, for example, any combination of spectral filters, diffractive, refractive, reflective, and/or catadioptric lenses.

[0042] As an example, referring to the first light ray location 50-1, the computing device 28 determines a desired angle of incidence of a light ray 62-1
30 that is incident on the outer conformal nose cone surface 42 at the first light ray location 50-1. In the example illustrated in Figure 4, the desired angle of

incidence is such that the light rays 62 are parallel with respect to the longitudinal axis 56. The process described herein may also make iterative determinations of the inner nose cone surface 44 at each of multiple different angles of incidence to determine a shape of the inner nose cone surface 44 that provides a best

5 compromise over the desired range of angles of incidence. For example, the process may be repeated for each degree up to +/- 20 degrees "off axis" with respect to the longitudinal axis 56.

[0043] The computing device 28 then determines the path that the light ray 62-1 travels through the material of the nose cone 40, based in part on the index
10 of refraction of the material and the angle of incidence of the light ray 62-1 on the outer conformal nose cone surface 42 at the first light ray location 50-1. The computing device 28 determines that the light ray 62-1 will strike the inner nose cone surface 44 at a light ray exit location 52-1. The computing device 28 then determines an inner surface slope of the inner nose cone surface 44 at the
15 corresponding light ray exit location 52-1 that is required to direct the light ray 62-1 in a desired direction into the void 64.

[0044] This process is repeated at each first light ray location 50. Ultimately, a plurality of corresponding light ray exit locations 52 is determined.

[0045] The plurality of corresponding light ray exit locations 52 defines the
20 inner nose cone surface 44. Thus, the corresponding light ray exit locations 52 may be the functional representation of the inner nose cone surface 44. In some embodiments, the computing device 28 may use a polynomial or other form of mathematical equation suitable for fitting a surface given a plurality of points, such as the light ray exit locations 52. The functional representation of the inner
25 nose cone surface 44 may comprise the coefficients of a polynomial, asphere or other parameterized mathematical expression (Figure 5, block 208).

[0046] Figure 6 is a block diagram of the nose cone 40 illustrated in Figure 4. In one embodiment, a component 68 is a detector, or a set of receive optics and a detector, and is strapped down, or fixed, with respect to the inner nose cone
30 surface 44 and has a field of view 70. In another embodiment, the component 68

is a detector or a set of receive optics and a detector, and is coupled to a gimbal or other scanning apparatus and has a field of regard 72.

[0047] The nose cone 40 forms the void 64 and has the outer conformal nose cone surface 42 and the inner nose cone surface 44 that defines the void 64 and that is configured to direct light received at a plurality of different points on the outer conformal nose cone surface 42 into a predetermined output beam toward the plane 66 that is perpendicular to the longitudinal axis 56 of the nose cone 40.

[0048] Figure 7 is a block diagram illustrating a process for determining the inner nose cone surface 44 according to another embodiment. In this embodiment, it will again be assumed, for purposes of illustration, that the goal is to define the inner nose cone surface 44 given a functional description of the outer conformal nose cone surface 42, a predetermined optical material, and a center thickness 74 between the outer conformal nose cone surface 42 and the inner nose cone surface 44 on an optical axis 76 of the nose cone 40. Further assumptions, for purposes of illustration, are that the light rays 62 incident on the outer conformal nose cone surface 42 are collimated, and it is desired to create collimated light rays 62 that exit the inner nose cone surface 44.

[0049] Starting with the light ray 62-1 (R_{1in}) incident on the outer conformal nose cone surface 42 at a light ray location 50-A, given the refracted light ray 62-1 (R_1), and the thickness 74, a point 52-A is determined. A slope of the tangent of the inner nose cone surface 44 at the point 52-A is determined. Because the point 52-A is at the optical axis 76, the slope of the tangent is vertical, and the thickness 74 is not relevant, but at every other point 52, the thickness of the nose cone 40 is determined at the respective point 52 so that effects of the index of refraction of the material are taken into consideration.

[0050] A predetermined distance 78 (Δh) is used to determine a second light ray 62-2 (R_{2in}) that is parallel to the light ray 62-1 but displaced from the light ray 62-1 by the distance 78. For purposes of illustration and discussion, the predetermined distance 78 is not to scale, and in practice the predetermined distance 78 may be on the order of microns. It is determined that the second light ray 62-2 intersects the outer conformal nose cone surface 42 at a light ray

location 50-B. An angle of incidence of the second light ray 62-2 is determined with respect to a surface normal, n_{O2} , at the light ray location 50-B. The slope of the refracted light ray 62-2R is determined at the light ray location 50-B, and the equation of the line for the refracted light ray 62-2R (R_2) is determined. Using the
5 slope of the refracted light ray 62-2R and the pre-defined slope of a desired exit light ray 62-2E (R_{2out}), determine a resultant slope of an inner surface normal n_{i2} at the point 52-B (yet to be determined) that provides the pre-defined slope for the exit light ray 62-2E.

[0051] An equation of a line L_T that is tangent to the inner nose cone surface
10 44 at the point 52-A using the location of the point 52-A and the slope of the light ray 62-1R is defined. The point 52-B located at the intersection of the lines determined for the refracted light ray 62-2R and the line L_T is determined. This identifies the precise location of the point 52-B on the inner nose cone surface 44 for an incident light ray at the light ray location 50-B.

15 **[0052]** The slope of the inner surface at the point 52-B is determined based on the slope of the inner surface normal n_{i2} and saved for the next point 52 (not illustrated). By now utilizing the point 52-B and the slope of the inner surface 44 at the point 52-B, the process may be repeated iteratively over the entire optical aperture of the nose cone 40. The locations of each point 52 define the inner
20 nose cone surface 44. In practice, hundreds of thousands, or millions, of points 52 may be determined for the nose cone surface 44.

[0053] Those skilled in the art will appreciate that the points 52 can then be fit in a desired mathematical representation, such as by using spline, linear, or non-linear interpolation techniques, for inclusion in other design tools such as CAD or
25 optical design programs for further design specification and/or analysis. The density of points chosen should be fine enough to ensure a desired beam pattern.

[0054] In some embodiments, the nose cone 40 comprises additional corrective optics that operate in conjunction with the nose cone 40 such that the
30 nose cone 40 is an integral part of an overall focusing optical system.

[0055] In some embodiments, the nose cone 40 comprises an imaging device such as, for example, a focal plane array with corrective image processing to reduce residual errors in the image plane of the focusing optics.

[0056] In some embodiments, the nose cone 40 comprises one or more
5 reflective or refractive spatial light modulators and/or diffractive optical elements.

[0057] In some embodiments, the inner surface 44 may include slits or grooves, such as, for example, the grooves that define a Fresnel lens, to shape the output beam 22 in a desired manner.

[0058] In some embodiments, the nose cone 40 may have obscured areas
10 within the field of regard that are not transparent to EMR in the relevant bands. Such obscured areas may include, for example, an obscured tip that is obscured by heat ablating materials. In such embodiments, the precise area of the outer conformal nose cone surface 42 may be determined, and the determination of light rays 62 is not made at such locations. In other embodiments, the existence
15 of an obscured area of the outer conformal nose cone surface 42 may in practice not materially affect the desired beam pattern, and thus may be ignored.

[0059] While, for purposes of illustration, the embodiments have been described in the context of generating a definition of an inner nose cone surface based on a definition of an outer nose cone surface, it is apparent that the
20 principles disclosed herein can also be used to determine a definition of an outer nose cone surface based on a definition of an inner nose cone surface.

[0060] Those skilled in the art will recognize improvements and modifications to the preferred embodiments of the disclosure. All such improvements and modifications are considered within the scope of the concepts disclosed herein
25 and the claims that follow.

CLAIMS

What is claimed is:

1. A method for generating a functional definition of a surface of a hollow
5 nose cone shell comprising a transparent material and having an interior void,
comprising:

accessing, by a computing device comprising a processor, a first
functional definition of a first surface that comprises one of an outer nose cone
surface and an inner nose cone surface;

10 determining, at a plane in the interior void, a desired beam pattern of light
that is transmitted through the hollow nose cone shell;

determining an optical prescription of a second surface that comprises one
of the outer nose cone surface and the inner nose cone surface, the second
surface being different from the first surface, wherein the optical prescription
15 provides the desired beam pattern of light at the plane in the interior void based
on the first functional definition;

generating a second functional definition that identifies the optical
prescription; and

20 storing the second functional definition in a storage device.

2. The method of claim 1, further comprising:

determining a thickness of the hollow nose cone shell at at least one
location of the first surface;

identifying a plurality of first light ray locations on the first surface;

25 based on the at least one location of the first surface, the desired beam
pattern of light, the transparent material, and a predetermined angle of incidence
of a light ray at each first light ray location, determining a plurality of
corresponding second light ray locations on the second surface and a slope of
the second surface at each second light ray location based on a desired path of
30 the light ray after passing through the second light ray location; and

determining the second functional definition based on the plurality of second light ray locations on the second surface.

3. The method of claim 2, wherein the first surface is an outer conformal surface of the hollow nose cone shell and the second surface is an inner surface of the hollow nose cone shell.

4. The method of claim 2, wherein the desired beam pattern of light is one of a converging beam pattern, a diverging beam pattern, and a collimated beam pattern.

5. The method of claim 2, wherein the at least one location of the first surface comprises a location that intersects an axis of symmetry of the hollow nose cone shell.

6. The method of claim 2, wherein the second surface is an outer conformal surface of the hollow nose cone shell and the first surface is an inner surface of the hollow nose cone shell.

7. A nose cone shell that forms a void, comprising:
a conformal outer nose cone surface; and
an inner nose cone surface that defines the void and is configured to direct light received at a plurality of different points on the conformal outer nose cone surface into a predetermined output beam pattern toward a plane that is perpendicular to a longitudinal axis of the nose cone shell.

8. The nose cone shell of claim 7, wherein the plane is within the void.

9. The nose cone shell of claim 7, wherein the predetermined output beam pattern comprises a converging output beam pattern.

10. The nose cone shell of claim 7, wherein the predetermined output beam pattern comprises a diverging output beam pattern.

5 11. The nose cone shell of claim 7, wherein the predetermined output beam pattern comprises a collimated output beam pattern.

12. The nose cone shell of claim 7, further comprising a detector positioned in the void.

10 13. The nose cone shell of claim 12, further comprising an optical receiver positioned at an upstream location with respect to the detector.

14. The nose cone shell of claim 7, wherein a thickness of the nose cone shell varies along the nose cone shell.

15

15. The nose cone shell of claim 7, wherein an obscuration obscures an area of the conformal outer nose cone surface.

20 16. An apparatus for generating a functional definition of a surface of a hollow nose cone shell comprising a transparent material and having an interior void, comprising:

a memory; and

a processing device coupled to the memory and configured to:

25 access, by a computing device comprising a processor, a first functional definition of a first surface that comprises one of an outer nose cone surface and an inner nose cone surface;

determine, at a plane in the interior void, a desired beam pattern of light that is transmitted through the hollow nose cone shell;

30 determine an optical prescription of a second surface that comprises one of the outer nose cone surface and the inner nose cone surface, the second surface being different from the first surface, wherein

the optical prescription provides the desired beam pattern of light at the plane in the interior void based on the first functional definition;

generate a second functional definition that identifies the optical prescription; and

5 store the second functional definition in a storage device.

17. The apparatus of claim 16, wherein the desired beam pattern of light is one of a converging beam pattern, a diverging beam pattern, and a collimated beam pattern.

10

18. The apparatus of claim 16, wherein the first surface is an outer conformal surface of the hollow nose cone shell and the second surface is an inner surface of the hollow nose cone shell.

15 19. The apparatus of claim 18, wherein the second surface is an outer conformal surface of the hollow nose cone shell and the first surface is an inner surface of the hollow nose cone shell.

20. A method for defining an inner nose cone surface of a hollow nose cone comprising an outer nose cone surface, comprising:

20

accessing a functional definition of the outer nose cone surface of the hollow nose cone, the hollow nose cone comprising a transparent material;

identifying a plurality of first light ray locations on the outer nose cone surface;

25 determining, for the plurality of first light ray locations, a corresponding plurality of inner surface light ray locations on the inner nose cone surface and a plurality of inner surface slopes, wherein each inner surface slope defines a slope of the inner nose cone surface at a corresponding inner surface light ray location by, for each first light ray location of the plurality of first light ray locations:

30

determining a path through the transparent material that a light ray travels given a predetermined angle of incidence of the light ray on the outer nose cone surface at the first light ray location;

determining the corresponding second light ray location on the inner nose cone surface at which the light ray will exit the inner nose cone surface given the path; and

determining the inner surface slope of the corresponding second light ray location required to direct the light ray in a desired direction into a void of the hollow nose cone; and

defining the inner nose cone surface based on the plurality of inner surface light ray locations.

21. The method of claim 20, wherein defining the inner nose cone surface further comprises fitting a polynomial to the plurality of inner surface light ray locations.

22. The method of claim 20, wherein determining the path through the transparent material that the light ray travels given the predetermined angle of incidence of the light ray on the outer nose cone surface at the first light ray location comprises determining the path through the transparent material that the light ray travels given the predetermined angle of incidence of the light ray on the outer nose cone surface at the first light ray location based at least in part on the transparent material.

23. The method of claim of claim 20, wherein determining the inner surface slope of the corresponding second light ray location required to direct the light ray in a desired direction into the void of the hollow nose cone is based at least in part on a desired optical power of the hollow nose cone.

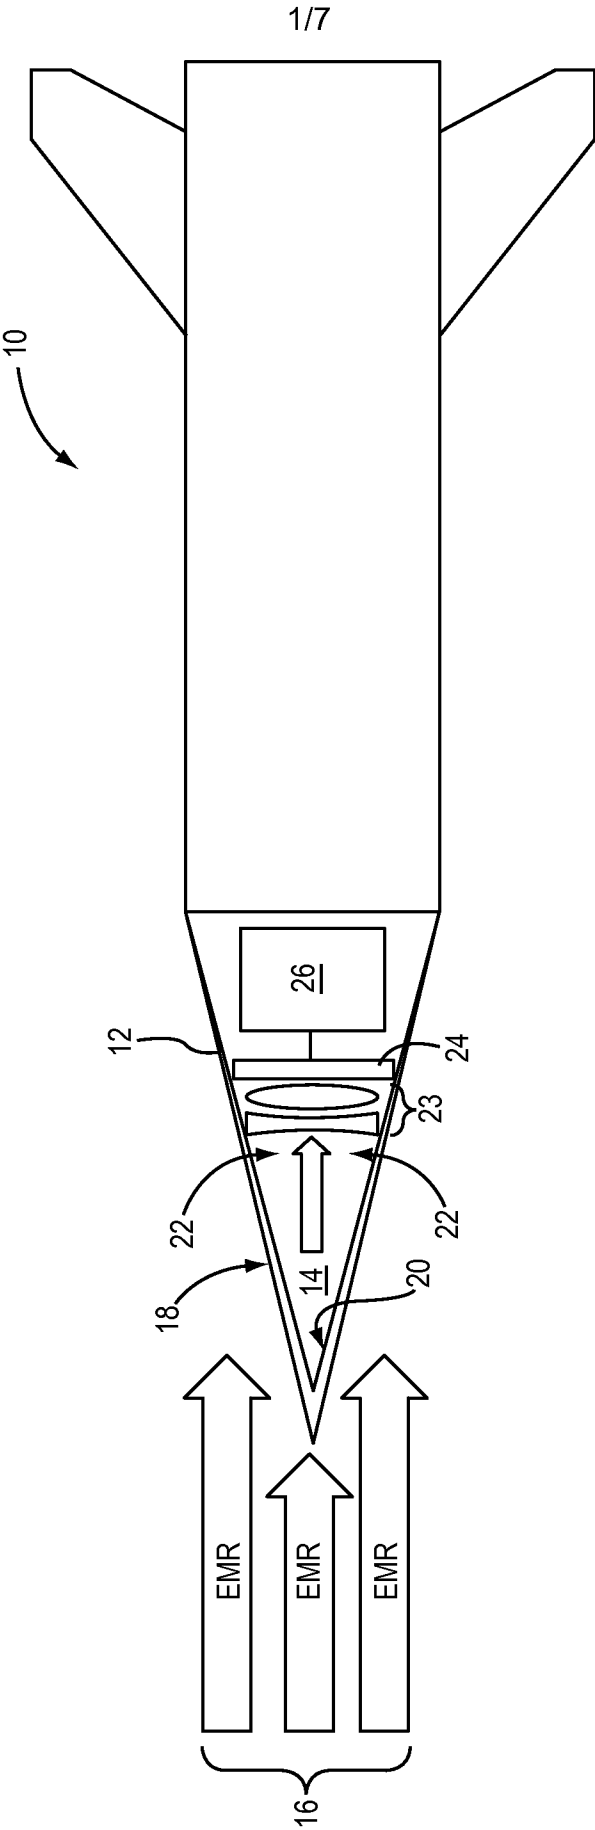
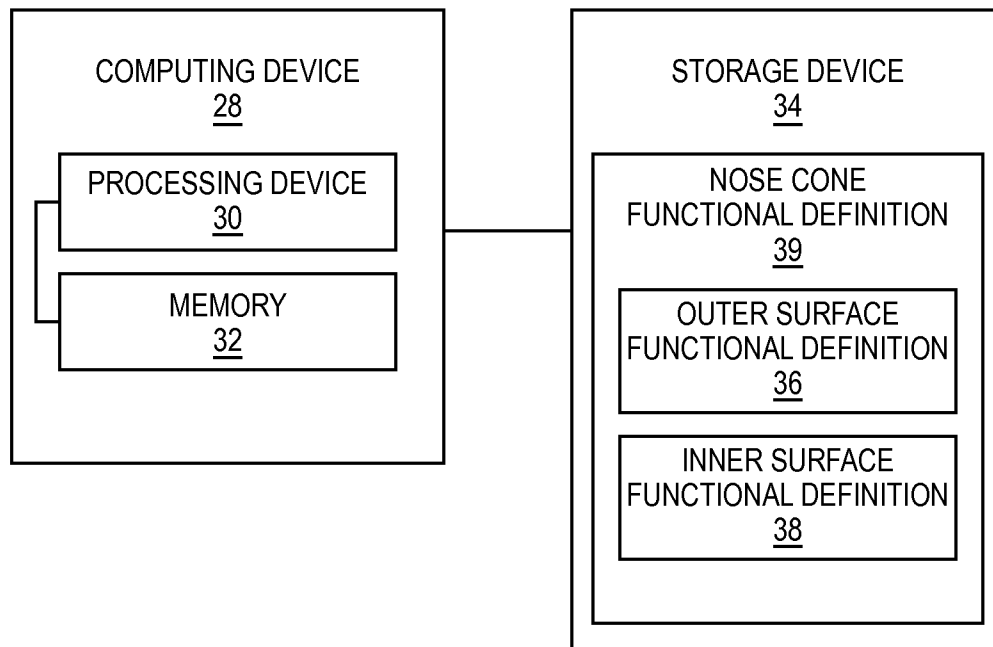
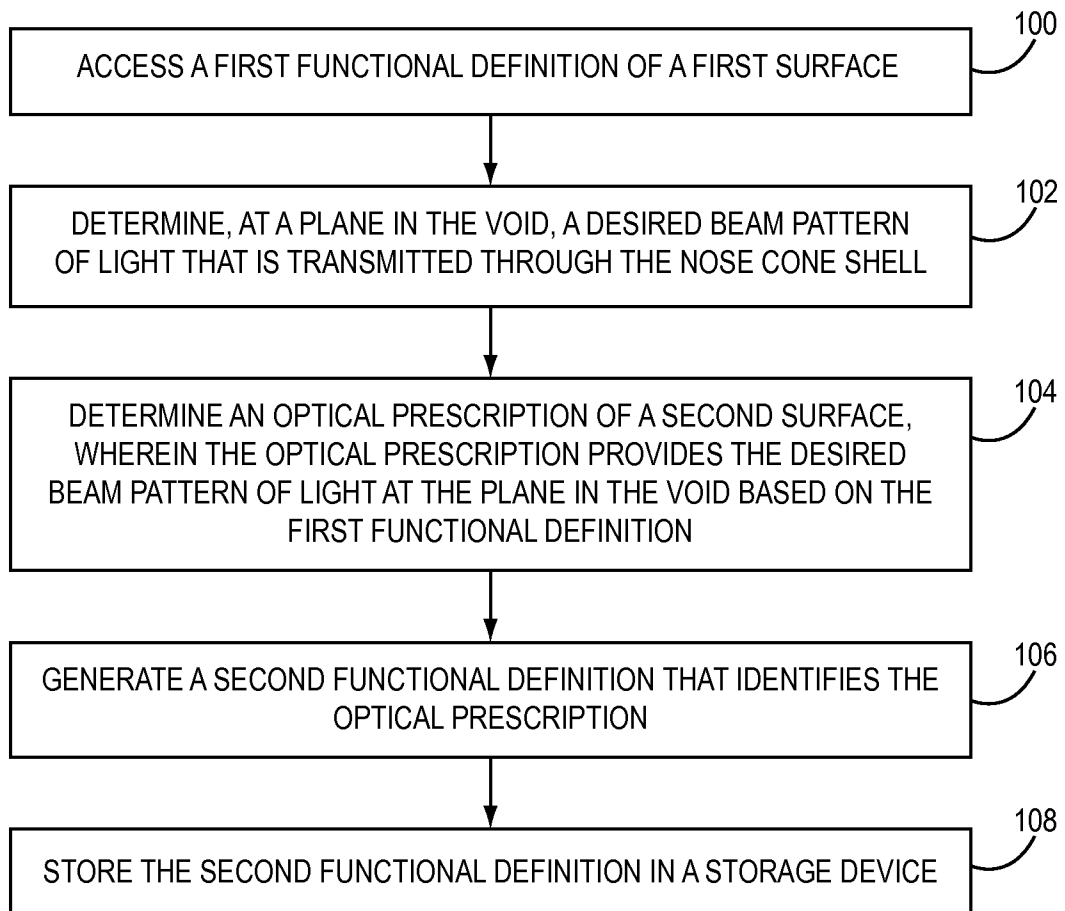



FIG. 1

2/7

*FIG. 2*

3/7

**FIG. 3**

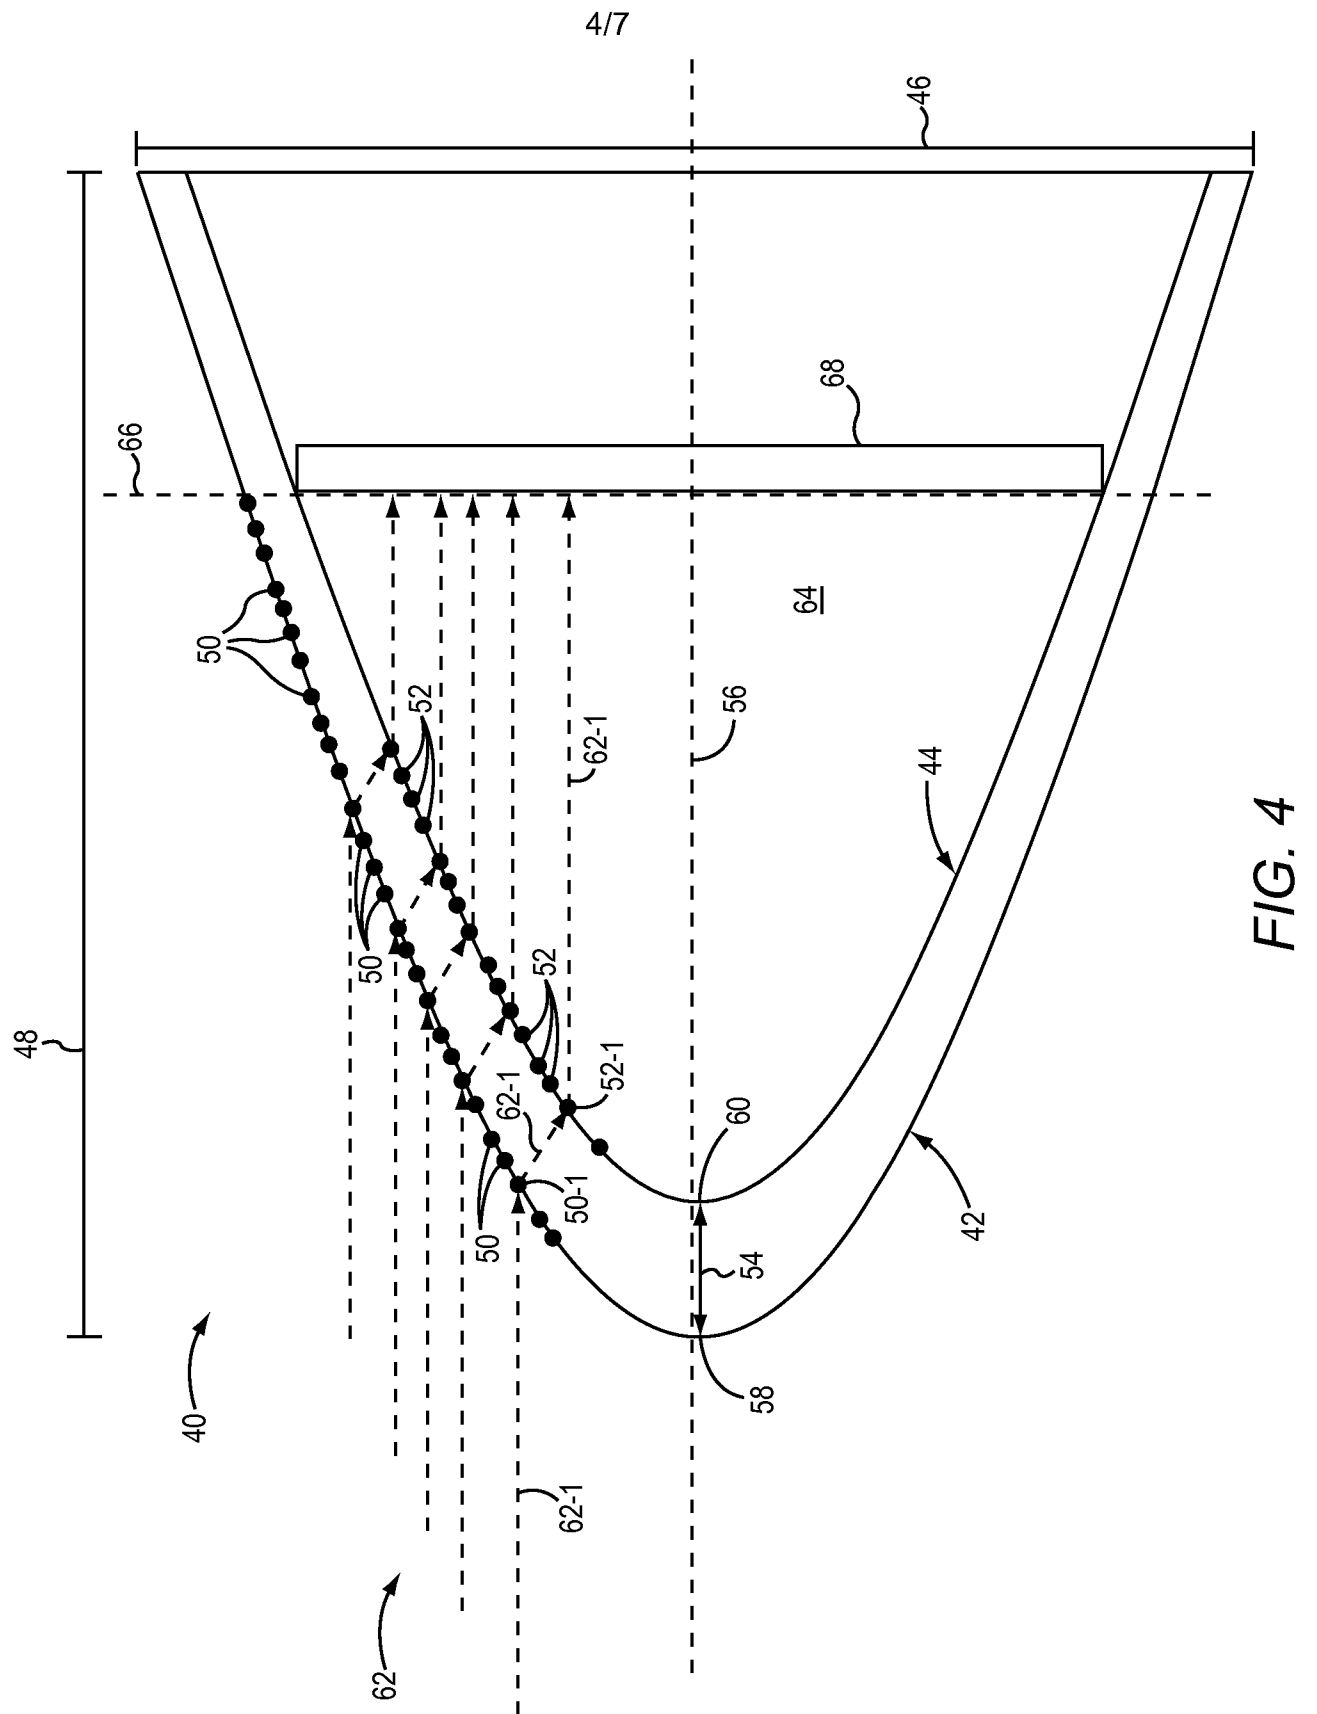

5/7

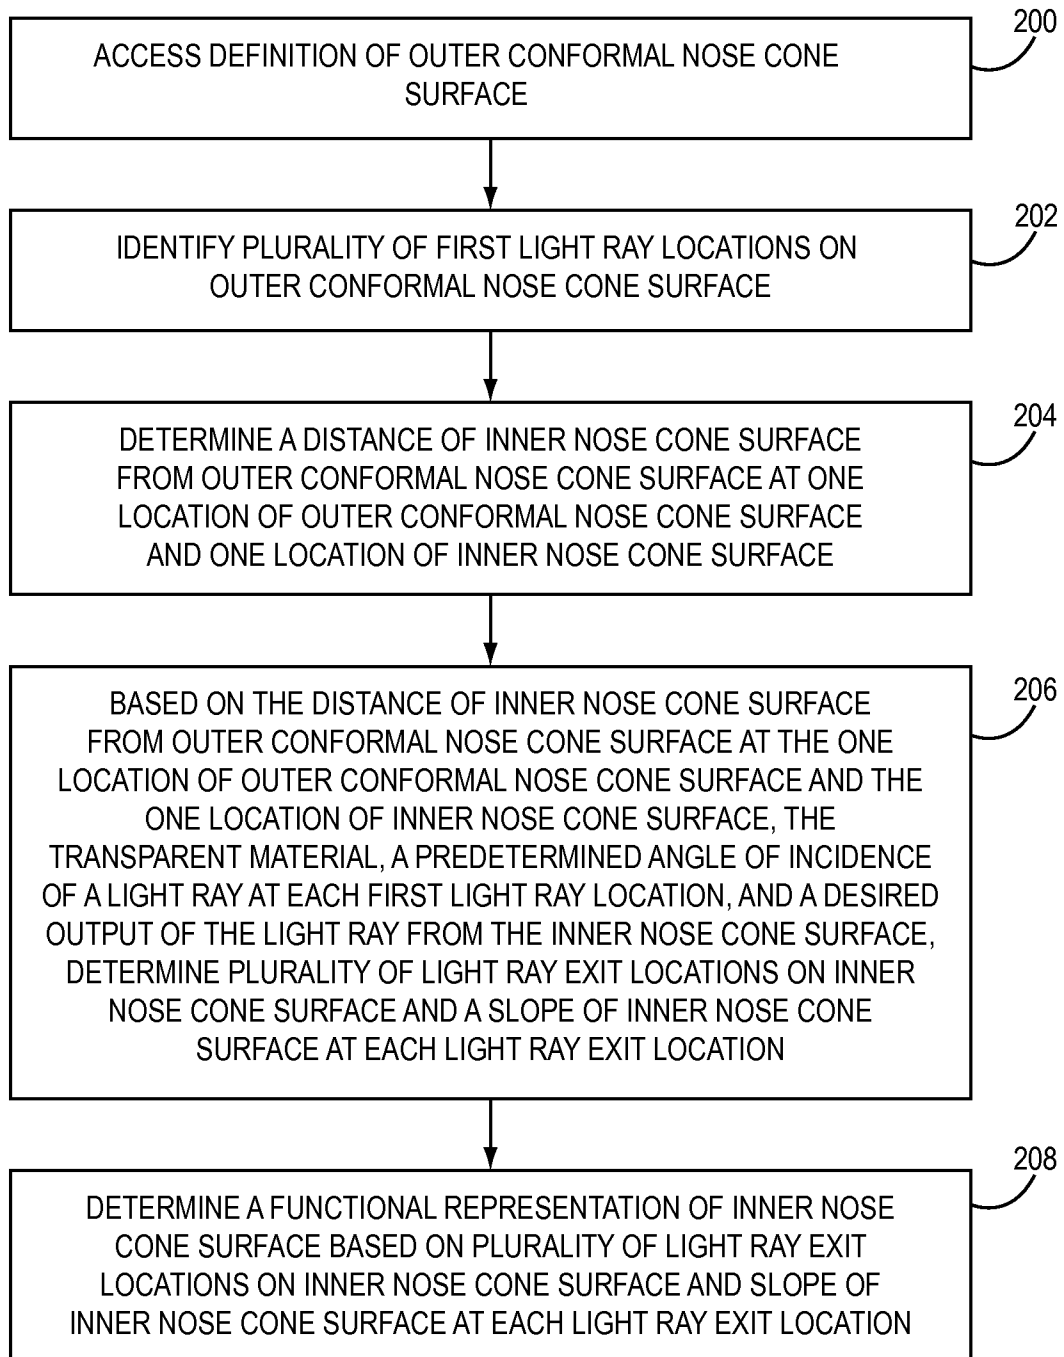


FIG. 5

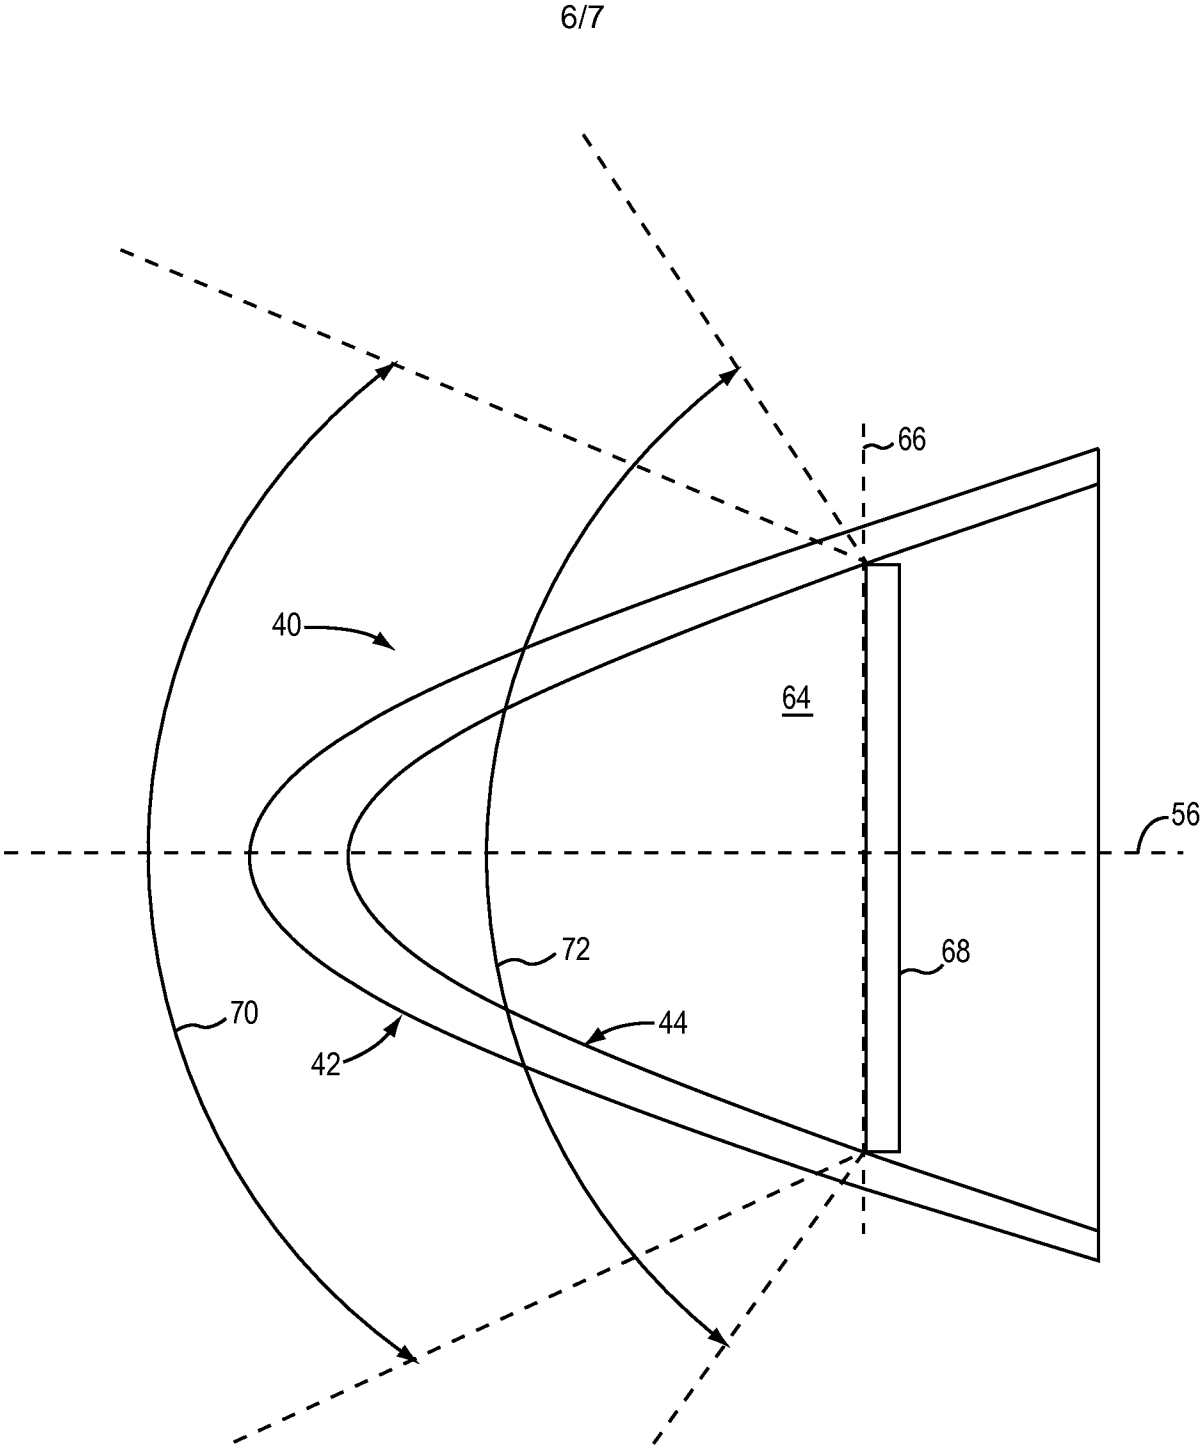


FIG. 6

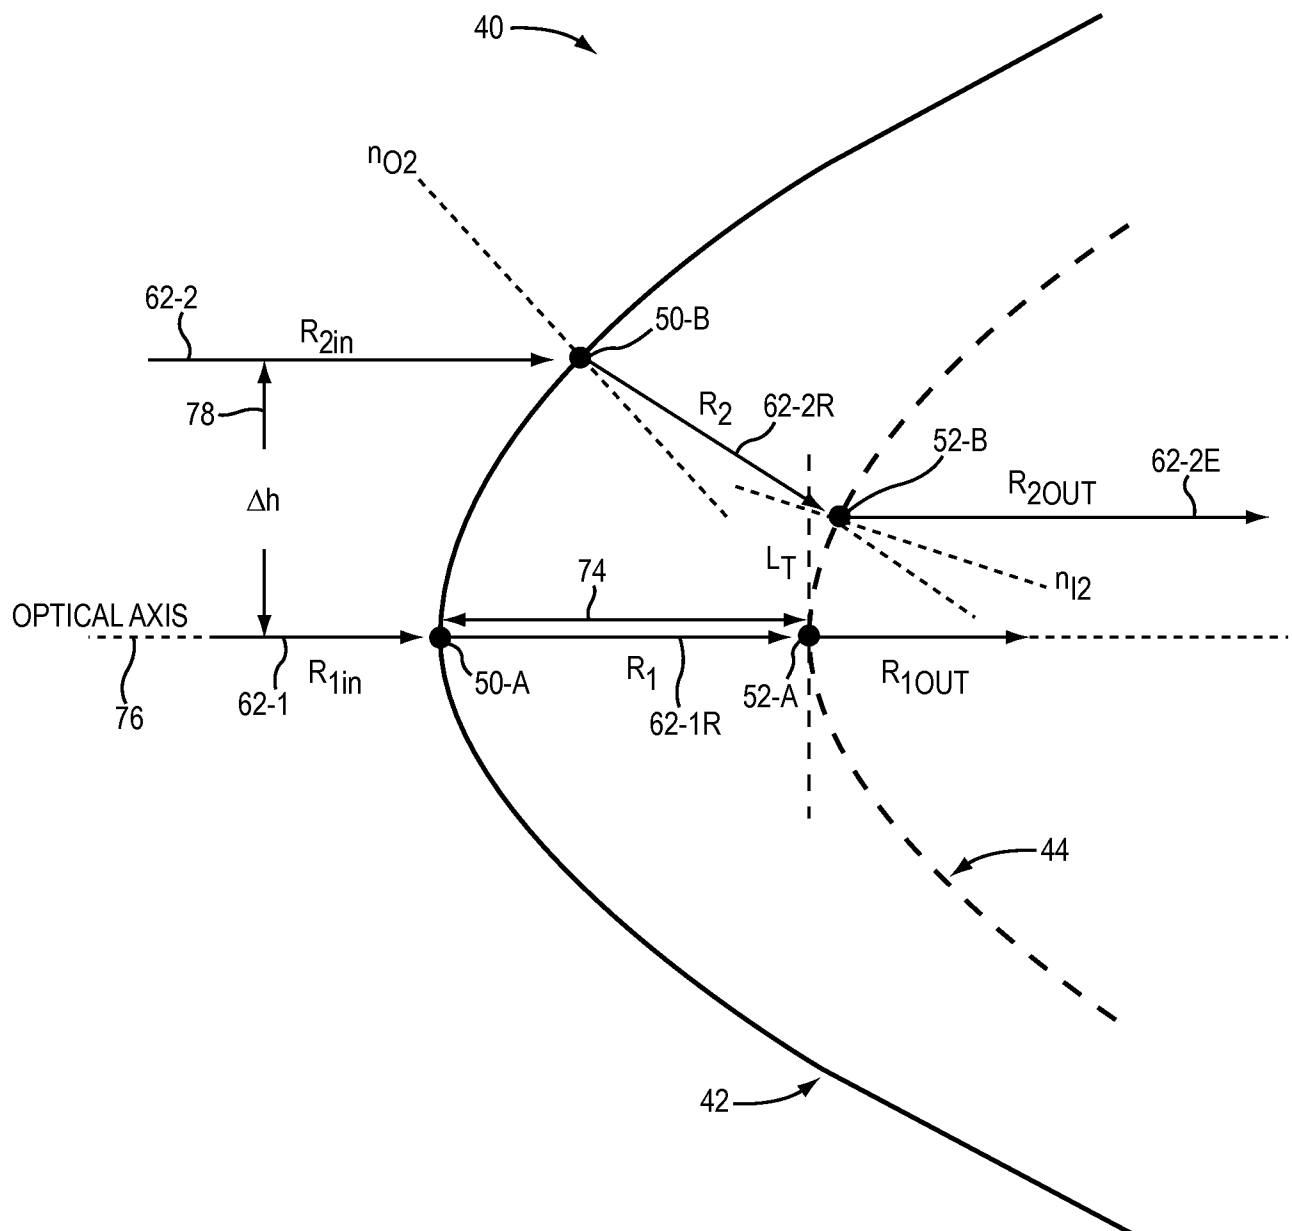


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2015/042391**A. CLASSIFICATION OF SUBJECT MATTER****F42B 10/46(2006.01)i, F42B 15/00(2006.01)i, H01Q 1/28(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F42B 10/46; G02B 3/00; F42B 10/28; H01Q 1/42; G02B 7/02; H01J 3/14; F41G 7/26; F42B 12/00; G02B 13/06; G02B 9/00; F42B 15/00; H01Q 1/28

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: nose cone, conformal, thickness, functional definition, optical prescription, detector, beam pattern

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 7423245 B2 (BAUMGART, JORG) 09 September 2008 See column 5, lines 3-14, claim 1 and figure.	7-15
A		1-6, 16-23
A	US 6356396 B1 (CHEN et al.) 12 March 2002 See column 6, line 44 - column 7, line 19 and figures 1-5.	1-23
A	US 6180938 B1 (CROWTHER et al.) 30 January 2001 See abstract, column 4, lines 14-35 and figures 1-3.	1-23
A	US 6462889 B1 (JACKSON, JEREMIE E.) 08 October 2002 See column 3, line 27 - column 4, line 37 and figures 1-2.	1-23
A	US 6565036 B1 (PALATHINGAL et al.) 20 May 2003 See abstract, claim 1 and figure 1.	1-23



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

14 October 2015 (14.10.2015)

Date of mailing of the international search report

15 October 2015 (15.10.2015)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 35208,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

HWANG, Chan Yoon

Telephone No. +82-42-481-3347



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/042391

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 7423245 B2	09/09/2008	DE 102004053449 A1 DE 102004053449 B4 FR 2877719 A1 FR 2877719 B1 GB 2419932 A GB 2419932 B US 2006-0208131 A1	18/05/2006 09/12/2010 12/05/2006 20/05/2011 10/05/2006 13/02/2008 21/09/2006
US 6356396 B1	12/03/2002	EP 1196806 A2 JP 2004-508575 A TR 200102812 T1 WO 01-57558 A2 WO 01-57558 A3	17/04/2002 18/03/2004 22/07/2002 09/08/2001 23/08/2001
US 6180938 B1	30/01/2001	AT 244901 T AU 1999-37396 A1 AU 1999-37396 B2 AU 3739699 A AU 739920 B2 CA 2279952 A1 CA 2279952 C DE 69816321 D1 DE 69816321 T2 EP 1023616 A2 EP 1023616 B1 IL 131026 A JP 03371381 B2 JP 2000-510958 A KR 10-0365541 B1 NO 317192 B1 NO 993622 A NZ 336584 A TR 9901890 T1 WO 99-38033 A2 WO 99-38033 A3	15/07/2003 09/08/1999 25/10/2001 09/08/1999 25/10/2001 29/07/1999 21/05/2002 14/08/2003 13/05/2004 02/08/2000 09/07/2003 10/11/2002 27/01/2003 22/08/2000 18/12/2002 13/09/2004 07/10/1999 26/10/2001 21/09/2001 29/07/1999 29/06/2000
US 6462889 B1	08/10/2002	None	
US 6565036 B1	20/05/2003	None	