




(86) Date de dépôt PCT/PCT Filing Date: 2009/12/30
(87) Date publication PCT/PCT Publication Date: 2010/12/02
(45) Date de délivrance/Issue Date: 2017/05/23
(85) Entrée phase nationale/National Entry: 2011/12/13
(86) N° demande PCT/PCT Application No.: NL 2009/050821
(87) N° publication PCT/PCT Publication No.: 2010/137953
(30) Priorité/Priority: 2009/06/17 (EP09163008.7)

(51) Cl.Int./Int.Cl. *A47J 31/36* (2006.01),
B65D 85/804 (2006.01)
(72) Inventeurs/Inventors:
KAMERBEEK, RALF, NL;
FLAMAND, JOHN HENRI, NL;
POST VAN LOON, ANGENITA DOROTHEA, NL;
KOELING, HENDRIK CORNELIS, NL;
BIESHEUVEL, AREND CORNELIS JACOBUS, NL
(73) Propriétaire/Owner:
KONINKLIJKE DOUWE EGBERTS B.V., NL
(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : SYSTÈME, CAPSULE ET PROCÉDE DE PRÉPARATION DE BOISSON
(54) Title: SYSTEM, CAPSULE AND METHOD FOR PREPARING A BEVERAGE

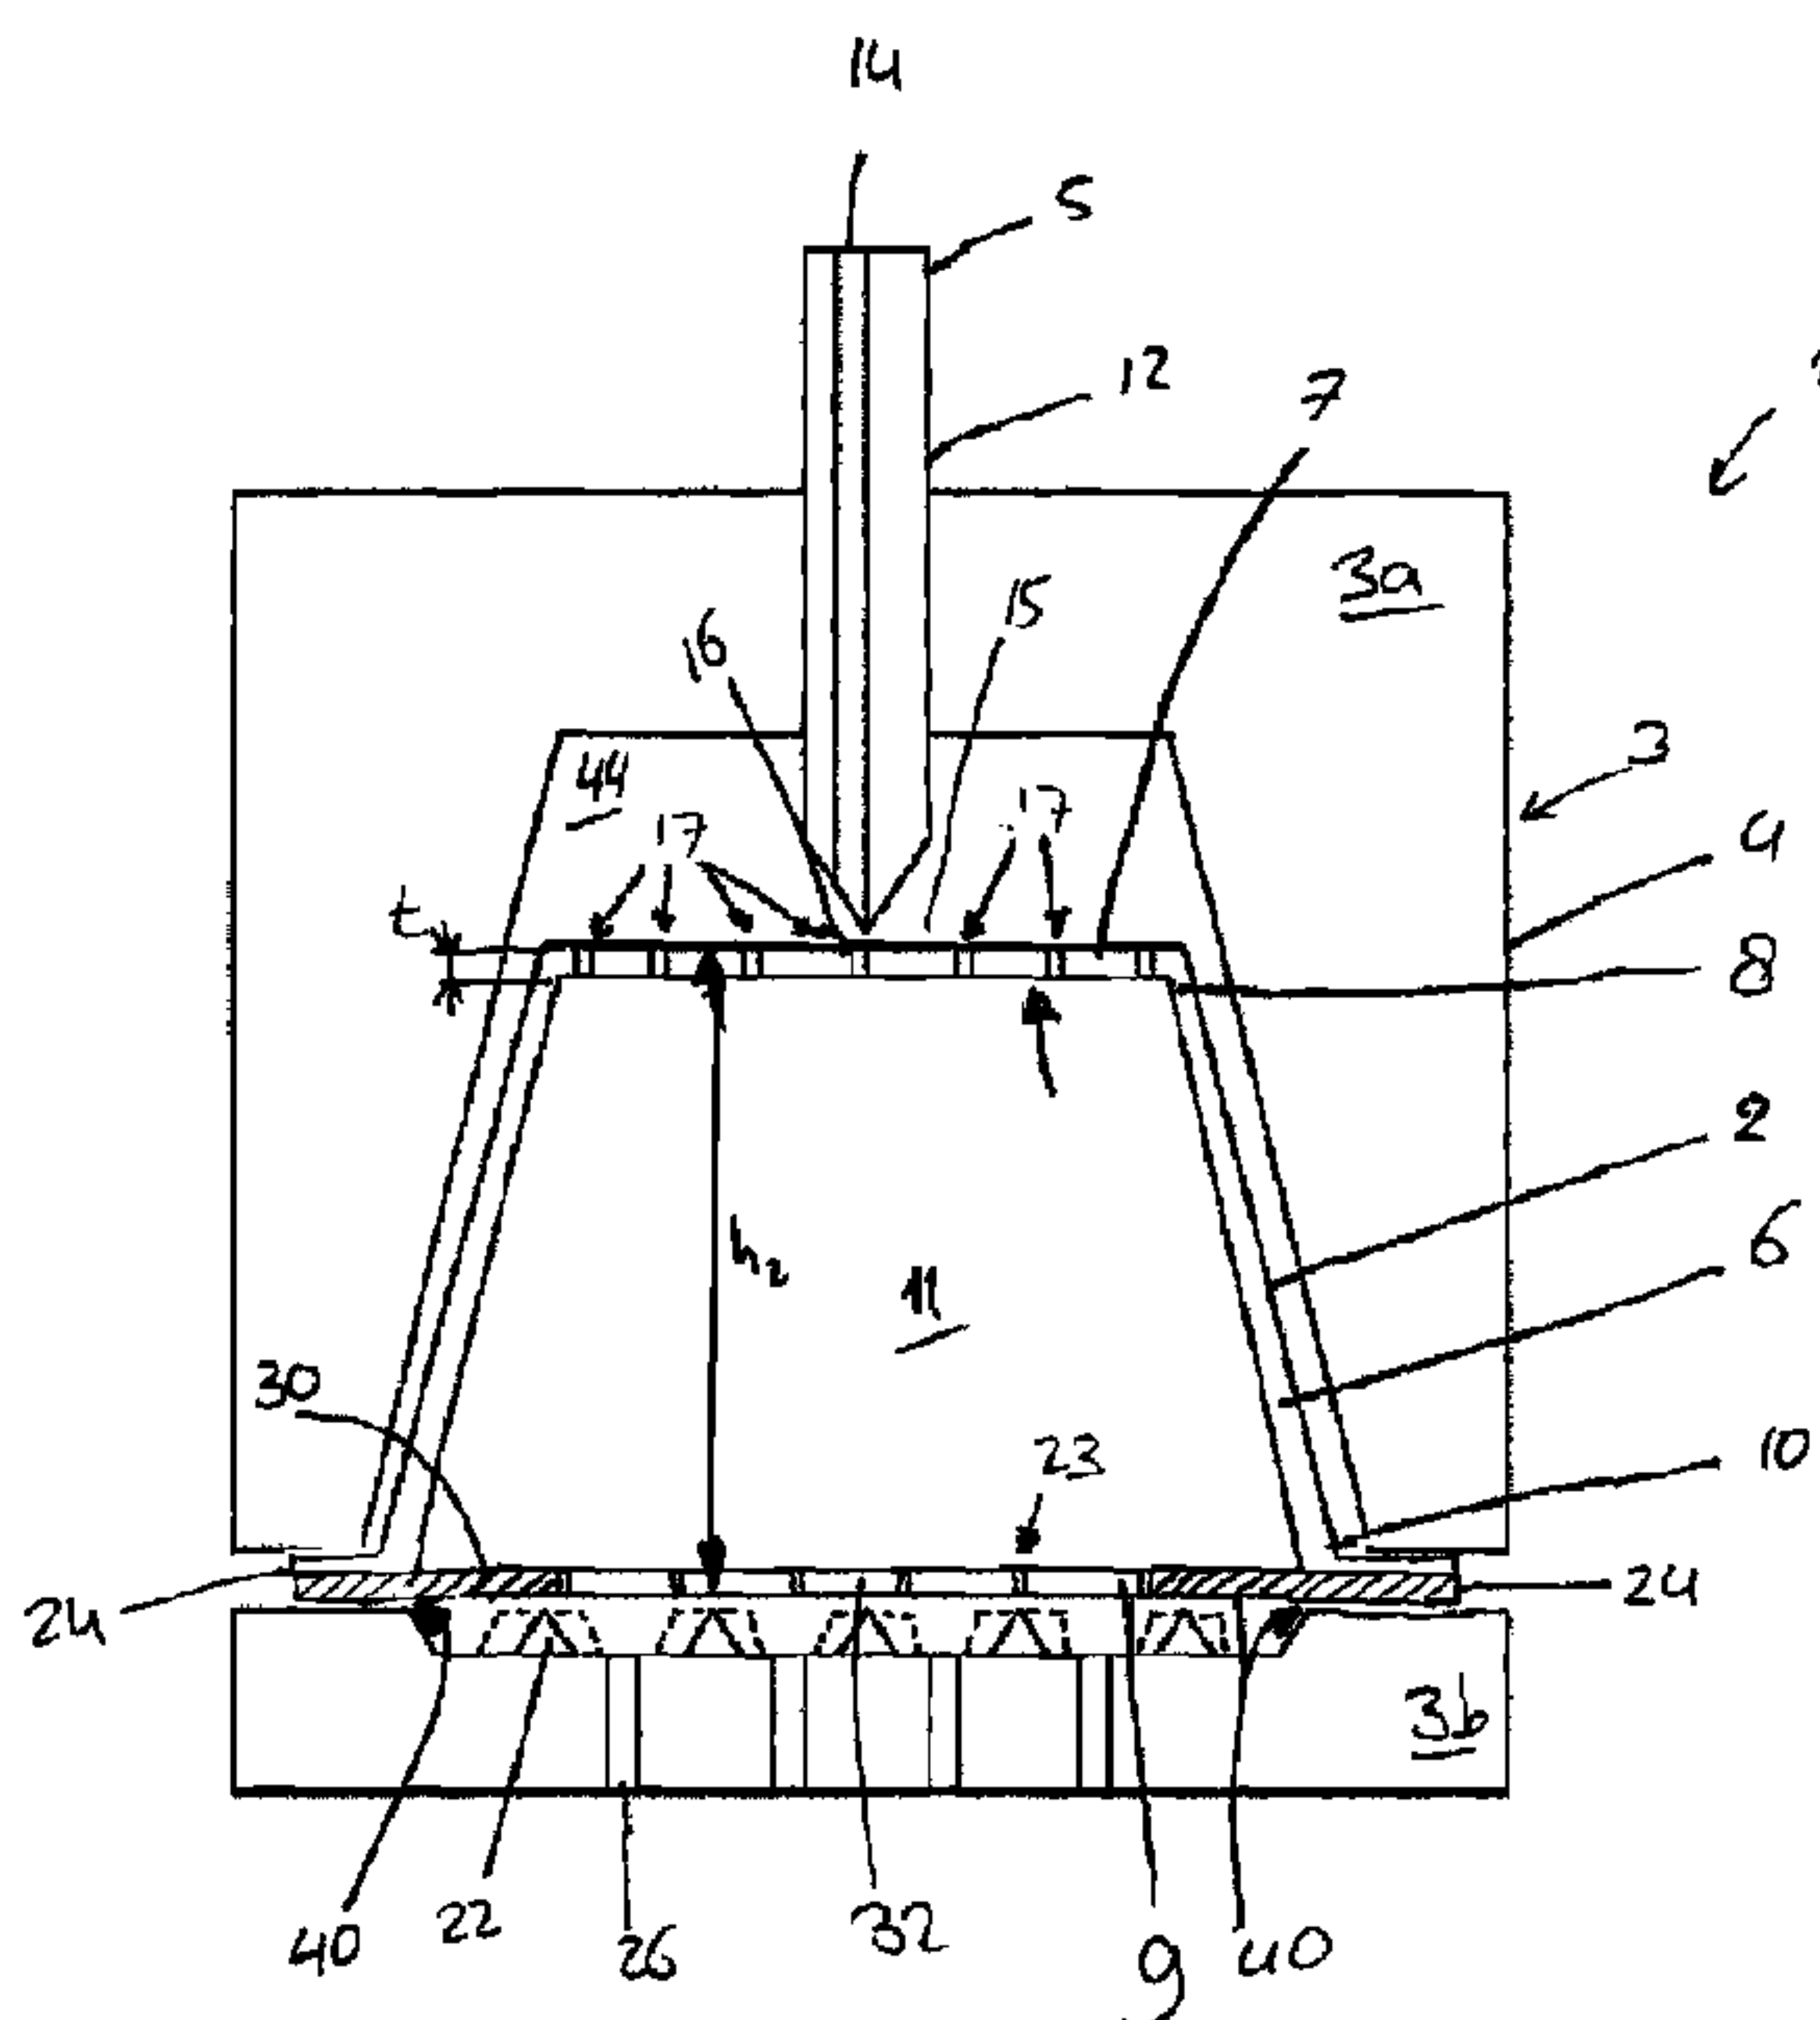

(57) Abrégé/Abstract:

System comprising a capsule (2) for preparing a predetermined quantity of beverage suitable for consumption using an extractable product, comprising: a substantially rigid circumferential wall (6), a bottom (7) closing the circumferential wall at a first end (8), and lid (9) of a flexible sheet-shaped perforate and/or porous material closing the circumferential wall at a second, open, end (10) opposite the bottom, wherein the circumferential wall, the bottom and the lid enclose an inner space (11) comprising the extractable product, wherein the lid comprises an impermeable outer circumferential area (30) and an exit area (32) being enclosed by said impermeable outer circumferential area such that, in use, the prepared beverage is drained from the capsule through the exit area. The invention further relates to a method for preparing said beverage using the above system.

(10) International Publication Number
WO 2010/137953 A1

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(57) Abstract: System comprising a capsule (2) for preparing a predetermined quantity of beverage suitable for consumption using an extractable product, comprising: a substantially rigid circumferential wall (6), a bottom (7) closing the circumferential wall at a first end (8), and lid (9) of a flexible sheet- shaped perforate and/or porous material closing the circumferential wall at a second, open, end (10) opposite the bottom, wherein the circumferential wall, the bottom and the lid enclose an inner space (11) comprising the extractable product, wherein the lid comprises an impermeable outer circumferential area (30) and an exit area (32) being enclosed by said impermeable outer circumferential area such that, in use, the prepared beverage is drained from the capsule through the exit area. The invention further relates to a method for preparing said beverage using the above system.

WO 2010/137953 A1



Published:

— *with international search report (Art. 21(3))*

— *upon request of the applicant, before the expiration of the time limit referred to in Article 21(2)(a)*

Title: System, capsule and method for preparing a beverage

The invention relates to a system for preparing a predetermined quantity of beverage suitable for consumption using an extractable product, comprising an exchangeable capsule, and an apparatus comprising a receptacle for holding the exchangeable capsule, and a fluid dispensing device
5 for supplying an amount of a fluid, such as water, under pressure to the exchangeable capsule, wherein the exchangeable capsule comprises a circumferential wall, a bottom closing the circumferential wall at a first end, and a lid closing the circumferential wall at a second end opposite the bottom, wherein the wall, bottom and lid enclose an inner space comprising the
10 extractable product, wherein the fluid dispensing device is arranged for supplying the fluid to the extractable product through the bottom for forming the beverage, wherein the receptacle comprises a support surface, and wherein the capsule is arranged to at least partly abut against the support surface for draining the prepared beverage from the capsule through the lid and through
15 the support surface, wherein the lid comprises a flexible sheet-shaped perforate and/or porous material and the system comprises an outlet which, in use, is in fluid communication with the lid for draining the prepared beverage from the capsule and supplying the beverage to a container such as a cup.

Such a system using a capsule of which the lid comprises openings
20 for draining prepared beverage from the capsule and supplying the beverage to a container is known per se. These capsules are known as open capsules, since the capsule itself has perforate or porous sections, thus, prior to use, being open to ambient atmosphere (although the open capsule can be contained in an e.g. airtight outer package). When using the open capsule in the apparatus of
25 the system in the extended position, thus the position ready to supply fluid to the extractable product in the capsule, the open capsule is positioned in the receptacle, wherein the lid of the capsule faces the support surface and the bottom of the capsule faces the fluid dispensing device.

20184-518

2

A drawback of the abovementioned system using an open capsule is that during fluid supply under pressure already prepared beverage may bypass the outlet of the system after passing the sheet-shaped perforate and/or porous lid. This means that part of the prepared beverage, possibly mixed with air available between the lid and the outlet of the system, may try to pass between the capsule and the support surface even though the capsule is pressed against the support surface.

An aspect of the present disclosure is directed to the provision of a system according to the above described type, wherein the advantages of the known system are maintained and the disadvantages of the known system are at least partly overcome. More in particular, an aspect of the present disclosure is directed to the provision of a system for preparing a predetermined quantity of beverage wherein the risk of bypassing of the prepared beverage after passing the sheet-shaped perforate and/or porous material is minimized.

According to an aspect of the present invention, there is provided a system for preparing a predetermined quantity of beverage suitable for consumption using an extractable product, comprising: an exchangeable open capsule, and an apparatus comprising a receptacle for holding the exchangeable open capsule, and a fluid dispensing device for supplying an amount of a fluid under pressure to the exchangeable open capsule, wherein the exchangeable open capsule comprises a circumferential wall, a bottom closing the circumferential wall at a first end, and a lid closing the circumferential wall at a second end opposite the bottom, wherein the wall, bottom and lid enclose an inner space comprising the extractable product, wherein the lid comprises at least one of a flexible sheet-shaped perforate and porous material, wherein the fluid dispensing device is arranged for supplying the fluid to the extractable product through the bottom for forming the beverage, wherein the receptacle comprises a support surface, and wherein the capsule is arranged to at least partly abut against the support surface for draining the prepared beverage from the capsule through the lid and through the support surface, wherein the system comprises an outlet which, in use, is in fluid communication with the lid for draining the prepared beverage from the capsule and supplying the beverage to a container, wherein the lid comprises an impermeable outer

20184-518

2a

circumferential area and an exit area being enclosed by said impermeable outer circumferential area such that the prepared beverage is drained from the capsule through the exit area, and wherein the exit area comprises 75 to 170 openings, wherein an opening diameter is between $0,4\text{mm} \pm 0.05\text{mm}$ and $0.2\text{mm} \pm 0.05\text{mm}$.

- 5 According to a first aspect, in the above described system the lid comprises an impermeable outer circumferential area and an exit area being enclosed by said impermeable outer circumferential area such that the prepared beverage is drained from the capsule through the exit area.

- 10 By providing an impermeable outer circumferential area around an exit area intended for draining the prepared beverage from the capsule, the prepared beverage is actively forced to pass the exit area and subsequently the outlet of the system. Consequently, the risk of prepared beverage trying to pass between the lid of the capsule and the support surface of the receptacle is minimized. Thus, instead of for instance pressing the receptacle to the support surface with a higher pressing force, the system according to the present invention
- 15 may more exactly guide the prepared beverage from the capsule towards the outlet of the system.

Preferably, in some embodiments, the flexible sheet-shaped perforate and/or porous material is a flexible foil, such as

20184-518

3

a polymeric film, at least partly provided with a plurality of exit openings. Such flexible foil may for instance be a multilayer foil of polyethyleneterephthalate (PET-P) and chlorinated polypropylene (CPP) and according to further aspect of the invention comprise a first layer of PET-P
5 with a thickness of approximately 15µm and a second layer of CPP of approximately 30µm. The multilayer foil may also comprise a first layer of PET-P with a thickness of approximately 12µm and a second layer of CPP of approximately 30µm

In further elaboration of some embodiments, the plurality of exit
10 openings is provided in a centre area of the lid, wherein the impermeable outer circumferential area of the lid does not comprise any exit opening. Hence, the lid comprising the exit area and the impermeable outer circumferential area can be provided in a simple manner.

In an alternative embodiment of the invention, on a side of the lid
15 facing the support surface of the system, an additional substantially annular sealing member may be provided that forms the impermeable outer circumferential area of the lid. Such an annular sealing member can be easily attached to an outer surface of the lid after attaching the lid to the capsule. According to a further aspect of the invention, the lid and the annular sealing
20 member may be of the same material. For instance an annular sealing member of the multilayer foil as described before may be connected, for instance by means of an adhesive or sealing it, to an outer side of the lid of the multilayer foil.

In another embodiment of the invention, it is also possible that the
25 annular sealing member is of a resilient material such as a plastic, for instance PE or a rubber. The annular sealing member may be connected to a side of the lid facing the support surface of the receptacle by means of a suitable adhesive. Such a resilient sealing member can be used to advantage because upon closing of the receptacle, thus pressing the capsule against the support surface,

20184-518

4

the sealing member may be impressed a little thereby providing a tight seal between the lid and the support surface.

In order to further prevent the bypass between the support surface and the capsule it is advantageous according to some embodiments
5 if the impermeable outer circumferential area extends from the circumferential wall radially inward, preferably over a radial distance between 1mm-5mm from the circumferential wall. Such a dimension of the impermeable outer circumferential area provides sufficient prevention against bypass of the prepared beverage and at the same time provides a sufficiently
10 large exit area suitable to drain the prepared beverage from the capsule.

In further elaboration of some embodiments, the capsule preferably comprises an outwardly extending rim, wherein the lid is attached to the outwardly extending rim. Such a rim may have a radial length at a side facing the lid of approximately $0.2 \text{ mm} \pm 0.025 \text{ mm}$. Alternatively, such a rim may
15 have a radial length at a side facing the lid of approximately $4.7 \text{ mm} \pm 0.1 \text{ mm}$. The radial length can be defined as the dimension of the rim between an inner side of the circumferential wall of the capsule and the outer circumferential edge of the rim. Due to such a rim the upper part of the receptacle can easily press the capsule and thus the lid against the support surface of the receptacle
20 upon displacement of the upper part of the receptacle towards the support surface.

According to another embodiment of the invention, the exit area may comprise 75-170 openings such as 100-170 openings, preferably 90-150 openings such as 110-150, more preferably 100-125 openings. Alternatively,
25 the exit area may have approximately 145 openings. An opening diameter may be between $0.4 \text{ mm} \pm 0.05 \text{ mm}$ and $0.2 \text{ mm} \pm 0.05 \text{ mm}$, preferably approximately $0.3 \text{ mm} \pm 0.05 \text{ mm}$. Due to said openings, the prepared beverage will leave the capsule with a desired speed such that the preparation time will not be too long, for instance no more than 40 seconds, preferably no more than 30

20184-518

5

seconds. Such openings with such diameters also prevent roasted and ground coffee particles from leaving the capsule.

Optionally, the bottom of the capsule is permeable to liquid. Preferably, the bottom of the capsule is perforate and/or porous.

5 According to another aspect of the present invention, there is provided an open capsule for preparing a predetermined quantity of beverage suitable for consumption using an extractable product, comprising: a substantially rigid circumferential wall, a bottom closing the circumferential wall at a first end, and a lid comprising a flexible sheet-shaped material that is one of or both perforate and porous, the lid closing the circumferential wall at a second,
10 open, end opposite the bottom, wherein the circumferential wall, the bottom and the lid enclose an inner space comprising the extractable product, and wherein the lid comprises an impermeable outer circumferential area and an exit area being enclosed by said impermeable outer circumferential area, wherein the impermeable outer circumferential area extends from the circumferential wall radially inward, such that, in use, the prepared beverage is drained
15 from the capsule by actively forcing the prepared beverage through the exit area.

 Another aspect relates to a capsule for preparing a predetermined quantity of beverage suitable for consumption using an extractable product, comprising: a substantially rigid circumferential wall, a bottom closing the circumferential wall at a first end, and lid of a flexible sheet-shaped perforate and/or porous material closing the circumferential wall at a
20 second, open, end opposite the bottom, wherein the circumferential wall, the bottom and the lid enclose an inner space comprising the extractable product, wherein the lid comprises an impermeable outer circumferential area and an exit area being enclosed by said impermeable outer circumferential area such that, in use, the prepared beverage is drained from the capsule through the exit area, wherein the capsule may be a capsule of the above described system.
25 Another aspect relates to the use of a capsule for preparing a predetermined quantity of beverage in an apparatus of such a system.

20184-518

5a

According to another aspect of the present invention, there is provided a method for preparing a predetermined quantity of beverage suitable for consumption using an extractable product, comprising: providing an exchangeable open capsule, comprising a circumferential wall, a bottom closing the circumferential wall at a first end, and a lid closing

5 the circumferential wall at a second end opposite the bottom, wherein the wall, bottom and lid enclose an inner space comprising the extractable product, providing an apparatus comprising a receptacle for holding the exchangeable open capsule, a fluid dispensing device for supplying an amount of a fluid under pressure to the exchangeable open capsule, and an outlet which, in use, is in fluid communication with the capsule for draining the prepared beverage from the capsule

10 and supplying the beverage to a container, wherein the receptacle comprises a support surface, and wherein the capsule at least partly abuts against the support surface for draining the prepared beverage from the capsule through the lid and through the support surface, wherein the lid comprises at least one of a flexible sheet-shaped perforate and porous material and the apparatus comprises an outlet which is in fluid communication with the lid for draining the

15 prepared beverage from the capsule and supplying the beverage to a container, wherein the lid comprises an impermeable outer circumferential area and an exit area being enclosed by said impermeable outer circumferential area such that the prepared beverage is drained from the capsule through the exit area, wherein the exit area comprises 75 to 170 openings, wherein an opening diameter is between $0,4\text{mm} \pm 0.05\text{mm}$ and $0.2\text{mm} \pm 0.05\text{mm}$, and wherein the method

20 further comprises supplying the fluid to the extractable product for preparing the beverage.

Another aspect relates to a method for preparing a predetermined quantity of beverage suitable for consumption using an extractable product, comprising:

providing an exchangeable capsule, comprising a circumferential wall, a bottom closing the circumferential wall at a first end, and a lid closing the circumferential

25 wall at a second end opposite the bottom, wherein the wall, bottom and lid enclose an inner space comprising the extractable product,

providing an apparatus comprising a receptacle for holding the exchangeable capsule, a fluid dispensing device for supplying an amount of a fluid, such as water, under pressure to the exchangeable capsule, and an outlet which, in use, is in fluid communication

20184-518

5b

with the capsule for draining the prepared beverage from the capsule and supplying the beverage to a container such as a cup,

wherein the receptacle comprises a support surface, and wherein the capsule at least partly abuts against the support surface for draining the prepared beverage from the capsule through the lid and through the support surface,

5

wherein the lid comprises a flexible sheet-shaped perforate and/or porous material and the apparatus comprises an outlet which is in fluid communication with the lid for draining the prepared beverage from the capsule and supplying the beverage to a container such as a cup,

20184-518

6

wherein the lid comprises an impermeable outer circumferential area and an exit area being enclosed by said impermeable outer circumferential area such that the prepared beverage is drained from the capsule through the exit area,

5 wherein the method further comprises supplying the fluid to the extractable product for preparing the beverage.

Such a capsule and such a method provide similar advantages and effects as described with the system.

10 Embodiments of the invention will now be further elucidated by means of, non-limiting, examples referring to the drawing, in which

Fig. 1 shows a system for preparing a beverage according to a first embodiment of the invention;

15 Fig. 2 shows a second embodiment of a system according to the invention;

Fig. 3 shows a partial schematic cross sectional view of a capsule according to an embodiment of the invention; and

Fig. 4 shows a schematic cross sectional view of a second embodiment of a capsule according to the invention.

20

It is noted that identical or corresponding elements in the different drawings are indicated with identical or corresponding reference numerals.

Fig 1 shows a system 1 for preparing a predetermined quantity of
25 beverage suitable for consumption using an extractable product according to a first embodiment of the invention. The system 1 comprises an apparatus 4 comprising an exchangeable open capsule 2. The apparatus 4 comprises a receptacle 3 for holding the exchangeable open capsule 2. Commonly, the receptacle 3 has a shape at least partly complementary to the shape of the
30 capsule 2. The apparatus 4 further comprises a fluid dispensing device 5 for

supplying an amount of a fluid, such as water, under a pressure, of e.g. 9 bars, to the exchangeable capsule 2.

The exchangeable open capsule 2, as provided in the receptacle 3 of the apparatus 4, comprises a substantially rigid circumferential wall 6, a
5 bottom 7 closing the circumferential wall 6 at a first end 8, and a lid 9 closing the circumferential wall 6 at a second end 10 opposite the bottom 7. The circumferential wall 6, the bottom 7 and the lid 9 enclose an inner space 11 comprising the extractable product. Preferably, the extractable product comprises an amount of roasted and ground coffee. In this example, the
10 exchangeable capsule 2 comprises an amount of extractable product, e.g. approximately 5.0-6.5 grams of roasted and ground coffee, preferably of approximately 5.2.grams ± 0.15 grams, suitable for preparing a single portion of the beverage, preferably a single cup of the beverage, e.g. from 30-200ml of the prepared beverage.

15 In the shown embodiment of the system 1, the bottom 7, more specifically an entrance area 15 thereof, of the capsule 2 is adapted to, in use, being pierced by bottom piercing means 12 to provide a pierced opening 13 in the bottom 7. In use, fluid from the fluid dispensing device 5 is provided via bore 14 through the pierced opening 13 in the inner space 11 of the capsule.

20 According to the invention, the lid 9 of the capsule 2 comprises a flexible sheet-shaped perforate and/or porous material, in this embodiment a flexible foil such as a polymeric film with a plurality of openings 23 through which the beverage can drain from the capsule 2. The flexible foil may be a multilayer foil of a polyethyleneteraphtalate (PET-P) layer of approximately
25 15 μ m and a chlorinated polypropylene (CPP) layer of approximately 30 μ m. Alternatively, The flexible foil may be a multilayer foil of a PET-P layer of approximately 12 μ m and a chlorinated CPP layer of approximately 30 μ m. Furthermore, the lid comprises an impermeable outer circumferential area 30 that encloses an exit area 32. The exit area 32 is adapted to drain prepared
30 beverage from the capsule 2 to the outlet 26 of the system 1. Such a

construction of the lid 9 prevents prepared beverage from bypassing the outlet 26 of the system (indicated by arrows 40) by guiding the prepared beverage through the exit area 32 and subsequently through the outlet 26.

5 The impermeable outer circumferential area 30 of the lid 9 is formed by an additional substantially annular sealing member 31 that is attached to the side of the lid 9 facing the support surface 3b, for instance by gluing, welding and the like. In the shown embodiment, the annular sealing member is of a resilient material such as a plastic, for instance PE or a rubber. The annular sealing member 31 extends from the circumferential wall 6 radially inward, preferably over a radial distance L (see Figure 3) between 1mm-5mm from the circumferential wall 6. The capsule 2 comprises an outwardly extending rim 24 to which the lid 9 is attached, for instance by gluing, welding and the like. A radial length l of the rim 24 (see Figures 3 and 4) at a side facing the lid 9 is approximately $4.7 \text{ mm} \pm 0.1 \text{ mm}$.

15 The apparatus 4 further comprises lid piercing means 22, here embodied as protrusions, intended for piercing the lid of a prior art closed capsule (not shown). According to the invention, the lid 9 is sufficiently strong and sufficiently stiff not to be pierced by the lid piercing means 22 of the system 1 under the influence of the pressure inside the capsule 2. Under influence of the pressure inside the capsule 2, lid 9 may deform against the lid piercing means 22, but it may not tear, rupture or be pierced by the lid piercing means, the lid 9 may stay intact under influence of the pressure. The bottom piercing means 12 and the upper part 3a of the receptacle as shown in Figure 1 are in an extended position thereby pressing the capsule 2 against the support surface 3b of the receptacle 3.

The system 1 as shown in Figure 1 is operated as follows for preparing a cup of coffee, wherein the extractable product is roasted and ground coffee.

The capsule 2 is placed in the receptacle 3. The upper part 3a of the receptacle 3 is extended towards the support surface 3b of the receptacle 3. Due to the displacement of the upper part 3a of the receptacle, the extended bottom piercing means 12 are activated to pierce the bottom 7 of the capsule 2 in order to provide an opening 13 in the bottom 7 as shown in Figure 1. Upon displacement of the upper part 3a of the receptacle, the rim 24 of the capsule 2 and thus also the lid 9 connected thereto is pressed against the support surface 3b of the receptacle 3 of the apparatus 4. Then the fluid, here hot water under pressure, is supplied to the extractable product in the inner space 11 through the opening 13 via the bore 14 provided in the piercing means 12. The water will wet the coffee grounds and extract the desired substances to form the coffee beverage. The prepared coffee will drain from the capsule 2 through the exit area 32 of the lid 9 being guided by means of the impermeable outer circumferential area 30 towards openings 26 of the support surface 24, and may be supplied to a container such as a cup (not shown).

In Figure 2, a system 1 according to the invention is shown. For the sake of clarity, only the elements that differ from the system 1 as shown and described with Figure 1 will be described here in detail.

The open capsule 2 comprises, according to the second embodiment of the invention, an entrance filter 15 in the bottom 7 of the capsule 2. The entrance filter 15 comprises an amount of openings 17 for supplying fluid from the fluid dispensing device 5 of the apparatus 4 to the inner space 11 of the capsule. Thus, the fluid is supplied to the extractable product via the plurality of entrance openings, which causes the extractable product to be wetted over substantially the entire cross section of the capsule 2. Hence, a very homogeneous supply of fluid to the extractable product is obtained. It will be appreciated that thus the bottom 7 is perforate and hence permeable to liquid. Alternatively, the bottom might be porous.

The open capsule has a height h_1 of approximately $23.7 \text{ mm} \pm 0.2 \text{ mm}$ seen in an axial direction. Consequently, the entrance filter 15 in the bottom 7 is not pierced by the bottom piercing means 12 of the system 1 of the invention. The thickness t of the bottom 7 may be approximately $0.7 \text{ mm} \pm 0.05$ mm.

During preparing of the beverage, the fluid from the fluid dispensing device 5 enters the cavity 44 provided between the receptacle 3 and the open capsule 2 through the bore 14. The entrance filter 15 is adapted to drain fluid from the cavity 44 to the inner space 11 of the open capsule 2 for extracting desired substances from the extractable product.

Thus, more in general, in the example of Figure 1, the bottom 7 comprises an entrance area 16, formed by the entrance filter 15 which is positioned at a distance from the bottom piercing means 12. The apparatus 4 is arranged for bringing the fluid dispensing device 5 in fluid connection with the entrance area for supplying the fluid to the extractable product for preparing the beverage. In another (not shown) embodiment of the invention, the entrance filter 15 may be formed by a filtering paper, a flexible foil or the like material.

The circumferential wall 6 of the capsule 2 shown in Figure 2 may e.g. comprise a plastics material and may be formed by e.g. injection moulding, vacuum-forming, thermoforming or the like. Also, in the example of Figure 2, the circumferential wall 10 is frusto-conical, but other shapes are also possible. For example, the circumferential wall may be cylindrical or pyramidal. In the capsule 2 according to the system 1 of the invention, the impermeable outer circumferential area 30 is part of the lid 9 of the flexible foil which part does not comprise any exit opening. The impermeable outer circumferential area 30 may be formed by temporarily melting part of the perforated lid 9 such that the openings 23 that are located near the circumferential wall 6 closed. The impermeable outer circumferential area 30 may instead be provided by only providing openings 23 in the exit area 32 of the lid. Thus, the impermeable

20184-518

11

outer circumferential area 30 is provided in an easy manner. This integrated impermeable outer circumferential area 30 may comprise similar dimensions and materials as the annular sealing member 31 as described with Figure 1.

5 In Figures 3 and 4, two further embodiments of the capsule 2 according to the invention are shown. Said capsules 2 can be used in a system 1 according to the invention. For the sake of clarity, only the elements that differ from the system 1 as shown and described with Figures 1 and 2 are described here in detail. The capsule of Figure 3 comprises an entrance filter
10 15 as described with the capsule 2 as shown in Figure 2 and an impermeable outer circumferential sealing member 30 as described with the capsule 2 as shown in Figure 1. The capsule of Figure 4 comprises a bottom 7 intended to be pierced upon use as described with the capsule 2 as shown in Figure 1 and an integrated impermeable outer circumferential area 30 as described with the
15 capsule 2 as shown in Figure 2.

 In the foregoing specification, the invention has been described with reference to specific examples of embodiments of the invention. It will, however, be evident that various modifications and changes may be made
20 therein without departing from the broader scope of the invention as set forth in the appended claims.

 It is for instance possible that the entrance area of the capsule comprises different kinds of entrance filters. The capsule and parts thereof may be made of various materials, or various combinations of various
25 materials. Also, the capsule may have various shapes. For example, the circumferential wall of the capsule may have any shape such as cylindrical, frustoconical or polygonal, such as hexagonal or octagonal. Also the bottom and the lid may have various shapes, including non flat shapes. Furthermore the receptacle may have different constructions as long as the upper part of the
30 receptacle can be displaced to and retracted from the support surface such that

the capsule can be pressed against the support surface and subsequently be released. The apparatus of the system can also have different support surfaces, for instance without protrusion but with a substantially flat surface or with surface having a three dimensional pattern or the like. The apparatus
5 furthermore can have different fluid dispensing device adapted to supply fluid to the inner space of the capsule in different ways.

However, other modifications, variations and alternatives are also possible. The specifications, drawings and examples are, accordingly, to be
10 regarded in an illustrative rather than in a restrictive sense.

In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. The word 'comprising' does not exclude the presence of other features or steps then those listed in a claim.
Furthermore, the words 'a' and 'an' shall not be construed as limited to 'only
15 one', but instead are used to mean 'at least one', and do not exclude a plurality. The mere fact that certain measures are recited in mutually different claims does not indicate that a combination of these measures cannot be used to advantage.

20184-518

13

CLAIMS:

1. A system for preparing a predetermined quantity of beverage suitable for consumption using an extractable product, comprising:

an exchangeable open capsule, and

5 an apparatus comprising a receptacle for holding the exchangeable open capsule, and a fluid dispensing device for supplying an amount of a fluid under pressure to the exchangeable open capsule,

wherein the exchangeable open capsule comprises a circumferential wall, a bottom closing the circumferential wall at a first end, and a lid closing the circumferential
10 wall at a second end opposite the bottom, wherein the wall, bottom and lid enclose an inner space comprising the extractable product, wherein the lid comprises at least one of a flexible sheet-shaped perforate and porous material, wherein

the fluid dispensing device is arranged for supplying the fluid to the extractable product through the bottom for forming the beverage,

15 wherein the receptacle comprises a support surface, and wherein the capsule is arranged to at least partly abut against the support surface for draining the prepared beverage from the capsule through the lid and through the support surface, wherein

the system comprises an outlet which, in use, is in fluid communication with the lid for draining the prepared beverage from the capsule and supplying the beverage to a
20 container,

wherein the lid comprises an impermeable outer circumferential area and an exit area being enclosed by said impermeable outer circumferential area such that the prepared beverage is drained from the capsule through the exit area, and

wherein the exit area comprises 75 to 170 openings, wherein an opening
25 diameter is between $0,4\text{mm} \pm 0.05\text{mm}$ and $0.2\text{mm} \pm 0.05\text{mm}$.

20184-518

14

2. A system according to claim 1, wherein the at least one of flexible sheet-shaped perforate and porous material is a flexible foil at least partly provided with a plurality of exit openings.
3. A system according to claim 2, wherein the flexible foil is a multilayer foil of
5 polyethyleneterephthalate (PET-P) and chlorinated polypropylene (CPP)
4. A system according claim 3, wherein the foil comprises a first layer of polyethyleneterephthalat (PET-P) with a thickness of 15µm and a second layer of chlorinated polypropylene (CPP) of 30µm.
5. A system according to any one of claim 2 to 4, wherein the plurality of exit
10 openings is provided in a centre area of the lid, wherein the impermeable outer circumferential area of the lid is free of any exit opening.
6. A system according to any one of claim 2 to 4, wherein on a side of the lid facing the support surface of the system an additional annular sealing member is provided that forms the impermeable outer circumferential area of the lid.
- 15 7. A system according to claim 6, wherein the lid and the annular sealing member are of the same material.
8. A system according to claim 6, wherein the annular sealing member is of a resilient material.
9. A system according to any one of claims 1 to 8, wherein (1) the impermeable
20 outer circumferential area extends from the circumferential wall radially inward, or (2) the impermeable outer circumferential area extends from the circumferential wall radially inward over a radial distance between 1mm-5mm from the circumferential wall.
10. A system according to any one of claims 1 to 9, wherein the capsule comprises an outwardly extending rim, wherein the lid is attached to the outwardly extending rim.

20184-518

15

11. A system according to claim 10, wherein a radial length of the outwardly extending rim at a side facing the lid is $4.7 \text{ mm} \pm 0.1 \text{ mm}$.

12. A system according to any one of claims 1 to 11, wherein the apparatus of the system comprises lid piercing means, wherein the lid of the open capsule is sufficiently strong
5 and sufficiently stiff not to be pierced by the lid piercing means of the system under the influence of the pressure inside the capsule.

13. A system according to any one of claims 1 to 12, wherein the bottom of the capsule is permeable to liquid.

14. A system according to claim 12, wherein the bottom of the capsule is at least
10 one of perforate and porous.

15. A system according to any one of claims 1 to 14, wherein the apparatus of the system comprises bottom piercing means, wherein the bottom of the open capsule comprises an entrance area formed by an entrance filter which is positioned at a distance from the bottom piercing means.

15 16. A system according to any one of claims 1 to 15, wherein the exit area comprises 90 to 150 openings.

17. A system according to claim 16, wherein the exit area comprises 100 to 125 openings.

18. A system according to any one of claims 1 to 17, wherein the opening diameter
20 is $0.3 \text{ mm} \pm 0.05 \text{ mm}$.

19. A method for preparing a predetermined quantity of beverage suitable for consumption using an extractable product, comprising:

providing an exchangeable open capsule, comprising a circumferential wall, a bottom closing the circumferential wall at a first end, and a lid closing the circumferential

20184-518

16

wall at a second end opposite the bottom, wherein the wall, bottom and lid enclose an inner space comprising the extractable product,

providing an apparatus comprising a receptacle for holding the exchangeable open capsule, a fluid dispensing device for supplying an amount of a fluid under pressure to the exchangeable open capsule, and an outlet which, in use, is in fluid communication with the capsule for draining the prepared beverage from the capsule and supplying the beverage to a container,

wherein the receptacle comprises a support surface, and wherein the capsule at least partly abuts against the support surface for draining the prepared beverage from the capsule through the lid and through the support surface,

wherein the lid comprises at least one of a flexible sheet-shaped perforate and porous material and the apparatus comprises an outlet which is in fluid communication with the lid for draining the prepared beverage from the capsule and supplying the beverage to a container,

wherein the lid comprises an impermeable outer circumferential area and an exit area being enclosed by said impermeable outer circumferential area such that the prepared beverage is drained from the capsule through the exit area,

wherein the exit area comprises 75 to 170 openings, wherein an opening diameter is between $0.4\text{mm} \pm 0.05\text{mm}$ and $0.2\text{mm} \pm 0.05\text{mm}$, and

wherein the method further comprises supplying the fluid to the extractable product for preparing the beverage.

20. The method according to claim 19, using a system according to any one of claims 1 to 18.

21. The method according to claim 19 or 20, wherein the exit area comprises 90 to 150 openings.

20184-518

17

22. The method according to claim 21, wherein the exit area comprises 100 to 125 openings.

23. The method according to claim 19, 20, 21 or 22, wherein the opening diameter is $0,3 \text{ mm} \pm 0.05 \text{ mm}$.

5 24. An open capsule for preparing a predetermined quantity of beverage suitable for consumption using an extractable product, comprising:

a substantially rigid circumferential wall,

a bottom closing the circumferential wall at a first end, and

10 a lid comprising a flexible sheet-shaped material that is one of or both perforate and porous, the lid closing the circumferential wall at a second, open, end opposite the bottom,

wherein the circumferential wall, the bottom and the lid enclose an inner space comprising the extractable product, and

15 wherein the lid comprises an impermeable outer circumferential area and an exit area being enclosed by said impermeable outer circumferential area, wherein the impermeable outer circumferential area extends from the circumferential wall radially inward, such that, in use, the prepared beverage is drained from the capsule by actively forcing the prepared beverage through the exit area.

20 25. An open capsule according to claim 24, wherein the flexible sheet-shaped material is a flexible foil, at least partly provided with a plurality of exit openings.

26. An open capsule according to claim 25, wherein the flexible foil comprises a polymeric film.

27. An open capsule according to claim 25 or 26, wherein the flexible foil is a multilayer foil.

20184-518

18

28. An open capsule according to claim 25, 26 or 27, wherein the plurality of exit openings is provided in a centre area of the lid, and wherein the impermeable outer circumferential area of the lid is free of any exit opening.

29. An open capsule according to claim 28, wherein the flexible foil forming the lid is a perforate material, and wherein the impermeable outer circumferential area is formed by temporarily melting the perforate foil material such that the openings that are located near the circumferential wall are closed.

30. An open capsule according to any one of claims 24 to 29, wherein the lid is sufficiently strong and sufficiently stiff to resist, in use, piercing by lid piercing means of an apparatus.

31. An open capsule according to any one of claim 24 to 30, wherein the capsule in use is arranged to at least partly abut against a support surface of an apparatus for draining the prepared beverage from the capsule through the lid and through the support surface, and wherein on a side of the lid, adapted in use to face a support surface of a receptacle of an apparatus, an additional substantially annular sealing member is provided that forms the impermeable outer circumferential area of the lid.

32. An open capsule according to claim 31, wherein the lid and the annular sealing member are of the same material.

33. An open capsule according to claim 31, wherein the annular sealing member is of a resilient material.

34. An open capsule according to claim 33, wherein the resilient material comprises plastic or rubber.

35. An open capsule according to claim 34, wherein the plastic comprises PE.

20184-518

19

36. An open capsule according to any one of claims 24 to 35, wherein the impermeable outer circumferential area extends over a radial distance between 1 mm to 5 mm from the circumferential wall.
- 5 37. An open capsule according to any one of claims 24 to 36, further comprising an outwardly extending rim, wherein the lid is attached to the outwardly extending rim.
38. An open capsule according to claim 37, wherein a radial length of the outwardly extending rim at a side facing the lid is $4.7 \text{ mm} \pm 0.1 \text{ mm}$.
39. An open capsule according to any one of claims 24 to 38, wherein the bottom is permeable to liquid.
- 10 40. An open capsule according to claim 39, wherein the bottom of the capsule is perforate and/or porous.
41. An open capsule according to any one of claims 24 to 40, wherein the exit area comprises 75 to 170 openings, wherein an opening diameter is between $0.4 \text{ mm} \pm 0.05 \text{ mm}$ and $0.2 \text{ mm} \pm 0.05 \text{ mm}$.
- 15 42. An open capsule according to claim 41, comprising 90 to 150 openings.
43. An open capsule according to claim 41, comprising 100 to 125 openings.
44. An open capsule according to claim 41, 42 or 43, wherein the opening diameter is $0.3 \text{ mm} \pm 0.05 \text{ mm}$.

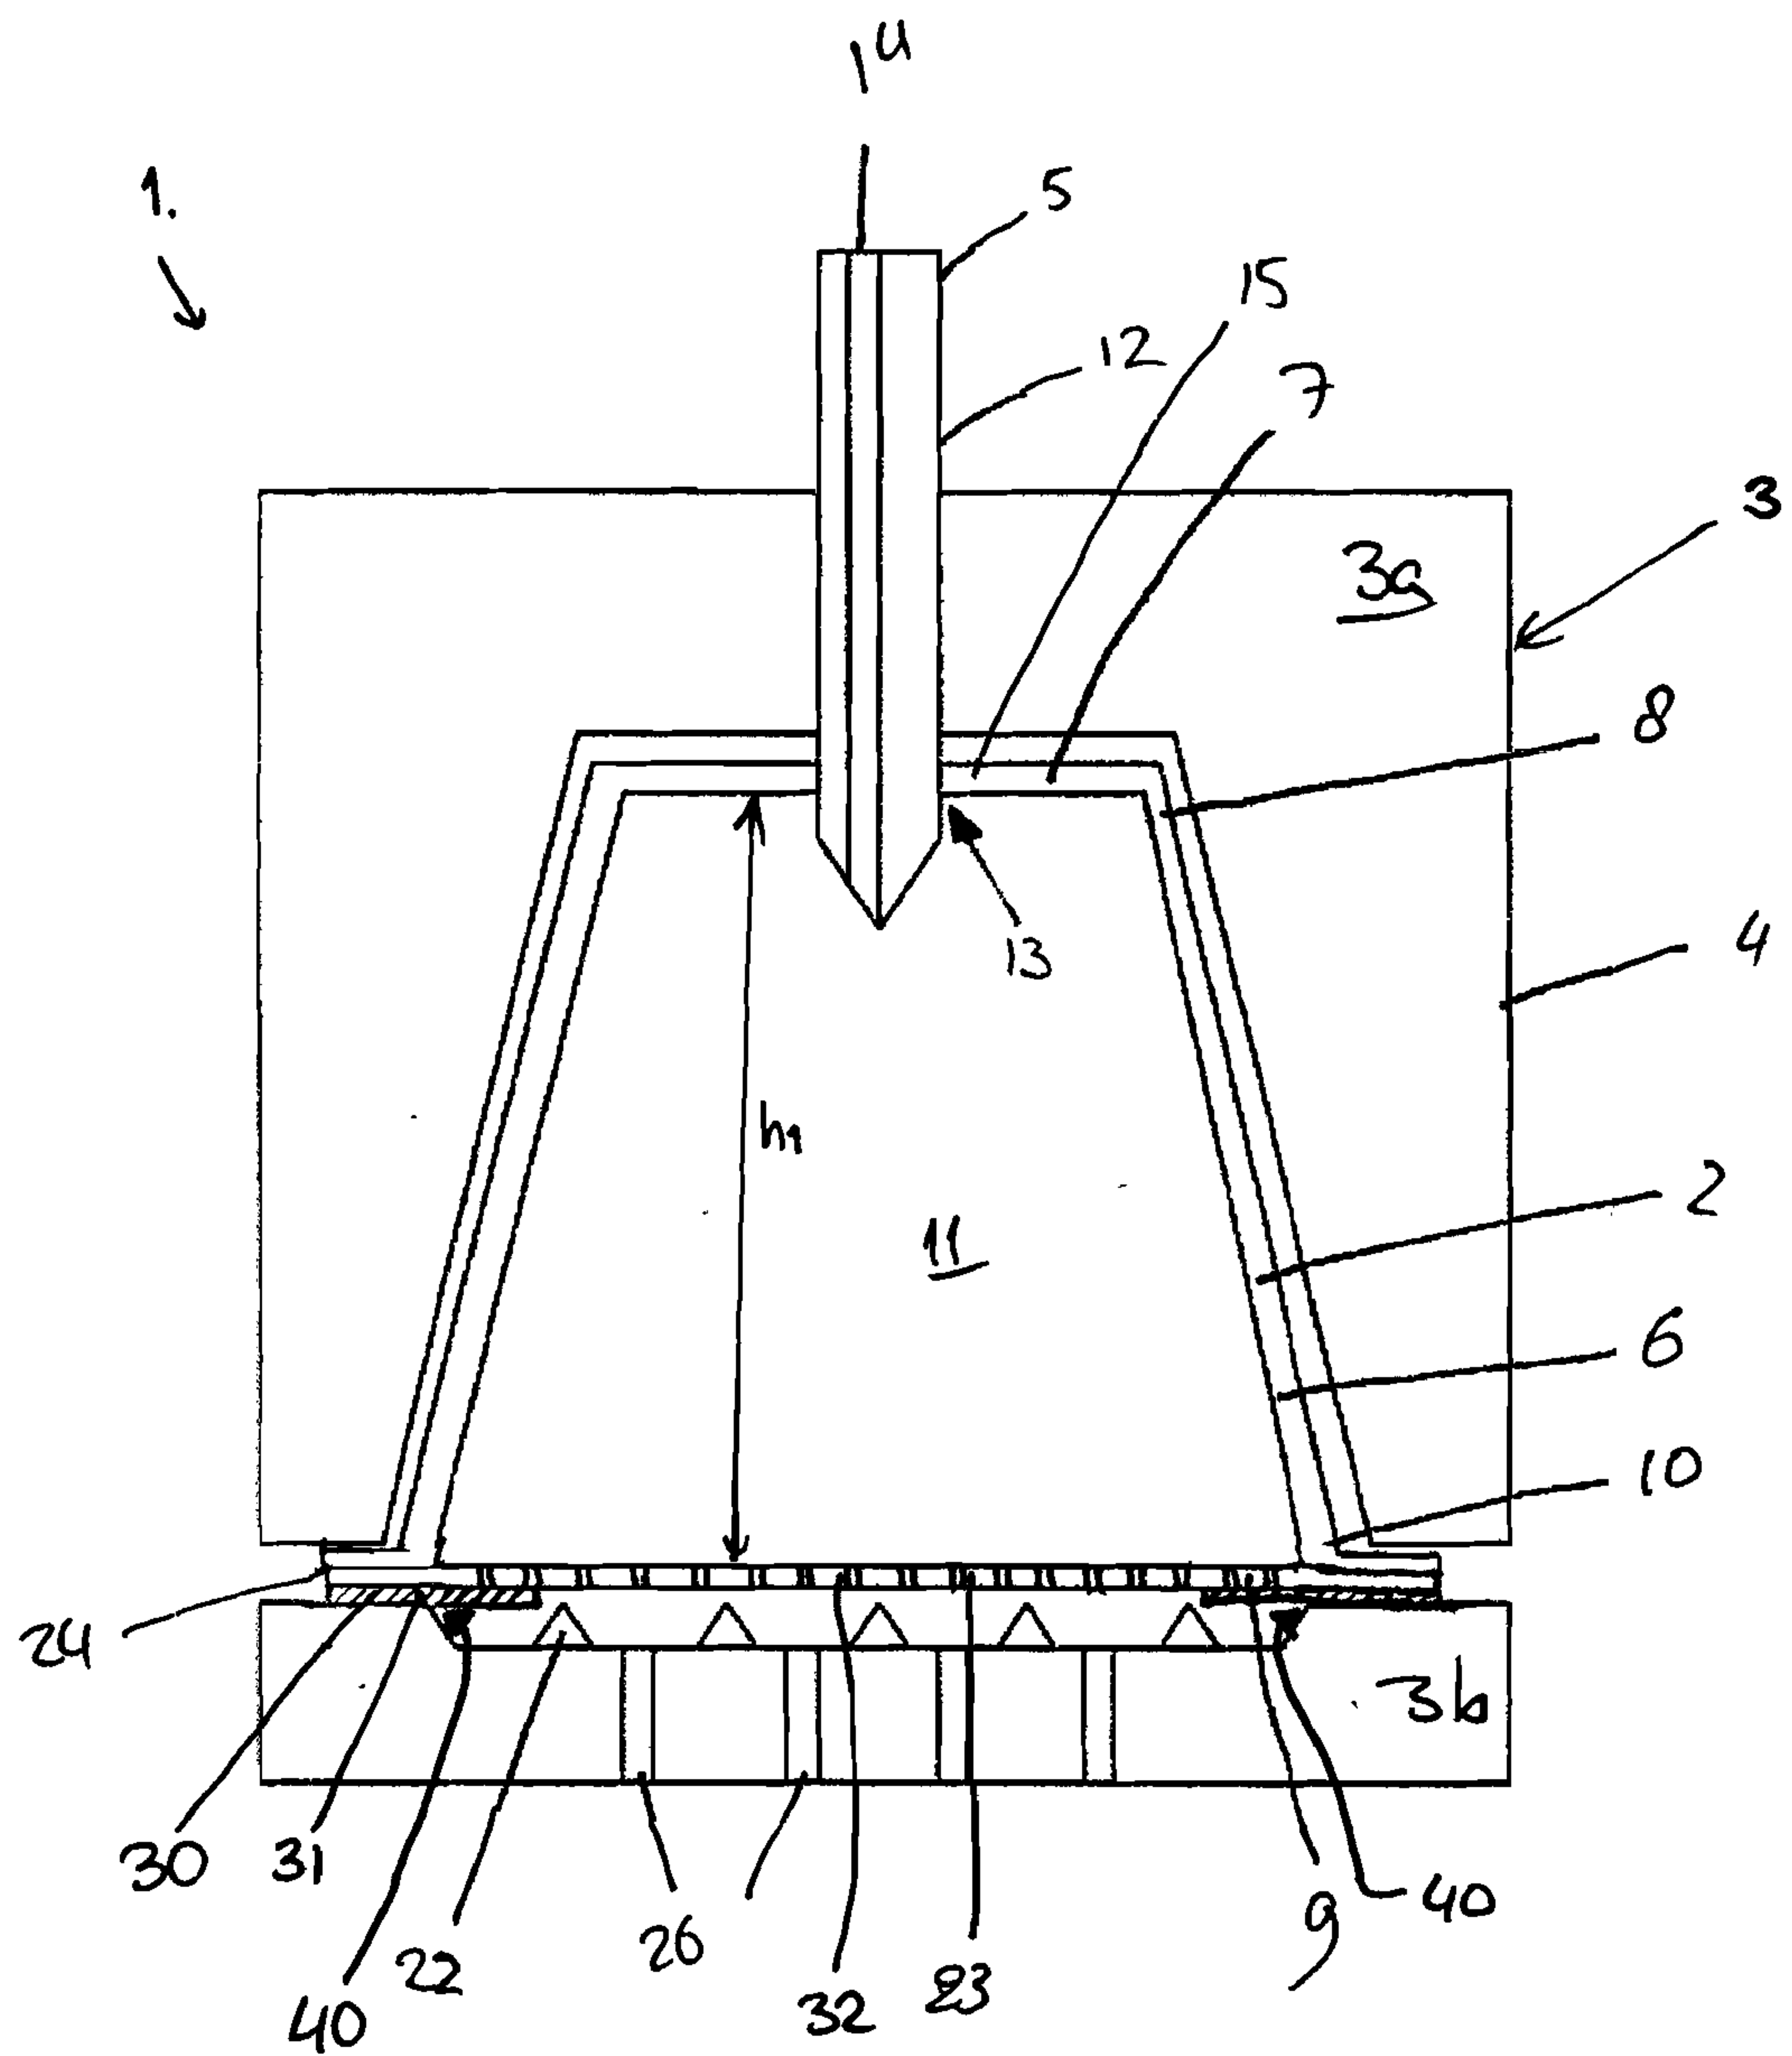


Fig. 1.

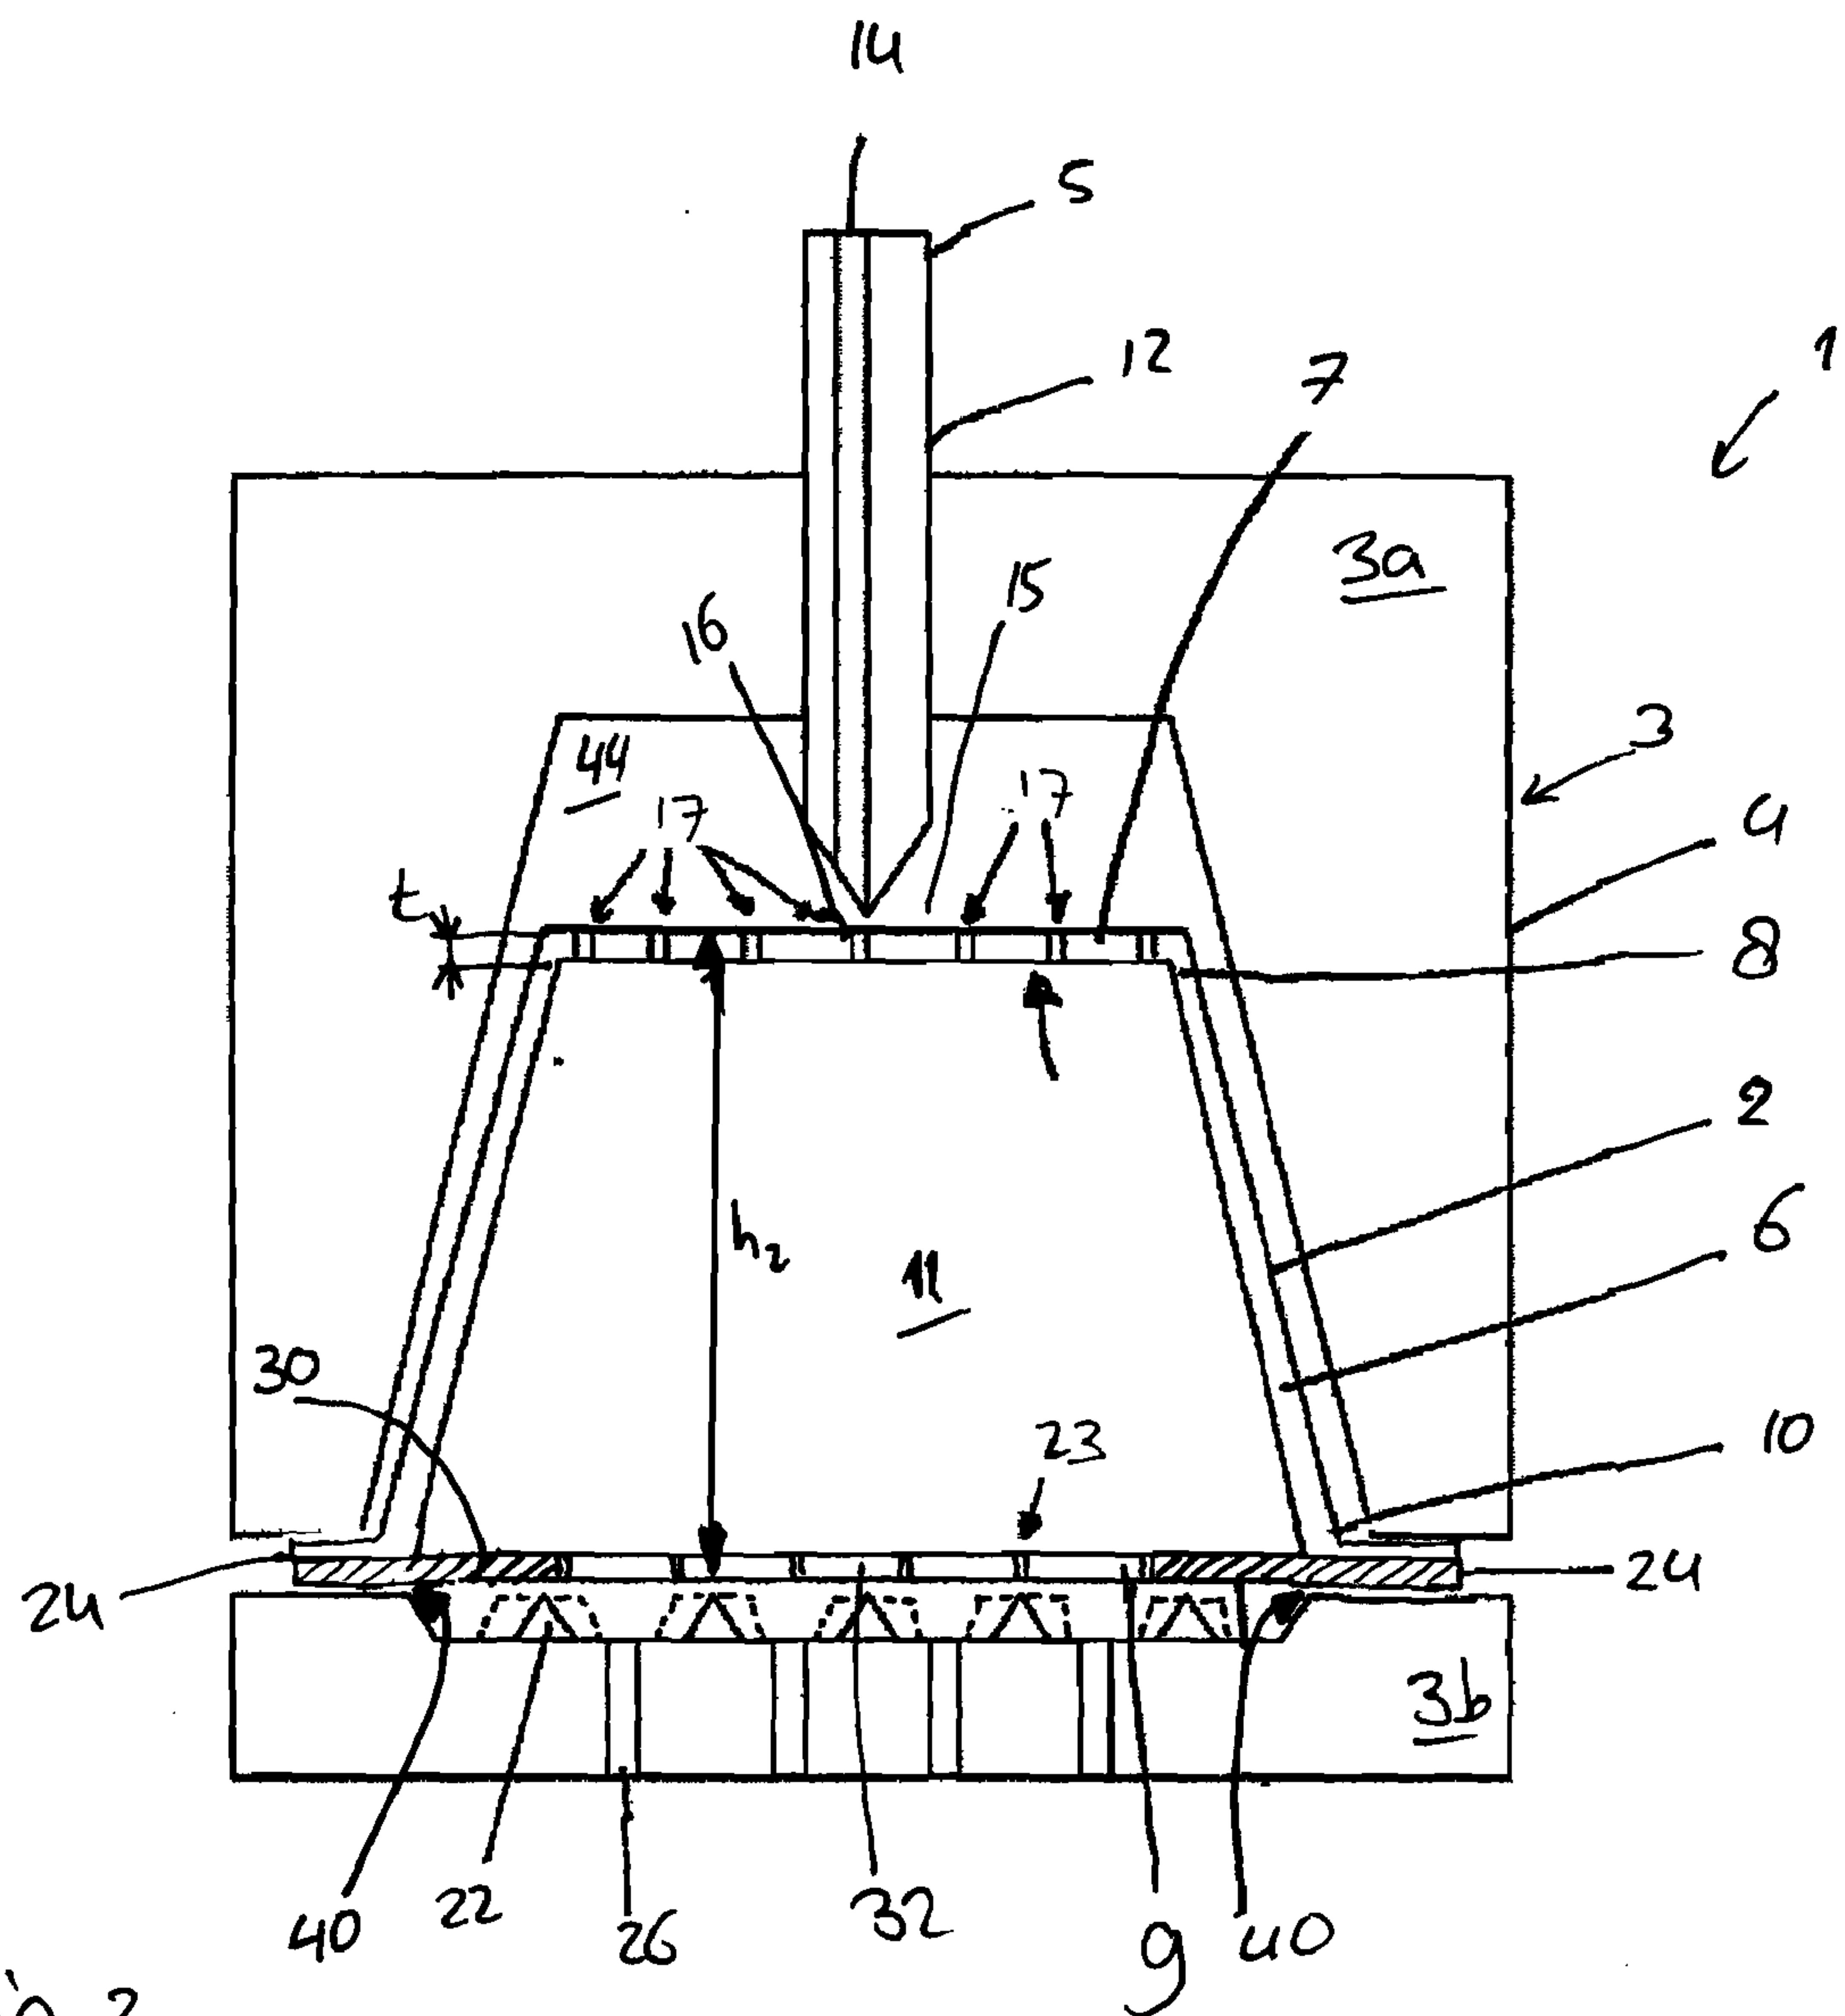


Fig. 2.

