



(43) International Publication Date  
24 November 2016 (24.11.2016)

- (51) International Patent Classification:  
*F25D 3/08* (2006.01) *B32B 5/14* (2006.01)
- (21) International Application Number:  
PCT/US2016/033294
- (22) International Filing Date:  
19 May 2016 (19.05.2016)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
62/164,416 20 May 2015 (20.05.2015) US  
62/296,763 18 February 2016 (18.02.2016) US
- (71) Applicant: **TEMPERPAK TECHNOLOGIES INC.**  
[US/US]; 3807 Castlewood Rd., Richmond, Virginia  
23234 (US).
- (72) Inventors: **MCGOFF, James**; 10911 Hoyle Avenue, Silver Spring, Maryland 20901 (US). **VINCENT, Charles**; 1486 Des Mesanges, St. Bruno De Montarville, Québec J3V6E4 (CA). **POWERS, Brian**; 8308 Osage Terrace, Adelphi, Maryland 20783 (US). **BOEHLING, Richard**; 4500 Sarellen Road, Henrico, Virginia 23231 (US).
- (74) Agents: **ROWE, Derrick** et al.; Wilson Sonsini Goodrich & Rosati, 650 Page Mill Road, Palo Alto, California 94304 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: THERMAL INSULATION LINERS

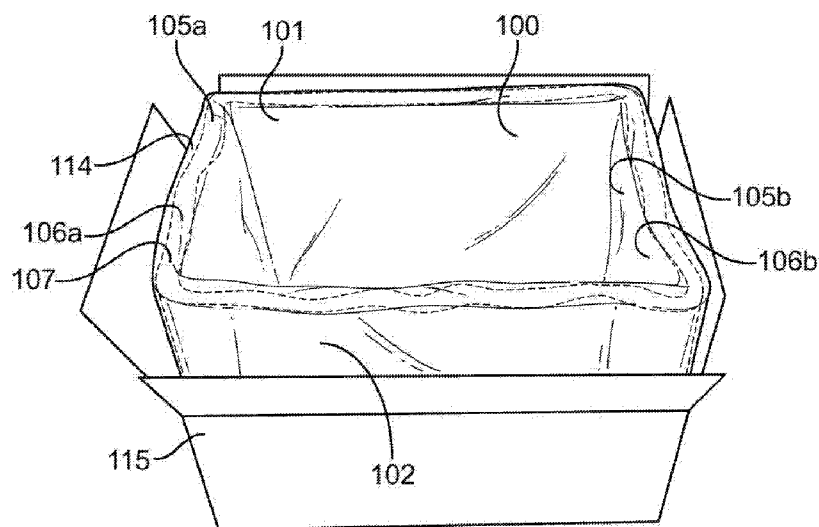


FIG. 7

(57) Abstract: Provided herein are products, methods, and kits, for use in regulating the temperature of an object. The present invention relates to thermal insulating liners for regulating the temperature of perishable goods or temperature sensitive products. The thermal insulating liners generally may be dimensioned to fit within a container. The thermal insulating liners may be quickly collapsed and reconstructed to improve stackability and diminish the amount of space required to store the thermal insulating liners prior to use.





---

**Published:**

- *without international search report and to be republished  
upon receipt of that report (Rule 48.2(g))*

## THERMAL INSULATION LINERS

### CROSS-REFERENCE

[001] This application claims the benefit of U.S. Provisional Patent Application Nos. 62/296,763, filed on February 18, 2016, and 62/164,416 filed on May 20, 2015 which are herein incorporated by reference in their entirety.

### BACKGROUND

[002] A multitude of industries produce and transport goods that are temperature sensitive. Such industries include but are not limited to the food industry, confectioneries, meat and seafood industry, medical diagnostics industry, pharmaceutical industry, and industrial goods industry. These goods are generally packaged at the plant where they are produced and prepared for shipping to customers or forwarded into a distribution channel. Containers such as boxes, steel drums, and wooden crates, are widely utilized for the packaging and transport of temperature sensitive goods. Additionally, a very effective and commonly utilized packaging material for the transport of temperature sensitive goods is polyurethane foam and/or polystyrene foam, such as expanded polystyrene ("EPS") and extruded polystyrene ("XPS") such as STYROFOAM®. Ideally, it would be desirable to provide insulation systems which have reliable thermal performance over extended time periods, are leak-proof, can be shipped and stored in a manner requiring limited space, and are fabricated from cost-competitive, environmentally-friendly materials in a cost-effective manner.

### SUMMARY OF THE DISCLOSURE

[003] Novel thermal insulating liners are presented. The thermal insulating liner may comprise an insulating layer and a barrier. The insulating layer may comprise a layer of flexible fibrous material. The layer of flexible fibrous material may comprise natural fibers and may be configured to form a cavity. The insulating layer may be compostable or biodegradable, made from recycled content, or recyclable. The thermal insulating liner may comprise 100% recycled materials. Flexible fibrous material may comprise seed, bast, animal, or synthetic fibers. The barrier may cover an inner surface of the cavity. The thermal insulating liner may have a thermal conductivity ranging from about 0.01 W/mK to about 0.05 W/mK. The thermal insulating liner may have a thermal conductivity ranging from about 0.01 W/mK to about 0.1 W/mK. The fibrous material may comprise nonwoven fibers and/or woven fibers. The insulating layer may comprise a single continuous layer of fibrous material. The insulating layer may comprise multiple discontinuous layers of fibrous material. The fibrous material may be produced by one or more of: needling, spunbonding, melt blowing, bonded carded, thermal bonding, garnett processed, or wet laid. The natural fiber may comprise plant fibers such as jute fibers. The natural fiber may comprise animal fibers such as wool. Synthetic fiber may comprise recycled plastics such as PET fibers. The fibrous material may comprise post-consumer recycled fibers and/or pre-consumer recycled fiber. The insulating layer may have a thickness of at least about 0.2 cm, for example, about 2.5 cm. The barrier may have a thickness ranging from about 1 to about 5 MIL. The barrier may have a thickness ranging from

about 1 to about 2 MIL. The barrier may be flexible or rigid. The barrier may be transparent and/or hydrophobic. The barrier may be made of a variety of materials. The barrier may comprise paper such as kraft paper. The barrier may comprise polyethylene. The barrier may comprise recycled materials such as post-consumer recycled materials and/or pre-consumer recycled materials. The barrier may comprise a biodegradable, recyclable or compostable polymer. The barrier may comprise a copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The barrier may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a polyhydroxyalkanoate copolymer. The barrier may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The barrier may comprise a biodegradable polylactic acid. The barrier may be a moisture resistant barrier. The barrier may be an oxygen barrier. The barrier may comprise a wax. The wax may be at least one of carnauba, candelilla, beeswax, or paraffin. In some embodiments, the barrier described herein can be coated with a biodegradable polymer, copolymer or blends thereof. In some embodiments, the coating can comprise a biodegradable copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The coating may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a polyhydroxyalkanoate copolymer. The coating may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The coating may comprise a biodegradable polylactic acid. In some embodiments, the coating can be moisture resistant. In some embodiments, the coating can be impermeable to oxygen. In some embodiments, the coating can comprise a wax. In some embodiments, the coating can comprise carnauba, candelilla, beeswax, or paraffin. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be bonded by a binder. In some embodiments, a bonding agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner can be closed via an adhesive. In some embodiments, an adhesive may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive

may be a sealant when heated or chilled. In some embodiments, a thermal insulating liner may comprise one or more backing.

[004] Disclosed herein are thermal insulating liners. The thermal insulating liner may comprise an insulating layer and a barrier. The insulating layer may comprise a layer of flexible fibrous material. The layer of flexible fibrous material may comprise needled fibers. The layer of flexible fibrous material may be configured to form a cavity. The insulating layer may be compostable or biodegradable. The thermal insulating liner may comprise 100% recycled materials. Flexible fibrous material may comprise bast fibers. The barrier may comprise a flexible material. The flexible material may cover an inner surface of the cavity. The barrier may have a thickness ranging from about 1 to about 5 MIL. The barrier may have a thickness ranging from about 1 to about 2 MIL. The barrier may comprise a biodegradable polymer. The barrier may comprise a copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The barrier may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a polyhydroxyalkanoate copolymer. The barrier may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The barrier may comprise a biodegradable polylactic acid. The barrier may be a moisture resistant barrier. The barrier may be an oxygen barrier. The barrier may comprise a wax. The wax may be at least one of carnauba, candelilla, beeswax, or paraffin. In some embodiments, the barrier described herein can be coated with a biodegradable polymer, copolymer or blends thereof. In some embodiments, the coating can comprise a biodegradable copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The coating may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a polyhydroxyalkanoate copolymer. The coating may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The coating may comprise a biodegradable polylactic acid. In some embodiments, the coating can be moisture resistant. In some embodiments, the coating can be impermeable to oxygen. In some embodiments, the coating can comprise a wax. In some embodiments, the coating can comprise carnauba, candelilla, beeswax, or paraffin. The insulating layer may comprise a single continuous layer of fibrous material. The insulating layer may comprise multiple discontinuous layers of fibrous material. The insulating layer may have a thermal conductivity ranging from about 0.01 W/mK to about 0.05 W/mK. The insulating layer may have a thermal conductivity ranging from about 0.01 W/mK to about 0.1 W/mK. The fibrous material may comprise plant fibers such as jute fibers. The fibrous material may comprise synthetic fibers. The fibrous material may comprise recycled fibers such as post-consumer recycled fibers and/or pre-consumer recycled fibers. The insulating layer may comprise a thickness of at least about 0.2 cm, for example about 2.5 cm. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be bonded by a binder. In some embodiments, a bonding

agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner can be closed via an adhesive. In some embodiments, an adhesive may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive may be a sealant when heated or chilled.

[005] Disclosed herein are insulating layers. The insulating layer may comprise a first side portion, a second side portion, and a middle portion separating the first and second side portions. One or more of the first side, and/or second side portions may comprise opposing first and/or second side flaps. The insulating layer may be folded such that the first side portion, second side portion and middle portion create an open mouth substantially polygonal box form. The open mouth substantially polygonal box form may comprise a cavity. The first and second side portions may define opposing sides of the polygonal box form. The middle portion may define a bottom of the polygonal box form. The opposing first and second side flaps may define at least part of opposing sides of the polygonal box form. The insulating layer may comprise a continuous layer of nonwoven fibrous material. The continuous layer of nonwoven fibrous material may have a thickness ranging from about 0.2 cm to about 9.0 cm. The insulating layer may have a density ranging from about 200 g/m<sup>2</sup> to about 3500 g/m<sup>2</sup>. The insulating layer may have a thermal conductivity ranging from about 0.01 W/mK to about 0.05 W/mK. The insulating layer may have a thermal conductivity ranging from about 0.01 W/mK to about 0.1 W/mK. The fibrous material may be produced by one or more of: needling, spunbonding, melt blowing, bonded carded, thermal bonding, garnett processed and wet laid. The fibrous material may comprise plant fibers such as jute fibers. The fibrous material may comprise synthetic fibers. The fibrous material may comprise recycled fibers such as post-consumer and or pre-consumer recycled fibers. The insulating layer may comprise one or more types of fibers. The polygonal box form may be a box comprising 5, 6, 7, 8, 9, or 10 sides. The box may be a rectangular box. The box may have a triangular face. The insulating layer may be compostable. The insulating layer may compost in the same manner as yard waste. The insulating layer may decompose within 4-8 months. 80% of the insulating layer may decompose within 2 to 4 weeks of composting the insulating layer. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be bonded by a binder. In some embodiments, a bonding agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA),

aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner may comprise one or more backing.

[006] Disclosed herein are thermal insulating liners. The thermal insulating liner may comprise an insulating layer and a barrier. The insulating layer may comprise a first side portion, a second side portion, and a middle portion. The middle portion may separate the first and second side portions. One or more of the first side, and/or second side portions may comprise opposing first and/or second side flaps. The insulating layer may be folded such that the first side portion, second side portion and middle portion create an open mouth substantially polygonal box form. The open mouth substantially polygonal box form may comprise a cavity. The first and second side portions may define opposing sides of the polygonal box form. The middle portion may define a bottom of the polygonal box form. The opposing first and/or second side flaps may define at least part of opposing sides of the polygonal box form. The insulating layer may comprise a continuous layer of nonwoven fibrous material. The continuous layer of nonwoven fibrous material may have a thickness ranging from about 0.2 cm to about 9.0 cm. The barrier may cover an inner surface of the polygonal box form. The fibrous material may be produced by one or more of: needling, spunbonding, melt blowing, bonded carded, thermal bonding, garnett processed and wet laid. The fibrous material may comprise plant fibers such as jute fibers. The fibrous material may comprise synthetic fibers. The fibrous material may comprise recycled fibers such as post-consumer and/or pre-consumer recycled fibers. The insulating layer may comprise a thickness of at least about 0.2 cm, for example about 2.5 cm. The barrier may have a thickness ranging from about 1 to about 5 MIL. The barrier may have a thickness ranging from about 1 to about 2 MIL. The barrier may be flexible. The barrier may be rigid. The barrier may be transparent. The barrier may be hydrophobic. The barrier may comprise paper such as kraft paper. The barrier may comprise polyethylene. The barrier may comprise recycled materials such as post-consumer and/or pre-consumer recycled materials. The barrier may comprise a biodegradable polymer. The barrier may comprise a copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The barrier may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a polyhydroxyalkanoate copolymer. The barrier may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The barrier may comprise a biodegradable polylactic acid. The barrier may be a moisture resistant barrier. The barrier may be an oxygen barrier. The barrier may comprise a wax. The wax may be at least one of carnauba, candelilla, beeswax, or paraffin. In some embodiments, the barrier described herein can be coated with a biodegradable polymer, copolymer or blends thereof. In some embodiments, the coating can comprise a biodegradable copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The coating may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof.

The coating may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a polyhydroxyalkanoate copolymer. The coating may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The coating may comprise a biodegradable polylactic acid. In some embodiments, the coating can be moisture resistant. In some embodiments, the coating can be impermeable to oxygen. In some embodiments, the coating can comprise a wax. In some embodiments, the coating can comprise carnauba, candelilla, beeswax, or paraffin. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be bonded by a binder. In some embodiments, a bonding agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner can be closed via an adhesive. In some embodiments, an adhesive may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive may be a sealant when heated or chilled. In some embodiments, a thermal insulating liner may comprise one or more backing.

[007] Disclosed herein are insulating layers. The insulating layer may comprise a flexible first side portion, a second side portion, and a middle portion. The middle portion may separate the first and second side portions. The insulating layer may be folded such that the first side portion, second side portion and middle portion create an open mouth pouch. The open mouth pouch may comprise a cavity. The first and second side portions may define opposing sides of the pouch. The middle portion may define a bottom of the pouch. The insulating layer may comprise a continuous layer of nonwoven fibrous material. The continuous layer of nonwoven fibrous material may comprise a bast fiber. The continuous layer of nonwoven fibrous material may have a density ranging from about 200 g/m<sup>2</sup> to about 3500 g/m<sup>2</sup>. The insulating layer may have a thickness ranging from about 0.2 cm to about 9.0 cm. The fibrous material may be produced by one or more of: needling, spunbonding, melt blowing, bonded carded, thermal bonding, garnett processed and wet laid. The fibrous material may comprise plant fibers such jute fibers. The fibrous material may comprise synthetic fibers. The fibrous material may comprise post-consumer recycled fibers. The fibrous material may comprise pre-consumer recycled fibers. The insulating layer may comprise one or more types of fibers. The insulating layer may be compostable. The insulating layer may compost in the same manner as yard waste. The insulating layer may decompose within 2 to 8 weeks. 80% of the insulating layer may decompose within 2 to 4 weeks of composting the insulating layer.

[008] Disclosed herein are thermal insulating liners. The thermal insulating liner may comprise an insulating layer and a barrier. The insulating layer may comprise a flexible first side portion, a second side portion, and a

middle portion. The middle portion may separate the first and second side portions. The insulating layer may be folded such that the first side portion, second side portion and middle portion create an open mouth pouch. The open mouth pouch may comprise a cavity. The first and second side portions may define opposing sides of the pouch. The middle portion may define a bottom of the pouch. The insulating layer may comprise a continuous layer of nonwoven fibrous material. The continuous layer of nonwoven fibrous material may comprise a bast fiber. The continuous layer of nonwoven fibrous material may have a density ranging from about 200 g/m<sup>2</sup> to about 3500 g/m<sup>2</sup>. The barrier may cover an inner surface of the pouch. The fibrous material may be produced by one or more of: needling, spunbonding, melt blowing, bonded carded, thermal bonding, garnett processed and wet laid. The fibrous material may comprise plant fibers such as jute fibers. The fibrous material may comprise synthetic fibers. The fibrous material may comprise post-consumer recycled fibers. The fibrous material may comprise pre-consumer recycled fibers. The insulating layer may have a thickness of at least about 0.5 cm, for example about 2.5 cm. The barrier may have a thickness ranging from about 1 to about 5 MIL. The barrier may have a thickness ranging from about 1 to about 2 MIL. The barrier may be flexible. The barrier may be rigid. The barrier may be transparent. The barrier may be hydrophobic. The barrier may comprise paper such as kraft paper. The barrier may comprise polyethylene. The barrier may comprise recycled materials. The recycled materials may comprise post-consumer recycled materials. The recycled materials may comprise pre-consumer recycled materials. The barrier may comprise a biodegradable polymer. The barrier may comprise a copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The barrier may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a polyhydroxyalkanoate copolymer. The barrier may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The barrier may comprise a biodegradable polylactic acid. The barrier may be a moisture resistant barrier. The barrier may be an oxygen barrier. The barrier may comprise a wax. The wax may be at least one of carnauba, candelilla, beeswax, or paraffin. In some embodiments, the barrier described herein can be coated with a biodegradable polymer, copolymer or blends thereof. In some embodiments, the coating can comprise a biodegradable copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The coating may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a polyhydroxyalkanoate copolymer. The coating may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The coating may comprise a biodegradable polylactic acid. In some embodiments, the coating can be moisture resistant. In some embodiments, the coating can be impermeable to oxygen. In some embodiments, the coating can comprise a wax. In some embodiments, the coating can comprise carnauba, candelilla, beeswax, or paraffin. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be

bonded by a binder. In some embodiments, a bonding agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner can be closed via an adhesive. In some embodiments, an adhesive may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive may be a sealant when heated or chilled.

[009] Disclosed herein are methods for regulating a temperature of a sample, the method may comprise placing the sample into a cavity of a thermal insulating liner. The thermal insulating liner may comprise an insulating layer and a barrier. The insulating layer may comprise a layer of flexible fibrous material. The layer of flexible fibrous material may comprise natural fibers. The layer of flexible fibrous material may be configured to form the cavity. The barrier may cover an inner surface of the cavity. The barrier may comprise a biodegradable polymer. The barrier may comprise a copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The barrier may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a polyhydroxyalkanoate copolymer. The barrier may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The barrier may comprise a biodegradable polylactic acid. The barrier may be a moisture resistant barrier. The barrier may be an oxygen barrier. The barrier may comprise a wax. The wax may be at least one of carnauba, candelilla, beeswax, or paraffin. In some embodiments, the barrier described herein can be coated with a biodegradable polymer, copolymer or blends thereof. In some embodiments, the coating can comprise a biodegradable copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The coating may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a polyhydroxyalkanoate copolymer. The coating may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The coating may comprise a biodegradable polylactic acid. In some embodiments, the coating can be moisture resistant. In some embodiments, the coating can be impermeable to oxygen. In some embodiments, the coating can comprise a wax. In some embodiments, the coating can comprise carnauba,

candelilla, beeswax, or paraffin. The thermal insulating liner may have a thermal conductivity ranging from about 0.01 W/mK to about 0.05 W/mK. The thermal insulating liner may have a thermal conductivity ranging from about 0.01 W/mK to about 0.1 W/mK. The fibrous material may comprise nonwoven fibers. The fibrous material may comprise woven fibers. The insulating layer may comprise a single continuous layer of fibrous material. The insulating layer may comprise multiple discontinuous layers of fibrous material. The sample may be a temperature sensitive sample. The temperature sensitive sample may be a food product. The method of regulating the temperature of a sample may further comprise placing a heating agent into the cavity. The heating agent may comprise a gel pack. The method of regulating the temperature of a sample may further comprise placing a cooling agent into the cavity. A cooling agent may comprise at least one or more of: wet ice, dry ice, ice packs, ice tubes, ice gel, BLUE ICE®, frozen gel, and a gel pack. The method of regulating the temperature of a sample may further comprise covering the cavity containing the sample. Covering may comprise folding a portion of the thermal insulating liner on itself or placing a lid onto the thermal insulating liner. The method of regulating the temperature of a sample may further comprise placing the thermal insulating liner into a container. The fibrous material may be produced by one or more of: needling, spunbonding, melt blowing, bonded carded, thermal bonding, garnett processed and wet laid. The natural fiber may comprise plant fibers such as jute fibers. The natural fiber may comprise animal fibers such as wool. The fibrous material may comprise post-consumer recycled fibers. The fibrous material may comprise pre-consumer recycled fibers. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be bonded by a binder. In some embodiments, a bonding agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner can be closed via an adhesive. In some embodiments, an adhesive may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive may be a sealant when heated or chilled.

[010] Disclosed herein are methods for regulating a temperature of a sample, the method may comprise placing the sample into a cavity of a thermal insulating liner. The thermal insulating liner may comprise an insulating layer and a barrier. The insulating layer may comprise a layer of flexible fibrous material. The layer of flexible fibrous material may comprise needled fibers. The layer of flexible fibrous material may be configured to form the cavity. The barrier may comprise a flexible material. The flexible material may cover an inner surface of the cavity. The barrier may have a thickness ranging from about 1 to about 5 MIL. The barrier

may have a thickness ranging from about 1 to about 2 MIL. The barrier may comprise a biodegradable polymer. The barrier may comprise a copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The barrier may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a polyhydroxyalkanoate copolymer. The barrier may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The barrier may comprise a biodegradable polylactic acid. The barrier may be a moisture resistant barrier. The barrier may be an oxygen barrier. The barrier may comprise a wax. The wax may be at least one of carnauba, candelilla, beeswax, or paraffin. In some embodiments, the barrier described herein can be coated with a biodegradable polymer, copolymer or blends thereof. In some embodiments, the coating can comprise a biodegradable copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The coating may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a polyhydroxyalkanoate copolymer. The coating may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The coating may comprise a biodegradable polylactic acid. In some embodiments, the coating can be moisture resistant. In some embodiments, the coating can be impermeable to oxygen. In some embodiments, the coating can comprise a wax. In some embodiments, the coating can comprise carnauba, candelilla, beeswax, or paraffin. The insulating layer may comprise a single continuous layer of fibrous material. The insulating layer may comprise multiple discontinuous layers of fibrous material. The sample may comprise a temperature sensitive sample. The temperature sensitive sample may be a food product. The method of regulating the temperature of a sample may further comprise placing a heating agent into the cavity. The heating agent may comprise a gel pack. The method of regulating the temperature of a sample may further comprise placing a cooling agent into the cavity. The cooling agent may comprise at least one or more of: wet ice, dry ice, ice packs, ice tubes, ice gel, BLUE ICE®, frozen gel, and a gel pack. The method of regulating the temperature of a sample may further comprise covering the cavity containing the sample. Covering may comprise folding a portion of the thermal insulating liner on itself. The method of regulating the temperature of a sample may further comprise placing the thermal insulating liner into a container. The fibrous material may comprise plant fibers such as jute fibers. The fibrous material may comprise post-consumer recycled fibers. The fibrous material may comprise pre-consumer recycled fibers. The fibrous material may comprise synthetic fibers. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be bonded by a binder. In some embodiments, a bonding agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA), aliphatic

copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner can be closed via an adhesive. In some embodiments, an adhesive may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive may be a sealant when heated or chilled.

[011] Disclosed herein are methods for regulating a temperature of a sample, the method may comprise placing the sample into a cavity of a thermal insulating liner. The thermal insulating liner may comprise an insulating layer and a barrier. The insulating layer may comprise a first side portion, a second side portion, and a middle portion. The middle portion may separate the first and second side portions. One or more of the first side, and/or second side portions may comprise opposing first and/or second side flaps. The insulating layer may be folded such that the first side portion, second side portion and middle portion create an open mouth substantially polygonal box form. The open mouth substantially polygonal box form may comprise a cavity. The first and second side portions may define opposing sides of the polygonal box form. The middle portion may define a bottom of the polygonal box form. The opposing first and/or second side flaps may define at least part of opposing sides of the polygonal box form. The insulating layer may comprise a continuous layer of nonwoven fibrous material. The continuous layer of nonwoven fibrous material may have a thickness ranging from about 0.2 cm to about 9.0 cm. The barrier may cover an inner surface of the polygonal box form. The barrier may comprise a biodegradable polymer. The barrier may comprise a copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The barrier may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a polyhydroxyalkanoate copolymer. The barrier may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The barrier may comprise a biodegradable polylactic acid. The barrier may be a moisture resistant barrier. The barrier may be an oxygen barrier. The barrier may comprise a wax. The wax may be at least one of carnauba, candelilla, beeswax, or paraffin. In some embodiments, the barrier described herein can be coated with a biodegradable polymer, copolymer or blends thereof. In some embodiments, the coating can comprise a biodegradable copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The coating may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a polyhydroxyalkanoate copolymer. The coating may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The coating may comprise a biodegradable polylactic acid. In some embodiments,

the coating can be moisture resistant. In some embodiments, the coating can be impermeable to oxygen. In some embodiments, the coating can comprise a wax. In some embodiments, the coating can comprise carnauba, candelilla, beeswax, or paraffin. The sample may comprise a temperature sensitive sample. The temperature sensitive sample may be a food product. The method of regulating the temperature of a sample may further comprise placing a heating agent into the cavity. The heating agent may comprise a gel pack. The method of regulating the temperature of a sample may further comprise placing a cooling agent into the cavity. The cooling agent may comprise at least one or more of: wet ice, dry ice, ice packs, ice tubes, ice gel, BLUE ICE®, frozen gel, and a gel pack. The method of regulating the temperature of a sample may further comprise covering the cavity containing the sample. Covering may comprise folding a portion of the thermal insulating liner on itself. The method of regulating the temperature of a sample may further comprise placing the thermal insulating liner into a container. The fibrous material may be produced by one or more of: needling, spunbonding, melt blowing, bonded carded, thermal bonding, garnett processed and wet laid. The fibrous material may comprise plant fibers such as jute fibers. The fibrous material may comprise post-consumer recycled fibers. The fibrous material may comprise pre-consumer recycled fibers. The fibrous material may comprise synthetic fibers. Synthetic fiber may comprise recycled plastics such as PET fibers. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be bonded by a binder. In some embodiments, a bonding agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner can be closed via an adhesive. In some embodiments, an adhesive may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive may be a sealant when heated or chilled.

[012] Disclosed herein are methods for regulating a temperature of a sample, the method may comprise placing the sample into a cavity of a thermal insulating liner. The thermal insulating liner may comprise an insulating layer and a barrier. The insulating layer may comprise a flexible first side portion, a second side portion, and a middle portion. The middle portion may separate the first and second side portions. The insulating layer may be folded such that the first side portion, second side portion and middle portion create an open mouth pouch. The open mouth pouch may comprise a cavity. The first and second side portions may define opposing sides of the pouch. The middle portion may define a bottom of the pouch. The insulating layer may comprise a continuous layer of nonwoven fibrous material. The continuous layer of nonwoven fibrous

material may comprise a bast fiber. The continuous layer of nonwoven fibrous material may have a density ranging from about 200 g/m<sup>2</sup> to about 3500 g/m<sup>2</sup>. The barrier may covers an inner surface of the pouch. The barrier may comprise a biodegradable polymer. The barrier may comprise a copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The barrier may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a polyhydroxyalkanoate copolymer. The barrier may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The barrier may comprise a biodegradable polylactic acid. The barrier may be a moisture resistant barrier. The barrier may be an oxygen barrier. The barrier may comprise a wax. The wax may be at least one of carnauba, candelilla, beeswax, or paraffin. In some embodiments, the barrier described herein can be coated with a biodegradable polymer, copolymer or blends thereof. In some embodiments, the coating can comprise a biodegradable copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The coating may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a polyhydroxyalkanoate copolymer. The coating may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The coating may comprise a biodegradable polylactic acid. In some embodiments, the coating can be moisture resistant. In some embodiments, the coating can be impermeable to oxygen. In some embodiments, the coating can comprise a wax. In some embodiments, the coating can comprise carnauba, candelilla, beeswax, or paraffin. The sample may comprise a temperature sensitive sample. The temperature sensitive sample may be a food product. The method of regulating the temperature of a sample may further comprise placing a heating agent into the cavity. The heating agent may comprise a gel pack. The method of regulating the temperature of a sample may further comprise placing a cooling agent into the cavity. The cooling agent may comprise at least one or more of: wet ice, dry ice, ice packs, ice tubes, ice gel, BLUE ICE®, frozen gel, and a gel pack. The method of regulating the temperature of a sample may further comprise covering the cavity containing the sample. Covering may comprise folding a portion of the thermal insulating liner on itself. The method of regulating the temperature of a sample may further comprise placing the thermal insulating liner into a container. The fibrous material may be produced by one or more of: needling, spunbonding, melt blowing, bonded carded, thermal bonding, garnett processed and wet laid. The fibrous material may comprise plant fibers such as jute fibers. The fibrous material may comprise post-consumer recycled fibers. The fibrous material may comprise pre-consumer recycled fibers. The fibrous material may comprise synthetic fibers. Synthetic fiber may comprise recycled plastics such as PET fibers. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be bonded by a binder. In some embodiments, a bonding agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents

or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner can be closed via an adhesive. In some embodiments, an adhesive may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive may be a sealant when heated or chilled.

[013] Disclosed herein are kits. The kit may comprise a thermal insulating liner and a container. The thermal insulating liner may comprise an insulating layer and a barrier. The insulating layer may comprise a layer of flexible fibrous material. The layer of flexible fibrous material may comprise natural fibers. The layer of flexible fibrous material may be configured to form a cavity. The barrier may cover an inner surface of the cavity. The barrier may comprise a biodegradable polymer. The barrier may comprise a copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The barrier may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a polyhydroxyalkanoate copolymer. The barrier may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The barrier may comprise a biodegradable polylactic acid. The barrier may be a moisture resistant barrier. The barrier may be an oxygen barrier. The barrier may comprise a wax. The wax may be at least one of carnauba, candelilla, beeswax, or paraffin. In some embodiments, the barrier described herein can be coated with a biodegradable polymer, copolymer or blends thereof. In some embodiments, the coating can comprise a biodegradable copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The coating may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a polyhydroxyalkanoate copolymer. The coating may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The coating may comprise a biodegradable polylactic acid. In some embodiments, the coating can be moisture resistant. In some embodiments, the coating can be impermeable to oxygen. In some embodiments, the coating can comprise a wax. In some embodiments, the coating can comprise carnauba, candelilla, beeswax, or paraffin. The thermal insulating liner may have a thermal conductivity ranging from about 0.01 W/mK to about 0.05 W/mK. The thermal insulating liner may have a thermal conductivity ranging from about 0.01 W/mK to about 0.1 W/mK.

The thermal insulating liner may be placed in the container. The fibrous material may comprise nonwoven fibers. The fibrous material may comprise woven fibers. The insulating layer may comprise a single continuous layer of fibrous material. The insulating layer may comprise multiple discontinuous layers of fibrous material. The kit may further comprise a heating agent. The heating agent may comprise a gel pack. The kit may further comprise a cooling agent. The cooling agent may comprise at least one or more of: wet ice, dry ice, ice packs, ice tubes, ice gel, BLUE ICE®, frozen gel, and a gel pack. The fibrous material may be produced by one or more of: needling, spunbonding, melt blowing, bonded carded, thermal bonding, garnett processed and wet laid. The natural fiber may comprise plant fibers such as jute fibers. The natural fiber may comprise animal fibers such as wool. The fibrous material may comprise synthetic fibers. Synthetic fiber may comprise recycled plastics such as PET fibers. The fibrous material may comprise post-consumer recycled fibers. The fibrous material may comprise pre-consumer recycled fibers. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be bonded by a binder. In some embodiments, a bonding agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner can be closed via an adhesive. In some embodiments, an adhesive may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive may be a sealant when heated or chilled.

[014] Disclosed herein are kits. The kit may comprise a thermal insulating liner and a container. The thermal insulating liner may comprise an insulating layer, and a barrier. The insulating layer may comprise a layer of flexible fibrous material. The layer of flexible fibrous material may comprise needled fibers. The layer of flexible fibrous material may be configured to form a cavity. The barrier may comprise a flexible material that covers an inner surface of the cavity. The barrier may have a thickness ranging from about 1 to about 5 MIL. The barrier may have a thickness ranging from about 1 to about 2 MIL. The barrier may comprise a biodegradable polymer. The barrier may comprise a copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The barrier may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a polyhydroxyalkanoate copolymer. The barrier may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The barrier may comprise a biodegradable polylactic acid. The barrier may be a

moisture resistant barrier. The barrier may be an oxygen barrier. The barrier may comprise a wax. The wax may be at least one of carnauba, candelilla, beeswax, or paraffin. In some embodiments, the barrier described herein can be coated with a biodegradable polymer, copolymer or blends thereof. In some embodiments, the coating can comprise a biodegradable copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The coating may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a polyhydroxyalkanoate copolymer. The coating may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The coating may comprise a biodegradable polylactic acid. In some embodiments, the coating can be moisture resistant. In some embodiments, the coating can be impermeable to oxygen. In some embodiments, the coating can comprise a wax. In some embodiments, the coating can comprise carnauba, candelilla, beeswax, or paraffin. The insulating layer may comprise a single continuous layer of fibrous material. The kit may further comprise a heating agent. The insulating layer may comprise multiple discontinuous layers of fibrous material. The heating agent may comprise a gel pack. The kit may further comprise a cooling agent. The cooling agent may comprise at least one or more of: wet ice, dry ice, ice packs, ice tubes, ice gel, BLUE ICE®, frozen gel, and a gel pack. The fibrous material may comprise plant fibers such as jute fibers. The fibrous material may comprise synthetic fibers. Synthetic fiber may comprise recycled plastics such as PET fibers. The fibrous material may comprise recycled fibers. The recycled fibers may comprise post-consumer and/or pre-consume recycled fibers. The container may be a corrugated box. The container may comprise polystyrene. The container may be rigid. The container may be flexible. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be bonded by a binder. In some embodiments, a bonding agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner can be closed via an adhesive. In some embodiments, an adhesive may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive may be a sealant when heated or chilled.

[015] Disclosed herein are kits. The kit may comprise a thermal insulating liner and a container. The thermal insulating liner may comprise an insulating layer and a barrier. The barrier may comprise a biodegradable

polymer. The barrier may comprise a copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The barrier may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a polyhydroxyalkanoate copolymer. The barrier may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The barrier may comprise a biodegradable polylactic acid. The barrier may be a moisture resistant barrier. The barrier may be an oxygen barrier. The barrier may comprise a wax. The wax may be at least one of carnauba, candelilla, beeswax, or paraffin. In some embodiments, the barrier described herein can be coated with a biodegradable polymer, copolymer or blends thereof. In some embodiments, the coating can comprise a biodegradable copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The coating may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a polyhydroxyalkanoate copolymer. The coating may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The coating may comprise a biodegradable polylactic acid. In some embodiments, the coating can be moisture resistant. In some embodiments, the coating can be impermeable to oxygen. In some embodiments, the coating can comprise a wax. In some embodiments, the coating can comprise carnauba, candelilla, beeswax, or paraffin. The insulating layer may comprise a first side portion, a second side portion, and a middle portion. The middle portion may separate the first and second side portions. One or more of the first side, and/or second side portions may comprise opposing first and/or second side flaps. The insulating layer may be folded such that the first side portion, second side portion and middle portion create an open mouth substantially polygonal box form. The open mouth substantially polygonal box form may comprise a cavity. The first and second side portions may define opposing sides of the polygonal box form. The middle portion may define a bottom of the polygonal box form. The opposing first and/or second side flaps may define at least part of opposing sides of the polygonal box form. The insulating layer may comprise a continuous layer of nonwoven fibrous material. The continuous layer of nonwoven fibrous material may have a thickness ranging from about 0.2 cm to about 9.0 cm. The barrier may cover an inner surface of the polygonal box form. The kit may further comprise a heating agent. The heating agent may comprise a gel pack. The kit may further comprise a cooling agent. The cooling agent may comprise at least one or more of: wet ice, dry ice, ice packs, ice tubes, ice gel, BLUE ICE®, frozen gel, and a gel pack. The fibrous material may be produced by one or more of: needling, spunbonding, melt blowing, bonded carded, thermal bonding, garnett processed and wet laid. The fibrous material may comprise plant fibers such as jute fibers. The fibrous material may comprise synthetic fibers. Synthetic fiber may comprise recycled plastics such as PET fibers. The fibrous material may comprise post-consumer recycled fibers. The fibrous material may comprise pre-consumer recycled fibers. The container may be a corrugated box. The container may comprise polystyrene. The

container may be rigid. The container may be flexible. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be bonded by a binder. In some embodiments, a bonding agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner can be closed via an adhesive. In some embodiments, an adhesive may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive may be a sealant when heated or chilled.

[016] Disclosed herein are kits. The kit may comprise a thermal insulating liner and a container. The thermal insulating liner may comprise an insulating layer and a barrier. The insulating layer may comprise a flexible first side portion, a second side portion, and a middle portion. The middle portion may separate the first and second side portions. The insulating layer may be folded such that the first side portion, second side portion and middle portion create an open mouth pouch. The open mouth pouch may comprise a cavity. The first and second side portions may define opposing sides of the pouch. The middle portion may define a bottom of the pouch. The insulating layer may comprise a continuous layer of nonwoven fibrous material. The continuous layer of nonwoven fibrous material may comprise a bast fiber. The continuous layer of nonwoven fibrous material may have a density ranging from about 200 g/m<sup>2</sup> to about 3500 g/m<sup>2</sup>. The barrier may cover an inner surface of the pouch. The barrier may comprise a biodegradable polymer. The barrier may comprise a copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The barrier may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a polyhydroxyalkanoate copolymer. The barrier may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The barrier may comprise a biodegradable polylactic acid. The barrier may be a moisture resistant barrier. The barrier may be an oxygen barrier. The barrier may comprise a wax. The wax may be at least one of carnauba, candelilla, beeswax, or paraffin. In some embodiments, the barrier described herein can be coated with a biodegradable polymer, copolymer or blends thereof. In some embodiments, the coating can comprise a biodegradable copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The coating may comprise a 3-

hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a polyhydroxyalkanoate copolymer. The coating may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The coating may comprise a biodegradable polylactic acid. In some embodiments, the coating can be moisture resistant. In some embodiments, the coating can be impermeable to oxygen. In some embodiments, the coating can comprise a wax. In some embodiments, the coating can comprise carnauba, candelilla, beeswax, or paraffin. The kit may further comprise a heating agent. The heating agent may comprise a gel pack. The kit may further comprise a cooling agent. The cooling agent may comprise at least one or more of: wet ice, dry ice, ice packs, ice tubes, ice gel, BLUE ICE®, frozen gel, and a gel pack. The fibrous material may be produced by one or more of: needling, spunbonding, melt blowing, bonded carded, thermal bonding, garnett processed and wet laid. The fibrous material may comprise plant fibers such as jute fibers. The fibrous material may comprise synthetic fibers. Synthetic fiber may comprise recycled plastics such as PET fibers. The fibrous material may comprise post-consumer recycled fibers. The fibrous material may comprise pre-consumer recycled fibers. The container may be a corrugated box. The container may comprise polystyrene. The container may be rigid. The container may be flexible. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be bonded by a binder. In some embodiments, a bonding agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner can be closed via an adhesive. In some embodiments, an adhesive may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive may be a sealant when heated or chilled.

[017] Disclosed herein are methods of making thermal insulating liners. The method of making a thermal insulating liner may comprise producing an insulating layer. The insulating layer may comprise a continuous layer of nonwoven fibrous material. The continuous layer of nonwoven fibrous material may comprise a bast fiber. The continuous layer of nonwoven fibrous material may have a density ranging from about 200 g/m<sup>2</sup> to about 3500 g/m<sup>2</sup>. The insulating layer may be folded on itself whereby the insulating layer comprises a flexible first side portion, a second side portion, and a middle portion. The middle portion may separate the first and second side portions. The first side portion, second side portion and middle portion may create an open mouth pouch. The open mouth pouch may comprise a cavity. The first and second side portions may define opposing sides of the pouch. The middle portion may define a bottom of the pouch. An inner surface of the first side

portion, second side portion and the middle portion may be covered with a barrier. The barrier covering the inner surface of the first side portion, second side portion and the middle portion may be sealed. The fibrous material may be produced by one or more of: needling, spunbonding, melt blowing, bonded carded, thermal bonding, garnett processed and wet laid. The fibrous material may comprise plant fibers such as jute fibers. The fibrous material may comprise post-consumer recycled fibers. The fibrous material may comprise pre-consumer recycled fibers. The fibrous material may comprise synthetic fibers. Synthetic fiber may comprise recycled plastics such as PET fibers. The barrier may comprise a biodegradable polymer. The barrier may comprise a copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The barrier may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a polyhydroxyalkanoate copolymer. The barrier may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The barrier may comprise a biodegradable polylactic acid. The barrier may be a moisture resistant barrier. The barrier may be an oxygen barrier. The barrier may comprise a wax. The wax may be at least one of carnauba, candelilla, beeswax, or paraffin. In some embodiments, the barrier described herein can be coated with a biodegradable polymer, copolymer or blends thereof. In some embodiments, the coating can comprise a biodegradable copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The coating may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a polyhydroxyalkanoate copolymer. The coating may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The coating may comprise a biodegradable polylactic acid. In some embodiments, the coating can be moisture resistant. In some embodiments, the coating can be impermeable to oxygen. In some embodiments, the coating can comprise a wax. In some embodiments, the coating can comprise carnauba, candelilla, beeswax, or paraffin. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be bonded by a binder. In some embodiments, a bonding agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner can be closed via an adhesive. In some embodiments, an adhesive may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a

resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive may be a sealant when heated or chilled.

[018] Disclosed herein are methods of making thermal insulating liners. The method of making a thermal insulating liner may comprise producing an insulating layer. The insulating layer may comprise a continuous layer of nonwoven fibrous material. The continuous layer of nonwoven fibrous material may have a thickness ranging from about 0.2 cm to about 9.0 cm. An excised portion of the insulating layer may be removed whereby the insulating layer comprises a first side portion, a second side portion, and a middle portion. The middle portion may separate the first and second side portions. One or more of the first side, and/or second side portions may comprise opposing first and/or second side flaps. An inner surface of the first side portion, second side portion and the middle portion may be covered with a barrier. The barrier covering the inner surface of the first side portion, second side portion and the middle portion may be sealed. The insulating layer may be folded such that the first side portion, second side portion and middle portion create an open mouth substantially polygonal box form. The open mouth substantially polygonal box form may comprise a cavity. The first and second side portions may define opposing sides of the polygonal box form. The middle portion may define a bottom of the polygonal box form. The opposing first and/or second side flaps may define at least part of opposing sides of the polygonal box form. The excised portion may have a length equal to the width of a container that the insulating liner will be placed in and a width equal to half a width of the container that the insulating liner will be placed. The insulating layer may be folded along its length before an excised portion is removed. The insulating layer may be folded along its width before an excised portion is removed. One or more excised portions may be removed. One excised portion may be removed. Two excised portions may be removed. The fibrous material may be produced by one or more of: needling, spunbonding, melt blowing, bonded carded, thermal bonding, garnett processed and wet laid. The fibrous material may comprise plant fibers such as jute fibers. The fibrous material may comprise post-consumer recycled fibers. The fibrous material may comprise pre-consumer recycled fibers. The fibrous material may comprise synthetic fibers. Synthetic fiber may comprise recycled plastics such as PET fibers. The barrier may comprise a biodegradable polymer. The barrier may comprise a copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The barrier may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a polyhydroxyalkanoate copolymer. The barrier may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The barrier may comprise a biodegradable polylactic acid. The barrier may be a moisture resistant barrier. The barrier may be an oxygen barrier. The barrier may comprise a wax. The wax may be at least one of carnauba, candelilla, beeswax, or paraffin. In some embodiments, the barrier described herein can be coated with a biodegradable polymer, copolymer or blends thereof. In some embodiments, the coating can comprise a biodegradable copolymer. The biodegradable polymer may comprise at least one of a

polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The coating may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a polyhydroxyalkanoate copolymer. The coating may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The coating may comprise a biodegradable polylactic acid. In some embodiments, the coating can be moisture resistant. In some embodiments, the coating can be impermeable to oxygen. In some embodiments, the coating can comprise a wax. In some embodiments, the coating can comprise carnauba, candelilla, beeswax, or paraffin. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be bonded by a binder. In some embodiments, a bonding agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner can be closed via an adhesive. In some embodiments, an adhesive may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive may be a sealant when heated or chilled.

[019] Disclosed herein are apparatus. The apparatus may comprise a thermal insulating liner and a lid. The thermal insulating liner may comprise an insulating layer and a barrier. The insulating layer may comprise a layer of flexible fibrous material. The layer of flexible fibrous material may comprise natural fibers. The layer of flexible fibrous material may be configured to form a cavity. The barrier may cover the interior surface of the cavity. The lid may be attached to the thermal insulating liner. The lid may be movable from a closed state to an open state. The apparatus may have a thermal conductivity ranging from about 0.01 W/mK to about 0.05 W/mK. The apparatus may have a thermal conductivity ranging from about 0.01 W/mK to about 0.1 W/mK. The fibrous material may comprise nonwoven fibers. The fibrous material may comprise woven fibers. The insulating layer may comprise a single continuous layer of fibrous material. The insulating layer may comprise multiple discontinuous layers of fibrous material. The barrier may be flexible. The lid may comprise natural fibers such as jute fibers. The lid may comprise synthetic fibers. The lid may comprise recycled fibers such as post-consumer and/or pre-consumer recycled fibers. The fibrous material may comprise recycled fibers such as post-consumer and/or pre-consumer recycled fibers. The natural fiber may comprise plant fibers such as jute fibers. The natural fiber may comprise animal fibers such as wool. The fibrous material may comprise synthetic fibers. Synthetic fiber may comprise recycled plastics such as PET fibers. The insulating layer may

have a thickness of at least about 0.2 cm. The insulating layer may have a density ranging from about 200 g/m<sup>2</sup> to about 3500 g/m<sup>2</sup>. The barrier may be rigid. The barrier may be transparent. The barrier may be hydrophobic. The barrier may comprise paper such as kraft paper. The barrier may comprise polyethylene. The barrier may comprise recycled materials such as post-consumer and/or pre-consumer recycled fibers. The barrier may comprise a biodegradable polymer. The barrier may comprise a copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The barrier may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a polyhydroxyalkanoate copolymer. The barrier may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The barrier may comprise a biodegradable polylactic acid. The barrier may be a moisture resistant barrier. The barrier may be an oxygen barrier. The barrier may comprise a wax. The wax may be at least one of carnauba, candelilla, beeswax, or paraffin. In some embodiments, the barrier described herein can be coated with a biodegradable polymer, copolymer or blends thereof. In some embodiments, the coating can comprise a biodegradable copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The coating may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a polyhydroxyalkanoate copolymer. The coating may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The coating may comprise a biodegradable polylactic acid. In some embodiments, the coating can be moisture resistant. In some embodiments, the coating can be impermeable to oxygen. In some embodiments, the coating can comprise a wax. In some embodiments, the coating can comprise carnauba, candelilla, beeswax, or paraffin. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be bonded by a binder. In some embodiments, a bonding agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner can be closed via an adhesive. In some embodiments, an adhesive may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive may be a sealant when heated or chilled.

[020] Disclosed herein are apparatus. The apparatus may comprise a thermal insulating liner and a lid. The thermal insulating liner may comprise an insulating layer and a barrier. The insulating layer may comprise a layer of flexible fibrous material. The layer of flexible fibrous material may comprise needled fibers. The layer of flexible fibrous material may be configured to form a cavity. The barrier may comprise a flexible material that covers the interior surface of the cavity. The barrier may have a thickness ranging from about 1 to about 5 MIL. The barrier may have a thickness ranging from about 1 to about 2 MIL. The lid may be attached to the thermal insulating liner. The lid may be movable from a closed state to an open state. The insulating layer may comprise a single continuous layer of fibrous material. The insulating layer may comprise multiple discontinuous layers of fibrous material. The insulating layer may have a thermal conductivity ranging from about 0.01 W/mK to about 0.05 W/mK. The insulating layer may have a thermal conductivity ranging from about 0.01 W/mK to about 0.1 W/mK. The insulating layer and the lid may be a single continuous layer of fibrous material. The lid may comprise natural fibers. The lid may comprise synthetic fibers. The lid may comprise recycled fibers. Recycled fibers may comprise post-consumer recycled fibers. The natural fiber may comprise plant fibers such as jute fibers. The natural fiber may comprise animal fibers such as wool. The fibrous material may comprise recycled fibers. The fibrous material may comprise post-consumer recycled fibers. The fibrous material may comprise pre-consumer recycled fibers. The fibrous material may comprise plant fibers such as jute fibers. The fibrous material may comprise synthetic fibers. Synthetic fiber may comprise recycled plastics such as PET fibers. The insulating layer may have a thickness of at least about 0.2 cm. The insulating layer may have a density ranging from about 200 g/m<sup>2</sup> to about 3500 g/m<sup>2</sup>. The barrier may be rigid. The barrier may be transparent. The barrier may be hydrophobic. The barrier may comprise paper such as kraft paper. The barrier may comprise polyethylene. The barrier may comprise recycled materials. The recycled materials may comprise post-consumer recycled materials. The recycled materials may comprise pre-consumer recycled materials. The barrier may comprise a biodegradable polymer. The barrier may comprise a copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The barrier may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a polyhydroxyalkanoate copolymer. The barrier may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The barrier may comprise a biodegradable polylactic acid. The barrier may be a moisture resistant barrier. The barrier may be an oxygen barrier. The barrier may comprise a wax. The wax may be at least one of carnauba, candelilla, beeswax, or paraffin. In some embodiments, the barrier described herein can be coated with a biodegradable polymer, copolymer or blends thereof. In some embodiments, the coating can comprise a biodegradable copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The coating may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a 4-hydroxybutyrate

polymer, copolymer or blends thereof. The coating may comprise a polyhydroxyalkanoate copolymer. The coating may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The coating may comprise a biodegradable polylactic acid. In some embodiments, the coating can be moisture resistant. In some embodiments, the coating can be impermeable to oxygen. In some embodiments, the coating can comprise a wax. In some embodiments, the coating can comprise carnauba, candelilla, beeswax, or paraffin. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be bonded by a binder. In some embodiments, a bonding agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner can be closed via an adhesive. In some embodiments, an adhesive may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive may be a sealant when heated or chilled.

[021] Disclosed herein are systems. The system may comprise a thermal insulating liner and a container. The thermal insulating liner may comprise an insulating layer and a barrier. The insulating layer may comprise a layer of flexible fibrous material. The layer of flexible fibrous material may comprise natural fibers. The layer of flexible fibrous material may be configured to form a cavity. The barrier may cover an inner surface of the cavity. The barrier may comprise a biodegradable polymer. The barrier may comprise a copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The barrier may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a polyhydroxyalkanoate copolymer. The barrier may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The barrier may comprise a biodegradable polylactic acid. The barrier may be a moisture resistant barrier. The barrier may be an oxygen barrier. The barrier may comprise a wax. The wax may be at least one of carnauba, candelilla, beeswax, or paraffin. In some embodiments, the barrier described herein can be coated with a biodegradable polymer, copolymer or blends thereof. In some embodiments, the coating can comprise a biodegradable copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The coating may comprise a 3-

hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a polyhydroxyalkanoate copolymer. The coating may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The coating may comprise a biodegradable polylactic acid. In some embodiments, the coating can be moisture resistant. In some embodiments, the coating can be impermeable to oxygen. In some embodiments, the coating can comprise a wax. In some embodiments, the coating can comprise carnauba, candelilla, beeswax, or paraffin. The thermal insulating liner may have a thermal conductivity ranging from about 0.01 W/mK to about 0.05 W/mK. The thermal insulating liner may have a thermal conductivity ranging from about 0.01 W/mK to about 0.1 W/mK. The thermal insulating liner may be placed in the container. The fibrous material may comprise nonwoven fibers. The fibrous material may comprise woven fibers. The insulating layer may comprise a single continuous layer of fibrous material. The insulating layer may comprise multiple discontinuous layers of fibrous material. The system may further comprise a heating agent. The heating agent may comprise a gel pack. The system may further comprise a cooling agent. The cooling agent may comprise at least one or more of: wet ice, dry ice, ice packs, ice tubes, ice gel, BLUE ICE®, frozen gel, and a gel pack. The fibrous material may be produced by one or more of: needling, spunbonding, melt blowing, bonded carded, thermal bonding, garnett processed and wet laid. The natural fiber may comprise plant fibers such as jute fibers. The natural fiber may comprise animal fibers such as wool. The fibrous material may comprise synthetic fibers. Synthetic fiber may comprise recycled plastics such as PET fibers. The fibrous material may comprise post-consumer recycled fibers. The fibrous material may comprise pre-consumer recycled fibers. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be bonded by a binder. In some embodiments, a bonding agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner can be closed via an adhesive. In some embodiments, an adhesive may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive may be a sealant when heated or chilled.

[022] Disclosed herein are systems. The system may comprise a thermal insulating liner and a container. The thermal insulating liner may comprise an insulating layer, and a barrier. The insulating layer may comprise a layer of flexible fibrous material. The layer of flexible fibrous material may comprise needled fibers. The layer of flexible fibrous material may be configured to form a cavity. The barrier may comprise a flexible material

that covers an inner surface of the cavity. The barrier may have a thickness ranging from about 1 to about 5 MIL. The barrier may have a thickness ranging from about 1 to about 2 MIL. The barrier may comprise a biodegradable polymer. The barrier may comprise a copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The barrier may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a polyhydroxyalkanoate copolymer. The barrier may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The barrier may comprise a biodegradable polylactic acid. The barrier may be a moisture resistant barrier. The barrier may be an oxygen barrier. The barrier may comprise a wax. The wax may be at least one of carnauba, candelilla, beeswax, or paraffin. In some embodiments, the barrier described herein can be coated with a biodegradable polymer, copolymer or blends thereof. In some embodiments, the coating can comprise a biodegradable copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The coating may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a polyhydroxyalkanoate copolymer. The coating may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The coating may comprise a biodegradable polylactic acid. In some embodiments, the coating can be moisture resistant. In some embodiments, the coating can be impermeable to oxygen. In some embodiments, the coating can comprise a wax. In some embodiments, the coating can comprise carnauba, candelilla, beeswax, or paraffin. The insulating layer may comprise a single continuous layer of fibrous material. The system may further comprise a heating agent. The insulating layer may comprise multiple discontinuous layers of fibrous material. The heating agent may comprise a gel pack. The system may further comprise a cooling agent. The cooling agent may comprise at least one or more of: wet ice, dry ice, ice packs, ice tubes, ice gel, BLUE ICE®, frozen gel, and a gel pack. The fibrous material may comprise plant fibers such as jute fibers. The fibrous material may comprise synthetic fibers. Synthetic fiber may comprise recycled plastics such as PET fibers. The fibrous material may comprise recycled fibers. The recycled fibers may comprise post-consumer and/or pre-consume recycled fibers. The container may be a corrugated box. The container may comprise polystyrene. The container may be rigid. The container may be flexible. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be bonded by a binder. In some embodiments, a bonding agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner

can be closed via an adhesive. In some embodiments, an adhesive may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive may be a sealant when heated or chilled.

[023] Disclosed herein are systems. The system may comprise a thermal insulating liner and a container. The thermal insulating liner may comprise an insulating layer and a barrier. The barrier may comprise a biodegradable polymer. The barrier may comprise a copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The barrier may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a polyhydroxyalkanoate copolymer. The barrier may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The barrier may comprise a biodegradable polylactic acid. The barrier may be a moisture resistant barrier. The barrier may be an oxygen barrier. The barrier may comprise a wax. The wax may be at least one of carnauba, candelilla, beeswax, or paraffin. In some embodiments, the barrier described herein can be coated with a biodegradable polymer, copolymer or blends thereof. In some embodiments, the coating can comprise a biodegradable copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The coating may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a polyhydroxyalkanoate copolymer. The coating may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The coating may comprise a biodegradable polylactic acid. In some embodiments, the coating can be moisture resistant. In some embodiments, the coating can be impermeable to oxygen. In some embodiments, the coating can comprise a wax. In some embodiments, the coating can comprise carnauba, candelilla, beeswax, or paraffin. The insulating layer may comprise a first side portion, a second side portion, and a middle portion. The middle portion may separate the first and second side portions. One or more of the first side, and/or second side portions may comprise opposing first and/or second side flaps. The insulating layer may be folded such that the first side portion, second side portion and middle portion create an open mouth substantially polygonal box form. The open mouth substantially polygonal box form may comprise a cavity. The first and second side portions may define opposing sides of the polygonal box form. The middle portion may define a bottom of the polygonal box form. The opposing first and/or second side flaps may define at least part of opposing sides of the polygonal box form. The insulating layer may comprise a continuous layer of nonwoven fibrous material. The continuous layer of nonwoven fibrous material may have a thickness

ranging from about 0.2 cm to about 9.0 cm. The barrier may cover an inner surface of the polygonal box form. The system may further comprise a heating agent. The heating agent may comprise a gel pack. The system may further comprise a cooling agent. The cooling agent may comprise at least one or more of: wet ice, dry ice, ice packs, ice tubes, ice gel, BLUE ICE®, frozen gel, and a gel pack. The fibrous material may be produced by one or more of: needling, spunbonding, melt blowing, bonded carded, thermal bonding, garnett processed and wet laid. The fibrous material may comprise plant fibers such as jute fibers. The fibrous material may comprise synthetic fibers. Synthetic fiber may comprise recycled plastics such as PET fibers. The fibrous material may comprise post-consumer recycled fibers. The fibrous material may comprise pre-consumer recycled fibers. The container may be a corrugated box. The container may comprise polystyrene. The container may be rigid. The container may be flexible. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be bonded by a binder. In some embodiments, a bonding agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner can be closed via an adhesive. In some embodiments, an adhesive may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive may be a sealant when heated or chilled.

[024] Disclosed herein are systems. The system may comprise a thermal insulating liner and a container. The thermal insulating liner may comprise an insulating layer and a barrier. The insulating layer may comprise a flexible first side portion, a second side portion, and a middle portion. The middle portion may separate the first and second side portions. The insulating layer may be folded such that the first side portion, second side portion and middle portion create an open mouth pouch. The open mouth pouch may comprise a cavity. The first and second side portions may define opposing sides of the pouch. The middle portion may define a bottom of the pouch. The insulating layer may comprise a continuous layer of nonwoven fibrous material. The continuous layer of nonwoven fibrous material may comprise a bast fiber. The continuous layer of nonwoven fibrous material may have a density ranging from about 200 g/m<sup>2</sup> to about 3500 g/m<sup>2</sup>. The barrier may cover an inner surface of the pouch. The barrier may comprise a biodegradable polymer. The barrier may comprise a copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The barrier may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a 4-

hydroxybutyrate polymer, copolymer or blends thereof. The barrier may comprise a polyhydroxyalkanoate copolymer. The barrier may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The barrier may comprise a biodegradable polylactic acid. The barrier may be a moisture resistant barrier. The barrier may be an oxygen barrier. The barrier may comprise a wax. The wax may be at least one of carnauba, candelilla, beeswax, or paraffin. In some embodiments, the barrier described herein can be coated with a biodegradable polymer, copolymer or blends thereof. In some embodiments, the coating can comprise a biodegradable copolymer. The biodegradable polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. The biodegradable polymer may comprise polyhydroxyalkanoate. The coating may comprise a 3-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a 4-hydroxybutyrate polymer, copolymer or blends thereof. The coating may comprise a polyhydroxyalkanoate copolymer. The coating may comprise a 3-hydroxybutyrate-co-4-hydroxybutyrate copolymer. The coating may comprise a biodegradable polylactic acid. In some embodiments, the coating can be moisture resistant. In some embodiments, the coating can be impermeable to oxygen. In some embodiments, the coating can comprise a wax. In some embodiments, the coating can comprise carnauba, candelilla, beeswax, or paraffin. The system may further comprise a heating agent. The heating agent may comprise a gel pack. The system may further comprise a cooling agent. The cooling agent may comprise at least one or more of: wet ice, dry ice, ice packs, ice tubes, ice gel, BLUE ICE®, frozen gel, and a gel pack. The fibrous material may be produced by one or more of: needling, spunbonding, melt blowing, bonded carded, thermal bonding, garnett processed and wet laid. The fibrous material may comprise plant fibers such as jute fibers. The fibrous material may comprise synthetic fibers. Synthetic fiber may comprise recycled plastics such as PET fibers. The fibrous material may comprise post-consumer recycled fibers. The fibrous material may comprise pre-consumer recycled fibers. The container may be a corrugated box. The container may comprise polystyrene. The container may be rigid. The container may be flexible. In some embodiments, an insulating layer may comprise a binder. In some embodiments, an insulating layer may be bonded by a binder. In some embodiments, a bonding agent may comprise sap, cornstarch, polylactates, polyester, nylon, honey, polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof. In some embodiments, a bonding agent may comprise a biodegradable polymers of the following types: polylactates, polymalates, polyhydroxyalkanoates, polycaprolactones, polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters, celluloses or starches. In some embodiments, an insulating layer does not comprise a binder. In some embodiments, a thermal insulating liner can be closed via an adhesive. In some embodiments, an adhesive may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive may be a sealant when heated or chilled

### INCORPORATION BY REFERENCE

[025] All publications, patents, and patent applications mentioned in this specification are herein incorporated by reference to the same extent as if each individual publication, patent, or patent application was specifically and individually indicated to be incorporated by reference.

### BRIEF DESCRIPTION OF THE DRAWINGS

[026] The novel features described herein are set forth with particularity in the appended claims. A better understanding of the features and advantages of the features described herein will be obtained by reference to the following detailed description that sets forth illustrative examples, in which the principles of the features described herein are utilized, and the accompanying drawings of which:

[027] **FIG. 1A** illustrates a rectangular insulating layer, according to many embodiments.

[028] **FIG. 1B** illustrates the rectangular insulating layer of FIG. 1A folded along its width.

[029] **FIG. 1C** illustrates the rectangular insulating layer of FIG. 1A folded along its width and having portions excised.

[030] **FIG. 1D** illustrates the rectangular insulating layer of FIG. 1A folded along its width and having excised portions removed.

[031] **FIG. 2A** illustrates an unfolded small insulating layer with excised portions removed, according to many embodiments.

[032] **FIG. 2B** illustrates the small insulating layer of FIG. 2A folded along its width and the dimensions of its excised portions, according to many embodiments.

[033] **FIG. 3A** illustrates an unfolded medium insulating layer with excised portions removed, according to many embodiments.

[034] **FIG. 3B** illustrates the medium insulating layer of FIG. 3A folded along its width and the dimensions of its excised portions, according to many embodiments.

[035] **FIG. 4A** illustrates an unfolded large insulating layer with excised portions removed, according to many embodiments.

[036] **FIG. 4B** illustrates the large insulating layer of FIG. 4A folded along its width and the dimensions of its excised portions, according to many embodiments.

[037] **FIG. 5A** illustrates a rectangular insulating layer, according to many embodiments.

[038] **FIG. 5B** illustrates the rectangular insulating layer of FIG. 5A folded along its length and portion to be excised indicated.

[039] **FIG. 5C** illustrates the rectangular insulating layer of FIG. 5A folded along its length and excised portion removed.

[040] **FIG. 5D** illustrates the unfolded insulating layer of FIG. 5C with excised portion removed.

[041] **FIG. 6** illustrates a collapsed thermal insulating liner, according to many embodiments.

[042] **FIG. 7** illustrates the thermal insulating liner of FIG. 6 placed in a container, according to many embodiments.

[043] **FIG. 8** illustrates the thermal insulating liner of FIG. 6 placed in a container with samples, according to many embodiments.

[044] **FIG. 9** illustrates the thermal insulating liner of FIG. 6 placed in a container with samples and covered, according to many embodiments.

[045] **FIG. 10** illustrates a graph showing a thermal insulating liner, polyurethane A|B liner test. The graph illustrates the performance of a jute thermal insulating liner and a polyurethane liner with an A|B configuration at ambient temperature.

[046] **FIG. 11** illustrates a graph showing a thermal insulating liner, polyurethane A|B liner, bubble foil test. The graph illustrates the performance of a jute thermal insulating liner, a polyurethane liner with an A|B configuration, and a bubble foil liner at ambient temperature.

[047] **FIG. 12** illustrates a graph showing a thermal insulating liner, bubble foil test. The graph illustrates the performance of a jute thermal insulating liner and a bubble foil liner at ambient temperature.

[048] **FIG. 13** illustrates a graph showing a thermal insulating liner, EPS foam cooler test. The graph illustrates the performance of jute thermal insulating liners of varying densities and an EPS foam cooler at ambient temperature.

[049] **FIG. 14** illustrates a graph showing a thermal insulating liner density test. The graph illustrates the performance of jute thermal insulating liners of varying densities at ambient temperature.

[050] **FIG. 15** illustrates a graph showing a thermal insulating liner composition test. The graph illustrates the performance of jute thermal insulating liners of varying densities and fiber compositions at ambient temperature.

[051] **FIG. 16** illustrates a graph showing a thermal insulating liner, bubble foil test. The graph illustrates the performance of jute thermal insulating liners of varying thickness and densities and a bubble foil liner at ambient temperature.

[052] **FIG. 17** illustrates a graph showing a thermal insulating liner, polyurethane A|B liner test. The graph illustrates the performance of jute thermal insulating liners of varying densities and a polyurethane liner with an A|B configuration at ambient temperature.

[053] **FIG. 18** illustrates a graph showing a thermal insulating liner, EPS foam test. The graph illustrates the performance of a jute thermal insulating liner and an EPS foam cooler at ambient temperature.

[054] **FIG. 19** illustrates a graph showing a thermal insulating liner, polyurethane A|B liner test. The graph illustrates the performance of jute thermal insulating liners and polyurethane liner with an A|B configuration at ambient temperature. Gel pack temperature and the temperature of the top portion of the volume defined by the cavity created by the thermal insulating liners were analyzed.

[055] **FIG. 20** illustrates a graph showing a thermal insulating liner, polyurethane A|B liner adhesive test. The graph illustrates the performance of jute thermal insulating liners and polyurethane liner with an A|B

configuration at ambient temperature. Gel pack temperature and the temperature of the top portion of the volume defined by the cavity created by the thermal insulating liners were analyzed.

[056] **FIG. 21** illustrates a graph showing a gusset/non-gusset test. The graph illustrates the performance of a jute thermal insulating liner with gusset and a jute thermal insulating liner without gusset.

[057] **FIG. 22** illustrates a graph showing an adhesive/non adhesive test. The graph illustrates the performance of a jute thermal insulating liner with adhesive, a jute thermal insulating liner without adhesive and an EPS foam cooler at ambient temperature.

[058] **FIG. 23** illustrates a graph showing a 0.5 inch thermal insulating liner, 1.0 inch opened cell polyurethane foam A|B liner test. The graph illustrates the performance of jute thermal insulating liners of varying densities and a polyurethane liner with an A|B configuration at ambient temperature.

[059] **FIG. 24** illustrates a graph showing a thermal insulating liner, polyurethane A|B liner food test. The graph illustrates the performance of jute thermal insulating liners and a 1.0 inch opened cell polyurethane foam liner with an A|B configuration at ambient temperature with sample and varying gel pack quantity.

[060] **FIG. 25** illustrates a graph showing a thermal insulating liner food test. The graph illustrates the performance of jute thermal insulating liners of varying thickness at ambient temperature with sample.

[061] **FIG. 26** illustrates a graph showing a LP Summer, LP Winter, and Wool liner test. The graph illustrates the performance of jute thermal insulating liners of varying thickness at ambient temperature with sample and varying ice quantity.

[062] **FIG. 27** illustrates a continuous folded barrier.

[063] **FIG. 28** illustrates a barrier enclosing an insulating layer folded in half along the centerline connecting one side length to the other side length, with the edges formed by the fold joined together and forming a gusset.

[064] **FIG. 29** illustrates a barrier enclosing an insulating layer folded in half along the centerline connecting one side length to the other side length, with the edges formed by the fold joined together and forming a gusset wherein the gusset is held into place to give the part a 3D attribute.

[065] **FIG. 30** illustrates a one piece box liner (thermal insulating liner).

[066] **FIG. 31A** illustrates a non-gusseted A|B design, part A and part B.

[067] **FIG. 31B** illustrates a non-gusseted A|B design, part A and part B positioned in close proximity with closed lid.

[068] **FIG. 31C** illustrates a non-gusseted A|B design, part A and part B positioned in close proximity with an open lid.

[069] **FIG. 32A** illustrates a non-gusseted A|B design with ridged backing part A and part B.

[070] **FIG. 32B** illustrates a non-gusseted A|B design with ridged backing part A and part B, positioned in close proximity with an open lid.

[071] **FIG. 32C** illustrates a non-gusseted A|B design with ridged backing part A and part B, positioned in close proximity with an open lid placed into a container.

[072] **FIG. 33** illustrates a non-gusseted A|B design production line.

[073] **FIG. 34** illustrates a non-gusseted A|B design production line.

- [074] FIG. 35 illustrates a non-gusseted A|B design production line.
- [075] FIG. 36 illustrates a non-gusseted A|B design production line.
- [076] FIG. 37 illustrates a non-gusseted A|B design production line.
- [077] FIG. 38 illustrates a non-gusseted A|B design production line.

### DETAILED DESCRIPTION OF THE DISCLOSURE

[078] Several aspects are described below with reference to example applications for illustration. It should be understood that numerous specific details, relationships, and methods are set forth to provide a full understanding of the features described herein. One having ordinary skill in the relevant art, however, will readily recognize that the features described herein may be practiced without one or more of the specific details or with other methods. The features described herein are not limited by the illustrated ordering of acts or events, as some acts can occur in different orders and/or concurrently with other acts or events. Furthermore, not all illustrated acts or events are required to implement a methodology in accordance with the features described herein.

[079] The terminology used herein is for the purpose of describing particular cases only and is not intended to be limiting. As used herein, the singular forms “a”, “an” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise. Furthermore, to the extent that the terms “including”, “includes”, “having”, “has”, “with”, or variants thereof are used in either the detailed description and/or the claims, such terms are intended to be inclusive in a manner similar to the term “comprising”.

[080] In this disclosure the term “about” or “approximately” can mean a range of up to 10% of a given value. In this disclosure the term “substantially” refers to something which is done to a great extent or degree.

[081] In this disclosure, the term “biodegradable” is used herein to mean degradable over time by water and/or enzymes found in nature (e.g. compost), without harming, and in fact helping, the environment. Biodegradable materials include those materials which biodegrade when composted under compost conditions and materials which biodegrade without compost conditions. Biodegradable materials that are compostable will degrade under typical household or municipal compost conditions. A “biodegradable” material has the ability to break down, safely and relatively quickly, by biological means, into the raw materials of nature and disappear into the environment. A material that is “compostable” is one that can be placed into a composition of decaying biodegradable materials, and eventually turns into a nutrient-rich material. The “biodegradable” or “compostable” material can be tested under a recognized protocol and with tested methods of established regulatory bodies such as: EPA, EPA-TSCA, OECD, MITI or other similar or equivalent organizations in the United States or internationally.

[082] In this disclosure the term “oxygen barrier” “impermeable to oxygen” can refer to materials having oxygen transmission rates of less than about 10 cc/m<sup>2</sup>, in 24 hours at 73° F. (STP).

### Overview

[083] Provided herein are apparatuses, methods, and kits, for use in regulating the temperature of goods, foodstuffs, samples and medical items. The apparatuses, methods, and kits may comprise thermal insulating

liners. The thermal insulating liner may be dimensioned to fit within a container. The thermal insulating liner may be quickly collapsed and reconstructed to improve stackability and diminish the amount of space required to store the thermal insulating liner prior to use.

[084] The shipment or transport of goods, foodstuffs, samples and medical items may require that such materials remain at a stable temperature, or within a specific temperature range. This stable temperature or temperature range may be either elevated or decreased with respect to ambient temperatures to which the packaging is exposed. Because of long transport times for goods, foodstuffs, samples and medical items and the sensitivity of certain of these items due to slight temperature fluctuations, considerable efforts have been made to provide shipping containers with improved insulating characteristics.

[085] Provided herein are thermal insulating liners that may reduce leakage that may lead to degradation of the container material, and destruction of surrounding property. Provided herein are thermal insulating liners that may follow the contours of the outer container.

[086] Provided herein are thermal insulating liners for use in regulating the temperature of goods, foodstuffs, samples and medical items. In some embodiments, the thermal insulating liners may be flexible. In some embodiments, the thermal insulating liners may comprise recycled materials. In some embodiments, the thermal insulating liner may be used where it is essential to keep goods, foodstuffs, samples and medical items within a relatively defined thermal range. In some embodiments, the defined thermal range may be hot, warm, cool or cold, depending upon the goods, foodstuffs, samples, medical items or the purpose of use.

[087] Provided herein are thermal insulating liners comprising an insulating layer that may be partially or fully covered by a barrier. Fully covered insulating layers may be insulating layers with a barrier covering the entire interior and/or the entire exterior portions of the insulating layer. Partially covered insulating layers may be insulating layers with a barrier covering a part of the interior or exterior portions of the insulating layer.

[088] In some embodiment's, an insulating liner, insulating layer, barrier or a combination there of may be recyclable, compostable and/or biodegradable.

### **Insulating Layer**

[089] **FIG. 1A** illustrates a rectangular insulating layer **200**. **FIG. 1B** illustrates a rectangular insulating layer **200** folded along its width. **FIG. 1C** illustrates a rectangular insulating layer **200** folded along its width and having portions excised. **FIG. 1D** illustrates a rectangular insulating layer **200** folded along its width and having excised portions removed. The insulating layer **200** refers to fibrous materials produced by methods known in the art. The insulating layer **200** may comprise a first side portion **101**, a second side portion **102** and a middle portion **103** separating the first side portion **101** and second side portion **102**. The insulating layer may be folded along its width and have excised portions **104a**, **104b** removed.

[090] **FIG. 2A** illustrates an unfolded small insulating layer **200** comprising a first side portion **101**, and a second side portion **102**, with excised portions removed thus creating a middle portion **103**, a first side portion opposing first side flap **105a** and second side flap **105b**, and second side portion opposing first side flap **106a** and second side flap **106b**.

[091] **FIG. 2B** illustrates a small insulating layer **200** folded along its width. Middle portion **103** and excised portions **104a**, **104b** dimensions highlighted.

[092] **FIG. 3A** illustrates an unfolded medium insulating layer **200** comprising a first side portion **101**, and a second side portion **102**, with excised portions removed thus creating a middle portion **103**, a first side portion opposing first side flap **105a** and second side flap **105b**, and second side portion opposing first side flap **106a** and second side flap **106b**.

[093] **FIG. 3B** illustrates a medium insulating layer **200** folded along its width. Middle portion **103** and excised portions **104a**, **104b** dimensions highlighted.

[094] **FIG. 4A** illustrates an unfolded large insulating layer **200** comprising a first side portion **101**, and a second side portion **102**, with excised portions removed thus creating a middle portion **103**, a first side portion opposing first side flap **105a** and second side flap **105b**, and second side portion opposing first side flap **106a** and second side flap **106b**.

[095] **FIG. 4B** illustrates a large insulating layer **200** folded along its width. Middle portion **103** and excised portions **104a**, **104b** are dimensions highlighted.

[096] **FIG. 5A** illustrates a rectangular insulating layer **200**. **FIG. 5B** illustrates a rectangular insulating layer **200** folded along its length and excised portions **104** indicated. **FIG. 5C** illustrates a rectangular insulating layer **200** folded along its length and portion excised. **FIG. 5D** illustrates an unfolded insulating layer with excised portion removed. The insulating layer may comprise a first side portion **101**, a second side portion **102** and a middle portion **103** separating the first side portion **101** and second side portion **102**. The insulating layer **200** may be folded along its width and an excised portion **104** removed.

[097] In some embodiments, the insulating layer **200** may be flexible. In some embodiments, the insulating layer **200** may be pliable, bendable, or give way easily under pressure. In some embodiments, the insulating layer **200** may be one that may be capable of being bent or flexed repeatedly without significant damage. In some embodiments, the insulating layer **200** may be rigid. In some embodiments, the insulating layer **200** may be substantially rigid.

[098] In some embodiments, the insulating layer **200** may comprise nonwoven fibrous materials. Nonwoven may refer to any material made from the aggregation of fibers which is produced without the use of conventional weaving, or knitting operations. In some embodiments, in preparing such fibers, the starting nonwoven fabric may comprise a web of staple fibers, continuous filaments, plexifilamentary strands or the like. In some embodiments, the insulating layer **200** may comprise woven fibrous materials. In some embodiments, the insulating layer **200** may comprise fibers consolidated or bonded by any method known to one of skill in the art. In some embodiments, the insulating layer **200** may comprise woven, nonwoven, weaved, knitted, laced, felted, braided, plaited fibrous materials or combinations thereof.

[099] In some embodiments, the nonwoven fibrous materials may be made by any nonwoven process. In some embodiments, the nonwoven process may include, but are not limited to, wet laid, air laid, carding, felting, needling, print bonding, discontinues bonding, hot calendaring, belt calendaring, through-air thermal

bonding, garnett processed, ultrasonic bonding, radiant heat bonding, hydroentangling (spunlaced), or combinations thereof.

[0100] In some embodiments, the insulating layer **200** may be substantially dense. In some embodiments, the insulating layer **200** may be substantially stiff. In some embodiments, the insulating layer **200** may be substantially light. In some embodiments, the insulating layer **200** may be voluminous.

[0101] In some embodiments, the insulating layer **200** may comprise a first fibrous material and a second fibrous material. In some embodiments, an insulating layer may comprise at least about 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 20, 30, or 40 different fibrous materials. In some embodiments, an insulating layer may comprise about 1%, about 2%, about 3%, about 4%, about 5%, about 6%, about 7%, about 8%, about 9%, about 10%, about 11%, about 12%, about 13%, about 14%, about 15%, about 16%, about 17%, about 18%, about 19%, about 20%, about 21%, about 22%, about 23%, about 24%, about 25%, about 26%, about 27%, about 28%, about 29%, about 30%, about 31%, about 32%, about 33%, about 34%, about 35%, about 36%, about 37%, about 38%, about 39%, about 40%, about 41%, about 42%, about 43%, about 44%, about 45%, about 46%, about 47%, about 48%, about 49%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95%, or about 100% of a first fibrous material. In some embodiments, an insulating layer may comprise about 1%, about 2%, about 3%, about 4%, about 5%, about 6%, about 7%, about 8%, about 9%, about 10%, about 11%, about 12%, about 13%, about 14%, about 15%, about 16%, about 17%, about 18%, about 19%, about 20%, about 21%, about 22%, about 23%, about 24%, about 25%, about 26%, about 27%, about 28%, about 29%, about 30%, about 31%, about 32%, about 33%, about 34%, about 35%, about 36%, about 37%, about 38%, about 39%, about 40%, about 41%, about 42%, about 43%, about 44%, about 45%, about 46%, about 47%, about 48%, about 49%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95%, or about 100% of a second fibrous material.

[0102] In some embodiments, the insulating layer **200** may comprise virgin material. In some embodiments, virgin material may be material that has not been previously used or consumed, or subjected to processing other than for its original production. In some embodiments, the insulating layer **200** may comprise about 1%, about 2%, about 3%, about 4%, about 5%, about 6%, about 7%, about 8%, about 9%, about 10%, about 11%, about 12%, about 13%, about 14%, about 15%, about 16%, about 17%, about 18%, about 19%, about 20%, about 21%, about 22%, about 23%, about 24%, about 25%, about 26%, about 27%, about 28%, about 29%, about 30%, about 31%, about 32%, about 33%, about 34%, about 35%, about 36%, about 37%, about 38%, about 39%, about 40%, about 41%, about 42%, about 43%, about 44%, about 45%, about 46%, about 47%, about 48%, about 49%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95%, or about 100% virgin material.

[0103] In some embodiments, the insulating layer **200** may be biodegradable. In some embodiments, an insulating layer may degrade upon exposure to the conditions of temperature and humidity commonly encountered in municipal compost. In some embodiments, an insulating layer may degrade upon exposure to the conditions of temperature and humidity commonly encountered in household compost. In some

embodiments, the insulating layer **200** may be about 1%, about 2%, about 3%, about 4%, about 5%, about 6%, about 7%, about 8%, about 9%, about 10%, about 11%, about 12%, about 13%, about 14%, about 15%, about 16%, about 17%, about 18%, about 19%, about 20%, about 21%, about 22%, about 23%, about 24%, about 25%, about 26%, about 27%, about 28%, about 29%, about 30%, about 31%, about 32%, about 33%, about 34%, about 35%, about 36%, about 37%, about 38%, about 39%, about 40%, about 41%, about 42%, about 43%, about 44%, about 45%, about 46%, about 47%, about 48%, about 49%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95%, or about 100% biodegradable under municipal or household compost conditions.

[0104] In some embodiments, the insulating layer **200** may be about 1%, about 2%, about 3%, about 4%, about 5%, about 6%, about 7%, about 8%, about 9%, about 10%, about 11%, about 12%, about 13%, about 14%, about 15%, about 16%, about 17%, about 18%, about 19%, about 20%, about 21%, about 22%, about 23%, about 24%, about 25%, about 26%, about 27%, about 28%, about 29%, about 30%, about 31%, about 32%, about 33%, about 34%, about 35%, about 36%, about 37%, about 38%, about 39%, about 40%, about 41%, about 42%, about 43%, about 44%, about 45%, about 46%, about 47%, about 48%, about 49%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95%, or about 100% biodegradable.

[0105] In some embodiments, the insulating layer **200** may be compostable. In some embodiments, about 1%, about 2%, about 3%, about 4%, about 5%, about 6%, about 7%, about 8%, about 9%, about 10%, about 11%, about 12%, about 13%, about 14%, about 15%, about 16%, about 17%, about 18%, about 19%, about 20%, about 21%, about 22%, about 23%, about 24%, about 25%, about 26%, about 27%, about 28%, about 29%, about 30%, about 31%, about 32%, about 33%, about 34%, about 35%, about 36%, about 37%, about 38%, about 39%, about 40%, about 41%, about 42%, about 43%, about 44%, about 45%, about 46%, about 47%, about 48%, about 49%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95%, or about 100% of the insulating layer **200** may decompose within the range about 1 to about 50 weeks. In some embodiments, the insulating layer **200** may decomposes within about 1 week, 2 weeks, 3 weeks, 4 weeks, 5 weeks, 6 weeks, 7 weeks, 8 weeks, 9 weeks, 10 weeks, 11 weeks, 12 weeks, 13 weeks, 14 weeks, 15 weeks, 16 weeks, 17 weeks, 18 weeks, 19 weeks, 20 weeks, 21 weeks, 22 weeks, 23 weeks, 24 weeks, 25 weeks, 26 weeks, 27 weeks, 28 weeks, 29 weeks, 30 weeks, 31 weeks, 32 weeks, 33 weeks, 34 weeks, 35 weeks, 36 weeks, 37 weeks, 38 weeks, 39 weeks, 40 weeks, 41 weeks, 42 weeks, 43 weeks, 44 weeks, 45 weeks, 46 weeks, 47 weeks, 48 weeks, 49 weeks, or about 50 weeks. In some embodiments, the insulating layer **200** may decompose within at least 50 weeks.

[0106] In some embodiments, the insulating layer **200** may comprise recycled fibers. In some embodiments, the recycled fibers may be sourced from burlap bags, garments, jeans or other consumer goods. In some embodiments, the recycled fibers may be broken down from highly dense fibers into lower density fibers. In some embodiments, the insulating layer **200** may comprise 100% post-consumer recycled fibers. Post-consumer recycling refers to materials of manufacturing that are recycled after reaching a consumer. In some embodiments, the insulating layer **200** may comprise within the range of about 1% to about 100% post-

consumer recycled fibers. In some embodiments, the insulating layer **200** may comprise about 1%, about 2%, about 3%, about 4%, about 5%, about 6%, about 7%, about 8%, about 9%, about 10%, about 11%, about 12%, about 13%, about 14%, about 15%, about 16%, about 17%, about 18%, about 19%, about 20%, about 21%, about 22%, about 23%, about 24%, about 25%, about 26%, about 27%, about 28%, about 29%, about 30%, about 31%, about 32%, about 33%, about 34%, about 35%, about 36%, about 37%, about 38%, about 39%, about 40%, about 41%, about 42%, about 43%, about 44%, about 45%, about 46%, about 47%, about 48%, about 49%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95%, or about 100% post-consumer recycled fibers.

[0107] In some embodiments, the insulating layer **200** may comprise 100% pre-consumer recycled fibers. Pre-consumer recycling refers to materials of manufacturing that do not reach an end consumer prior to being recycled. In some embodiments, the insulating layer **200** may comprise within the range of about 1% to about 100% pre-consumer recycled fibers. In some embodiments, the insulating layer **200** may comprise about 1%, about 2%, about 3%, about 4%, about 5%, about 6%, about 7%, about 8%, about 9%, about 10%, about 11%, about 12%, about 13%, about 14%, about 15%, about 16%, about 17%, about 18%, about 19%, about 20%, about 21%, about 22%, about 23%, about 24%, about 25%, about 26%, about 27%, about 28%, about 29%, about 30%, about 31%, about 32%, about 33%, about 34%, about 35%, about 36%, about 37%, about 38%, about 39%, about 40%, about 41%, about 42%, about 43%, about 44%, about 45%, about 46%, about 47%, about 48%, about 49%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95%, or about 100% pre-consumer recycled fibers.

[0108] In some embodiments, the insulating layer **200** may be compostable. In some embodiments, about 1%, about 2%, about 3%, about 4%, about 5%, about 6%, about 7%, about 8%, about 9%, about 10%, about 11%, about 12%, about 13%, about 14%, about 15%, about 16%, about 17%, about 18%, about 19%, about 20%, about 21%, about 22%, about 23%, about 24%, about 25%, about 26%, about 27%, about 28%, about 29%, about 30%, about 31%, about 32%, about 33%, about 34%, about 35%, about 36%, about 37%, about 38%, about 39%, about 40%, about 41%, about 42%, about 43%, about 44%, about 45%, about 46%, about 47%, about 48%, about 49%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95%, or about 100% of the insulating layer **200** may decompose within the range about 1 to about 50 weeks. In some embodiments, the insulating layer **200** may decomposes within about 1 week, 2 weeks, 3 weeks, 4 weeks, 5 weeks, 6 weeks, 7 weeks, 8 weeks, 9 weeks, 10 weeks, 11 weeks, 12 weeks, 13 weeks, 14 weeks, 15 weeks, 16 weeks, 17 weeks, 18 weeks, 19 weeks, 20 weeks, 21 weeks, 22 weeks, 23 weeks, 24 weeks, 25 weeks, 26 weeks, 27 weeks, 28 weeks, 29 weeks, 30 weeks, 31 weeks, 32 weeks, 33 weeks, 34 weeks, 35 weeks, 36 weeks, 37 weeks, 38 weeks, 39 weeks, 40 weeks, 41 weeks, 42 weeks, 43 weeks, 44 weeks, 45 weeks, 46 weeks, 47 weeks, 48 weeks, 49 weeks, or about 50 weeks. In some embodiments, the insulating layer **200** may decompose within at least 50 weeks. In some embodiments, the insulating layer **200** may comprise a single continuous insulating layer. In some embodiments, the insulating layer **200** may comprise one or more segmented or discontinuous layers. In some embodiments, the insulating layers may comprise at least 1, at least 2, at least 3, at least 4, at least 5, at least 6, at least 7, at least 8, at least 9,

at least 10, at least 11, at least 12, at least 13, at least 14, at least 15, or at least 20 segmented or discontinuous layers.

### **Fibers**

[0109] In some embodiments, the insulating layer **200** may comprise fibrous materials. In some embodiments, the fibrous materials may comprise natural fibers, such as animal, plant or mineral fibers. In some embodiments, the insulating layer may comprise seed fibers. In some embodiments, the fibrous materials may comprise a regenerated fiber. In some embodiments, the fibrous materials may comprise a semi-synthetic fiber. In some embodiments, the fibrous materials may comprise a synthetic fiber, or a synthetic organic polymer. Synthetic fiber may comprise recycled plastics such as PET fibers. In some embodiments, polymer generally includes, but is not limited to, homopolymers, copolymers, for example, block, graft, random and alternating copolymers, terpolymers, etc., and blends and modifications thereof. Furthermore, unless otherwise specifically limited, the term “polymer” also includes all possible geometric configurations of the material. These configurations include, but are not limited to, isotactic, syndiotactic, atactic and random symmetries.

[0110] In some embodiments, the fibrous materials may comprise mineral fibers. In some embodiments, the fibrous materials may comprise natural fibers, synthetic fibers, or combinations thereof.

[0111] In some embodiments, the fibrous materials may comprise a bast fiber. In some embodiments, bast fibers may be plant fibers collected from the phloem or bast surrounding the stem of certain plants. In some embodiments, the fibrous materials may comprise but are not limited to cotton fibers, flax fibers, wood fibers, silk fibers, wool fibers, alpaca fibers, angora fibers, bison fibers, cashmere fibers, mohair fibers, sheep's wool fibers, qiviut fibers, llama fibers, camel fibers, yak fibers, possum fibers, horse fibers, dog fibers, chinchilla fibers, guanaco fibers, merino fibers, jute fibers, tag fibers, abaca fibers, slash pine fibers, jack pine fibers, radiata pine fibers, loblolly pine fibers, white spruce fibers, lodgepole pine fibers, redwood fibers, Douglas fir. Oaks fibers, genus *Quercus* fibers, maples fibers, genus *Acer* fibers, poplars fibers, genus *Populus* fibers, esparto grass fibers, bagasse fibers, ramie fibers, kenaf fibers, sisal fibers, hemp fibers, straw and other lignaceous and cellulosic fiber sources, milkweed floss fibers, pineapple leaf fibers, woody fibers, albardine fibers, wheat fibers, rice fibers, corn fibers, sugar cane fibers, papyrus fibers, reed fibers, sabia fibers, raphia fibers, bamboo fibers, sisal fibers, sunn fibers, lyocell fibers, ramie fibers, nettle fibers, spanish broom fibers alone or combinations thereof.

[0112] In some embodiments, the fibrous materials may be natural non-plant sources, such as, down, feathers, or combinations thereof.

[0113] In some embodiments, the fibrous materials may be treated or otherwise modified mechanically or chemically to provide desired characteristics or may be in a form that is generally similar to the form in which they may be found in nature.

[0114] In some embodiments, the fibrous materials may comprise viscose rayon fibers in all its varieties and other fibers derived from viscose or chemically-modified cellulose, cupra-ammonium rayon, ethyl cellulose, cellulose acetate, cellulosic esters, cellulosic ethers, cellulosic nitrates, cellulosic acetate butyrates, regenerated

celluloses, chemically modified cellulose such as cross-linked cellulose fibers, highly purified cellulose fibers such as Buckeye HPF polyamides alone or combinations thereof.

[0115] In some embodiments, the fibrous materials may comprise polyamides such as nylon, KEVLAR®, and the like, TEFLON®, polyesters, such as polyethylene terephthalate, poly(glycolic acid) (PGA), poly(lactic acid) (PLA), poly( $\beta$ -malic acid) (PMLA), poly( $\epsilon$ -caprolactone) (PCL), poly( $p$ -dioxanone) (PDS), poly(3-hydroxybutyrate) (PHB), and the like, Dacron, acrylics, Orlon, Acrilan, Dynel, polyolefins, such as, polyethylene, polypropylene, polybutylene, and the like, (including atactic, isotactic, syndiotactic and impact modified versions thereof) and poly(4-methyl-1-pentene), polyethylene terephthalate (PET), vinylidene chloride, saran, polyvinyl chloride, polyurethane, neoprene or polychloroprene, recycled polyethylene terephthalate (RPET), leather, canvas, bicomponent sheath-core fibers, multi-component fibers, and the like, ethylene vinyl alcohol copolymer fibers, carbon fibers, silicon nitride fibers, and the like, alone or combinations thereof.

[0116] Polyester as used herein, encompasses both “homopolyesters” and “copolyesters” and means a synthetic polymer prepared by the polycondensation of difunctional carboxylic acids with a difunctional hydroxyl compound. Typically, the difunctional carboxylic acid may be a dicarboxylic acid and the difunctional hydroxyl compound may be a dihydric alcohol such as, for example, glycols and diols. Alternatively, the difunctional carboxylic acid may be a hydroxy carboxylic acid such as, for example,  $p$ -hydroxybenzoic acid. The difunctional hydroxyl compound may be an aromatic nucleus bearing two hydroxy substituents such as, for example, hydroquinone.

[0117] In some embodiments, a fibrous material can comprise a polymer. In some embodiments, the fibrous materials may comprise polymers such as ethylene-vinyl acetate (EVA), polystyrene, impact modified polystyrene, ABS, styrenebutadiene block copolymers and hydrogenated derivatives thereof (SBS and SEBS), and thermoplastic polyurethanes. In some embodiments, the fibrous materials may comprise suitable styrenic polymers such as polystyrene, rubber modified polystyrene (HIPS), styrene/acrylonitrile copolymers (SAN), rubber modified SAN (ABS or AES), styrene maleic anhydride copolymers alone or combinations thereof. In some embodiments, a fibrous material can comprise a plastic. In some embodiments, a fibrous material can comprise petroleum plastics.

[0118] In some embodiments, the synthetic fibers may be a single component (e.g., single synthetic material or mixture makes up entire fiber), bi-component (e.g., the fiber is divided into regions, the regions including two or more different synthetic materials or mixtures thereof and may include co-extruded fibers and core and sheath fibers) or combinations thereof. Synthetic fiber may comprise recycled plastics such as PET fibers.

[0119] In some embodiments, any or all of the synthetic fibers may be treated before, during, or after manufacture to change any desired properties of the fibers.

[0120] In some embodiments, the fibrous material may have various cross-sectional shapes, including but not limited to round, rectangular, oval, tri-lobal, or other cross-sectional shapes.

[0121] In some embodiments, the insulating layer **200** may comprise a plurality of flame resistant fibers.

[0122] In some embodiments, the insulating layer **200** may further comprise at least one or more additional fibrous materials. In some embodiments, the additional fibrous materials may have a different composition and/or configuration (e.g., length, minimum transverse dimension, maximum transverse dimension, cross-sectional shape, or combinations thereof) than the insulating layer **200** fibers and may be of any type of fiber that is known in the art. In some embodiments, the additional fibrous material may be natural, or synthetic as disclosed herein. In some embodiments, the insulating layer **200** may comprise additional fibers in an amount of at least 10, 15, 20, 25, 30, 40, or 60 weight percent of the insulating layer **200** and/or not more than 99, 98, 95, 90, 85, 80, 70, 60, or 50 weight percent of the insulating layer **200**. In some embodiments, the insulating layer **200** may comprise additional fibers in an amount of about 1 to about 99 weight percent of the insulating layer **200**.

### **Nonwoven**

[0123] In some embodiments, the fibrous material may be nonwoven.

[0124] In some embodiments, the nonwoven fibrous material may be fabricated by methods such as, for example, bonded carded, needling, spunbonding, melt blowing, wet laid, thermal bonding, garnett processed, or combinations thereof.

[0125] In some embodiments, the fibers may be separated and then carded, or “combed” into a web by passing through rotating cylinders covered by wires with teeth. In some embodiments, the unbonded web of fibers may be bonded using various techniques. In some embodiments, carded refers to webs that are made from staple fibers wherein the fibers are separated. Next, the fibers may be sent through a combining or carding unit which further breaks apart and aligns the staple fibers in the machine direction so as to form a machine direction-oriented fibrous nonwoven web. Once the web has been formed, it may be then bonded by one or more of several bonding methods.

[0126] In some embodiments, the fibers may be bonded by inserting barbed needles mechanically into the substrate, hooking tufts of fibers and entangling them (needling). In some embodiments, needling may refer to inserting and drawing a fiber-interlacing tool such as needles into and from the base of loose fibers. The mechanical interlocking may be achieved with a large number of barbed needles that repeatedly punch through fibrous webs.

[0127] In some embodiments, spunbonding may refer to a process in which small diameter of substantially continuous fibers are formed by extruding a molten thermoplastic material from a plurality of fine, usually circular, capillaries of a spinnerette with the diameter of the extruded fibers then being rapidly reduced as by, for example, educative drawing and/or other well-known spunbonding mechanisms. The production of spunbonded nonwoven fabric is described and illustrated, for example, in U.S. Pat. Nos. 4,340,563 to Appel, et al., 3,692,618 to Dorschner, et al., 3,802,817 to Matsuki, et al., 3,338,992 to Kinney, 3,341,394 to Kinney, 3,502,763 to Hartman, 3,502,538 to Levy, 3,542,615 to Dobo, et al., and 5,382,400 to Pike, et al., which are incorporated herein in their entirety by reference thereto for all purposes. More information on the spunbond process in general may be obtained from Wadsworth, L. C. and Goswami, B. C., Nonwoven Fabrics:

“Spunbonded and Melt Blown Processes”, Proceedings of the Eighth Annual Nonwovens Workshop, July 30 to Aug. 3, 1990, sponsored by TANDEC, University of Tennessee at Knoxville.

[0128] In some embodiments, garnett processed can refer to the use of a fiber processing machine with a series of sawtooth wires that are much coarser than found in a conventional carding system. In some embodiments, garnett process can reduce textile waste, old clothing and assorted natural fibers to a fibrous feed that can be needlepunched.

[0129] In some embodiments, melt blowing may refer to fibers formed by extruding a molten thermoplastic material through a plurality of fine, usually circular, die capillaries as molten threads or filaments into converging high velocity gas streams (for example, airstreams) which attenuate the filaments of molten thermoplastic material to reduce their diameter, which may be to microfiber diameter. Such a process is disclosed, in various patents and publications, including NRL Report 4364, “Manufacture of Super-Fine Organic Fibers” by B. A. Wendt, E. L. Boone and D. D. Fluharty; NRL Report 5265, “An Improved Device For The Formation of Super-Fine Thermoplastic Fibers” by K. D. Lawrence, R. T. Lukas, J. A. Young; and U.S. Pat. No. 3,849,241, issued Nov. 19, 1974, to Butin, et al.

[0130] In some embodiments, the fibers may be bonded by laying a slurry of the fibers on a screen followed by squeezing the web between rolls and drying in an oven (wet laid). In some embodiments, wet laid may refer to the process for making nonwoven webs prepared by suspending fibers in a liquid medium, such as water, applying the fibrous slurry to a forming wire or fabric, removing the liquid from the fibers to form a continuous fibrous web and drying the web. Wet laid webs are well known in the art. In some embodiments, this process may produce a web in which fibers are randomly oriented. In some embodiments, these webs may be then superimposed on one another in a parallel fashion. Wet laid webs are disclosed, for instance, in U.S. Pat. No. 3,879,257 to Gentile et al., U.S. Pat. No. 5,399,412, issued to S. J. Sudall and S. A. Engel on Mar. 21, 1995; and U.S. Pat. No. 5,672,248, issued to Wendt et al. on Sep. 30, 1997 which are incorporated herein by reference.

[0131] In some embodiments, the fibrous materials may be bonded with heat and pressure from a calender (thermal bonding). In some embodiments, thermal bonding may comprise hot calendering, belt calendering, through-air thermal bonding, ultrasonic bonding, radiant-heat bonding and methods known to one of skill in the art or combinations thereof. In some embodiments, hot calendering comprises area bonding, point bonding, embossing or combinations thereof.

[0132] In some embodiments, the fibrous materials may not be bonded by a binder. In some embodiments, the fibrous material is not bonded together by a bonding agent. In some embodiments, the fibrous materials may be bonded by adding chemical binders (chemical or resin bonding). In some embodiments, the fibrous materials may be bonded by a powdered adhesive. In some embodiments, the powdered adhesive may be distributed throughout the web and then activated. In some embodiments, the powdered adhesive may be activated by heating the web and adhesive with hot air. In some embodiments, the fibrous materials in the web may be bound together by a bonding agent. In some embodiments, the bonding agent may consist of the same polymer as the fibrous materials, or a different fibrous material. In some embodiments, the bond may be a result of the combination of physical and chemical forces which acts on the boundary layer between the two polymers.

[0133] In some embodiments, the bonding agent may be but not limited to polyvinyl alcohol (PVA), polyvinyl chloride, polyvinyl acetate, acrylic bonding agents or combinations thereof.

[0134] In some embodiments, the bonding agent may comprise polyester, nylon, honey or sap. In some embodiments, a bonding agent may be biodegradable. In some embodiments, a bonding agent may be a polymer. In some embodiments, a bonding agent may be polylactic acid. In some embodiments, a bonding agent comprise polylactic acid. In some embodiments, a bonding agent may be a polyhydroxyalkanoates. In some embodiments, a bonding agent may comprise polyhydroxyalkanoates. In some embodiments, a bonding agent may comprise a copolymer. In some embodiments, a bonding agent may comprise a homopolymer. In some embodiments, a bonding agent may comprise a heteropolymer. In some embodiments, a bonding agent may be without limitation a biodegradable polymers of the following types: polylactates (or PLA), polymalates (or PMA), polyhydroxyalkanoates (or PHA), polycaprolactones (or PCL), polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters (PBAT), celluloses or starches which are highly acetylated or rendered hydrophobic by introduction of fixed fatty chains, taken alone or in combination, in the form of homopolymers or heteropolymers, whether linear, branched, crosslinked, dendritic or grafted.

[0135] In some embodiments, the bonding agent may comprise but is not limited to a synthetic resin bonding agent and/or a phenolic resin bonding agent. In some embodiments, the synthetic resin bonding agent may be acrylic copolymers, copolymer latex, styrenic copolymers, styrene-butadiene copolymers, vinyl copolymers, polyurethanes, sulfopolyesters, or combinations thereof. Sulfopolyester may include any polyester comprising a sulfomonomer.

[0136] In some embodiments, the bonding agent may comprise but is not limited to a resin bonding agent such as a starch, casein, a cellulose derivative, a powder adhesive bonding agent, or combinations thereof.

[0137] In some embodiments, the bonding agent may enhance one or more properties of the insulating layer **200**. In some embodiments, the bonding agent may enhance dry tensile strength, wet tensile strength, tear force. In some embodiments, the bonding agent may be hydrophilic. In some embodiments, the bonding agent may be hydrophobic. In some embodiments, the bonding agent may make up at least about 0.1, .02, 0.5, 0.7, 0.9, 1, 2, 3, 4, 5, 7, 10, 12, 14, 16, 18, 20, 25, 30, or at least about 40 weight percent of the insulating layer **200**.

[0138] In some embodiments, fibrous materials may be produced by total saturation of dry laid web of fibers in a suitable adhesive. In some embodiments, the fibers may be immersed in a bath containing adhesives, where the amount taken up by the web may be controlled by the concentration of the adhesive in the bath and by the degree of squeezing applied to the impegtrated material. In some embodiments, dry laid webs may be parallel laid, cross laid or randomly laid.

[0139] In some embodiments, the fibrous materials may be bonded by hydroentangling with water jets (spunlaced or hydroentangling).

[0140] In some embodiments, the fibrous materials may be bonded by processing the webs through a hot air oven (airlaid or thru-airbonded).

[0141] In some embodiments, the fibrous materials may be bonded by stitched bonding.

[0142] In some embodiments, the one or more fibers may be bonded into a nonwoven insulating layer **200**.

**Woven**

[0143] In some embodiments, the fibrous materials of the insulating layer **200** may be woven. There are literally hundreds of variations of weave patterns commonly used in the textile industry, and those of ordinary skill in the art are familiar with the patterns.

[0144] In some embodiments, the woven fabric may include, but is not limited to, weaves such as plain weaves, basket weaves, rep or rib weaves, twill weaves (e.g., straight twill, reverse twill, herringbone twill), leno weave, a mock leno weave, satin weaves, double weaves (e.g., double-width, tubular double weave, reversed double weave) or combinations thereof.

[0145] The woven fabric material may be woven in any suitable manner known by one of skill in the art. In some embodiments, the fabric may be woven on, but not limited to a table loom, a floor loom, a jacquard loom, a counterbalance loom, a jack loom, or an upright loom, a floor loom or combinations thereof.

[0146] In some embodiments the woven fibers are bonded by methods known by one of skill in the art. In some embodiments, the woven fibers are treated or bonded by any method disclosed herein.

**Heating**

[0147] In some embodiments, after producing the insulating layer **200**, the insulating layer **200** may undergo a heat setting step comprising heating the insulating layer **200** to a temperature of at least about 50, about 60, about 70, about 80, about 90, about 100, about 110, or at least about 120° C. In some embodiments, the insulating layer **200** may be heated to least about 120, about 130, about 140, about 150, about 160, about 170, about 180, about 190, or at least about 200° C. In some embodiments, after adding an optional bonding agent, the insulating layer **200** may undergo a heat setting step comprising heating the insulating layer **200** to a temperature of at least about 50, about 60, about 70, about 80, about 90, about 100, about 110, or at least about 120° C. In some embodiments, the insulating layer **200** may be heated to least about 120, about 130, about 140, about 150, about 160, about 170, about 180, about 190, or at least about 200° C. In some embodiments, after adding an optional coating, the insulating layer **200** may undergo a heat setting step comprising heating the insulating layer **200** to a temperature of at least about 50, about 60, about 70, about 80, about 90, about 100, about 110, or at least about 120° C. In some embodiments, the insulating layer **200** may be heated to least about 120, about 130, about 140, 150, about 160, about 170, about 180, about 190, or at least about 200° C. In some embodiments, the heat setting step may relax out internal fiber stresses and may aids in producing a dimensionally stable insulating layer **200**. In some embodiments, an odor neutralizer may be dispersed through the fibrous material during the heat treatment to reduce the presense of undesirable odors. These odor neutralizing agents may comprise organic, food safe substances and may be atmoized for effective transportation through the hot air stream. To assist in the even dispersion of the odor neutralizing agent through the material, a pressure gradient may be formed within the oven by placing fans above the material and vacuums underneath.

**Insulating Layer Properties**

[0148] In some embodiments, the insulating layer **200** may have a thickness ranging from about 0.10 centimeter (“cm”) to about 30 cm. In some embodiments, the insulating layer **200** have a thickness of about

0.10, about 0.15, about 0.20, about 0.25, about 0.30, about 0.40, about 0.50, about 0.60, about 0.70, about 0.80, about 0.90, about 1.0, about 1.10, about 1.20, about 1.30, about 1.40, about 1.50, about 1.60, about 1.70, about 1.80, about 1.90, about 2.00, about 2.50, about 3.00, about 3.50, about 4.00, about 5.0, about 6.0, about 7.0, about 8.0, about 9.0, about 10.0, about 11.0, about 11.5, about 12.0, about 12.5, about 13.0, about 13.5, about 14.0, about 14.5, about 15.0, about 15.5, about 16.0, about 16.5, about 17.0, about 17.5, about 18.0, about 18.5, about 19.0, about 19.5, about 20.0, about 21.0, about 22.0, about 23.0, about 24.0, about 25.0, about 26.0, about 27.0, about 28.0, about 29.0, or about 30.0 cm.

[0149] In some embodiments, the insulating layer **200** may have a length ranging from about 12 cm to about 300 cm. In some embodiments, the insulating layer **200** have a length of about 12, about 15, about 20, about 25, about 30, about 35, about 40, about 45, about 50, about 55, about 60, about 65, about 70, about 75, about 80, about 85, about 90, about 95, about 100, about 110, about 120, about 130, about 140, about 150, about 160, about 170, about 180, about 190, about 200, about 210, about 220, about 230, about 240, about 250, about 260, about 270, about 280, about 290, or about 300 cm.

[0150] In some embodiments, the insulating layer **200** may have a width ranging from about 12 cm to about 300 cm. In some embodiments, the insulating layer **200** may have a width of about 12, about 15, about 20, about 25, about 30, about 35, about 40, about 45, about 50, about 55, about 60, about 65, about 70, about 75, about 80, about 85, about 90, about 95, about 100, about 110, about 120, about 130, about 140, about 150, about 160, about 170, about 180, about 190, about 200, about 210, about 220, about 230, about 240, about 250, about 260, about 270, about 280, about 290, or about 300 cm. In some embodiments, the insulating layer **200** may be to a specific length and width as needed.

[0151] In some embodiments, the insulating layer **200** may comprise a density ranging from about 100 g/m<sup>2</sup> to about 5000 g/m<sup>2</sup>. In some embodiments, the insulating layer **200** may have a density of about 100, about 110, about 120, about 130, about 140, about 150, about 160, about 170, about 180, about 190, about 200, about 210, about 220, about 230, about 240, about 250, about 260, about 270, about 280, about 290, about 300, about 400, about 500, about 600, about 700, about 800, about 900, about 1000, about 1100, about 1200, about 1300, about 1400, about 1500, about 1600, about 1700, about 1800, about 1900, about 2000, about 2100, about 2200, about 2300, about 2400, about 2500, about 2600, about 2700, about 2800, about 2900, about 3000, about 3500, about 4000, or about 5000 g/m<sup>2</sup>.

[0152] In some embodiments, the insulating layer **200** may further comprise one or more additives. In some embodiments, the one or more additives may be added in any one or more steps of producing the insulating layer **200**. In some embodiments, the additives may include but are not limited to, starches, fillers, light and heat stabilizers, antistatic agents, extrusion aids, dyes, anticounterfeiting markers, slip agents, tougheners, adhesion promoters, oxidative stabilizers, UV absorbers, colorants, pigments, opacifiers (delustrants), optical brighteners, fillers, nucleating agents, flame retardants, softeners, plasticizers, viscosity modifiers, surface modifiers, antimicrobials, antifoams, lubricants, thermostabilizers, emulsifiers, disinfectants, water repellent, cold flow inhibitors, branching agents, oils, oil extracts, waxes, cleaning agents, detergents, odor control agents and catalysts.

[0153] In some embodiments, the oils may comprise one or more of oils from thyme (thymol, carvacrol), oregano (carvacrol, terpenes), lemon (limonene, terpinene, phellandrene, pinene, citral), lemongrass (citral, methylheptenone, citronellal, geraniol), orange flower (linalool,  $\beta$ -pinene, limonene), orange (limonene, citral), anise (anethole, safrol), clove (eugenol, eugenyl acetate, caryophyllene), rose (geraniol, citronellol), rosemary (borneol, bornyl esters, camphor), geranium (geraniol, citronellol, linalool), lavender (linalyl acetate, linalool), citronella (geraniol, citronellol, citronellal, camphene), eucalyptus (eucalyptol); peppermint (menthol, menthyl esters), spearmint (carvone, limonene, pinene); wintergreen (methyl salicylate), camphor (safrole, acetaldehyde, camphor), bay (eugenol, myrcene, chavicol), cinnamon (cinnamaldehyde, cinnamyl acetate, eugenol), tea tree (terpinen-4-ol, cineole), and cedar leaf ( $\alpha$ -thujone,  $\beta$ -thujone, fenchone).

[0154] In some embodiments, an odor neutralizer may be dispersed through the insulating layer to reduce the presence of undesirable odors. These odor neutralizing agents may comprise organic, food safe substances and may be atomized for effective transportation through the hot air stream. To assist in the even dispersion of the odor neutralizing agent through the material, a pressure gradient may be formed within the oven by placing fans above the material and vacuums underneath.

[0155] In some embodiments, oil extract may be oils dissolved in one or more of ethyl alcohol, glycerol, propylene glycol, water, a sweetening agent, a food color or combinations thereof.

[0156] In some embodiments, the insulating layer **200** may comprise at least about 0.05 to about 70 weight percent of one or more additives. In some embodiments, the insulating layer **200** may be at least about 0.05, about 0.1, about 0.2, about 0.3, about 0.4, about 0.5, about 0.6, about 0.7, about 0.8, about 0.9, about 1.0, about 1.5, about 2.0, about 2.5, about 3.0, about 3.5, about 4.0, about 4.5, about 5.0, about 5.5, about 6.0, about 6.5, about 7.0, about 8.0, about 9.0, about 10, about 15, about 20, about 25, about 30, about 35, about 40, about 45, about 50, about 60, or at least about 70 weight percent of one or more additives.

[0157] In some embodiments, an excised portion **104**, **104a**, **104b** of the insulating layer **200** may be removed. In some embodiments, the excision may be made by any method known by one of skill in the art. In some embodiments, the excision may be made by a die cut (punch). In some embodiments, the excision may be made by a knife. In some embodiments, the excision may be made by a scissor. In some embodiments, the excision may be performed by hand. In some embodiments, the excision may be performed by machine. In some embodiments, the excised portion may be a polygonal box form. In some embodiments, the excised portion **104**, **104a**, **104b** may be rectangular. In some embodiments, the excised portion may be a square. In some embodiments, the die cut may be triangular. In some embodiments, the excision may create a gusset design **FIG. 1D**. In some embodiments, about 1 to about 50 excisions are made and removed from the insulating layer **200**. In some embodiments about 1 (**104**), about 2 (**104a**, **104b**), about 3, about 4, about 5, about 6, about 7, about 15, about 20, about 25, about 30, about 35, about 40, or about 50 excised portions may be removed. In some embodiments, the excised portions may be of the same length and width. In some embodiments, the excised portions have varying length and width.

[0158] In some embodiments, the excised portion **104**, **104a**, **104b** may have a length ranging from about 5 cm to about 100 cm. In some embodiments, the excised portion **104**, **104a**, **104b** may have a length of about 5,

about 10, about 15, about 20, about 25, about 30, about 35, about 40, about 45, about 50, about 55, about 60, about 65, about 70, about 75, about 80, about 85, about 90, about 95, or about 100 cm.

[0159] In some embodiments, the excised portion **104**, **104a**, **104b** may have a width ranging from about 5 cm to about 100 cm. In some embodiments, the excised portion **104**, **104a**, **104b** may have a width of about 5, about 10, about 15, about 20, about 25, about 30, about 35, about 40, about 45, about 50, about 55, about 60, about 65, about 70, about 75, about 80, about 85, about 90, about 95, or about 100 cm. In some embodiments, the excised portion **104**, **104a**, **104b** may be to a specific length and width as needed.

[0160] In some embodiments, the excised portion may be added to the bottom of the insulating layer. In some embodiments, about 1 to about 50 excised portions may be added to the bottom of the insulating layer. In some embodiments, about 1, about 2, about 3, about 4, about 5, about 6, about 7, about 15, about 20, about 25, about 30, about 35, about 40, or about 50 excised portions may be added to the bottom of the insulating layer. In some embodiments, adding the excised portion to the bottom of the insulating layer may further mitigate conductive heat transfer.

### **Insulating Liner**

[0161] **FIG. 6** illustrates a collapsed thermal insulating liner **100**. The insulating layer enclosed in a transparent polyethylene barrier **114**. The thermal insulating liner **100** may comprise a first side portion, a second side portion **102**, a middle portion **103**, a first side portion opposing first side flap and second side flap, and second side portion opposing first side flap **106a** and second side flap **106b**.

[0162] **FIG. 7** illustrates a thermal insulating liner **100** placed in a container **115**. The thermal insulating liner **100** may comprise a bottom, first side portion **101**, second side portion **102**, first side portion opposing first side flap **105a** and second side flap **105b**, and second side portion opposing first side flap **106a** and second side flap **106b**, enclosed in a polyethylene barrier **114** in a polygonal box form.

[0163] In some embodiments, the polygonal box form may be triangular, a quadrilateral, pentagon, hexagon, heptagon, octagon, nonagon, or decagon. In some embodiments, the polygonal box form may be a concave polygon, a cyclic polygon, a regular polygon, a star polygon, a monoform polygon, polyform polygon or combinations thereof.

[0164] In some embodiments, the polygonal box form may comprise about 5 to about 30 sides. In some embodiments, the polygonal box form has about 5, about 6, about 7, about 8, about 9, or about 10 sides.

[0165] In some embodiments, the insulating layer **200** may be folded about its length or width and sealed at the edges to form a pouch.

[0166] In some embodiments, the open mouth substantially polygonal box form may be transformed into a closed structure by folding the top portion of the first side portion and the second side portion towards the center of the substantially polygonal box form and onto the opposing first and second side flaps. In some embodiments, during this maneuver, the first and second side flaps may also be folded toward the center of the substantially polygonal box form.

[0167] In some embodiments, the thermal insulating liner **100** may have a thermal conductivity ranging from about 0.001 W/mK (watts per meter kelvin) to about 4 W/mK. In some embodiments, the thermal insulating

liner **100** may have a thermal conductivity of about 0.001, 0.002, 0.003, 0.004, 0.005, 0.006, 0.007, 0.008, 0.009, 0.01, 0.011, 0.012, 0.013, 0.014, 0.015, 0.016, 0.017, 0.018, 0.019, 0.02, 0.021, 0.022, 0.023, 0.024, 0.025, 0.026, 0.027, 0.028, 0.029, 0.030, 0.031, 0.032, 0.033, 0.034, 0.035, 0.036, 0.037, 0.038, 0.039, 0.04, 0.041, 0.042, 0.043, 0.044, 0.045, 0.046, 0.047, 0.048, 0.049, 0.05, 0.051, 0.052, 0.053, 0.056, 0.057, 0.058, 0.059, 0.6, 0.061, 0.062, 0.063, 0.064, 0.065, 0.066, 0.067, 0.068, 0.069, 0.07, 0.08, 0.09, 0.1, 0.11, 0.12, 0.13, 0.14, 0.15, 0.16, 0.17, 0.18, 0.19, 0.2, 0.25, 0.3, 0.35, 0.4, 0.45, 0.5, 0.55, 0.6, 0.65, 0.7, 0.75, 0.8, 0.95, 1, 1.01, 1.1, 1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.8, 1.9, 2.0, 2.1, 2.2, 2.3, 2.4, 2.5, 2.6, 2.7, 2.8, 2.9, 3.0, 3.1, 3.2, 3.3, 3.4, 3.5, 3.6, 3.7, 3.8, 3.9, or about 4 W/mK.

[0168] In some embodiments, the thermal insulating liner **100** may include one or more insulating layers **200**. In some embodiments, the thermal insulating liner **100** may comprise about 1 to about 50 insulating layers **200**. In some embodiments, the thermal insulating liner **100** comprises about 1, about 2, about 3, about 4, about 5, about 6, about 7, about 8, about 9, about 10, about 11, about 12, about 13, about 14, about 15, about 20, about 25, about 30, about 35, about 40, or about 50 insulating layers **200**. In some embodiments, the additional insulating layers **200** may serve as strength reinforcement. In some embodiments, the additional insulating layers **200** may serve as an aid for bonding. In some embodiments, the additional insulating layers **200** may include woven or non-woven, natural or synthetic, components or fibers. In some embodiments, the additional insulating layers **200** may provide enhanced dimensional stability to the thermal insulating liner **100** structure. In some embodiments, one or more insulating layers **200** may be stacked together. In some embodiments, portions of the insulating layers **200** may be stacked together.

[0169] In some embodiments, the thermal insulating liner may be used as a temperature regulating apparatus, for example a cooler. In some embodiments, the thermal insulating liner may comprise a lid and may be a temperature regulating apparatus. In some embodiments, the thermal insulating liner may comprise a lid and may be a cooler. In some embodiments, the lid may be attached to the thermal insulating liner. In some embodiments, the lid may be a portion of the insulating layer. The lid may be movable from a closed state to an open state. The lid may be movable from an open state to a closed state. The lid may comprise nonwoven and/or woven fibers. The lid may be flexible or rigid. The lid may comprise natural fibers such as jute fibers. The lid may comprise synthetic fibers. The lid may comprise recycled fibers such as post-consumer and/or pre-consumer recycled fibers. The lid may be attached to the thermal insulating liner by adhesive, pressure sensitive adhesive, tapes, zippers, zip-lock, hooks, buttons, friction, solder, pins, clips, VELCRO®, among others. The lid may be woven or nonwoven into the thermal insulating liner by any method disclosed herein. The lid may be closed from an open state by adhesive, pressure sensitive adhesive, tapes, zippers, zip-lock, hooks, buttons, friction, solder, pins, clips, VELCRO®, among others. The lid may be manufactured in a process similar to that of the insulating layer disclosed herein. The lid may share the properties of the insulating layer as disclosed herein. In some embodiments, the lid may be covered by a barrier.

[0170] In some embodiments, a thermal insulating liner may comprise a backing **504**. In some embodiment, a backing may be rigid or flexible. In some embodiments, a backing may comprise any one or more materials disclosed herein. In embodiments, the backing may comprise the same and or similar properties as a barrier, an

insulating layer, a container or a thermal insulating liner. In embodiments, the backing may comprise the same and or similar materials as a barrier, an insulating layer, a container or a thermal insulating liner. In some embodiments, the backing may comprise a corrugated material, for example cardboard. In some embodiments, the backing may comprise one or more fibrous materials disclosed herein. In some embodiments, the backing may be attached to a barrier, an insulating layer and or a coating of an thermal insulating liner by any method disclosed herein, for example adhesive, pressure sensitive adhesive, tapes, zippers, zip-lock, hooks, buttons, friction, solder, pins, clips, VELCRO®, among others. In some embodiments, the backing may be on all sides of a thermal insulating liner. In some embodiments, a backing may be on an external surface of a thermal insulating liner. In some embodiments, a backing may be on an internal surface of a thermal insulating liner. In some embodiments, a backing is not on all sides of a thermal insulating liner. In some embodiments, a backing is on 1, 2, 3, 4, 5, 6, 7 or more sides of a thermal insulating liner. In some embodiments, a thermal insulating liner may have 1, 2, 3, 4, 5, 6, 7 or more backings. In some embodiments, a backing may mirror the dimensions of a side or a portion of a thermal insulating liner. In some embodiments, a backing may mirror the shape or a side or a portion of a thermal insulating liner. In some embodiments, the backing may be pliable, bendable, or gives way easily under pressure. In some embodiments, the backing may be one that is capable of being bent or flexed repeatedly without significant damage. In some embodiments, the backing may be hydrophilic, hydrophobic, hygroscopic, and or electrically conductive. In some embodiments, a backing may be moisture resistant. In some embodiments, a backing may be oxygen impermeable. In some embodiments, a backing may be compostable, recyclable, and/or biodegradable. In some embodiments, a backing comprises recycled materials.

[0171] In some embodiments, a thermal insulating liner **100** may be compostable. In some embodiments, about 1%, about 2%, about 3%, about 4%, about 5%, about 6%, about 7%, about 8%, about 9%, about 10%, about 11%, about 12%, about 13%, about 14%, about 15%, about 16%, about 17%, about 18%, about 19%, about 20%, about 21%, about 22%, about 23%, about 24%, about 25%, about 26%, about 27%, about 28%, about 29%, about 30%, about 31%, about 32%, about 33%, about 34%, about 35%, about 36%, about 37%, about 38%, about 39%, about 40%, about 41%, about 42%, about 43%, about 44%, about 45%, about 46%, about 47%, about 48%, about 49%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95%, or about 100% of the thermal insulating liner **100** may decompose within the range about 1 to about 50 weeks. In some embodiments, the thermal insulating liner **100** may decomposes within about 1 week, 2 weeks, 3 weeks, 4 weeks, 5 weeks, 6 weeks, 7 weeks, 8 weeks, 9 weeks, 10 weeks, 11 weeks, 12 weeks, 13 weeks, 14 weeks, 15 weeks, 16 weeks, 17 weeks, 18 weeks, 19 weeks, 20 weeks, 21 weeks, 22 weeks, 23 weeks, 24 weeks, 25 weeks, 26 weeks, 27 weeks, 28 weeks, 29 weeks, 30 weeks, 31 weeks, 32 weeks, 33 weeks, 34 weeks, 35 weeks, 36 weeks, 37 weeks, 38 weeks, 39 weeks, 40 weeks, 41 weeks, 42 weeks, 43 weeks, 44 weeks, 45 weeks, 46 weeks, 47 weeks, 48 weeks, 49 weeks, or about 50 weeks. In some embodiments, the thermal insulating liner **100** may decompose within at least 50 weeks.

### **Barriers**

[0172] In some embodiments, the insulating layer **200** may not be enclosed in a barrier **114**. In some embodiments, the insulating layer **200** may be enclosed in a barrier **114** thus forming the thermal insulating liner **100**. In some embodiments, a portion of the insulating layer **200** may be covered by a barrier **114**. In some embodiments, the inner surface of the insulating layer **200** may be covered by a barrier **114**. In some embodiments, the insulating layer **200** may be partially enclosed in a barrier **114**. In some embodiments, the insulating layer **200** may be fully enclosed in a barrier **114**. In some embodiments, enclosing or covering the insulating layer **200** may be accomplished with a sealer. In some embodiments, a sealer may seal the barrier **114** around the insulating layer **200**.

[0173] In some embodiments, the barrier **114** may contain at least one seal. In some embodiments, the barrier **114** may contain at least about 1 to at least about 50 seals. In some embodiments, the barrier **114** contains at least about 1, about 2, about 3, about 4, about 5, about 6, about 7, about 8, about 9, about 10, about 11, about 12, about 13, about 14, about 15, about 16, about 17, about 18, about 19, about 20, about 21, about 22, about 23, about 24, about 25, about 26, about 27, about 28, about 29, about 30, about 31, about 32, about 33, about 34, about 35, about 36, about 37, about 38, about 39, about 40, about 41, about 42, about 43, about 44, about 45, about 46, about 47, about 48, about 49, or at least about 50 seals.

[0174] In some embodiments, the sealer may be a vacuum valve sealer, heat sealer or radiofrequency welder, tape, adhesives, sealants, zip-locks, zippers, mechanical closure or any combination thereof. In some embodiments, the sealer may be a fastening mechanism. In some embodiments, the barrier **114** may comprise a rigid or semi-rigid material.

[0175] In some embodiments, the barrier **114** may loosely enclose the insulating layer **200**. In some embodiments, the barrier **114** may tightly enclose the insulating layer **200**. In some embodiments, the barrier **114** may be flexible. In some embodiments, the barrier **114** may be pliable, bendable, or gives way easily under pressure. In some embodiments, the barrier **114** may be one that is capable of being bent or flexed repeatedly without significant damage. In some embodiments, the barrier **114** may be hydrophilic, hydrophobic, hygroscopic, and or electrically conductive.

[0176] In some embodiments, the barrier **114** may be a coating. In some embodiments, the barrier **114** may be a polymer coating. In some embodiments, the insulating layer **200** may be subjected to drying, and the barrier **114** coating may be applied to the insulating layer **200**. In some embodiments, the barrier **114** coating is applied to the insulating layer **200** and thereafter dried.

[0177] In some embodiments, the barrier **114** may comprise a decorative coating, a printing ink, an adhesive coating, and/or a heat seal coating. In some embodiments, the coating may comprise a liquid impermeable substance and/or a microbial substance. In some embodiments, the microbial substance may be an antimicrobial, antibiotic, antiviral, antiparasitic, antiamoebic, antifungal, or antiprotozoal materials and/or compounds.

[0178] In some embodiments, the barrier **114** may be paper. In some embodiments, the barrier **114** may be Kraft paper. Kraft paper is a paper made by a Kraft pulping process wherein the paper consists of a web of pulp fibers (normally from wood or other plant fibers), and may be formed from an aqueous slurry on a wire or

screen, and may be held together by hydrogen bonding. Kraft paper may also contain a variety of additives and fillers. See, for example, Handbook of Pulp and Papermaking, Christopher Bierman, Academic Press, 1996. In some embodiments, the Kraft paper barrier can be coated with petroleum plastics. In some embodiments, the Kraft paper barrier can be coated with biodegradable polymers that behave like plastics. In some embodiments, the Kraft paper barrier can be coated with PHA Latex. In some embodiments, the Kraft paper barrier can be coated with resins derived from sugarcane. In some embodiments, the Kraft paper barrier can be coated with resins derived from cornstarch. In some embodiments, the Kraft paper barrier can be coated with resins derived from any resins that is derived from a biological material that is known in the art.

[0179] In some embodiments, the barrier **114** may comprise fluted paper laminated between higher density paperboard components. In some embodiments, the barrier **114** may mirror the container **115** in color. In some embodiments, the barrier **114** may mirror the container **115** in physical strength. In some embodiments, the barrier **114** may mirror the container **115** in rigidity. In some embodiments, the barrier **114** may mirror the container **115** in thickness.

[0180] In some embodiments, the barrier **114** may comprise one or more materials that may reflect radiant heat. In some embodiments, the barrier **114** may comprise one or more materials that may be tear resistant. In some embodiments, the barrier **114** may comprise one or more materials that may be non-porous. In some embodiments, the barrier **114** may comprise one or more materials that may be leak proof. In some embodiments, the barrier can be a moisture resistant barrier. In some embodiments, the barrier **114** may comprise one or more materials that may be heat sealed. In some embodiments, the barrier **114** may comprise one or more materials that may be welded. In some embodiments, the barrier **114** may comprise one or more materials that may be sealed with a sterile polyethylene pouch material. In some embodiments, the barrier **114** may comprise one or more materials that may be compatible with conventional printing techniques. In some embodiments, the barrier may comprise but is not limited to, thermoplastic polymers, such as metallic polyethylene terephthalate (METPET), and various reflective or metallic foils. In some embodiments, the barrier **114** may comprise films derived from hydrocarbons or other materials. In some embodiments, the barrier **114** may be printed with advertising information, artwork or any other indicia as desired. In some embodiments, advertising information, artwork or any other indicia may be printed as a mirror image or reversed image. In some embodiments, the barrier may be printed with mirror imaged advertising information, artwork or any other indicia and may be flipped to be read in the correct sense. In some embodiment, advertising information, artwork or any other indicia may be printed in the correct sense. In some embodiments, the barrier **114** may comprise a fibrous material. In some embodiments, the barrier **114** may comprise any one or more fibers disclosed herein. In some embodiments, the barrier **114** may comprise fibers consolidated or bonded by any method known to one of skill in the art. In some embodiments, the barrier **114** may comprise woven, nonwoven, weaved, knitted, laced, felted, braided, plaited fibers or combinations thereof.

[0181] In some embodiments, the barrier **114** may comprise virgin material. In some embodiments, the barrier **114** may comprise about 1%, about 2%, about 3%, about 4%, about 5%, about 6%, about 7%, about 8%, about 9%, about 10%, about 11%, about 12%, about 13%, about 14%, about 15%, about 16%, about 17%, about 18%,

about 19%, about 20%, about 21%, about 22%, about 23%, about 24%, about 25%, about 26%, about 27%, about 28%, about 29%, about 30%, about 31%, about 32%, about 33%, about 34%, about 35%, about 36%, about 37%, about 38%, about 39%, about 40%, about 41%, about 42%, about 43%, about 44%, about 45%, about 46%, about 47%, about 48%, about 49%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95%, or about 100% virgin material.

[0182] In some embodiments, the barrier **114** may be transparent. In some embodiments, the barrier **114** may be substantially transparent. In some embodiments, the barrier **114** may not be transparent. In some embodiment the barrier **114** may comprise pre-consumer recycled materials.

[0183] In some embodiments, the barrier **114** may comprise within the range of about 0% to about 100% pre-consumer recycled materials. In some embodiments, the barrier may comprise about 0, about 1, about 2, about 3, about 4, about 5, about 6, about 7, about 8, about 9, about 10, about 11, about 12, about 13, about 14, about 15, about 16, about 17, about 18, about 19, about 20, about 21, about 22, about 23, about 24, about 25, about 26, about 27, about 28, about 29, about 30, about 31, about 32, about 33, about 34, about 35, about 36, about 37, about 38, about 39, about 40, about 41, about 42, about 43, about 44, about 45, about 46, about 47, about 48, about 49, about 50, about 55, about 60, about 65, about 70, about 75, about 80, about 85, about 90, about 95, or about 100% pre-consumer recycled materials.

[0184] In some embodiments, the barrier **114** may comprise post-consumer recycled materials. In some embodiments, the barrier **114** may comprise within the range of about 0% to about 100% post-consumer recycled materials. In some embodiments, the barrier may comprise about 0, about 1, about 2, about 3, about 4, about 5, about 6, about 7, about 8, about 9, about 10, about 11, about 12, about 13, about 14, about 15, about 16, about 17, about 18, about 19, about 20, about 21, about 22, about 23, about 24, about 25, about 26, about 27, about 28, about 29, about 30, about 31, about 32, about 33, about 34, about 35, about 36, about 37, about 38, about 39, about 40, about 41, about 42, about 43, about 44, about 45, about 46, about 47, about 48, about 49, about 50, about 55, about 60, about 65, about 70, about 75, about 80, about 85, about 90, about 95, or about 100% pre-consumer recycled materials.

[0185] In some embodiments, the barrier **114** may be biodegradable. In some embodiments, a barrier may degrade upon exposure to the conditions of temperature and humidity commonly encountered in municipal compost. In some embodiments, an insulating layer may degrade upon exposure to the conditions of temperature and humidity commonly encountered in household compost. In some embodiments, the barrier **114** may be about 1%, about 2%, about 3%, about 4%, about 5%, about 6%, about 7%, about 8%, about 9%, about 10%, about 11%, about 12%, about 13%, about 14%, about 15%, about 16%, about 17%, about 18%, about 19%, about 20%, about 21%, about 22%, about 23%, about 24%, about 25%, about 26%, about 27%, about 28%, about 29%, about 30%, about 31%, about 32%, about 33%, about 34%, about 35%, about 36%, about 37%, about 38%, about 39%, about 40%, about 41%, about 42%, about 43%, about 44%, about 45%, about 46%, about 47%, about 48%, about 49%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95%, or about 100% biodegradable under municipal or household compost conditions.

[0186] In some embodiments, the barrier **114** may be about 1%, about 2%, about 3%, about 4%, about 5%, about 6%, about 7%, about 8%, about 9%, about 10%, about 11%, about 12%, about 13%, about 14%, about 15%, about 16%, about 17%, about 18%, about 19%, about 20%, about 21%, about 22%, about 23%, about 24%, about 25%, about 26%, about 27%, about 28%, about 29%, about 30%, about 31%, about 32%, about 33%, about 34%, about 35%, about 36%, about 37%, about 38%, about 39%, about 40%, about 41%, about 42%, about 43%, about 44%, about 45%, about 46%, about 47%, about 48%, about 49%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95%, or about 100% biodegradable.

[0187] In some embodiments, the barrier **114** may be compostable. In some embodiments, about 1%, about 2%, about 3%, about 4%, about 5%, about 6%, about 7%, about 8%, about 9%, about 10%, about 11%, about 12%, about 13%, about 14%, about 15%, about 16%, about 17%, about 18%, about 19%, about 20%, about 21%, about 22%, about 23%, about 24%, about 25%, about 26%, about 27%, about 28%, about 29%, about 30%, about 31%, about 32%, about 33%, about 34%, about 35%, about 36%, about 37%, about 38%, about 39%, about 40%, about 41%, about 42%, about 43%, about 44%, about 45%, about 46%, about 47%, about 48%, about 49%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95%, or about 100% of the barrier **114** may decompose within the range about 1 to about 50 weeks. In some embodiments, the barrier **114** may decomposes within about 1 week, 2 weeks, 3 weeks, 4 weeks, 5 weeks, 6 weeks, 7 weeks, 8 weeks, 9 weeks, 10 weeks, 11 weeks, 12 weeks, 13 weeks, 14 weeks, 15 weeks, 16 weeks, 17 weeks, 18 weeks, 19 weeks, 20 weeks, 21 weeks, 22 weeks, 23 weeks, 24 weeks, 25 weeks, 26 weeks, 27 weeks, 28 weeks, 29 weeks, 30 weeks, 31 weeks, 32 weeks, 33 weeks, 34 weeks, 35 weeks, 36 weeks, 37 weeks, 38 weeks, 39 weeks, 40 weeks, 41 weeks, 42 weeks, 43 weeks, 44 weeks, 45 weeks, 46 weeks, 47 weeks, 48 weeks, 49 weeks, or about 50 weeks. In some embodiments, the barrier **114** may decompose within at least 50 weeks.

[0188] In some embodiments, the barrier **114** may comprise within the range of about 1 to about 99 weight percent of the thermal insulating liner **100**. In some embodiments, the barrier may be about 1, about 2, about 3, about 4, about 5, about 6, about 7, about 8, about 9, about 10, about 11, about 12, about 13, about 14, about 15, about 16, about 17, about 18, about 19, about 20, about 21, about 22, about 23, about 24, about 25, about 26, about 27, about 28, about 29, about 30, about 31, about 32, about 33, about 34, about 35, about 36, about 37, about 38, about 39, about 40, about 41, about 42, about 43, about 44, about 45, about 46, about 47, about 48, about 49, about 50, about 55, about 60, about 65, about 70, about 75, about 80, about 85, about 90, about 95, or about 100 weight percent of the thermal insulating liner **100**.

[0189] In some embodiments, the barrier **114** may be the same shape as the insulating layer **200**. In some embodiments, the barrier **114** may be substantially the same shape as the insulating layer **200**. In some embodiments, the barrier **114** may not be substantially the same shape as the layer **200**. In some embodiments, the barrier **114** may be a polygonal box form.

[0190] MIL is one thousandth of an inch and measures the thickness. In some embodiments, the barrier **114** may have a thickness ranging from about 0.5 MIL to about 10 MIL. In some embodiments, the barrier **114** may

have a thickness of about 0.5, about 0.6, about 0.7, about 0.8, about 0.9, about 1.0, about 1.1, about 1.2, about 1.3, about 1.4, about 1.5, about 1.6, about 1.7, about 1.8, about 1.9, about 2.0, about 2.1, about 2.2, about 2.3, about 2.4, about 2.5, about 2.6, about 2.7, about 2.8, about 2.9, about 3.0, about 3.1, about 3.2, about 3.3, about 3.4, about 3.5, about 3.6, about 3.7, about 3.8, about 3.9, about 4.0, about 4.1, about 4.2, about 4.3, about 4.4, about 4.5, about 4.6, about 4.7, about 4.8, about 4.9, about 5, about 6, about 7, about 8, about 9, or about 10 MIL. In some embodiments, the barrier 114 may have a thickness of at least 10, 20, 30, 40, 50, or at least 60 MIL.

[0191] In some embodiments the insulating layer 200 may comprise a barrier 114, wherein the barrier may cover an inner surface of the insulating layer 100. In some embodiments, the barrier 114 may cover an outer surface of the insulating layer 200.

[0192] In some embodiments, the barrier 114 may comprise renewable, biobased, biodegradable latex. In some embodiments, the barrier 114 may comprise a polymer. In some embodiments, the polymer may be a biodegradable polymer. In some embodiments, the biodegradable polymer may include a polymer that may be obtained from renewable monomers, polymers which may be obtained from renewable natural sources (e.g., starch, sugars, lipids, corn, sugar beet, wheat, sugarcane, castor oil plant, rapeseed, wood, or other starch-rich products etc.). In some embodiments, the biodegradable polymer may include plant resins. The present invention is not limited to any particular plant resin. Indeed, a variety of plant resins are contemplated, the resins can be obtained from a plant including but not limited to a flowering plant, a vegetable plant, a crop plant, an herb plant, a shrub plant, and a tree plant. In some embodiments, the plant can be selected from the group of a *Brassica carinata*, *Crambe abyssinica*, corn (*Zea mays*), canola (*Brassica napus*), alfalfa (*Medicago sativa*), rice (*Oryza sativa*), rye (*Secale cereale*), sorghum (*Sorghum bicolor*), millet (*Pennisetum glaucum*), sunflower (*Helianthus annuus*), safflower (*Carthamus tinctorius*), wheat (*Triticum aestivum*), soybean (*Glycine max*), tobacco (*Nicotiana tabacum*), potato (*Solanum tuberosum*), peanuts (*Arachis hypogaea*), cotton (*Gossypium hirsutum*), sweet potato (*Ipomoea batatas*), cassava (*Manihot esculenta*), coffee (*Coffea* spp.), bamboo, coconut (*Cocos nucifera*), pineapple (*Ananas comosus*), citrus (*Citrus* spp.), cocoa (*Theobroma cacao*), tea (*Camellia sinensis*), banana (*Musa* spp.), avocado (*Persea americana*), fig (*Ficus casica*), guava (*Psidium guajava*), mango (*Mangifera indica*), olive (*Olea europaea*), papaya (*Carica papaya*), cashew (*Anacardium occidentale*), macadamia (*Macadamia integrifolia*), almond (*Prunus amygdalus*), sugar beets (*Beta vulgaris*), sugarcane (*Saccharum* spp.), oats, barley, Cork Oak (*Quercus suber*), Aspen (*Populus tremula*), Loblolly pine (*Pinus taeda*). In some embodiments, the plant can be selected from the group of a Brassicaceae species, *Nicotiana* species, a *Solanum* species, a *Gossypium* species, or a *Botryococcus* species. In some embodiments, the crop plant can be selected from the group of a mustard, tobacco, potato, cotton, sunflower, corn, safflower, rice, or algae. In some embodiments, the flowering plant can be an *Arabidopsis* sp. plant.

[0193] Examples of plant resins include but are not limited to amber, Balm of Gilead, balsam, Canada balsam, Boswellia, copal from trees of *Protium copal* and *Hymenaea courbaril*, dammar gum from trees of the family Dipterocarpaceae, Dragon's blood from the dragon trees (*Dracaena* species), elemi, frankincense from

*Boswellia sacra*, galbanum from *Ferula gummosa*, gum guaiacum from the lignum vitae trees of the genus *Guaiacum*, kauri gum from trees of *Agathis australis*, labdanum from mediterranean species of *Cistus*, mastic (plant resin) from the mastic tree *Pistacia lentiscus*, myrrh from shrubs of *Commiphora*, sandarac resin from *Tetraclinis articulata*, styrax (a Benzoin resin from various *Styrax* species), Spinifex resin from Australian *Spinifex* grasses, and turpentine, distilled from pine resin.

[0194] In some embodiments, the biodegradable polymer may be polylactic acid. In some embodiments, the biodegradable polymer comprise polylactic acid. In some embodiments, the biodegradable polymer may be polyhydroxyalkanoates. In some embodiments, the biodegradable polymer may comprise polyhydroxyalkanoates. In some embodiments, the barrier 114 may comprise a copolymer. In some embodiments, the barrier 114 may comprise a homopolymer. In some embodiments, the barrier 114 may comprise a heteropolymer.

[0195] In some embodiments, the biodegradable polymer may be without limitation a biodegradable polymers of the following types: polylactates (or PLA), polymalates (or PMA), polyhydroxyalkanoates (or PHA), polycaprolactones (or PCL), polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters (PBAT), celluloses or starches which are highly acetylated or rendered hydrophobic by introduction of fixed fatty chains, taken alone or in combination, in the form of homopolymers or heteropolymers, whether linear, branched, crosslinked, dendritic or grafted.

[0196] Polyhydroxyalkanoates are biopolyesters with various side chains and fatty acids with hydroxyl groups at the 4- or 5-position. They consist of (*R*)-3-hydroxy fatty acids. In some embodiments the polyhydroxyalkanoates may be a short chain length hydroxyalkanoic acids (PHA<sub>SCL</sub>) with an alkyl side chain. PHA<sub>SCL</sub> contain 3–5 carbon atoms, for example poly-3-hydroxybutyrate (P3HB), poly-4-hydroxybutyrate (P4HB). In some embodiments, the polyhydroxyalkanotes may be medium chain length hydroxyalkanoic acids (PHA<sub>MCL</sub>) with alkyl side chains. PHA<sub>MCL</sub> contain 6–14 carbon atoms. In some embodiments, the polyhydroxyalkanotes may be long chain length (PHA<sub>LCL</sub>) obtained from long chain fatty acids, which contain more than 14 carbon atoms. The monomer composition, macromolecular structure and physical chemical properties of PHAs vary. More than 150 different monomers may be combined within this family to give materials with extremely different properties. In some embodiments, the monomers may be 3-hydroxybutyrate (3HBA). In some embodiments, the monomers may be 3-hydroxyvalerate (3HVA). In some embodiments, the PHA may be a copolymer. In some embodiments, the copolymer may be Poly(3-hydroxybutyrate-*co*-3-hydroxyvalerate), commonly known as PHBV.

[0197] In some embodiments, the polyhydroxyalkanoates may comprise high molecular weights (for example, about 300,000 to about 800,000 Daltons (e.g., 350,000 Daltons; 400,000 Daltons; 450,000 Daltons; 500,000 Daltons; 550,000 Daltons; 600,000 Daltons; 650,000 Daltons; or 700,000 Daltons; 750,000 Daltons) with high melt temperatures of about 160° C. to about 170° C.). US patent number 6201083 and 9,085,688 are incorporated herein in their entirety by reference thereto for all purposes.

[0198] In some embodiments, an aqueous polyhydroxyalkanoate (PHA) emulsion from a biobased, biodegradable PHA polymer, copolymer or blend thereof can be produced by, melting the PHA polymer,

copolymer or blend thereof to form a molten PHA polymer, copolymer or blend thereof; lowering the temperature of the molten PHA polymer, copolymer or blend thereof to about 20°C to about 50°C below the melting temperature of the highest melting polymer component of the PHA polymer, copolymer or blend thereof to obtain a lower-temperature PHA polymer, copolymer or blend thereof; combining the lower-temperature PHA polymer, copolymer or blend thereof and an aqueous colloid stabilizer solution heated to about 60°C to about 90°C under high distributive mixing thereby forming a water-in-PHA emulsion; lowering the temperature of the water-in-PHA emulsion by about 20°C to about 50°C; and adding water and optionally one or more polymeric dispersants or surfactants producing an aqueous PHA emulsion having a ratio of colloid stabilizer to PHA polymer of 0.1 to 8 parts to 100 parts by dry weight PHA polymer.

[0199] In some embodiments, latexes can be produced from biobased, biodegradable polyhydroxyalkanoate (PHA) polyester for example by forming a PHA suspension from biomass containing the PHA using an aqueous recovery process involving cell digestion, washing with surfactant/peroxide followed by microfluidization, centrifugation and re-suspension of the PHA particles in water and producing an amorphous PHA latex by heating the suspension under pressure to 190°C -200°C (25°C above melt temperature of PHA) followed by rapid cooling.

[0200] In some embodiments, a biobased, biodegradable polyhydroxyalkanoate (PHA) latex can be produced initially by melting at least one PHA polymer or copolymer at a temperature above its highest melting temperature e.g., at about 160°C to about 170 °C, producing a melt which has a viscosity of about 800 Pas to 2500 Pas, and then optionally adding other polymer materials, plasticizers, emulsification additives or fillers producing a homogeneous molten composition; the temperature of the molten mass is then lowered, with continuous mixing, to a temperature about 20°C to about 50°C below the melting temperature of the highest melting polymer component e.g., about 120°C to about 140°C and then an aqueous solution containing colloid stabilizers can be added into the molten PHA which then undergoes a high shear or high distributive mixing event to produce a water-in-PHA dispersion; a second aqueous solution containing only water or pH adjusting aids and optionally more colloid stabilizers (same or different from the first step aqueous addition) can then be added to the water-in-PHA emulsion which then undergoes another high shear or high distributive mixing event producing a PHA-in-water emulsion; the temperature of the dispersion can be lowered to about 80°C and finally dispensing the formed latex (aqueous PHA emulsion) below about 40°C.

[0201] Polylactates (PLA) is a common biodegradable polymer derived from lactate. In some embodiments, the polylactate may comprise the monomers lactic acid. In some embodiments, the polylactate may comprise the cyclic di-ester, lactide.

[0202] In some embodiments, the biodegradable polymer may be heteropolymers. In some embodiments, the biodegradable polymers may be di-, tri- or tetrapolymers. In some embodiments, the monomers of which may be diols, caprolactones or acids and hydroxy acids, for example but not limited to D-lactic, L-lactic, glycolic, tetramethylglycolic, malic,  $\beta$ -propiolactic, butyric, valeric, phthalic, terephthalic, succinic, adipic, sebacic, hexanoic, octanoic, decanoic, dodecanoic, tetradecanoic, hexadecanoic or octadecanoic acids. In some embodiments, the biodegradable polymers may be random, alternating, sequential or block heteropolymers.

[0203] In some embodiments, the barrier 114 may be applied by a powder coating approach, casting, spraying, dipping or immersing, by the use of brushes, rollers, blocks or other instruments. In some embodiments, the barrier 114 may be applied by air knife coating, blade coating, metering roll coating, gravure coating, rod coating, curtain coating, bath coating.

[0204] In some embodiments, the barrier 114 may comprise wax, or polyethylene film. In some embodiments, wax may be used to improve moisture resistance properties of the barrier 114. In some embodiments, wax may be used to reduce the barrier's 114 coefficient of friction, and/or to reduce brittleness of the barrier 114. In some embodiments, the wax may be, without limitation, for example, carnauba, candelilla, beeswax, or paraffin.

[0205] In some embodiments, the barrier 114 may be applied in at least about 1, 2, 3, 4, 5, 6, 7, 8, 9, or at least about 10 steps. In some embodiments, the barrier 114 may comprise one or more layers. In some embodiments, the barrier 114 may comprise at least 1, 2, 3, 4, 5, 6, 7, 8, 9, or at least 10 layers. In some embodiments, a first barrier layer may comprise a different composition compare to a second barrier layer. In some embodiments, a first barrier layer may comprise the same composition as a second barrier layer.

[0206] In some embodiments, the barrier 114 may comprise a polymer selected from the group comprising, without limitation acrylic polymers, acrylic copolymers, polyvinyl acetate, polyvinyl alcohol, poly-ethylene vinyl acetate, poly-ethylene vinyl chloride, styrene butadiene copolymers, polyvinylidene chloride, or starch.

[0207] In some embodiments, the barrier 114 disclosed herein may comprise a polymer blend. In some embodiments, the polymer blend may be a first polymer blended with another polymer to form a latex. In some embodiments, the polymer blend may comprise one or more biodegradable polymer. In some embodiments, the polymer blend may comprise use of a melt blending process. In some embodiments, the melt blend may comprise polycaprolactone having a molecular weight from about 1000 to 1,000,000 Daltons. In some embodiments, the melt blend may comprise aliphatic polyesters derived from a diol and diacid comprising at least one diol selected from ethylene glycol, polyethylene glycol, butane diol, 1,2-hexane diol, 1,3-propylene glycol and at least one diacid selected from adipic acid, succinic acid, terephthalic acid or furan dicarboxylic acid. In some embodiments, the melt blend may comprise one or more polymers disclosed herein. In some embodiments, the blend may comprise one or more polymers disclosed herein. In some embodiments, the aforementioned polymers may be combined with other materials to impart specific characteristics to the barrier 114.

### **Barrier Coating**

[0208] In some embodiments, the barrier 114 can be coated. In some embodiments, a portion of a barrier 114 may be coated. In some embodiments, the inner surface of the barrier 114 can be coated. In some embodiments, the barrier 114 may be partially coated. In some embodiments, the barrier 114 may be fully coated. The barrier may be coated by any method disclosed herein.

[0209] In some embodiments, the coating may be a polymer coating. In some embodiments, the coating may comprise a rigid or semi-rigid material. In some embodiments, the coating may be flexible. In some embodiments, the coating may be pliable, bendable, or gives way easily under pressure. In some embodiments,

the coating may be one that is capable of being bent or flexed repeatedly without significant damage. In some embodiments, the coating may be hydrophilic, hydrophobic, hygroscopic, and or electrically conductive.

[0210] In some embodiments, the coating may comprise a decorative coating, a printing ink, an adhesive coating, and/or a heat seal coating. In some embodiments, the coating may comprise a liquid impermeable substance and/or a microbial substance. In some embodiments, the microbial substance may be an antimicrobial, antibiotic, antiviral, antiparasitic, antiamoebic, antifungal, or antiprotozoal materials and/or compounds.

[0211] In some embodiments, the coating may be paper. In some embodiments, the coating may mirror the container 115 in color. In some embodiments, the coating may mirror the container 115 in physical strength. In some embodiments, the coating may mirror the container 115 in rigidity. In some embodiments, the coating may mirror the container 115 in thickness.

[0212] In some embodiments, the coating may comprise one or more materials that may reflect radiant heat. In some embodiments, the coating may comprise one or more materials that may be tear resistant. In some embodiments, the coating comprise one or more materials that may be non-porous. In some embodiments, the coating may comprise one or more materials that may be leak proof. In some embodiments, the coating can be a moisture resistant coating. In some embodiments, the coating may comprise one or more materials that may be heat sealed. In some embodiments, the coating may comprise one or more materials that may be welded. In some embodiments, the coating may comprise one or more materials that may be sealed with a sterile polyethylene pouch material. In some embodiments, the coating may comprise one or more materials that may be compatible with conventional printing techniques. In some embodiments, the coating may comprise but is not limited to, thermoplastic polymers, such as metallic polyethylene terephthalate (METPET), and various reflective or metallic foils. In some embodiments, the coating may comprise films derived from hydrocarbons or other materials. In some embodiments, the coating may be printed with advertising information, artwork or any other indicia as desired. In some embodiments, advertising information, artwork or any other indicia may be printed as a mirror image or reversed image. In some embodiments, the coating may be printed with mirror imaged advertising information, artwork or any other indicia and may be flipped to be read in the correct sense. In some embodiment, advertising information, artwork or any other indicia may be printed in the correct sense. In some embodiments, the coating may comprise a fibrous material. In some embodiments, the coating may comprise any one or more fibers disclosed herein. In some embodiments, the coating may comprise fibers consolidated or bonded by any method known to one of skill in the art. In some embodiments, the coating may comprise woven, nonwoven, weaved, knitted, laced, felted, braided, plaited fibers or combinations thereof.

[0213] In some embodiments, the coating may comprise virgin material. In some embodiments, the coating may comprise about 1%, about 2%, about 3%, about 4%, about 5%, about 6%, about 7%, about 8%, about 9%, about 10%, about 11%, about 12%, about 13%, about 14%, about 15%, about 16%, about 17%, about 18%, about 19%, about 20%, about 21%, about 22%, about 23%, about 24%, about 25%, about 26%, about 27%, about 28%, about 29%, about 30%, about 31%, about 32%, about 33%, about 34%, about 35%, about 36%, about 37%, about 38%, about 39%, about 40%, about 41%, about 42%, about 43%, about 44%, about 45%,

about 46%, about 47%, about 48%, about 49%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95%, or about 100% virgin material.

[0214] In some embodiments, the barrier can be coated with petroleum plastics. In some embodiments, the barrier can be coated with biodegradable polymers that behave like plastics. In some embodiments, the barrier can be coated with PHA Latex. In some embodiments, the barrier can be coated with resins derived from sugarcane. In some embodiments, the barrier can be coated with resins derived from cornstarch. In some embodiments, the barrier can be coated with resins derived from any resins that is derived from a biological material that is known in the art.

[0215] In some embodiments, the coating may be transparent. In some embodiments, the coating may be substantially transparent. In some embodiments, the coating may not be transparent. In some embodiment the coating may comprise pre-consumer recycled materials.

[0216] In some embodiments, the coating may comprise within the range of about 0% to about 100% pre-consumer recycled materials. In some embodiments, the coating may comprise about 0, about 1, about 2, about 3, about 4, about 5, about 6, about 7, about 8, about 9, about 10, about 11, about 12, about 13, about 14, about 15, about 16, about 17, about 18, about 19, about 20, about 21, about 22, about 23, about 24, about 25, about 26, about 27, about 28, about 29, about 30, about 31, about 32, about 33, about 34, about 35, about 36, about 37, about 38, about 39, about 40, about 41, about 42, about 43, about 44, about 45, about 46, about 47, about 48, about 49, about 50, about 55, about 60, about 65, about 70, about 75, about 80, about 85, about 90, about 95, or about 100% pre-consumer recycled materials.

[0217] In some embodiments, the coating may comprise post-consumer recycled materials. In some embodiments, the coating may comprise within the range of about 0% to about 100% post-consumer recycled materials. In some embodiments, the coating may comprise about 0, about 1, about 2, about 3, about 4, about 5, about 6, about 7, about 8, about 9, about 10, about 11, about 12, about 13, about 14, about 15, about 16, about 17, about 18, about 19, about 20, about 21, about 22, about 23, about 24, about 25, about 26, about 27, about 28, about 29, about 30, about 31, about 32, about 33, about 34, about 35, about 36, about 37, about 38, about 39, about 40, about 41, about 42, about 43, about 44, about 45, about 46, about 47, about 48, about 49, about 50, about 55, about 60, about 65, about 70, about 75, about 80, about 85, about 90, about 95, or about 100% pre-consumer recycled materials.

[0218] In some embodiments, the coating may be compostable. In some embodiments, about 1%, about 2%, about 3%, about 4%, about 5%, about 6%, about 7%, about 8%, about 9%, about 10%, about 11%, about 12%, about 13%, about 14%, about 15%, about 16%, about 17%, about 18%, about 19%, about 20%, about 21%, about 22%, about 23%, about 24%, about 25%, about 26%, about 27%, about 28%, about 29%, about 30%, about 31%, about 32%, about 33%, about 34%, about 35%, about 36%, about 37%, about 38%, about 39%, about 40%, about 41%, about 42%, about 43%, about 44%, about 45%, about 46%, about 47%, about 48%, about 49%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, about 95%, or about 100% of the coating may decompose within the range about 1 to about 50 weeks. In some embodiments, the coating may decomposes within about 1 week, 2 weeks, 3 weeks, 4 weeks, 5

weeks, 6 weeks, 7 weeks, 8 weeks, 9 weeks, 10 weeks, 11 weeks, 12 weeks, 13 weeks, 14 weeks, 15 weeks, 16 weeks, 17 weeks, 18 weeks, 19 weeks, 20 weeks, 21 weeks, 22 weeks, 23 weeks, 24 weeks, 25 weeks, 26 weeks, 27 weeks, 28 weeks, 29 weeks, 30 weeks, 31 weeks, 32 weeks, 33 weeks, 34 weeks, 35 weeks, 36 weeks, 37 weeks, 38 weeks, 39 weeks, 40 weeks, 41 weeks, 42 weeks, 43 weeks, 44 weeks, 45 weeks, 46 weeks, 47 weeks, 48 weeks, 49 weeks, or about 50 weeks. In some embodiments, the coating may decompose within at least 50 weeks.

[0219] In some embodiments, the coating may comprise within the range of about 1 to about 99 weight percent of the thermal insulating liner **100**. In some embodiments, the coating may be about 1, about 2, about 3, about 4, about 5, about 6, about 7, about 8, about 9, about 10, about 11, about 12, about 13, about 14, about 15, about 16, about 17, about 18, about 19, about 20, about 21, about 22, about 23, about 24, about 25, about 26, about 27, about 28, about 29, about 30, about 31, about 32, about 33, about 34, about 35, about 36, about 37, about 38, about 39, about 40, about 41, about 42, about 43, about 44, about 45, about 46, about 47, about 48, about 49, about 50, about 55, about 60, about 65, about 70, about 75, about 80, about 85, about 90, about 95, or about 100 weight percent of the thermal insulating liner **100**.

[0220] In some embodiments, the coating may be the same shape as the insulating layer **200**. In some embodiments, the coating may be substantially the same shape as the insulating layer **200**. In some embodiments, the coating may not be substantially the same shape as the insulating layer **200**.

[0221] In some embodiments, the coating may have a thickness ranging from about 0.5 MIL to about 10 MIL. In some embodiments, the coating may have a thickness of about 0.5, about 0.6, about 0.7, about 0.8, about 0.9, about 1.0, about 1.1, about 1.2, about 1.3, about 1.4, about 1.5, about 1.6, about 1.7, about 1.8, about 1.9, about 2.0, about 2.1, about 2.2, about 2.3, about 2.4, about 2.5, about 2.6, about 2.7, about 2.8, about 2.9, about 3.0, about 3.1, about 3.2, about 3.3, about 3.4, about 3.5, about 3.6, about 3.7, about 3.8, about 3.9, about 4.0, about 4.1, about 4.2, about 4.3, about 4.4, about 4.5, about 4.6, about 4.7, about 4.8, about 4.9, about 5, about 6, about 7, about 8, about 9, or about 10 MIL. In some embodiments, the coating may have a thickness of at least 10, 20, 30, 40, 50, or at least 60 MIL.

[0222] In some embodiments the barrier **114** may comprise a coating, wherein the coating may cover an inner surface of the barrier **114**. In some embodiments, the coating may cover an outer surface of the barrier **114**.

[0223] In some embodiments, the coating may comprise renewable, biobased, biodegradable latex. In some embodiments, the coating can comprise a plastic. In some embodiments, the plastic can comprise petroleum plastics. In some embodiments, the coating may comprise a polymer. In some embodiments, the polymer may be a biodegradable polymer. In some embodiments, the biodegradable polymer may include a polymer that may be obtained from renewable monomers, polymers which may be obtained from renewable natural sources (e.g., starch, sugars, lipids, corn, sugar beet, wheat, castor oil plant, rapeseed, wood, or other starch-rich products etc.). In some embodiments, the biodegradable polymer may include plant resins. The present invention is not limited to any particular plant resin. Indeed, a variety of plant resins are contemplated, the resins can be obtained from a plant including but not limited to a flowering plant, a vegetable plant, a crop plant, an herb plant, a shrub plant, and a tree plant. In some embodiments, the plant can be selected from the group of a

*Brassica carinata*, *Crambe abyssinica*, corn (*Zea mays*), canola (*Brassica napus*), alfalfa (*Medicago sativa*), rice (*Oryza sativa*), rye (*Secale cereale*), sorghum (*Sorghum bicolor*), millet (*Pennisetum glaucum*), sunflower (*Helianthus annuus*), safflower (*Carthamus tinctorius*), wheat (*Triticum aestivum*), soybean (*Glycine max*), tobacco (*Nicotiana tabacum*), potato (*Solanum tuberosum*), peanuts (*Arachis hypogaea*), cotton (*Gossypium hirsutum*), sweet potato (*Ipomoea batatas*), cassava (*Manihot esculenta*), coffee (*Coffea* spp.), bamboo, coconut (*Cocos nucifera*), pineapple (*Ananas comosus*), citrus (*Citrus* spp.), cocoa (*Theobroma cacao*), tea (*Camellia sinensis*), banana (*Musa* spp.), avocado (*Persea americana*), fig (*Ficus casica*), guava (*Psidium guajava*), mango (*Mangifera indica*), olive (*Olea europaea*), papaya (*Carica papaya*), cashew (*Anacardium occidentale*), macadamia (*Macadamia integrifolia*), almond (*Prunus amygdalus*), sugar beets (*Beta vulgaris*), sugarcane (*Saccharum* spp.), oats, barley, Cork Oak (*Quercus suber*), Aspen (*Populus tremula*), Loblolly pine (*Pinus taeda*). In some embodiments, the plant can be selected from the group of a Brassicaceae species, *Nicotiana* species, a *Solanum* species, a *Gossypium* species, or a *Botryococcus* species. In some embodiments, the crop plant can be selected from the group of a mustard, tobacco, potato, cotton, sunflower, corn, safflower, rice, or algae. In some embodiments, the flowering plant can be an *Arabidopsis* sp. plant.

[0224] Examples of plant resins include but are not limited to amber, Balm of Gilead, balsam, Canada balsam, Boswellia, copal from trees of *Protium copal* and *Hymenaea courbaril*, dammar gum from trees of the family Dipterocarpaceae, Dragon's blood from the dragon trees (*Dracaena* species), elemi, frankincense from *Boswellia sacra*, galbanum from *Ferula gummosa*, gum guaiacum from the lignum vitae trees of the genus *Guaiacum*, kauri gum from trees of *Agathis australis*, labdanum from mediterranean species of *Cistus*, mastic (plant resin) from the mastic tree *Pistacia lentiscus*, myrrh from shrubs of *Commiphora*, sandarac resin from *Tetraclinis articulata*, styrax (a Benzoin resin from various *Styrax* species), Spinifex resin from Australian *Spinifex* grasses, and turpentine, distilled from pine resin.

[0225] In some embodiments, the biodegradable polymer may be polylactic acid. In some embodiments, the biodegradable polymer comprise polylactic acid. In some embodiments, the biodegradable polymer may be polyhydroxyalkanoates. In some embodiments, the biodegradable polymer may comprise polyhydroxyalkanoates. In some embodiments, the coating may comprise a copolymer. In some embodiments, the coating may comprise a homopolymer. In some embodiments, the coating may comprise a heteropolymer.

[0226] Examples of biobased polymers include polyethylene (PE) produced from sugarcane ethanol (Braskem's Green Polyethylene), polylactic acid (PLA) made from corn sugar (Nature Works Ingeo™ PLA) and polyhydroxyalkanoates (PHA's) produced by the fermentation of glucose (US Patents Nos. 6,593,116 and 6,913,911, US Patent Pub. No.2010/0168481), which is herein incorporated by reference in the entirety.

[0227] In some embodiments, the biodegradable polymer may be without limitation a biodegradable polymers of the following types: polylactates (or PLA), polymalates (or PMA), polyhydroxyalkanoates (or PHA), polycaprolactones (or PCL), polyesteramides (PEA), aliphatic copolyesters (PBSA), aliphatic-co-terephthalate copolyesters (PBAT), celluloses or starches which are highly acetylated or rendered hydrophobic by introduction of fixed fatty chains, taken alone or in combination, in the form of homopolymers or heteropolymers, whether linear, branched, crosslinked, dendritic or grafted.

[0228] In some embodiments, the coating may be applied by a powder coating approach, casting, spraying, dipping or immersing, by the use of brushes, rollers, blocks or other instruments. In some embodiments, the coating may be applied by air knife coating, blade coating, metering roll coating, gravure coating, rod coating, curtain coating, bath coating.

[0229] In some embodiments, the coating may comprise wax, or polyethylene film. In some embodiments, the coating may be applied in at least about 1, 2, 3, 4, 5, 6, 7, 8, 9, or at least about 10 steps. In some embodiments, the coating may comprise one or more layers. In some embodiments, the coating may comprise at least 1, 2, 3, 4, 5, 6, 7, 8, 9, or at least 10 layers. In some embodiments, a first coating layer may comprise a different composition compare to a second coating layer. In some embodiments, a first coating layer may comprise the same composition as a second coating layer.

[0230] In some embodiments, the coating may comprise a polymer selected from the group comprising, without limitation acrylic polymers, acrylic copolymers, polyvinyl acetate, polyvinyl alcohol, poly-ethylene vinyl acetate, poly-ethylene vinyl chloride, styrene butadiene copolymers, polyvinylidene chloride, or starch.

[0231] In some embodiments, the coating disclosed herein may comprise a polymer blend. In some embodiments, the polymer blend may be a first polymer blended with another polymer to form a latex. In some embodiments, the polymer blend may comprise one or more biodegradable polymer. In some embodiments, the polymer blend may comprise use of a melt blending process. In some embodiments, the melt blend may comprise polycaprolactone having a molecular weight from about 1000 to 1,000,000 Daltons. In some embodiments, the melt blend may comprise aliphatic polyesters derived from a diol and diacid comprising at least one diol selected from ethylene glycol, polyethylene glycol, butane diol, 1,2-hexane diol, 1,3-propylene glycol and at least one diacid selected from adipic acid, succinic acid, terephthalic acid or furan dicarboxylic acid. In some embodiments, the melt blend may comprise one or more polymers disclosed herein. In some embodiments, the blend may comprise one or more polymers disclosed herein. In some embodiments, the aforementioned polymers may be combined with other materials to impart specific characteristics to the coating.

#### **Thermal Insulating Layer and Barrier**

[0232] In some embodiments, the insulating layer **200** may be otherwise unattached to the barrier **114**.

[0233] In some embodiments, the insulating layer **200** may be joined to the barrier **114** by various methods known in the art. In some embodiments, the insulating layer **200** may be joined to the barrier **114** by lamination. Lamination is the technique of manufacturing a material in multiple layers, so that the composite material achieves improved strength, stability, sound insulation, appearance or other properties from the use of differing materials. In some embodiments, the laminate may be permanently assembled by heat, pressure, welding, or adhesives. In some embodiments, the insulating layer **200** may be joined to the barrier **114** by uniting layers of material by an adhesive or other techniques disclosed herein.

[0234] In some embodiments, the adhesive may be applied in various ways. In some embodiments, the adhesive may be applied in a pattern-application or spray application, or through the use of an adhesive layer, e.g., a thermoplastic adhesive scrim, which may be a web-like layer of adhesive. In some embodiments, the use

of pattern-application adhesive or an adhesive scrim may achieve a similar effect within the multilayer liner of the invention herein.

[0235] In some embodiments, insulating layer **200** may be joined to the barrier **114** by pinpoint embossing, needling and quilting, among others known to those of skill in the art.

[0236] In some embodiments, the insulating layer **200** may be joined to the barrier **114** by sealing such as with a hot knife, at its edges so that fluid cannot penetrate the edges. In some embodiments, the insulating layer **200** may be joined to the barrier by any one or more methods described herein.

[0237] In some embodiments, an additive may be added to the insulating layer **200** before the barrier **114** is sealed. In some embodiments, an additive may be added between the insulating layer **200** and the barrier **114**. In some embodiments, the additive may be one or more additives disclosed herein. In some embodiments, one or more coffee beans may be placed between the insulating layer **200** and the barrier **114**. In some embodiments, one or more mint leaves may be placed between the insulating layer **200** and the barrier **114**. In some embodiments, one or more oils may be placed between the insulating layer **200** and the barrier **114**. In some embodiments, one or more oil extracts may be placed between the insulating layer **200** and the barrier **114**. In some embodiments, one or more detergents may be placed between the insulating layer **200** and the barrier **114**. In some embodiments, detergents may be a surfactant or a mixture of one or more surfactants. In some embodiments the detergent may be in a solid, liquid or power form. In some embodiments, the detergent may be anionic, cationic, non-ionic or zwitterionic. A number of other detergents may be used, including those disclosed in WO2011/073062 and WO2012/041774.

[0238] In some embodiments, one or more cleaning agents may be placed between the insulating layer **200** and the barrier **114**. In some embodiments, the cleaning agent may be a liquid, powder, spray, granules or a combination thereof. In some embodiments, the cleaning agent may remove dirt, dust, stains, odor, and clutter on surfaces. In some embodiments, the cleaning agent may be acidic, alkaline or neutral. In some embodiments, the cleaning agent may comprise carbon tetrachloride, ammonia, borax, sodium bicarbonate, carbon dioxide, calcium hypochlorite, cyanuric acid, chromic acid, ethanol, methanol, chlorine, acetic acid, trisodium phosphate, sodium percarbonate, sodium perborate or combinations thereof. In some embodiments, the cleaning agent may be LYSOL®

[0239] In some embodiments, one or more odor control agents may be placed between the insulating layer **200** and the barrier **114**. In some embodiments, the odor control agent may be in a solid or liquid form. In some embodiments, the odor control agent may be an acrylic ester such as lauryl methacrylate, (sold under trade name METAZONE® by Pestco Company), sodium bicarbonate, benzalkonium chloride, bisulfite complexes of aldehydes and ketones, boric acid, borax, menthol, camphor, sodium bisulfate, lemon oil, and pine oil. In some embodiments, the odor control agent may be a powdered compounds such as magnesium silicates (talc), inorganic silicone and magnesium powders, sodium bicarbonate, chlorophyll, sodium dihydrogen phosphate, potassium acid phthalates, or other powdered odor control agents known to those skilled in the art, or combinations thereof. A number of other odor control agents and cleaning agents may be used, including those

disclosed in U.S. Pat. No. 4,898,727 to Osada et al., U.S. Pat. No. 6,495,097 to Streit et al., and U.S. Pat. No. 6,253,710 to Ward et al.

**Goods, Foodstuffs, Samples and Medical items**

[0240] **FIG. 8** illustrates a thermal insulating liner **100** placed in a container **115** with goods, foodstuffs, samples, and medical items. The thermal insulating liner **100** may comprise a first side portion, a second side portion **102**, a first side portion opposing first side flap **105a** and second side flap **105b**, and second side portion opposing first side flap **106a** and second side flap enclosed in a polyethylene barrier **114** in a polygonal box form, with goods, foodstuffs, samples, and medical items placed in the cavity of the thermal insulating liner and placed in a container **115**.

[0241] **FIG. 9** illustrates a covered thermal insulating liner placed in a container with goods, foodstuffs, samples, and medical items. The thermal insulating liner **100** may comprise a first side portion **101**, a second side portion **102**, a first side portion opposing first side flap **105a** and second side flap, and second side portion opposing first side flap and second side flap enclosed in a polyethylene barrier **114** in a polygonal box form. Goods, foodstuffs, samples, and medical items may be placed in the cavity of the thermal insulating liner and placed in a container **115**, with a portion of the first side portion **101**, second side portion **102**, the first side portion opposing first side flap **105a** and second side flap, second side portion opposing first side flap and second side flap folded about to cover the goods, foodstuffs, samples, and medical items from the ambient environment.

[0242] In some embodiments, the insulating layer **200** may be configured to form a pouch, bag or box for enclosing goods, foodstuffs, samples and/or medical items. In some embodiments, pouches, bags, or boxes may be manufactured according to any well-known method. One skilled in the art can recognize that a “pouch” means an enclosure sealed on at least two of four sides, though generally sealed on three of four sides with the fourth side being an opening. A “bag” may be a pouch, but can also include a “stand-up pouch”, comprising four sides and a rectangular bottom opposite an opening. In some embodiments, the thermal insulating liner **100** has an open mouth **107**. In some embodiments, a bag may comprise a gusset.

[0243] In some embodiments, after inserting the goods, foodstuffs, samples and medical items into the thermal insulating liner **100** pouch, bag or box of the invention herein, the pouch, bag or box may be sealed or closed in various ways known to those of skill in the art. The closing may be mechanical, such as the thermal insulating liner **100** flaps **105a**, **105b**, **106a**, **106b** or side portions **101**, **102** may be folded over and/or tucked in; and/or adhesive, such as pressure sensitive adhesive, zippers, among others. In some embodiments, the closing may be by any method disclosed herein.

[0244] In some embodiments, the goods, foodstuffs, samples and medical items may comprise perishable goods. In some embodiments, the goods, foodstuffs, samples and medical items may comprise nonperishable goods. In some embodiments, the goods, foodstuffs, samples and medical items may comprise temperature sensitive goods. In some embodiments, the goods, foodstuffs, samples and medical items may comprise non temperature sensitive goods.

[0245] In some embodiments, as will be appreciated by those of skill in the art, the goods, foodstuffs, samples and medical items may comprise any number of things, including, but not limited to, bodily fluids including, but not limited to, blood, nasopharyngeal secretions, urine, serum, lymph, saliva, milk, anal and vaginal secretions, and semen of any organism. In some embodiments, the goods, foodstuffs, samples and medical items may comprise mammalian samples taken from, including, but not limited to sheep, cow, horse, pig, goat, lama, emu, ostrich or donkey, chicken, turkey, goose, duck, game bird, human, fish, rabbit, guinea pig, rat or mouse, dog, and/or cat. In some embodiments, the goods, foodstuffs, samples and medical items may comprise environmental samples including, but not limited to, air, agricultural, water and soil samples. In some embodiments, the goods, foodstuffs, samples and medical items may comprise biological warfare agent samples, research samples, purified samples, such as purified genomic DNA, RNA, proteins, etc.; and raw samples (bacteria, virus, genomic DNA, etc.).

[0246] In some embodiments, the goods, foodstuffs, samples and medical items may comprise food products. In some embodiments, the disclosure provides a sample comprising raw food products, fresh food products, cooled or frozen food products, or products that are generally heated prior to consumption. In some embodiments, the food product could be partially cooked. In some embodiments, the food product could be cooked but may require additional heating prior to consumption. In some embodiments, the food product may comprise meats, poultry, fish, seafood, fruits, and vegetables. In some embodiments the food product may include meats (beef, pork, lamb, rabbit and/or goat), poultry, wild game (pheasant, partridge, boar and/or bison), fish, vegetables (veggie-patties, veggie hamburgers), combinations of vegetables and meat, egg products (quiches, custards, cheesecakes) and/or baked goods (batters, doughs, cakes, breads, muffins, biscuits, cupcakes, pancakes and the like whether baked, raw or partially baked).

[0247] In some embodiments, the goods, foodstuffs, samples and medical items may be less than or equal to about 25 kilograms (kg) by weight. In some aspects, the goods, foodstuffs, samples and medical items is about 0.1, about 0.2, about 0.3, about 0.4, about 0.5, about 0.6, about 0.7, about 0.8, about 0.9, 1, about 2, about 3, about 4, about 5, about 6, about 7, about 8, about 9, about 10, about 11, about 12, about 13, about 14, about 15, about 16 s, about 17, about 18, about 19 , about 20, about 21, about 22, about 23, about 24, or about 25 kg. In some embodiments, the goods, foodstuffs, samples and medical items may be less than 1 kg

[0248] In some embodiments, the goods, foodstuffs, samples and medical items may be greater than or equal to about 25kg by weight. In some embodiments the goods, foodstuffs, samples and medical items is about 26, about 27, about 28, about 29, about 30, about 31, about 32, about 33, about 34, about 35, about 36, about 37, about 38, about 39, about 40, about 41, about 42, about 43, about 44, about 45, about 46, about 47, about 48, about 49, about 50, about 51, about 52, about 53, about 54, or about 55kg. In some aspects, the sample is greater than 55 kg by weight.

### **Container**

[0249] In some embodiments, the thermal insulating liner **100** may not be placed in a container **115**. In some embodiments, the thermal insulating liner **100** may be placed in a container **115**. In some embodiments, the thermal insulating liner **100** may be the same size as the container **115** it will be placed in. In some

embodiments, the thermal insulating liner **100** may be the same shape as the container **115** it will be placed in. In some embodiments, the thermal insulating liner **100** may be larger than the container **115** it will be placed in. In some embodiments, the thermal insulating liner **100** may be a different shape than the container **115** it will be placed in. In some embodiments, the thermal insulating liner **100** fits in a portion of the container **115** it will be placed in. In some embodiments, the thermal insulating liner **100** fits completely in the container **115** it will be placed in.

[0250] In some embodiments, the container **115** may be reusable. In some embodiments, the container **115** may be single use. In some embodiments, the container **115** may comprise steel. In some embodiments, the container **115** may be a corrugated box. In some embodiments, the container **115** may comprise wood. In some embodiments, the container **115** may be a crate. In some embodiments, the container **115** may comprise a plastic. In some embodiments, the container **115** may comprise a composite. In some embodiments, the container **115** may comprise stainless steel. In some embodiments, the container **115** may comprise a fibrous material. In some embodiments, the container **115** may be made of any one or more fibers disclosed here in. In some embodiments, the container **115** may be flexible. In some embodiments, the container **115** may be collapsible. In some embodiments, the container **115** may be rigid. In some embodiments, the container **115** may be substantially rigid.

[0251] In some embodiments, the container **115** may include one or more openings for storage.

[0252] In some embodiments, the container **115** may be secured to the thermal insulating liner **100** by stitches, snaps, clips, or any method disclosed herein or may remain removable and unsecured to the thermal insulating liner **100**.

[0253] In some embodiments, the flexible nature of the thermal insulating liner **100** may enable the thermal insulating liner **100** to conform to the inner dimensions of the container **115**. In some embodiments, the thermal insulating liner **100** may extend along corresponding sides the container **115**. In some embodiments, the goods, foodstuffs, samples and medical items may be inserted into the thermal insulating liner **100** after the thermal insulating liner **100** is placed in a container **115**. In some embodiments, the goods, foodstuffs, samples and medical items may be inserted into the thermal insulating liner **100** prior to the thermal insulating liner **100** being placed in a container **115**. In some embodiments, the thermal insulating liner **100** may be closed. In some embodiments, the thermal insulating liner **100** side portions **105a**, **105b**, **106a**, **106b** may be folded. In some embodiments, the closing may be by adhesive, pressure sensitive adhesive, tapes, zippers, zip-lock, hooks, buttons, friction, solder, pins, clips, VELCRO®, among others. The closing may be by any method disclosed herein. In some embodiments, an adhesive described herein may be biodegradable. In some embodiments, an adhesive described herein may comprise polymers. In some embodiments, a polymer may comprise at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch. In some embodiments, an adhesive comprise cornstarch. In some embodiments, an adhesive comprise a resin. In some embodiments, an adhesive is water proof and can be a sealant when heated. In some embodiments, an adhesive may be waterproof. In some embodiments, an adhesive may be a sealant when heated or chilled.

[0254] In some embodiments, when the container **115** is open, the thermal insulating liner **100** may extend above the top of the container **115**. In some embodiments, when the container **115** is open, the thermal insulating liner **100** may extend below the top of the container **115**.

### **Temperature Regulation**

[0255] In some embodiments, a cooling or heating agent may be enclosed in the thermal insulating liner **100**. In some embodiments, a thermal insulating liner can comprise one or more compartments for storing a cooling or heating agent. In some embodiments, the compartment is on the interior of a thermal insulating liner. In some embodiments, the compartment is on the exterior of a thermal insulating liner. In some embodiments, the cooling or heating agent may be single use. In some embodiments, the cooling or heating agent may be reusable. In some embodiments, the cooling or heating agent may comprise wet ice, dry ice, ice packs, ice tubes, ice gel, BLUE ICE®, frozen gel, water, frozen substances, warm substances, gel packs, reusable gel packs, and/or removable gel packs, or any other phase change material pack. In some embodiments, the cooling or heating agents may be placed within the thermal insulating liner **100** and or the container **115** wherein which the thermal insulating liner **100** may be place to keep the interior cold or warm.

[0256] In some embodiments, the gel packs may be hot gel packs. In some embodiments, the gel packs may be cold gel packs. In some embodiments, the gel packs may be cooled or heated and then inserted within the thermal insulating liner **100** for keeping the object within the container **115** cold or hot. In some embodiments, the cold gel packs may be plastic. In some embodiments, the cold gel packs may contain a chemical gel therein. In some embodiments, the chemical gel may be quickly and easily frozen and remain in a frozen state for an extended period of time. In some embodiments, the hot gel packs may be metal. In some embodiments, the hot gel packs may be filled with a chemical gel. In some embodiments the chemical gel may be easily preheated and used for keeping an object warm for an extended period of time.

[0257] In some embodiments, the thermal insulating liner **100** may regulate and keep the temperature of goods, foodstuffs, samples, and medical items constant for at least about 1 to about 500 hours (“hrs.”). In some embodiments, the thermal insulating liner **100** regulates and keep the temperature of an object constant for at least about 1, about 2, about 3, about 4 , about 5, about 6, about 7, about 8, about 9, about 10, about 11, about 12, about 13, about 14, about 15, about 16, about 17, about 18, about 19, about 20, about 21, about 22, about 23, about 24, about 25, about 26, about 27, about 28, about 29, about 30, about 31, about 32, about 33, about 34, about 35, about 36, about 37, about 38, about 39, about 40, about 41, about 42, about 43, about 44, about 45, about 46, about 47, about 48, about 49, about 70, about 51, about 52, about 53, about 54, about 55, about 56, about 57, about 58, about 59, about 60, about 70, about 72, about 75, about 80, about 90, about 100, about 110, about 120, about 130, about 140, about 150, about 200, or at least about 500 hrs.

[0258] In some embodiments, an insulating liner may regulate and keep the temperature of goods, foodstuffs, samples, and medical items at a temperature of about -80° C to about 150° C for a period of time. In some embodiments, an insulating liner may regulate and keep the temperature of goods, foodstuffs, samples, and medical items at a temperature of about -100, about -90, about -80, about -79, about -78, about -77, about -76, about -75, about -70, about -60, about -50, about -40, about -30, about -20, about -10, about -5, about -4, about -

3, about -2, about -1, about 0, about 1, about 0.5, about 1, about 1.5, about 2, about 2.5, about 3, about 3.5, about 4, about 4.5, about 5, about 5.5, about 6, about 6.5, about 7, about 7.5, about 8, about 8.5, about 9, about 9.5, about 10, about 10.5, about 11, about 11.5, about 12, about 12.5, about 13, about 13.5, about 14, about 14.5, about 15, about 15.5, about 16, about 16.5, about 17, about 17.5, about 18, about 18.5, about 19, about 19.5, about 20, about 21, about 22, about 23, about 24, about 25, about 26, about 27, about 28, about 29, about 30, about 31, about 32, about 33, about 34, about 35, about 36, about 37, about 38, about 39, about 40, about 41, about 42, about 43, about 44, about 45, about 46, about 47, about 48, about 49, about 50, about 52, about 53, about 54, about 55, about 56, about 57, about 58, about 59, about 60, about 61, about 62, about 63, about 64, about 65, about 66, about 67, about 68, about 69, about 70, about 71, about 72, about 73, about 74, about 75, about 76, about 77, about 78, about 79, about 80, about 90, about 100, about 120, about 140, about 150, about 160, about 170, about 180, or about 190° C.

[0259] In some embodiments, the thermal insulating liner **100** may regulate and keep the temperature of an object with in a temperature range for about at least about 1 to about 500 hrs. In some embodiments, the thermal insulating liner **100** may regulate and keep the temperature of an object with in a temperature range for about at least about 1, about 2, about 3, about 4 , about 5, about 6, about 7, about 8, about 9, about 10, about 11, about 12, about 13, about 14, about 15, about 16, about 17, about 18, about 19, about 20, about 21, about 22, about 23, about 24, about 25, about 26, about 27, about 28, about 29, about 30, about 31, about 32, about 33, about 34, about 35, about 36, about 37, about 38, about 39, about 40, about 41, about 42, about 43, about 44, about 45, about 46, about 47, about 48, about 49, about 70, about 51, about 52, about 53, about 54, about 55, about 56, about 57, about 58, about 59, about 60, about 70, about 72, about 75, about 80, about 90, about 100, about 110, about 120, about 130, about 140, about 150, about 200, or at least about 500 hrs.

[0260] In some embodiments, the temperature range may be within the range of about .1 to about 50° C. In some embodiments, the temperature range is within about 0.1, about 0.5, about 1, about 1.5, about 2, about 2.5, about 3, about 3.5, about 4, about 4.5, about 5, about 5.5, about 6, about 6.5, about 7, about 7.5, about 8, about 8.5, about 9, about 9.5, about 10, about 10.5, about 11, about 11.5, about 12, about 12.5, about 13, about 13.5, about 14, about 14.5, about 15, about 15.5, about 16, about 16.5, about 17, about 17.5, about 18, about 18.5, about 19, about 19.5, about 20, about 21, about 22, about 23, about 24, about 25, about 26, about 27, about 28, about 29, about 30, about 31, about 32, about 33, about 34, about 35, about 36, about 37, about 38, about 39, about 40, about 41, about 42, about 43, about 44, about 45, about 46, about 47, about 48, about 49, or about 50° C.

[0261] Although described with reference to preferred embodiments of the invention, it should be readily understood that various changes and/or modifications may be made to the invention without departing from the spirit thereof.

### **Examples:**

#### **Example 1. Thermal Insulating Liner Production**

[0262] Recycled jute fibers were sourced from secondary fiber markets. The recycled jute fibers were previously used as inputs for the production of woven burlap bags used for the transportation of coffee and

cacao beans. The jute fibers were received in the form of bales. The bales were tightly packed and range in weight from 100 lbs. (45.359 kg). to over 500 lbs. (226.796 kg). Baled fibers were unpacked and loaded onto a moving conveyor in the form of loose chunks of densely packed jute fibers.

[0263] The loose jute fibers were escalated up a vertical conveyor wall about 15 to 20 feet in height. Protrusions (spikes) lift the jute fibers up the wall and served the function of opening the jute fibers. In this sense, opening refers to the breaking down of higher density, packed chunks of the jute fibers into lower density, evenly distributed individual jute fibers. The jute fibers were subsequently dropped into a vacuum shoot, which facilitated transport to the next process.

[0264] The jute fibers were moved by way of air pressure onto the secondary conveyor belt and passed underneath a guiding jig that had a variable height. The height of the jig sets and controls the height of the stack of jute fibers (usually 0.2" to 6.0" at this stage).

[0265] The loosely packed jute fibers were subjected to a needling process where rapid movements of thin needles into and out of the fiber bed led to entanglement and the production of an insulating layer **200**.

[0266] A rotary blade was installed on the conveyor belt and the rotary blade made incisions parallel to the direction of the movement of the newly formed insulating layer **200**. The rotary blade can be adjusted across the width of the insulating layer **200** to alter and fix the width of the insulating layer **200**.

[0267] Another blade was set to cut across the insulating layer **200** (perpendicular to the movement of the conveyor) allowing for a predetermined insulating layer **200** length to be implemented. The result was rectangular strips of insulating layers **200**.

[0268] The rectangular strips of insulating layers **200** were stacked on pallets. The pallets were left open to allow for airflow through the insulating layers **200**. The airflow reduced the moisture content of the insulating layer **200**, thus reducing the risk of odor generation.

[0269] Individual insulating layers **200** were folded along their lengths (**FIG. 5A**), thereby having a first side portion **101**, a second side portion **102**, and a middle portion **103**. An excised portion **104** of the folded insulating layer **200** was removed by a die punch (**FIG. 5C**). The excised portion **104** had a length approximately equal to the width of the intended container **115** and a width approximately equal to half the width of the container **115**. Intended container refers to the container **115** the completed thermal insulating liner **100** will be placed in.

[0270] A large bottom sealed polyethylene barrier **114**, 1 MIL to 2 MIL in thickness, was turned inside out, and then partially inverted back. The insulating layer **200** was folded and placed into the halfway inverted polyethylene barrier **114** in a fashion such that the inverted section of the polyethylene barrier **114** rested between the two layers of the folded insulation insulating layer **200**. The cross section view was as follows: polyethylene barrier | insulating layer | polyethylene barrier | polyethylene barrier | insulating layer | polyethylene barrier.

[0271] The edges of the inverted polyethylene barrier **114** containing the insulating layer **200** were heat sealed together for the purpose of securing the insulating layer **200** within the polyethylene barrier **114**, thus forming the thermal insulating liner **100**.

[0272] A mechanical, handheld rotary micro-perforator was used to produce small holes across the thermal insulating liner **100**.

#### **Example 2. Thermal Insulating Liner Production**

[0273] Rectangular strips of insulating layer **200** as described in example 1 were folded along its width (**FIG.1A**) and a die punch was used to remove excised portions **104a**, **104b**. A large bottom sealed polyethylene barrier **114**, 1 MIL to 2 MIL in thickness, were turned inside out, and then partially inverted back. The insulating layer **200** was folded and placed into the halfway inverted polyethylene barrier **114** in a fashion such that the inverted section of the polyethylene barrier **114** rested between the two layers of the folded insulation insulating layer **200**. The cross section view was as follows: polyethylene barrier | insulating layer | polyethylene barrier | polyethylene barrier | insulating layer | polyethylene barrier.

[0274] The edges of the inverted polyethylene barrier **114** containing the insulating layer **200** were heat sealed together for the purpose of securing the insulating layer **200** within the polyethylene barrier **114**, thus forming the thermal insulating liner **100**.

[0275] A mechanical, handheld rotary micro-perforator was used to produce small holes across the thermal insulating liner **100**.

#### **Example 3. Thermal Insulating Liner Production**

[0276] Thermal insulating liners **100** as described in example 1 or 2, were refolded into a polygonal box form. The polygonal box form comprising an opening **107**, a first side portion **101** and second a side portion **102** defining opposing sides of the polygonal box form, the middle portion **103** defining a bottom of the polygonal box form, a first side portion opposing first side flap **105a** and second side flap **105b**, and second side portion opposing first side flap **106a** and second side flap enclosed in a polyethylene barrier **114**.

#### **Example 4. Non-Gusseted Design**

[0277] The manufacturing process were the same or similar to those described herein (example 3), however with the exception of the creation of the gussets by removing excised portions **104**, **104a**, **104b** of the insulating layer **200**. In this design, thermal insulation liners were produced by folding a rectangular insulating layer along its width or along its length. The folded insulating layer was encapsulated and heat sealed within a polyethylene barrier. The polyethylene barrier was 1.5 MIL in thickness. The thermal insulating liner was inserted into a container. The thermal insulating liner was placed in a container such that the base width of the thermal insulating liner rests diagonally in the container.

#### **Example 5. Non-Gusseted A/B Design**

[0278] The manufacturing process was the same or similar to those described herein, however the thermal insulating liner comprised two or more pieces. The thermal insulating liner took the form of two flexible rectangular strips that, when placed into a container, cover all six internal walls including the lid of a six sided container. In this configuration, a first component, was denoted as “part A”, and was placed into a container such that it covered the bottom surface **403**, a first side portion **401**, and the remaining material was used as a flap that acts as the lid when folded **402**. In this configuration, a second component was denoted as “part B”

**400b**, was subsequently placed into the container and it covered the three remaining sides of the six sided container. **FIG. 31.**

**Example 6. Rigid Corrugated Paper Design**

[0279] The thermal insulating liner may be manufactured as described herein to be rigid. The rigid thermal insulating liner may be folded into a three-dimensional box liner. The rigid thermal insulating liner may be transported and stored flat prior to use. Furthermore, the thermal insulating liner may be enclosed in a rigid barrier. The rigid barrier may be corrugated paperboard. The rigid barrier may comprise a compartment for holding the thermal insulating liner. The compartment for holding the thermal insulating liner may secure the thermal insulating liner in such a manner that the walls maintain geometry and structure integrity of the thermal insulating liner.

**Example 7. The Concept of a Partially Insulated Container.**

[0280] The thermal insulating liner of the present invention may partially insulate a container. The thermal insulating liner may be a partial liner wherein the goods, foodstuffs, samples and medical items placed in or on the thermal insulating liner may be a mixture of both temperature sensitive and non-temperature sensitive objects. In this configuration, the container may be compartmentalized such that only objects requiring insulation is insulated.

**Performance Tests**

[0281] Examples 8 – 24 were performed according to the following. Tests were performed to analyze the performance of the present invention compared to other assorted thermal insulating liners under various conditions for fresh food products. 48 oz. or 32 oz. gel packs were frozen for at least 72 hours prior to testing. In each test, temperature loggers recorded and save temperature readings every two minutes.

**Example 8. Thermal Insulating Liner, Polyurethane A|B Liner Test**

[0282] 0.5 inch thick jute thermal insulating liners were manufactured according to example 4. In this illustration, insulating layers were manufactured at a density of about 1200 g/m<sup>2</sup> and about 700 g/m<sup>2</sup>. The thermal insulating liners were placed inside corrugated box containers according to example 4. The exterior dimensions of the corrugated box containers were 12" x 12" x 8". (") inch. Gel packs were added to the cavity of the thermal insulating liners. Total gel pack weight was 2 x 48 oz. per thermal insulating liner. The thermal insulating liners were folded at the opening created by the first side portion and the second side portion. The corrugated box containers were then closed. The polyurethane ("PUR") foam insulating liner was 1.0 inch thick, and was packaged in a similar manner as the thermal insulating liners. **FIG. 10.**

**Example 9. Thermal Insulating Liner, Polyurethane A|B Liner, Bubble Foil Test**

[0283] 0.5 inch thick jute thermal insulating liners were manufactured according to example 4. In this illustration, insulating layers were manufactured at a density of about 1200 g/m<sup>2</sup> and about 700 g/m<sup>2</sup>. The thermal insulating liners were placed inside corrugated box containers according to example 4. The exterior dimensions of the corrugated box containers were 12" x 12" x 8". Gel packs were added to the cavity of the thermal insulating liners. Total gel pack weight was 1 x 32 oz. per thermal insulating liner. The thermal insulating liners were folded at the opening created by the first side portion and the second side portion. The

corrugated box containers were then closed. The PUR foam insulating liner was 1.0" thick. The Bubble foil insulating liner comprised a bag formed from bubble wrap. PUR foam and bubble foil insulating liners were packaged in a similar manner as the thermal insulating liners. **FIG. 11.**

**Example 10. Thermal Insulating Liner, Bubble Foil Test**

[0284] A 0.25 inch thick jute thermal insulating liner was manufactured according to example 4. In this illustration, the insulating layer was manufactured at a density of about  $450 \text{ g/m}^2$ . The thermal insulating liner was placed inside a corrugated box container according to example 4. The exterior dimensions of the corrugated box container were 12" x 12" x 8". Gel packs were added to the cavity of the thermal insulating liner. Total gel pack weight was 2 x 32 oz. The thermal insulating liner was folded at the opening created by the first side portion and the second side portion. The corrugated box container was then closed. Bubble foil insulating liner comprised an enclosure formed from bubble wrap (InsuLTote bubble wrap bag), and was packaged in a similar manner as the thermal insulating liner. **FIG. 12.**

**Example 11. Thermal Insulating Liner, EPS Foam Cooler Test**

[0285] 0.5 inch thick jute thermal insulating liners were manufactured according to example 4. In this illustration, insulating layers were manufactured at a density of about  $1200 \text{ g/m}^2$  and about  $700 \text{ g/m}^2$ . The thermal insulating liners were placed inside corrugated box containers according to example 4. The exterior dimensions of the corrugated box containers were 16" x 13" x 9". Gel packs were added to the cavity of the thermal insulating liners. Total gel pack weight was 2 x 48 oz. per thermal insulating liner. The thermal insulating liners were folded at the opening created by the first side portion and the second side portion. The corrugated box containers were then closed. The EPS foam cooler was 1.0 inch thick, and was packaged in a similar manner as the thermal insulating liners. **FIG. 13.**

**FIG 12. Thermal Insulating Liner Density Test**

[0286] 0.5 inch thick jute thermal insulating liners were manufactured according to example 4. In this illustration, insulating layers were manufactured at a density of about  $1200 \text{ g/m}^2$  and about  $700 \text{ g/m}^2$ . The thermal insulating liners were placed inside corrugated box containers according to example 4. The exterior dimensions of the corrugated box containers were 16" x 13" x 9". Gel packs were added to the cavity of the thermal insulating liners. Total gel pack weight was 2 x 48 oz. per insulating liner. The thermal insulating liners were folded at the opening created by the first side portion and the second side portion. The corrugated box containers were then covered. **FIG. 14.**

**Example 13. Thermal Insulating Liner Composition Test**

[0287] In this illustration, all insulating liners were 1.0 inch thick. "2 pc" refers to thermal insulating liners that were manufactured according to example 5 and refers to the A|B design wherein the thermal insulating liners are placed independently into a six sided container to cover all six internal walls. "kraft" refers to thermal insulating liners manufactured with a kraft paper barrier. "Jute 30% wool" refers to an insulating layer manufactured to comprise a composite of 70% jute and 30% wool. In this illustration, jute insulating layers were manufactured at a density of about  $1535 \text{ g/m}^2$  and  $2185 \text{ g/m}^2$ . Each thermal insulating liner was placed inside a corrugated box container according to example 4. The exterior dimensions of the corrugated box

containers were 12" x 12" x 12". Dry ice was added to the cavity of the thermal insulating liners. Total ice was 3.2kg per thermal insulating liner. Thermal insulating liners were folded at the opening created by the first side portion and the second side portion. The corrugated box containers were then closed. **FIG. 15.**

**Example 14. Thermal Insulating Liner, Bubble Foil Test**

[0288] 0.5 and 0.25 inch thick jute thermal insulating liners were manufactured according to example 4. In this illustration, 0.5 inch thick insulating layers were manufactured at a density of about 1100 g/m<sup>2</sup> and 700 g/m<sup>2</sup>. In this illustration, 0.25 inch thick insulating layers were manufactured at a density of about 430 g/m<sup>2</sup>. The thermal insulating liners were placed inside corrugated box containers according to example 4. The exterior dimensions of the corrugated box containers were 16" x 10" x 10". Gel packs were added to the cavity of the thermal insulating liners. Total gel pack weight was 2 x 48 oz. per thermal insulating liner. The thermal insulating liners were folded at the opening created by the first side portion and the second side portion. The corrugated box containers were then closed. The bubble foil insulating liner comprised an enclosure formed from bubble wrap, and was packaged in a similar manner as the thermal insulating liners. **FIG. 16.**

**Example 15. Thermal Insulating Liner, Polyurethane A|B Liner Test**

[0289] 1.0 inch thick jute thermal insulating liners were manufactured according to example 4. In this illustration, insulating layers were manufactured at a density of about 1275 g/m<sup>2</sup> and about 700 g/m<sup>2</sup>. Two 700 g/m<sup>2</sup> insulating layers were stacked together for this test. Each thermal insulating liner was placed inside a corrugated box container according to example 4. The exterior dimensions of the corrugated box containers were 16" x 10" x 10". Gel packs were added to the cavity of the thermal insulating liners. Total gel pack weight was 2 x 48 oz. per thermal insulating liner. The thermal insulating liners were folded at the opening created by the first side portion and the second side portion. The corrugated box containers were then covered. The PUR foam insulating liner was 1.0 inch thick, and was packaged in a similar manner as the thermal insulating liners. **FIG. 17.**

**Example 16. Thermal Insulating Liner, EPS Foam Test**

[0290] A 1.0 inch thick jute thermal insulating liner was manufactured according to example 4. In this illustration, the insulating layer was manufactured at a density of about 1500 g/m<sup>2</sup>. The thermal insulating liner was placed inside a corrugated box container according to example 4. The exterior dimensions of the corrugated box container were 16" x 13" x 9". Dry ice was added to the cavity of the thermal insulating liner. Total dry ice weight was 3.2 kg. The thermal insulating liner was folded at the opening created by the first side portion and the second side portion and the corrugated box container was closed. The EPS foam insulating liner was 1.0 inch thick, and was packaged in a similar manner as the thermal insulating liner. **FIG. 18.**

**Example 17. Thermal Insulating Liner, Polyurethane A|B Liner Test**

[0291] 0.5 inch thick jute thermal insulating liners were manufactured according to example 4. In this illustration, insulating layers were manufactured at a density of about 1200 g/m<sup>2</sup>. Each thermal insulating liner was placed inside a corrugated box container according to example 4. The exterior dimensions of the corrugated box containers were 22" x 15" x 12". Gel packs were added to the cavity of the thermal insulating liner. Total gel pack weight was 2 x 48 oz. + 32 oz. per thermal insulating liner. The thermal insulating liners were folded at

the opening created by the first side portion and the second side portion. The corrugated box containers were thereafter closed. The PUR foam insulating liner was 1.0 inch thick, and was packaged in a similar manner as the thermal insulating liner. **FIG. 19.**

**Example 18. Thermal Insulating Liner, Polyurethane A|B Liner Adhesive Test**

[0292] This test was performed according to Example 19. However, in this test, thermal insulating liners were fitted with adhesive strips, “stick and peel”. These adhesives strips were used to aid the closing of each thermal insulating liner. **FIG. 20.**

**Example 19. Gusset/Non-Gusset Test**

[0293] 1.0 inch jute thermal insulating liners were manufactured according to example 4. Gusseted jute thermal insulating liners were manufactured according to example 3. In this illustration, insulating layers were manufactured at a density of about 1200 g/m<sup>2</sup>. Each thermal insulating liner was placed inside a corrugated box container. The exterior dimensions of the corrugated box containers were 15” x 10.5” x 10.5”. Gel packs were added to the cavity of the thermal insulating liner. Total gel pack weight was 1 x 32 oz. per thermal insulating liner. The thermal insulating liners were folded at the opening created by the first side portion and the second side portion and the corrugated box container was closed thereafter. **FIG. 21.**

**Example 20. Adhesive/Non Adhesive Test**

[0294] 1.0 inch jute thermal insulating liners were manufactured according to example 3. In this illustration, insulating layers were manufactured at a density of about 1100 g/m<sup>2</sup>. In this illustration, a first thermal insulating liner was fitted with an adhesive strip to aid in closing the liner. A second thermal insulating liner was not fitted with said adhesive strip. Each thermal insulating liner was placed inside a corrugated box container. The exterior dimensions of the corrugated box containers were 16” x 13” x 9”. Gel packs were added to the cavity of the thermal insulating liners. Total gel pack weight was 2 x 48 oz. per thermal insulating liner. The thermal insulating liners were folded at the opening created by the first side portion and the second side portion and the corrugated box container was thereafter closed. The EPS foam insulating liner was 1.0 inch thick, and was packaged in a similar manner as the thermal insulating liners. **FIG. 22.**

**Example 21. 0.5 Inch Thermal Insulating Liner, 1.0 Inch Polyurethane A|B Liner Test**

[0295] 0.5 inch thick jute thermal insulating liners were manufactured according to example 4. In this illustration, insulating layers were manufactured at a density of about 1100 g/m<sup>2</sup> and about 1300 g/m<sup>2</sup>. Each thermal insulating liner was placed inside a corrugated box container according to example 4. The exterior dimensions of the corrugated box containers were 16” x 13” x 12”. Gel packs were added to the cavity of the thermal insulating liner. Total gel pack weight was 2 x 48 oz. per thermal insulating liner. The thermal insulating liners were folded at the opening created by the first side portion and the second side portion and the corrugated box containers were thereafter closed. The PUR foam insulating liner was 1.0 inch thick, and was packaged in a similar manner as the thermal insulating liners. **FIG. 23.**

**Example 22. Thermal Insulating Liners, Polyurethane A|B Liner Food Test**

[0296] 1.0 inch thick jute thermal insulating liners were manufactured according to example 4. In this illustration, insulating layers were manufactured at a density of about 1270 g/m<sup>2</sup>. 2 layers indicate that

insulating layers were stacked together for this test. 2 layer thermal insulating liners had a final thickness of about 1.85 – about 2.0 inches. Each thermal insulating liner was placed inside a corrugated box container according to example 4. The exterior dimensions of the corrugated box containers were 16" x 13" x 9". Gel packs were added to the cavity of the thermal insulating liners. Total gel pack weight added to the PUR Foam, Jute, Jute, Jute, Jute 2 layers, and the Jute 2 layers thermal insulating liner were 6lbs (2.722 kg), 6lbs (2.722 kg), 9lbs (4.082 kg), 12lbs (5.443 kg), 9lbs (4.082 kg), and 12 lbs. (5.443 kg) respectively. Food products were also added to the cavity of the thermal insulating liners. Food products totaled 6lbs (2.722 kg). per thermal insulating liner. The thermal insulating liners were folded at the opening created by the first side portion and the second side portion and the corrugated box container were thereafter closed. The PUR foam insulating liner was 1.0 inch thick and was packaged in a similar manner as the thermal insulating liners. **FIG. 24.**

**Example 23. Thermal Insulating Liners Food Test**

[0297] 1.0 inch thick jute thermal insulating liners were manufactured according to example 4. In this illustration, insulating layers were manufactured at a density of  $1275 \text{ g/m}^2$ . 2 layers indicate that insulating layers were stacked together for this test. 2 layer thermal insulating liners had a final thickness of about 1.85 – about 2.0 inches. Each thermal insulating liner was placed inside a corrugated box container according to example 4. The exterior dimensions of the corrugated box container were 16" x 10" x 10". Gel packs were added to the cavity of the thermal insulating liners. Total gel pack weight was 12 lbs. (5.443 kg). per thermal insulating liner. Food products were also added to the cavity of the thermal insulating liners. Food products totaled 6lbs (2.722 kg). per thermal insulating liner. Thermal insulating liners were folded at the opening created by the first side portion and the second side portion and the corrugated box container was thereafter closed. **FIG. 25.**

**Example 24. LP Summer, LP Winter, Wool liner Test**

[0298] LP Summer refers to a 1.85 – 2.0 inch thick jute thermal insulating liner according to example 4, comprising 2 layers of insulating layers manufactured each at a density of about  $1275 \text{ g/m}^2$ . LP Winter refers to a 1 inch thick jute thermal insulating liner according to example 4, comprising 1 layer of an insulating layer manufactured at a density of about  $1275 \text{ g/m}^2$ . Each thermal insulating liner was placed inside a corrugated box container according to example 4. The exterior dimensions of the corrugated box container were 14" x 12" x 10". Ice was added to the cavity of the thermal insulating liners. Total ice for the first LP Summer was 2,000 ml. Total ice for the Wool liner was 1,000 ml. Total ice for the second LP Summer was 1,000 ml. Total ice for the LP winter was 1,000 ml. Thermal insulating liners were folded at the opening created by the first side portion and the second side portion and the corrugated box containers thereafter closed. The Wool liner insulating liner was about 1.0 inch thick, and was packaged in a similar manner as the thermal insulating liners. **Fig. 26.**

[0299] While preferred embodiments have been shown and described herein, it will be obvious to those skilled in the art that such embodiments are provided by way of example only. Numerous variations, changes, and substitutions will now occur to those skilled in the art. It should be understood that various alternatives to the embodiments of the invention described herein may be employed. It is intended that the following claims

define the scope of the invention and that methods and structures within the scope of these claims and their equivalents be covered thereby.

**Example 25. Once Piece Box Liner From Paper Strip Loaded With Pre-cut Insulating Layer**

[0300] A rectangular strip of insulating layer as described herein was die punched to form an insulating layer having a shape similar to “**I**”. The cut out material was placed in the center of the die cut insulating layer. The die cut insulating layer was inserted into a continuous half folded line of kraft paper. **Fig. 27**. The kraft paper was sealed with a band sealer on the edges opposite the fold. The kraft paper was cut along the width, perpendicular to the length on the top and bottom of the length. The newly cut edges were sealed with a clamp sealer (impulse or direct heat sealer) thus enclosing the insulating layer. The kraft paper enclosing the insulating layer is thereafter folded in half along the centerline connecting one side length to the other side length. The edges formed by the fold were taped together with kraft tape **300**. Optionally, the edges can be sewn together or fastened by other mechanical means. **Fig. 28-30**. Optionally, a gusset can be formed and taped **300** into place to give the part a 3D attribute. **Fig. 29**. The resulting one piece box liner (thermal insulating liner) is shown in **Fig. 30**.

**Example 26. Non-Gusseted A|B Design With Ridged Backing**

[0301] The manufacturing process was the same or similar to those described herein, however the thermal insulating liner comprised two or more pieces. The thermal insulating liner took the form of two rectangular strips with kraft barrier having corrugated backing **504** that, when placed into a container such as a grocery bag **500c**, cover all five sides of a five sided container, the lid exposed **502**. In this configuration, the corrugated backing **504** provides rigidity. In this configuration, a first component, was denoted as “part A”, and was placed into a container such that it covered the bottom surface **503**, a first side portion **501**, and the remaining material was used as a flap that acts as the lid when folded **502**. In this configuration, a second component was denoted as “part B” **500b**, was subsequently placed into the container **500c** and it covered the three remaining sides of the five sided container. This non-gusseted A|B design fits into a container such as a grocery bag to form a rigid, portable cooler. **FIG. 32**.

**Example 27. Non-Gusseted A|B Design Production**

[0302] All insulating materials disclosed herein may be used in this process. In this instance, the barrier comprised kraft paper **600a**. A kraft paper **600a** roll, was mounted vertically on a roll holder. The roll was positioned vertically to allow for the paper to folds on itself by gravity during unwinding. The kraft roll can be adjusted in height. The kraft paper had a heat-sealable coating on its interior facing the insulating layer. The production line spanned about 60 ft. and the distance between two production lines was about 10 ft. A band sealer **600b**, paper trimmer **600c**, and foot sealer **600d** were positioned along the production line.

[0303] An insulating layer **200** was loaded at the front of the line and sandwiched between the conformed kraft paper **600a**. The band sealer **600b** had traction wheels and pulled the kraft paper **600a** (thus unwinding the roll) while simultaneously sealing the longitudinal edge. The band sealer **600b** had a variable speed and temperature control, which dictated the production speed and sealing parameters. Once the unsealed-folded

kraft ran through the band sealer **600b**, the outcome is a sealed kraft tube with discrete pieces of an insulating layer inside.

[0304] The edge **602-604** had the folded edge from the kraft paper **600a** roll. The encapsulated insulation layer (now had edge **601-603** sealed) then traveled to the paper trimmer **600c**. The paper trimmer **600c** had an auto-sharpening blade that was used to cut between two insulating layers. The result was a tube with a longitudinal seal on the length **601-603**, and two open sides at the extremities, **601-602** and **603-604**. The tube then traveled to a foot sealer **600d** to seal edge **603-604**. In this instance the foot sealer **600d** was an automatic constant foot-operated heat-sealer. The unfinished thermal insulating liner was then rotated 180 degrees to trim the excess kraft on edge **601-602** using a paper trimmer **600c**. The unfinished thermal insulating liner edge **601-602** was sealed using a foot sealer **600d**. During this sealing process, the unfinished thermal insulating liner may be offset to leave a small about 1.0" ventilation hole unsealed for the air to escape in order to increase packing efficiency. The individual thermal insulating liner pieces **600e** were thereafter inspected and packed into gaylords. The number of units of thermal insulating liner pieces per gaylord was a function of the dimensions of the liners. In some instances, 150-650 thermal insulating liners can fit into a 40"x48"x48" gaylord box. Once filled, the gaylord box may be closed. In some instances, once filled, the gaylord box may be taped, labeled and shrink wrapped. **FIG. 33 – FIG. 38.**

## CLAIMS

## WHAT IS CLAIMED IS:

1. A thermal insulating liner comprising:
  - a. an insulating layer comprising:
    - a layer of flexible fibrous material, wherein the layer of flexible fibrous material comprises natural fibers and is configured to form a cavity, wherein the insulating layer is compostable or biodegradable; and
  - b. a barrier covering an inner surface of the cavity, wherein the thermal insulating liner has a thermal conductivity ranging from 0.01 W/mK to 0.1 W/mK.
2. A thermal insulating liner comprising:
  - a. an insulating layer comprising:
    - a layer of flexible fibrous material, wherein the layer of flexible fibrous material comprises natural fibers and is configured to form a cavity, wherein the insulating layer does not comprise a binder; and
  - b. a barrier covering an inner surface of the cavity, wherein the thermal insulating liner has a thermal conductivity ranging from 0.01 W/mK to 0.1 W/mK.
3. A thermal insulating liner comprising:
  - a. an insulating layer comprising:
    - a layer of flexible fibrous material, wherein the layer of flexible fibrous material is configured to form a cavity; and
  - b. a barrier covering an inner surface of the cavity, wherein the thermal insulating liner comprises 100% recycled materials.
4. A thermal insulating liner comprising:
  - a. an insulating layer comprising:
    - a layer of flexible fibrous material, wherein the layer of flexible fibrous material comprises bast fibers and is configured to form a cavity; and
  - b. a barrier covering an inner surface of the cavity, wherein the thermal insulating liner has a thermal conductivity ranging from 0.01 W/mK to 0.1 W/mK.
5. The thermal insulating liner of any one of claims 1-4, wherein the fibrous material comprises nonwoven fibers.
6. The thermal insulating liner of any one of claims 1-5, wherein the insulating layer comprises a single continuous layer of fibrous material.
7. A thermal insulating liner comprising:
  - a. an insulating layer comprising:
    - a layer of flexible fibrous material, wherein the layer of flexible fibrous material comprises needled fibers and is configured to form a cavity; and

- b. a barrier, wherein the barrier comprises a flexible material that covers an inner surface of the cavity, wherein the barrier has a thickness ranging from 1 to 5 MIL.
8. The thermal insulating liner of claim 7, wherein the insulating layer comprises a single continuous layer of fibrous material.
9. The thermal insulating liner of any one of claims 3, 7 or 8, wherein the insulating layer has a thermal conductivity ranging from 0.01 W/mK to 0.1 W/mK.
10. A thermal insulating liner comprising:
- a. an insulating layer comprising:
    - a first side portion, a second side portion, and a middle portion separating the first and second side portions,
    - wherein one or more of the first side, or second side portions comprises opposing first and second side flaps,
    - wherein the insulating layer is folded such that the first side portion, second side portion and middle portion create an open mouth substantially polygonal box form comprising a cavity, with the first and second side portions defining opposing sides of the polygonal box form, the middle portion defining a bottom of the polygonal box form, and the opposing first and second side flaps defining at least part of opposing sides of the polygonal box form,
    - wherein the insulating layer comprises a continuous layer of nonwoven fibrous material, wherein the continuous layer of nonwoven fibrous material has a thickness ranging from 0.2 cm to 9.0 cm; and
  - b. a barrier covering an inner surface of the polygonal box form.
11. A thermal insulating liner comprising:
- a. an insulating layer comprising:
    - a flexible first side portion, a second side portion, and a middle portion separating the first and second side portions,
    - wherein the insulating layer is folded such that the first side portion, second side portion and middle portion create an open mouth pouch comprising a cavity, with the first and second side portions defining opposing sides of the pouch, the middle portion defining a bottom of the pouch,
    - wherein the insulating layer comprises a continuous layer of nonwoven fibrous material, wherein the continuous layer of nonwoven fibrous material comprises a bast fiber and has a density ranging from 200 g/m<sup>2</sup> to 3500 g/m<sup>2</sup>; and
  - b. a barrier, wherein the barrier covers an inner surface of the pouch.
12. The thermal insulating liner of any one of claims 1-6, 10, or 11, wherein the fibrous material is produced by one or more of: needling, spunbonding, melt blowing, bonded carded, thermal bonding, and wet laid.

13. The thermal insulating liner of any one of claims 3, 7, or 10, wherein the fibrous material comprises plant fibers.
14. The thermal insulating liner of claim 13, wherein the plant fibers comprise jute fibers.
15. The thermal insulating liner of claim 4 or 11, wherein the bast fibers comprise jute fibers.
16. The thermal insulating liner of claim 1 or 2, wherein the natural fibers comprise jute fibers.
17. The thermal insulating liner of any one of claims 1, 2, 4, 7, 10, or 11, wherein the fibrous material comprises recycled fibers.
18. The thermal insulating liner of any one of claims 1-4, 7, 10, or 11, wherein the insulating layer comprises a thickness of at least 0.2 cm.
19. The thermal insulating liner of claim 18, wherein the insulating layer comprises a thickness of 2.5 cm.
20. The thermal insulating liner of any one of claims 1-4, 7, 10, or 11, wherein the barrier has a thickness ranging from 1 to 5 MIL.
21. The thermal insulating liner of any one of claims 1-20, wherein the barrier is transparent.
22. The thermal insulating liner of any one of claims 1-20, wherein the barrier comprises kraft paper.
23. The thermal insulating liner of any one of claims 1-22, wherein the barrier comprises recycled materials.
24. The thermal insulating liner of any one of claims 1-23, wherein the barrier comprises a biodegradable polymer, copolymer or blends thereof.
25. The thermal insulating liner of any one of claims 1-23, wherein the barrier is coated with a biodegradable polymer, copolymer or blends thereof.
26. The thermal insulating liner of claim 24 or 25, wherein the biodegradable polymer, copolymer or blends thereof comprises at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch.
27. The thermal insulating liner of claim 26, wherein the polymer, copolymer or blends thereof comprises polyhydroxyalkanoate.
28. The thermal insulating liner of claim 26, wherein the biodegradable polymer, copolymer or blends thereof comprises a polylactic acid.
29. The thermal insulating liner of claim 24, wherein the barrier is a moisture resistant barrier.
30. The thermal insulating liner of claim 24, wherein the barrier is an oxygen barrier.
31. The thermal insulating liner of claim 25, wherein the coating is moisture resistant.
32. The thermal insulating liner of claim 25, wherein the coating is impermeable to oxygen.
33. The thermal insulating liner of any one of claims 1, 3, 4, 7, 10, or 11, wherein the insulating layer does not comprise a binder.
34. The thermal insulating liner of any one of claims 1-33, wherein the insulating layer is compostable.
35. The thermal insulating liner of any one of claims 1-33, wherein the insulating layer is recyclable.
36. The thermal insulating liner of any one of claims 1-33, wherein the insulating layer is biodegradable.
37. An insulating layer comprising:

a flexible first side portion, a second side portion, and a middle portion separating the first and second side portions,

wherein the insulating layer is folded such that the first side portion, second side portion and middle portion create an open mouth pouch comprising a cavity, with the first and second side portions defining opposing sides of the pouch, the middle portion defining a bottom of the pouch,

wherein the insulating layer comprises a continuous layer of nonwoven fibrous material, wherein the continuous layer of nonwoven fibrous material comprises a bast fiber and has a density ranging from 200 g/m<sup>2</sup> to 3500 g/m<sup>2</sup>.

38. An insulating layer comprising:

a first side portion, a second side portion, and a middle portion separating the first and second side portions,

wherein one or more of the first side or second side portions comprises opposing first and second side flaps,

wherein the insulating layer is folded such that the first side portion, second side portion and middle portion create an open mouth substantially polygonal box form comprising a cavity, with the first and second side portions defining opposing sides of the polygonal box form, the middle portion defining a bottom of the polygonal box form, and the opposing first and second side flaps defining at least part of opposing sides of the polygonal box form,

wherein the insulating layer comprises a continuous layer of nonwoven fibrous material, and

wherein the continuous layer of nonwoven fibrous material has a thickness ranging from 0.2 cm to 9.0 cm.

39. The insulating layer of claim 38, wherein the insulating layer comprises a density ranging from 200 g/m<sup>2</sup> to 3500 g/m<sup>2</sup>.

40. The insulating layer of claim 37 or 38, wherein the insulating layer has a thermal conductivity ranging from 0.01 W/mK to 0.1 W/mK.

41. The insulating layer of claim 37, wherein the insulating layer comprises a thickness ranging from 0.2 cm to 9.0 cm.

42. The insulating layer of claim 37 or 38, wherein the fibrous material is produced by one or more of: needling, spunbonding, melt blowing, bonded carded, thermal bonding, and wet laid.

43. The insulating layer of claim 37 or 38, wherein the fibrous material comprises plant fibers.

44. The insulating layer of claim 43, wherein the plant fibers comprise jute fibers.

45. The insulating layer of claim 37 or 38, wherein the fibrous material comprises recycled fibers.

46. The insulating layer of claim 37 or 38, wherein the insulating layer comprises one or more types of fibers.

47. The insulating layer of claim 37 or 38, wherein the polygonal box form comprises a box comprising 5, 6, 7, 8, 9, or 10 sides.

48. The insulating layer of any one of claims 37-47, wherein the insulating layer is compostable.

49. The insulating layer of any one of claims 37-47, wherein the insulating layer is recyclable.

50. The insulating layer of any one of claims 37-47, wherein the insulating layer is biodegradable.
51. A method for regulating a temperature of a sample, the method comprising:  
placing the sample into a cavity of a thermal insulating liner, the thermal insulating liner comprising
- i. an insulating layer, the insulating layer comprising:
    - a layer of flexible fibrous material, wherein the layer of flexible fibrous material comprises bast fibers, and is configured to form the cavity; and
  - ii. a barrier covering an inner surface of the cavity, wherein the thermal insulating liner has a thermal conductivity ranging from 0.01 W/mK to 0.1 W/mK.
52. The method of claim 51, wherein the fibrous material comprises nonwoven fibers.
53. The method of claim 52, wherein the insulating layer comprises a single continuous layer of fibrous material.
54. A method for regulating a temperature of a sample, the method comprising:
- a. placing the sample into a cavity of a thermal insulating liner, the thermal insulating liner comprising
    - i. an insulating layer comprising:
      - a layer of flexible fibrous material, wherein the layer of flexible fibrous material comprises needled fibers, and is configured to form the cavity; and
    - ii. a barrier, wherein the barrier comprises a flexible material that covers an inner surface of the cavity, wherein the barrier has a thickness ranging from 1 to 5 MIL.
55. The method of claim 54, wherein the insulating layer comprises a single continuous layer of fibrous material.
56. A method for regulating a temperature of a sample, the method comprising:  
placing the sample into a cavity of a thermal insulating liner, the thermal insulating liner comprising:
- i. an insulating layer, the insulating layer comprising:
    - a first side portion, a second side portion, and a middle portion separating the first and second side portions,  
wherein one or more of the first side, or second side portions comprises opposing first and second side flaps,  
wherein the insulating layer is folded such that the first side portion, second side portion and middle portion create an open mouth substantially polygonal box form comprising a cavity, with the first and second side portions defining opposing sides of the polygonal box form, the middle portion defining a bottom of the polygonal box form, and the opposing first and second side flaps defining at least part of opposing sides of the polygonal box form,

wherein the insulating layer comprises a continuous layer of nonwoven fibrous material,

wherein the continuous layer of nonwoven fibrous material has a thickness ranging from 0.2 cm to 9.0 cm; and

ii. a barrier, wherein the barrier covers an inner surface of the polygonal box form.

57. A method for regulating a temperature of a sample, the method comprising:

placing the sample into a cavity of a thermal insulating liner, the thermal insulating liner comprising

a. an insulating layer, the insulating layer comprising

a flexible first side portion, a second side portion, and a middle portion separating the first and second side portions,

wherein the insulating layer is folded such that the first side portion, second side portion and middle portion create an open mouth pouch comprising a cavity, with the first and second side portions defining opposing sides of the pouch, the middle portion defining a bottom of the pouch,

wherein the insulating layer comprises a continuous layer of nonwoven fibrous material,

wherein the continuous layer of nonwoven fibrous material comprises a bast fiber and a density ranging from 200 g/m<sup>2</sup> to 3500 g/m<sup>2</sup>; and

b. a barrier, wherein the barrier covers an inner surface of the pouch.

58. The method of any one of claims 51-57, wherein the sample comprises a temperature sensitive sample.

59. The method of any one of claims 51-57, further comprising placing a heating or cooling agent into the cavity.

60. The method of any one of claims 51-57, further comprises covering the cavity containing the sample.

61. The method of claim 60, wherein covering comprises folding a portion of the thermal insulating liner on itself.

62. The method of any one of claims 51-60, further comprises placing the thermal insulating liner into a container.

63. A method of making a thermal insulating liner, the method comprising:

a. producing an insulating layer, wherein the insulating layer comprises a continuous layer of nonwoven fibrous material, wherein the continuous layer of nonwoven fibrous material comprises a bast fiber and has a density ranging from 200 g/m<sup>2</sup> to 3500 g/m<sup>2</sup>;

b. folding the insulating layer on itself whereby the insulating layer comprises:

a flexible first side portion, a second side portion, and a middle portion separating the first and second side portions, wherein the first side portion, second side portion and middle portion create an open mouth pouch comprising a cavity, with the first and second side

portions defining opposing sides of the pouch, the middle portion defining a bottom of the pouch;

- c. covering an inner surface of the first side portion, second side portion and the middle portion with a barrier; and
- d. sealing the barrier covering the inner surface of the first side portion, second side portion and the middle portion.

64. A method of making a thermal insulating liner, the method comprising:

- a. producing an insulating layer, wherein the insulating layer comprises a continuous layer of nonwoven fibrous material, wherein the continuous layer of nonwoven fibrous material has a thickness ranging from 0.2 cm to 9.0 cm;
- b. removing a excised portion of the insulating layer whereby the insulating layer comprises:  
a first side portion, a second side portion, and a middle portion separating the first and second side portions, wherein one or more of the first side, or second side portions comprises opposing first and second side flaps;
- c. covering an inner surface of the first side portion, second side portion and the middle portion with a barrier;
- d. sealing the barrier covering the inner surface of the first side portion, second side portion and the middle portion; and
- e. folding the insulating layer such that the first side portion, second side portion and middle portion create an open mouth substantially polygonal box form comprising a cavity, with the first and second side portions defining opposing sides of the polygonal box form, the middle portion defining a bottom of the polygonal box form, and the opposing first and second side flaps defining at least part of opposing sides of the polygonal box form.

65. The method of claim 64, wherein the excised portion has a length equal to the width of a container that the insulating liner will be placed in and a width equal to half a width of the container that the insulating liner will be placed.

66. The method of claim 64, wherein the insulating layer is folded along its length before an excised portion is removed.

67. The method of claim 64, wherein the insulating layer is folded along its width before an excised portion is removed.

68. The method of any one of claims 52, 56, 57, 63, or 64, wherein the fibrous material is produced by one or more of: needling, spunbonding, melt blowing, bonded carded, thermal bonding, and wet laid.

69. The method of any one of claims 54, 56, 57, 63, or 64, wherein the fibrous material comprises plant fibers.

70. The method of claim 69, wherein the plant fibers comprise jute fibers.

71. The method of any one of claims 51, 54, 56, 57, 63, or 64, wherein the fibrous material comprises recycled fibers.

72. The method of any one of claims 51-71, wherein the barrier comprises a biodegradable polymer, copolymer or blends thereof.
73. The method of any one of claims 51-71, wherein the barrier is coated with a biodegradable polymer, copolymer or blends thereof.
74. The method of claim 72 or 73, wherein the biodegradable polymer, copolymer or blends thereof comprises at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch.
75. The method of claim 74, wherein the biodegradable polymer, copolymer or blends thereof comprises polyhydroxyalkanoate.
76. The method of claim 74, wherein the biodegradable polymer, copolymer or blends thereof comprises a polylactic acid.
77. The method of claim 72, wherein the barrier is a moisture resistant barrier.
78. The method of claim 72, wherein the barrier is an oxygen barrier.
79. The method of claim 73, wherein the coating is moisture resistant.
80. The method of claim 73, wherein the coating is impermeable to oxygen.
81. The method of any one of claims 51-80, wherein the insulating layer does not comprise a binder.
82. An apparatus comprising:
  - a. a thermal insulating liner, the thermal insulating liner comprising:
    - an insulating layer, the insulating layer comprising:
      - a layer of flexible fibrous material, wherein the layer of flexible fibrous material comprises bast fibers and is configured to form a cavity;
      - a barrier covering an interior surface of the cavity; and
  - b. a lid attached to the thermal insulating liner, wherein the lid is movable from a closed state to an open state, wherein the apparatus has a thermal conductivity ranging from 0.01 W/mK to 0.1 W/mK.
83. The apparatus of claim 82, wherein the fibrous material comprises nonwoven fibers.
84. An apparatus comprising:
  - a. a thermal insulating liner, the thermal insulating liner comprising:
    - an insulating layer, the insulating layer comprising:
      - a layer of flexible fibrous material, wherein the layer of flexible fibrous material comprises needled fibers, and is configured to form a cavity;
    - b. a barrier, wherein the barrier comprises a flexible material that covers the interior surface of the cavity, wherein the barrier has a thickness ranging from 1 to 5 MIL; and
    - c. a lid attached to the thermal insulating liner, wherein the lid is movable from a closed state to an open state.
85. The apparatus of any one of claims 82, 83, or 84, wherein the insulating layer comprises a single continuous layer of fibrous material.

86. The apparatus of claim 85, wherein the insulating layer has a thermal conductivity ranging from 0.01 W/mK to 0.1 W/mK.
87. The apparatus of claim 82 or 84, wherein the lid comprises natural fibers.
88. The apparatus of claim 87, wherein the lid comprises recycled fibers.
89. The apparatus of claim 87, wherein the natural fibers comprise jute fibers.
90. The apparatus of claim 82, wherein the bast fibers comprise jute fibers.
91. The apparatus of claim 82 or 84, wherein the fibrous material comprises recycled fibers
92. The apparatus of claim 84, wherein the fibrous material comprises plant fibers.
93. The apparatus of claim 82 or 84, wherein the insulating layer comprises a thickness of at least 0.2 cm.
94. The apparatus of claim 82 or 84, wherein the insulating layer comprises a density ranging from 200 g/m<sup>2</sup> to 3500 g/m<sup>2</sup>.
95. The apparatus of claim 82 or 84, wherein the barrier is transparent.
96. The apparatus of claim 82 or 84, wherein the barrier comprises kraft paper.
97. The apparatus of claim 82 or 84, wherein the barrier comprises recycled materials.
98. The apparatus of any one of claims 82-97, wherein the barrier comprises a biodegradable polymer, copolymer or blends thereof.
99. The apparatus of any one of claims 82-97, wherein the barrier is coated with a biodegradable polymer, copolymer or blends thereof.
100. The apparatus of claim 98 or 99, wherein the biodegradable polymer, copolymer or blends thereof comprises at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch.
101. The apparatus of claim 100, wherein the biodegradable polymer, copolymer or blends thereof comprises polylactic acid.
102. The apparatus of claim 98, wherein the barrier is a moisture resistant barrier.
103. The apparatus of claim 99, wherein the coating is moisture resistant.
104. The apparatus of claim 99, wherein the coating is impermeable to oxygen.
105. The apparatus of any one of claims 82-104, wherein the insulating layer does not comprise a binder.
106. A system comprising:
  - a. a thermal insulating liner, the thermal insulating liner comprising:
    - i. an insulating layer comprising:
      - a layer of flexible fibrous material, wherein the layer of flexible fibrous material comprises bast fibers, and is configured to form a cavity;
    - ii. a barrier covering an inner surface of the cavity, wherein the thermal insulating liner has a thermal conductivity ranging from 0.01 W/mK to 0.1 W/mK; and
  - b. a container within which the thermal insulating liner will be placed.
107. The system of claim 106, wherein the fibrous material comprises nonwoven fibers.

108. The system of claim 107, wherein the insulating layer comprises a single continuous layer of fibrous material.
109. A system comprising:
- a. a thermal insulating liner, the thermal insulating liner comprising:
    - i. an insulating layer comprising:
      - a layer of flexible fibrous material, wherein the layer of flexible fibrous material comprises needled fibers, and is configured to form a cavity;
    - ii. a barrier, wherein the barrier comprises a flexible material that covers an inner surface of the cavity, wherein the barrier has a thickness ranging from 1 to 5 MIL; and
  - b. a container within which the thermal insulating liner replaceably fits.
110. The system of claim 109, wherein the insulating layer comprises a single continuous layer of fibrous material.
111. A system comprising:
- a. a thermal insulating liner, the thermal insulating liner comprising
    - i. an insulating layer, the insulating layer comprising
      - a first side portion, a second side portion, and a middle portion separating the first and second side portions,
      - wherein one or more of the first side, or second side portions comprises opposing first and second side flaps,
      - wherein the insulating layer is folded such that the first side portion, second side portion and middle portion create an open mouth substantially polygonal box form comprising a cavity, with the first and second side portions defining opposing sides of the polygonal box form, the middle portion defining a bottom of the polygonal box form, and the opposing first and second side flaps defining at least part of opposing sides of the polygonal box form,
      - wherein the insulating layer comprises a continuous layer of nonwoven fibrous material,
      - wherein the continuous layer of nonwoven fibrous material has a thickness ranging from 0.2 cm to 9.0 cm;
    - ii. a barrier wherein the barrier covers an inner surface of the polygonal box form; and
  - b. a container within which the thermal insulating liner replaceably fits.
112. A system comprising:
- a. a thermal insulating liner, the thermal insulating liner comprising
    - i. an insulating layer, the insulating layer comprising
      - a flexible first side portion, a second side portion, and a middle portion separating the first and second side portions,

wherein the insulating layer is folded such that the first side portion, second side portion and middle portion create an open mouth pouch comprising a cavity, with the first and second side portions defining opposing sides of the pouch, the middle portion defining a bottom of the pouch,

wherein the insulating layer comprises a continuous layer of nonwoven fibrous material,


wherein the continuous layer of nonwoven fibrous material comprises a bast fiber and a density ranging from 200 g/m<sup>2</sup> to 3500 g/m<sup>2</sup>; and

ii. a barrier, wherein the barrier covers an inner surface of the pouch; and

b. a container within which the thermal insulating liner replaceably fits.

113. The system of anyone of claims 106 - 112, further comprising a heating agent.
114. The system of anyone of claims 106 - 112, further comprising a cooling agent.
115. The system of claims 106, 111, or 112, wherein the fibrous material is produced by one or more of: needling, spunbonding, melt blowing, bonded carded, thermal bonding, and wet laid.
116. The system of any one of claims 109-111, wherein the fibrous material comprises plant fibers.
117. The system of claim 116, wherein the plant fibers comprise jute fibers.
118. The system of claim 106 or 112, wherein the bast fiber comprises jute fibers.
119. The system of any one of claims 106, 109, 111, or 112, wherein the fibrous material comprises recycled fibers.
120. The system of any one of claims 106, 109, 111, or 112, wherein the container is a corrugated box.
121. The system of any one of claims 106, 109, 111, or 112, wherein the container comprises polystyrene.
122. The system of any one of claims 106, 109, 111, or 112, wherein the container is rigid.
123. The system of any one of claims 106, 109, 111, or 112, wherein the container is flexible.
124. The system of any one of claims 106-123, wherein the barrier comprises a biodegradable polymer, copolymer or blends thereof.
125. The system of any one of claims 106-123, wherein the barrier is coated with a biodegradable polymer, copolymer or blends thereof.
126. The system of claim 124 or 125, wherein the biodegradable polymer, copolymer or blends thereof comprises at least one of a polylactate, polymalate, polyhydroxyalkanoate, polycaprolactone, polyesteramide, aliphatic copolyester, aliphatic-co-terephthalate copolyester, cellulose or starch.
127. The system of claim 126, wherein the biodegradable polymer, copolymer or blends thereof comprises a polylactic acid.
128. The system of claim 124, wherein the barrier is a moisture resistant barrier.
129. The system of claim 124, wherein the barrier is an oxygen barrier.
130. The system of claim 125, wherein the coating is moisture resistant.
131. The system of claim 125, wherein the coating is impermeable to oxygen.
132. The system of any one of claims 106-131, wherein the insulating layer does not comprise a binder.

Insulating Layer  
Fold Along Width

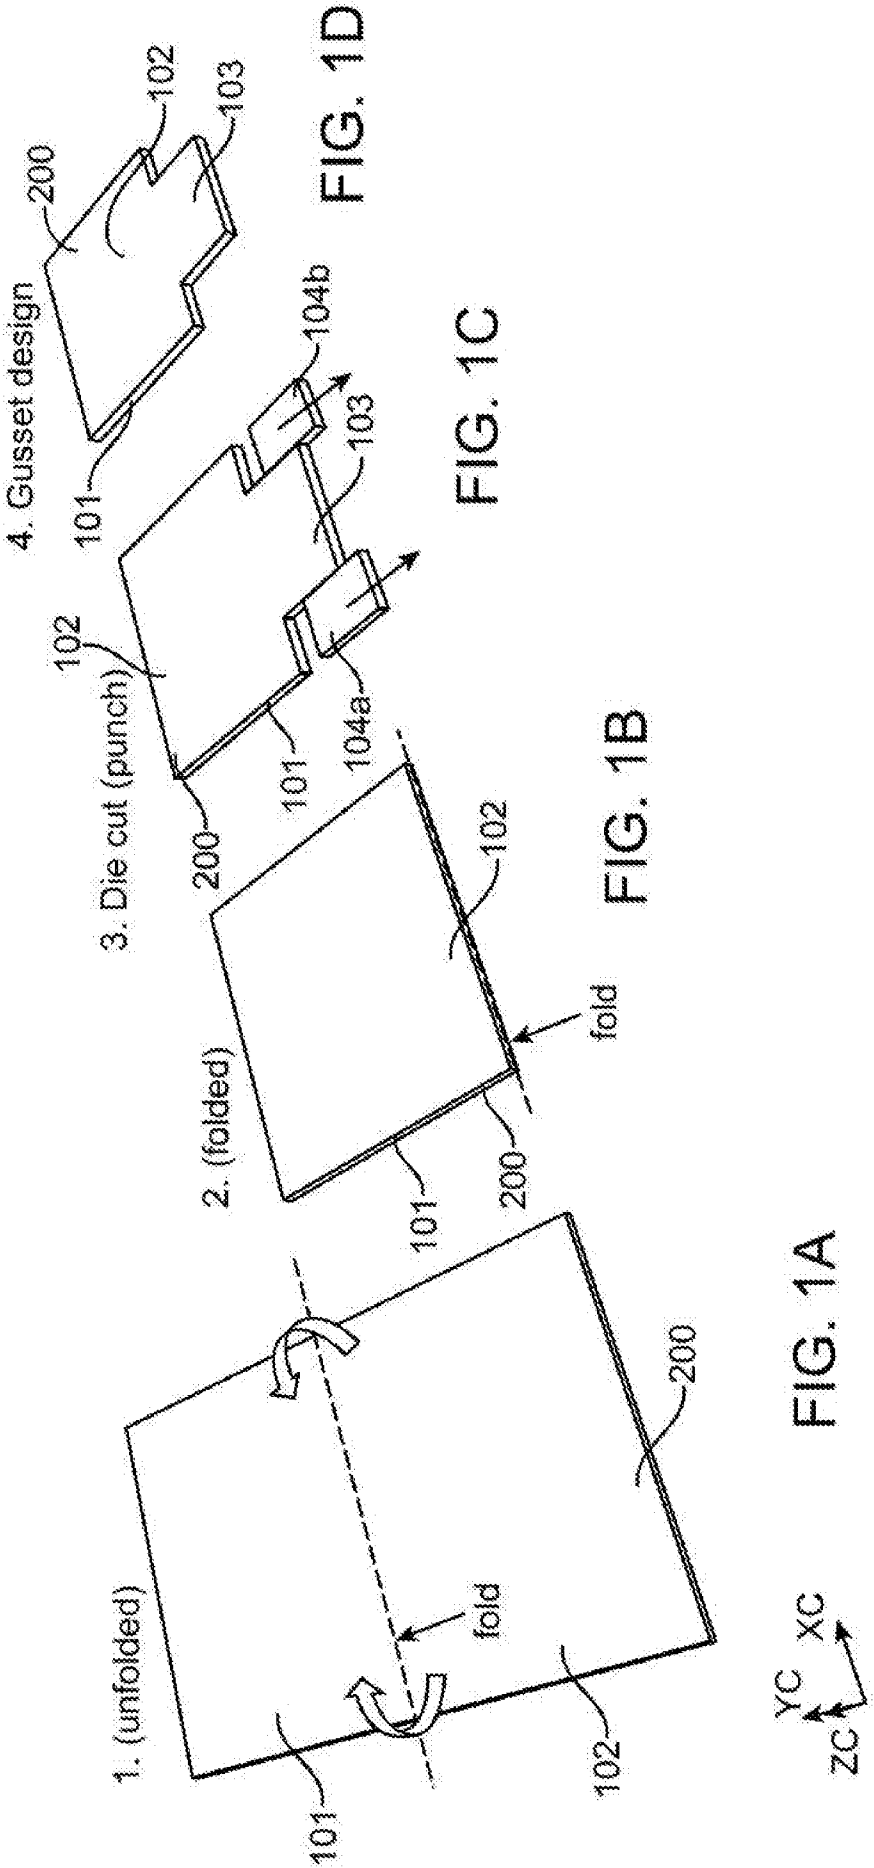

Small Insulating Layer

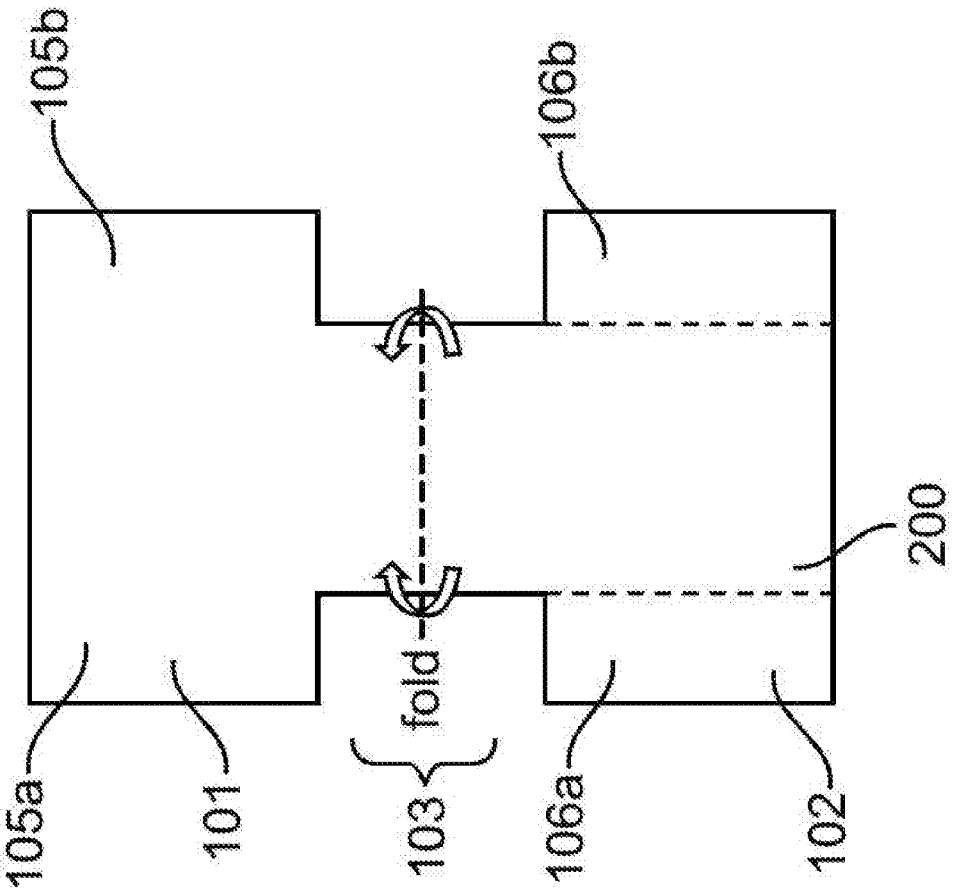


FIG. 2A

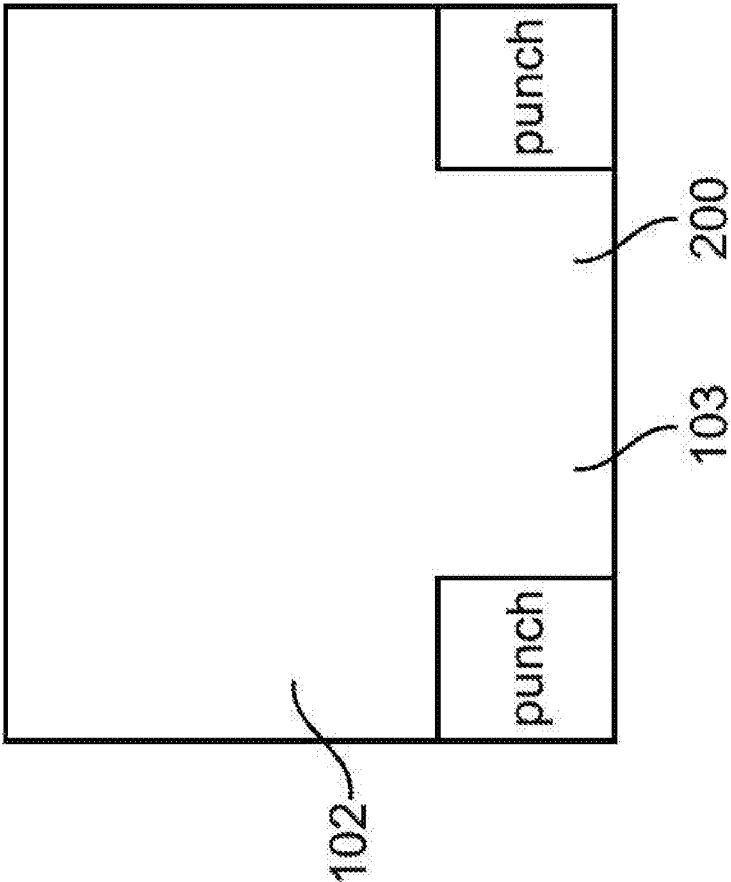


FIG. 2B

Medium Insulating Layer

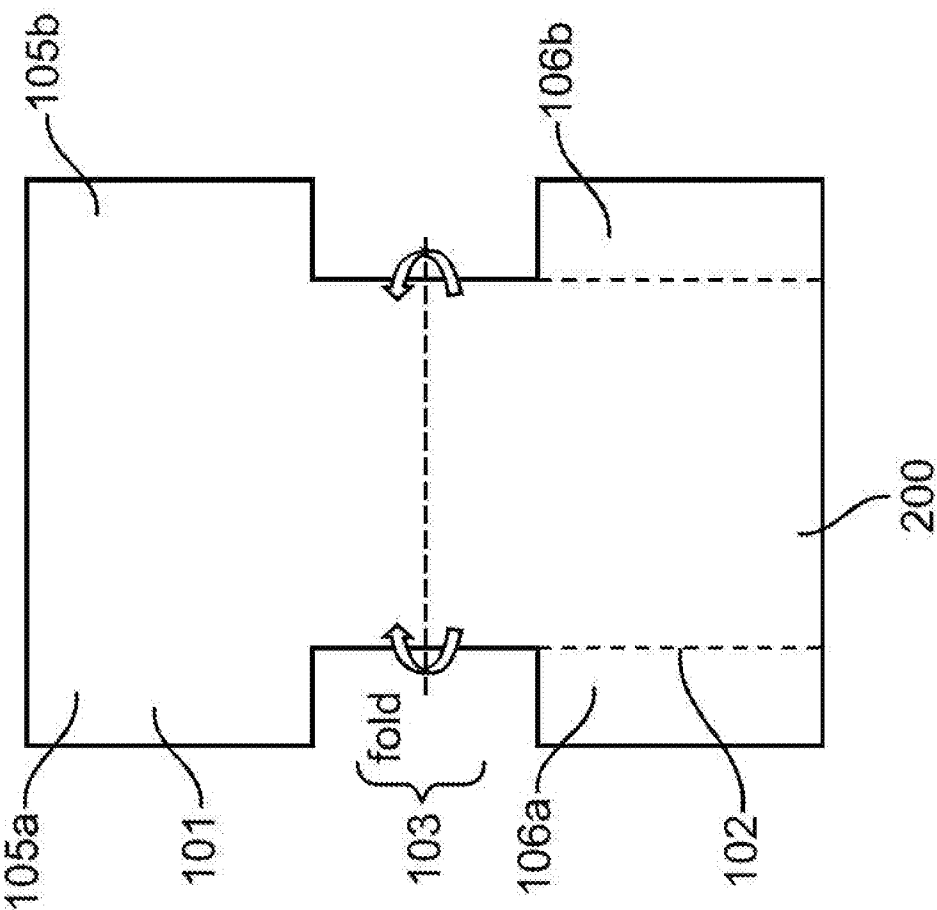


FIG. 3A

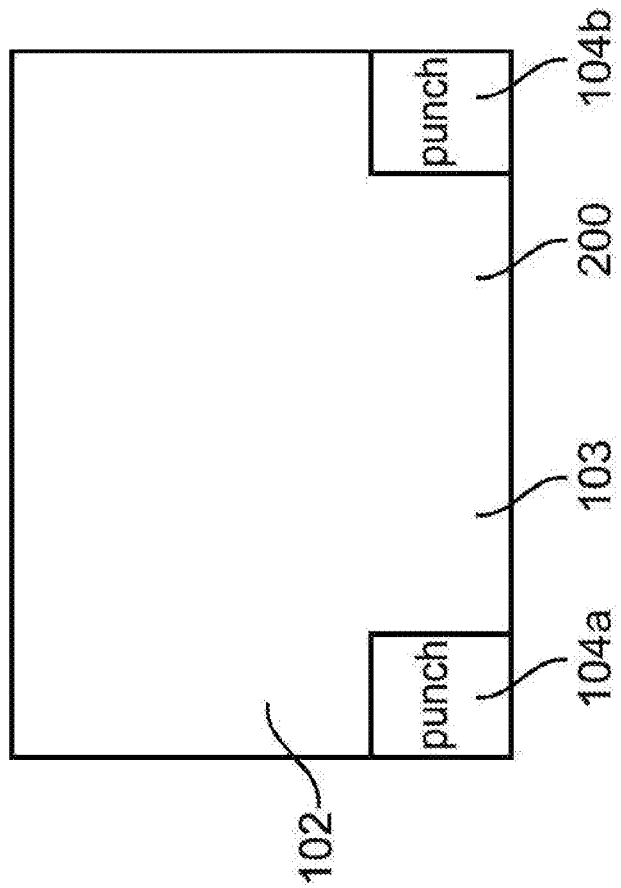


FIG. 3B

Large Insulating Layer

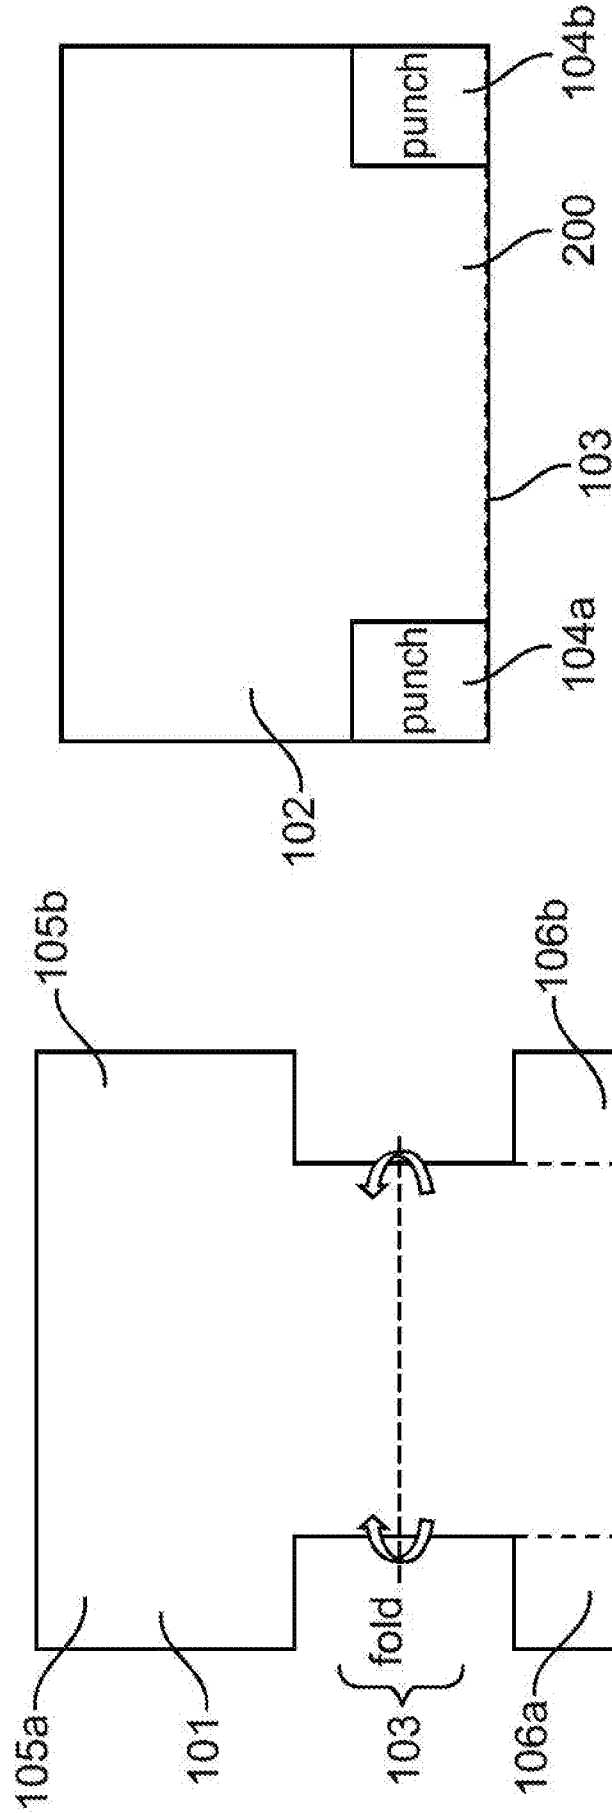


FIG. 4B

FIG. 4A

Insulating Layer  
Fold Along Length



FIG. 5D



FIG. 5C

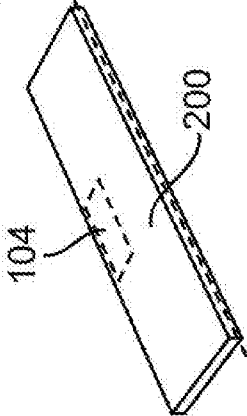


FIG. 5B

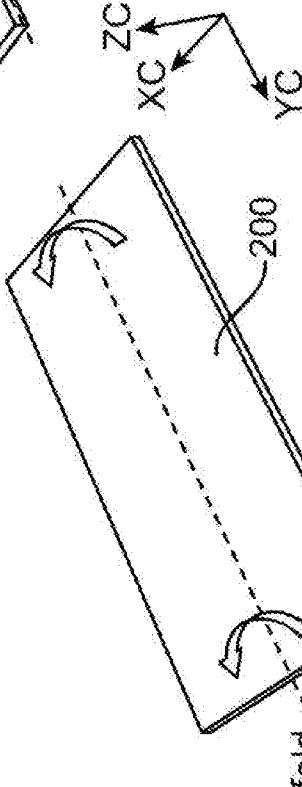


FIG. 5A

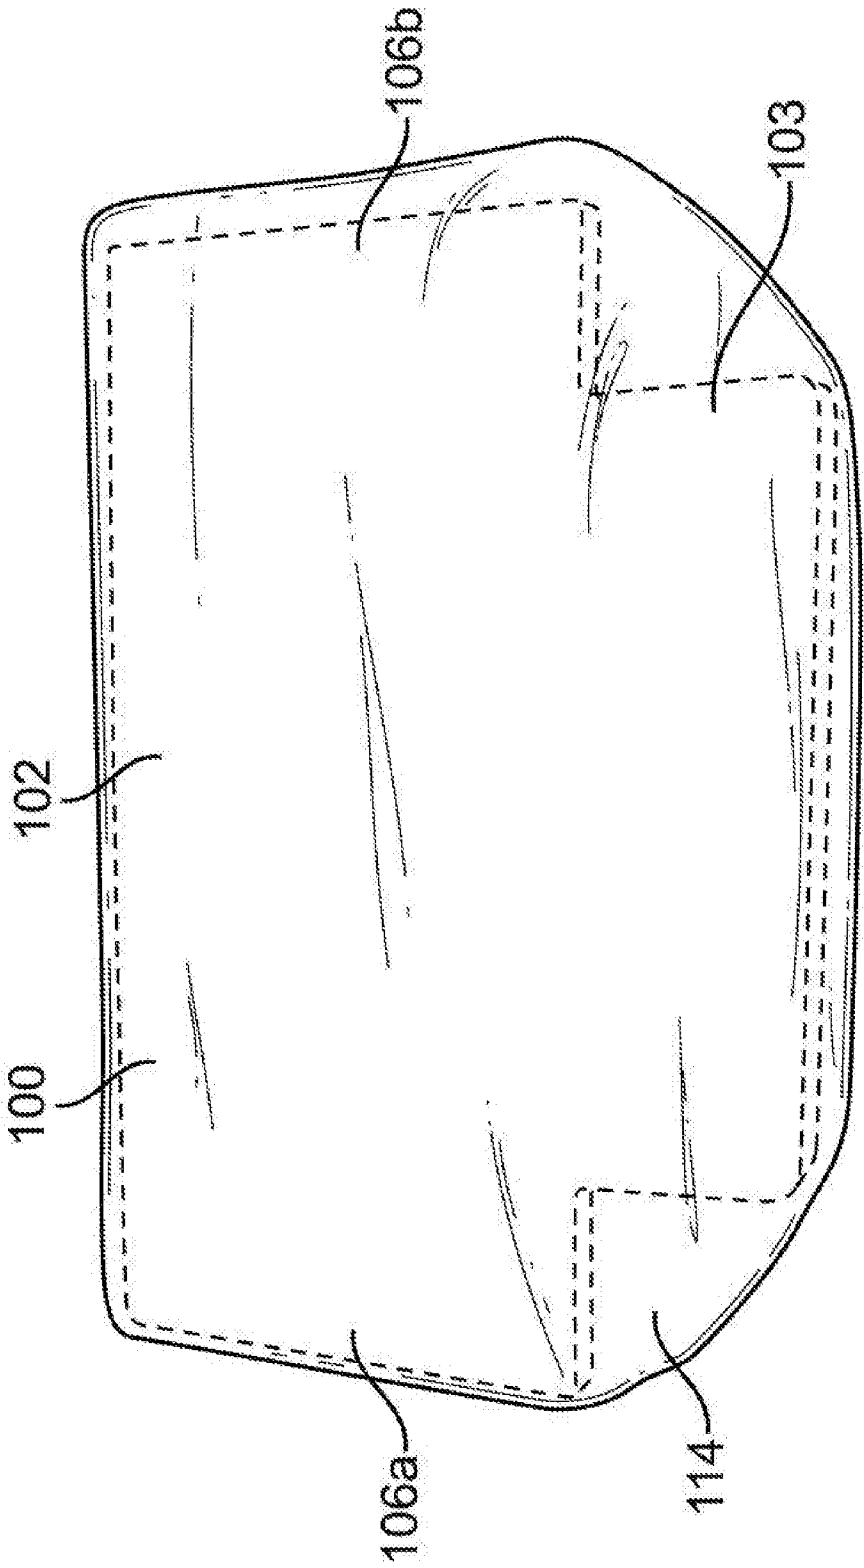


FIG. 6

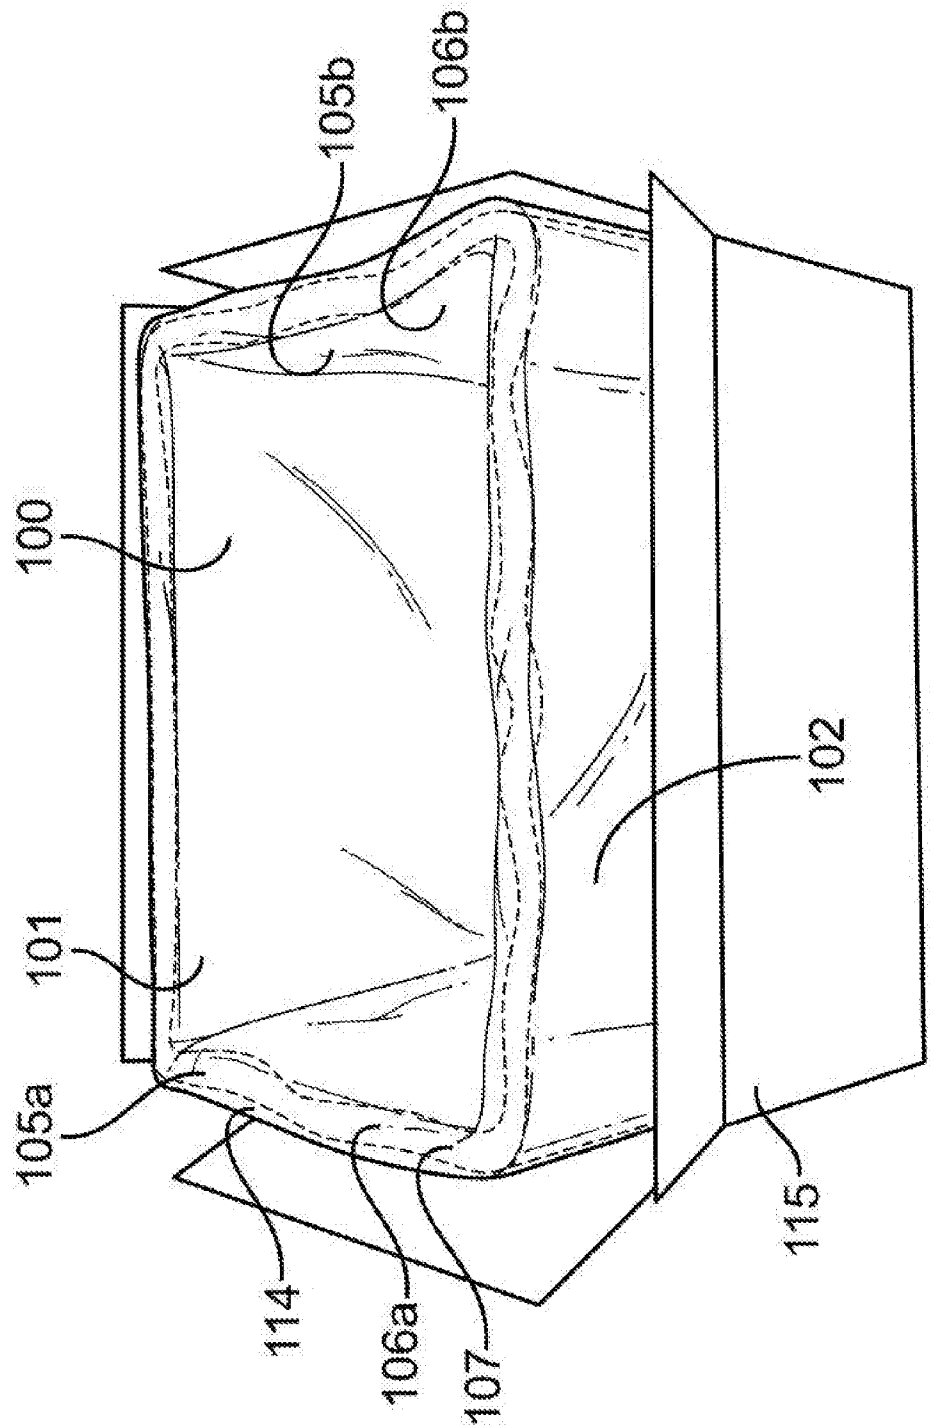


FIG. 7

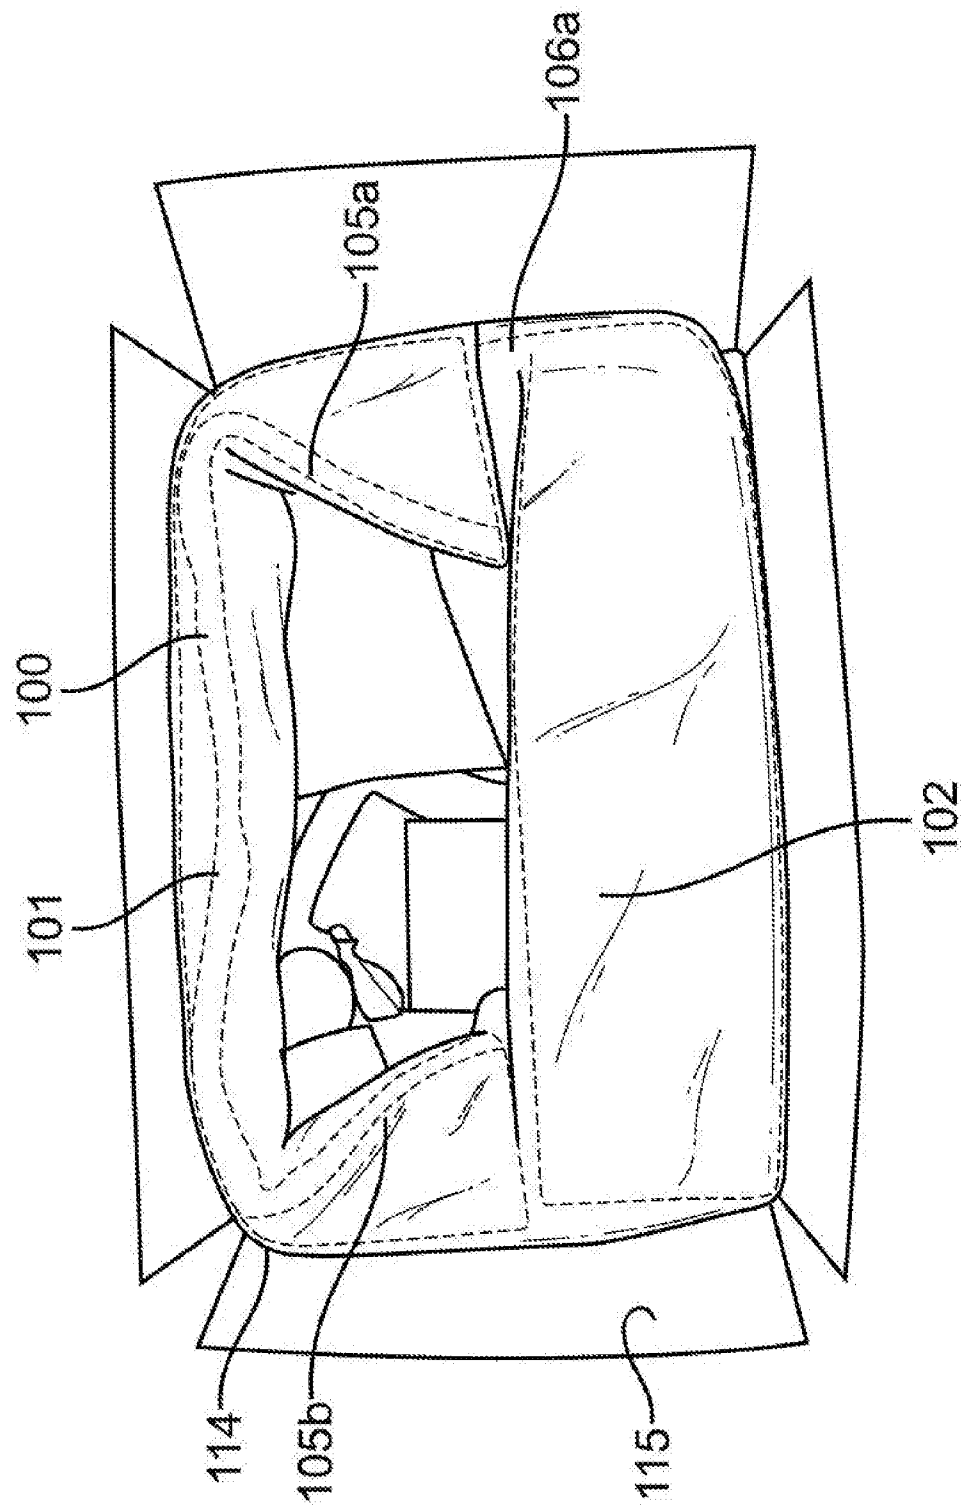


FIG. 8

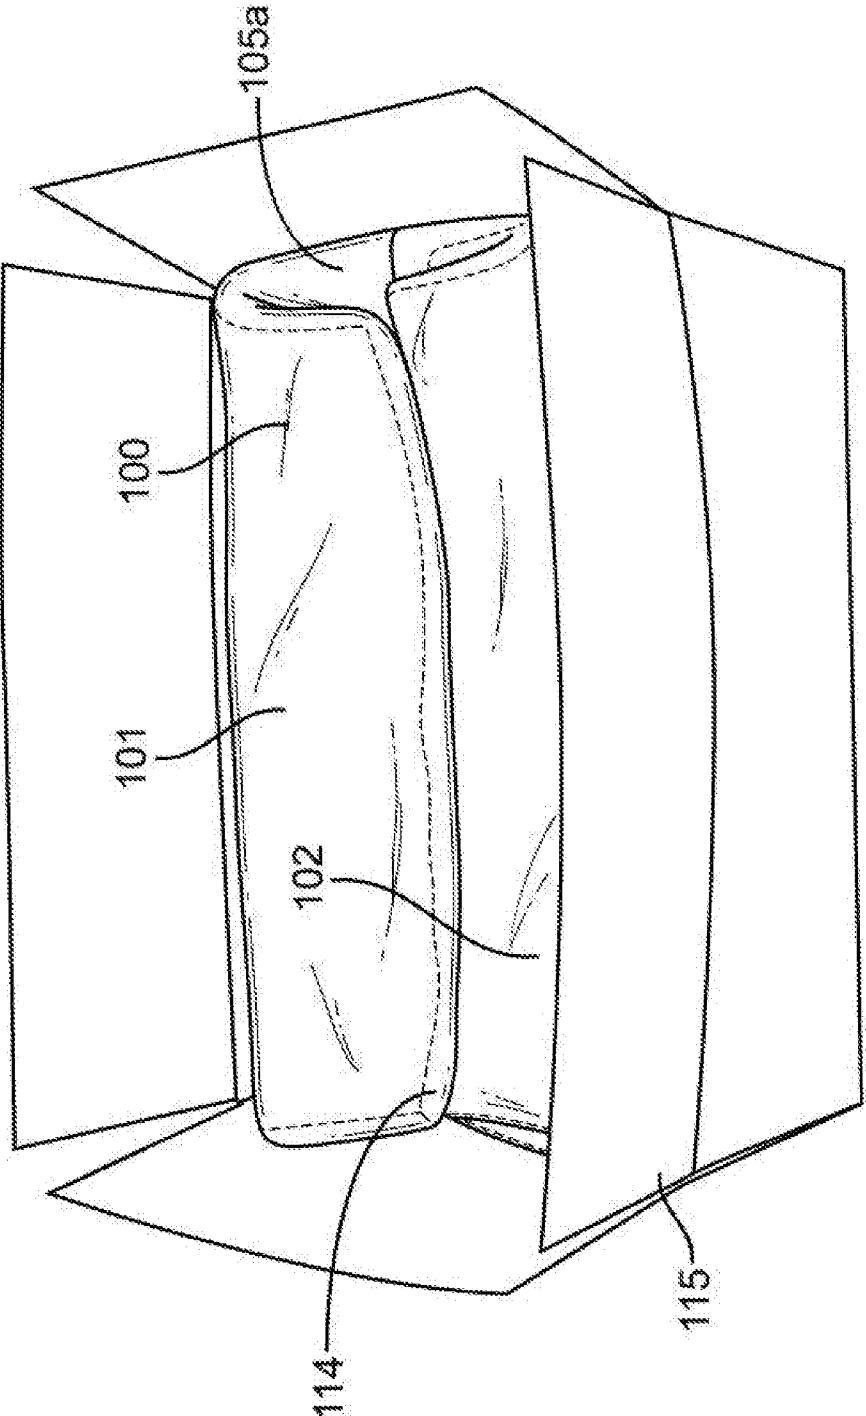


FIG. 9

FIG. 10

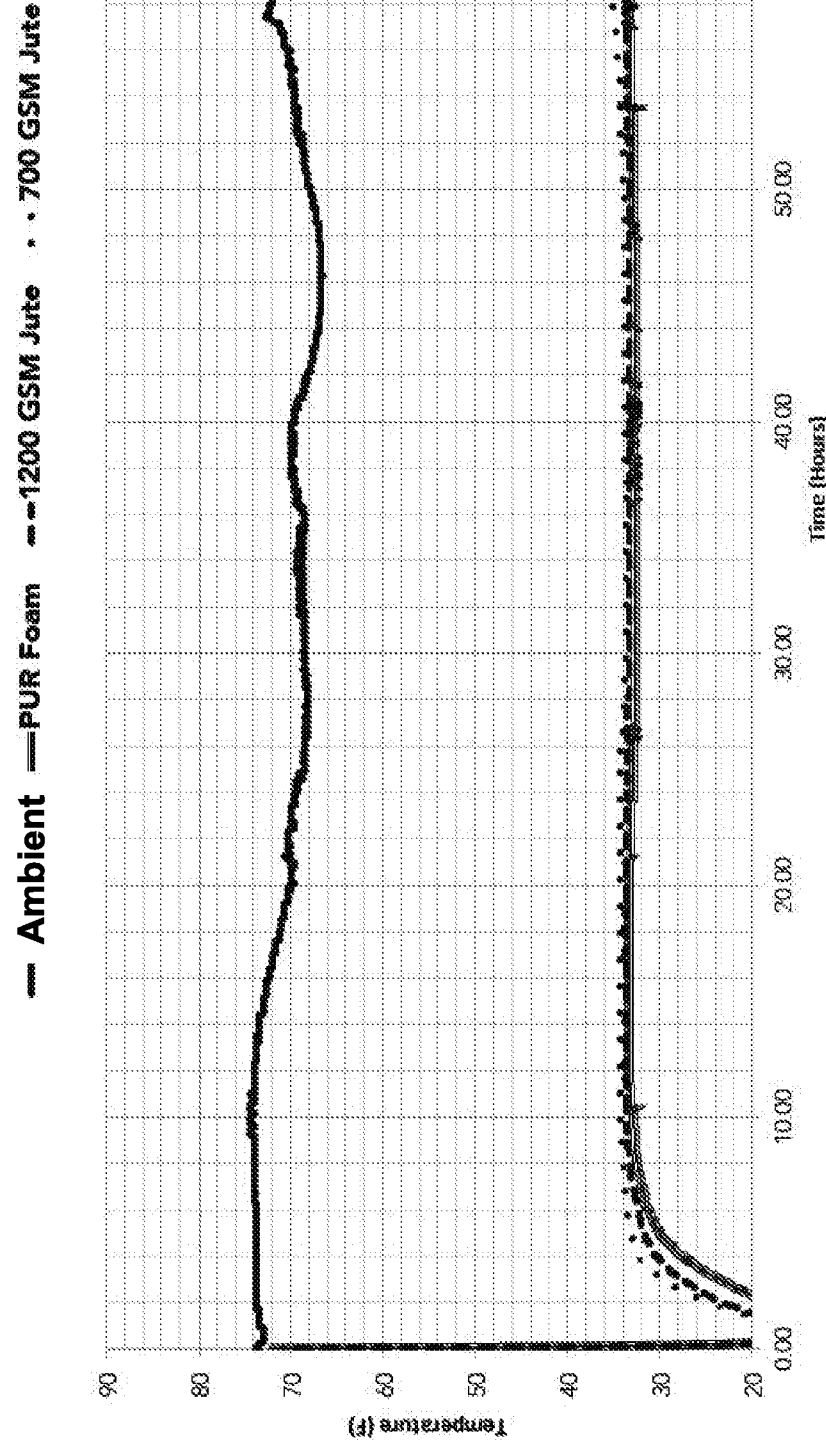


FIG. 11

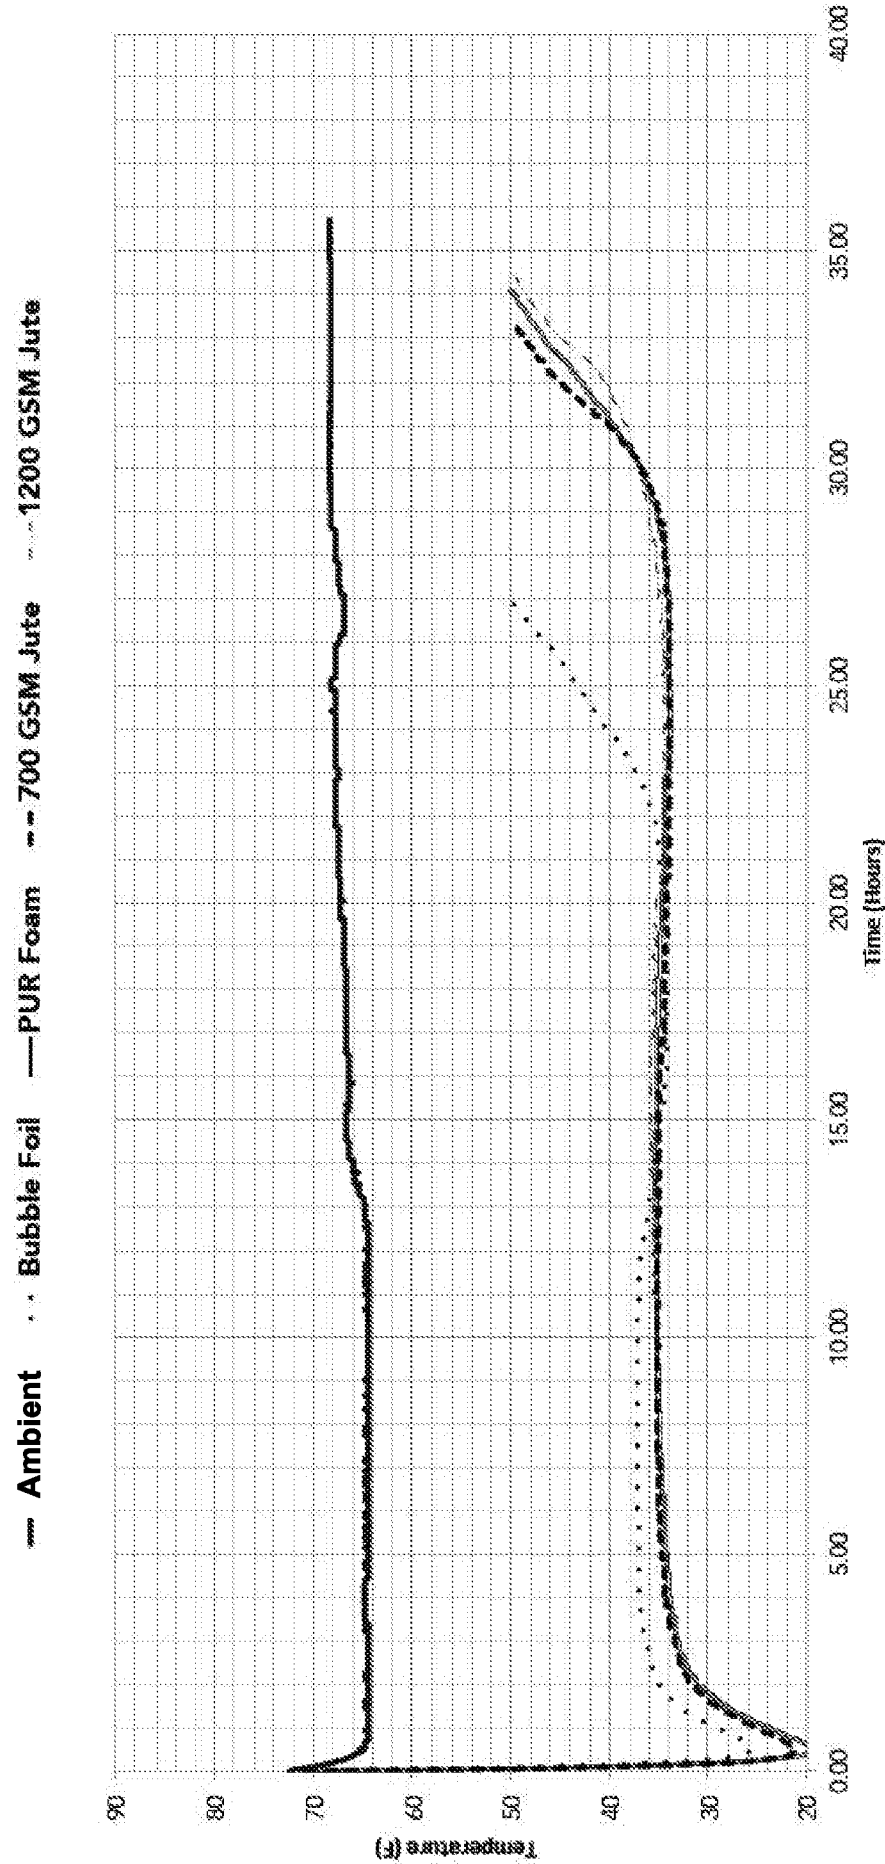


FIG. 12

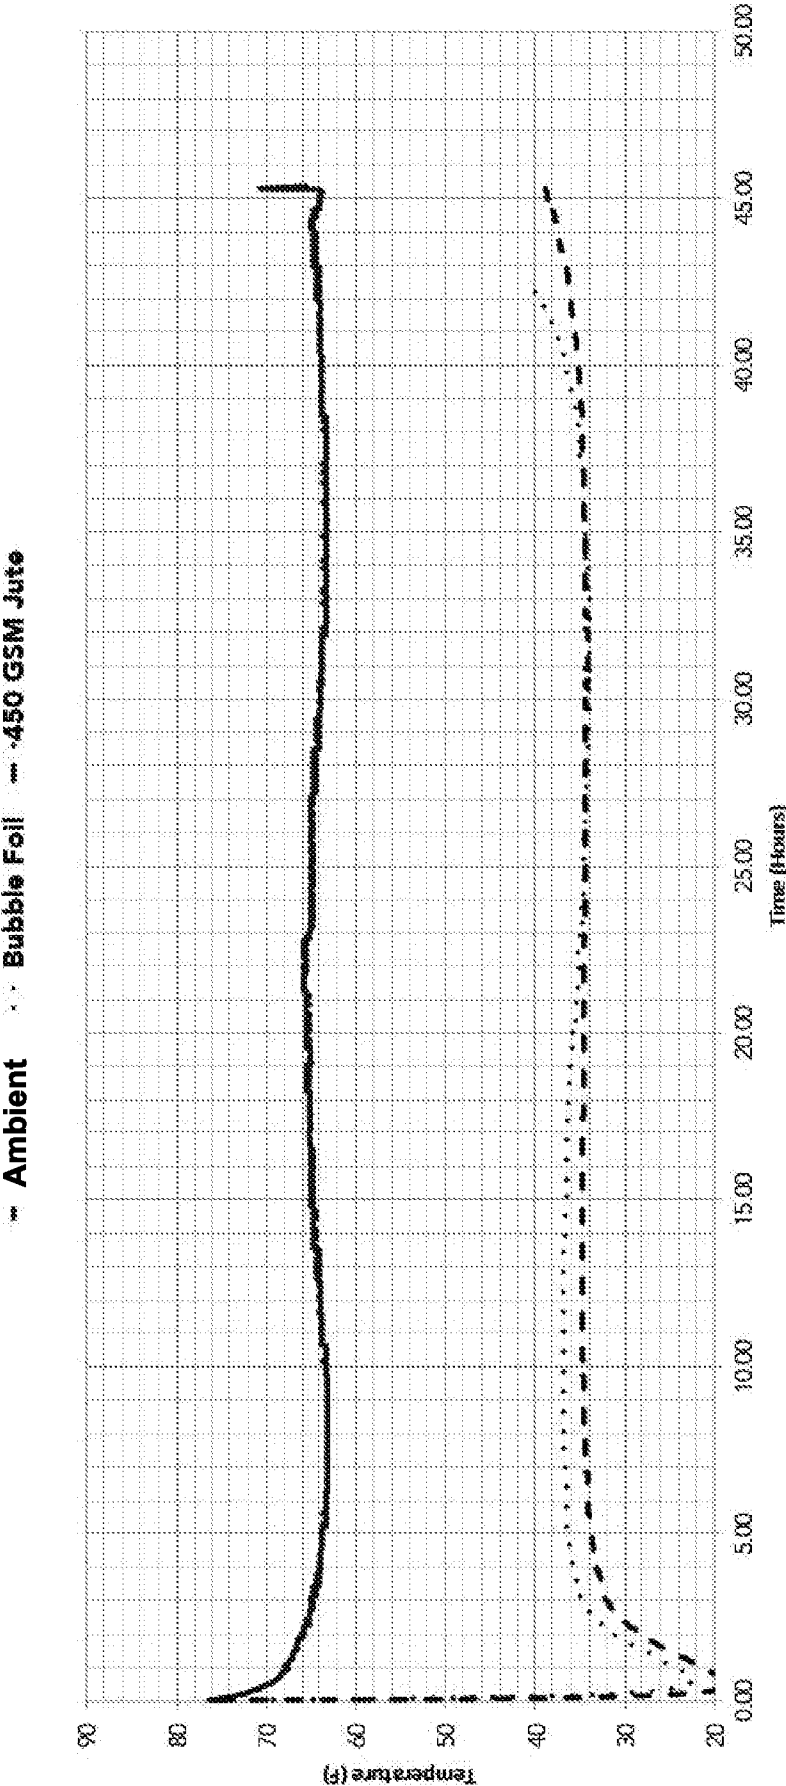


FIG. 13

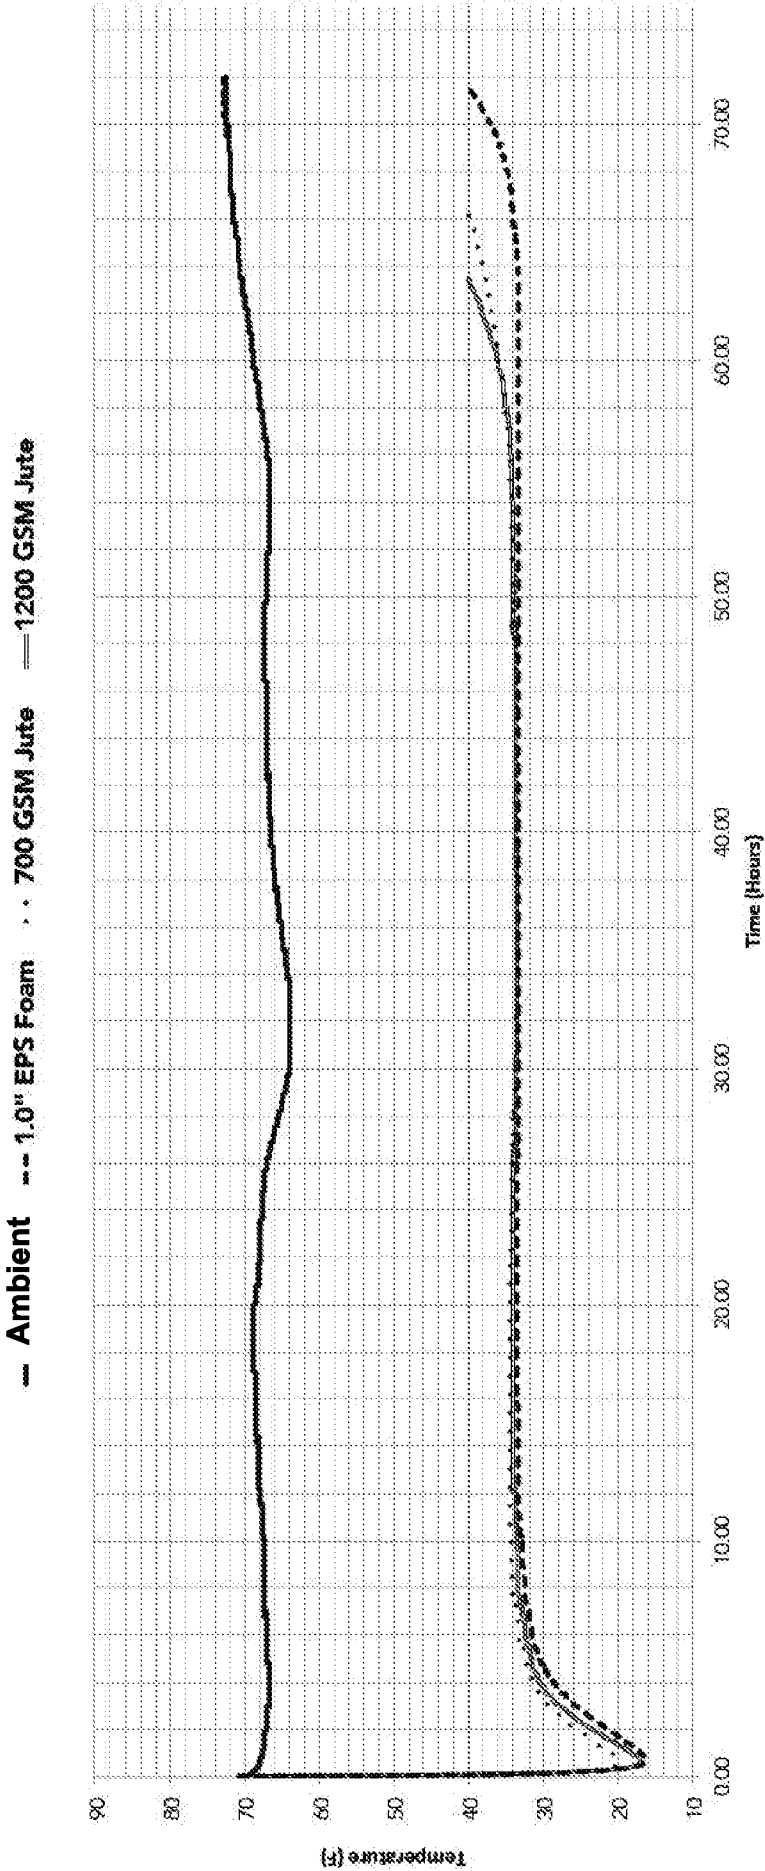


FIG. 14

— Ambient    - - - 700 GSM Jute    · · · 1200 GSM Jute

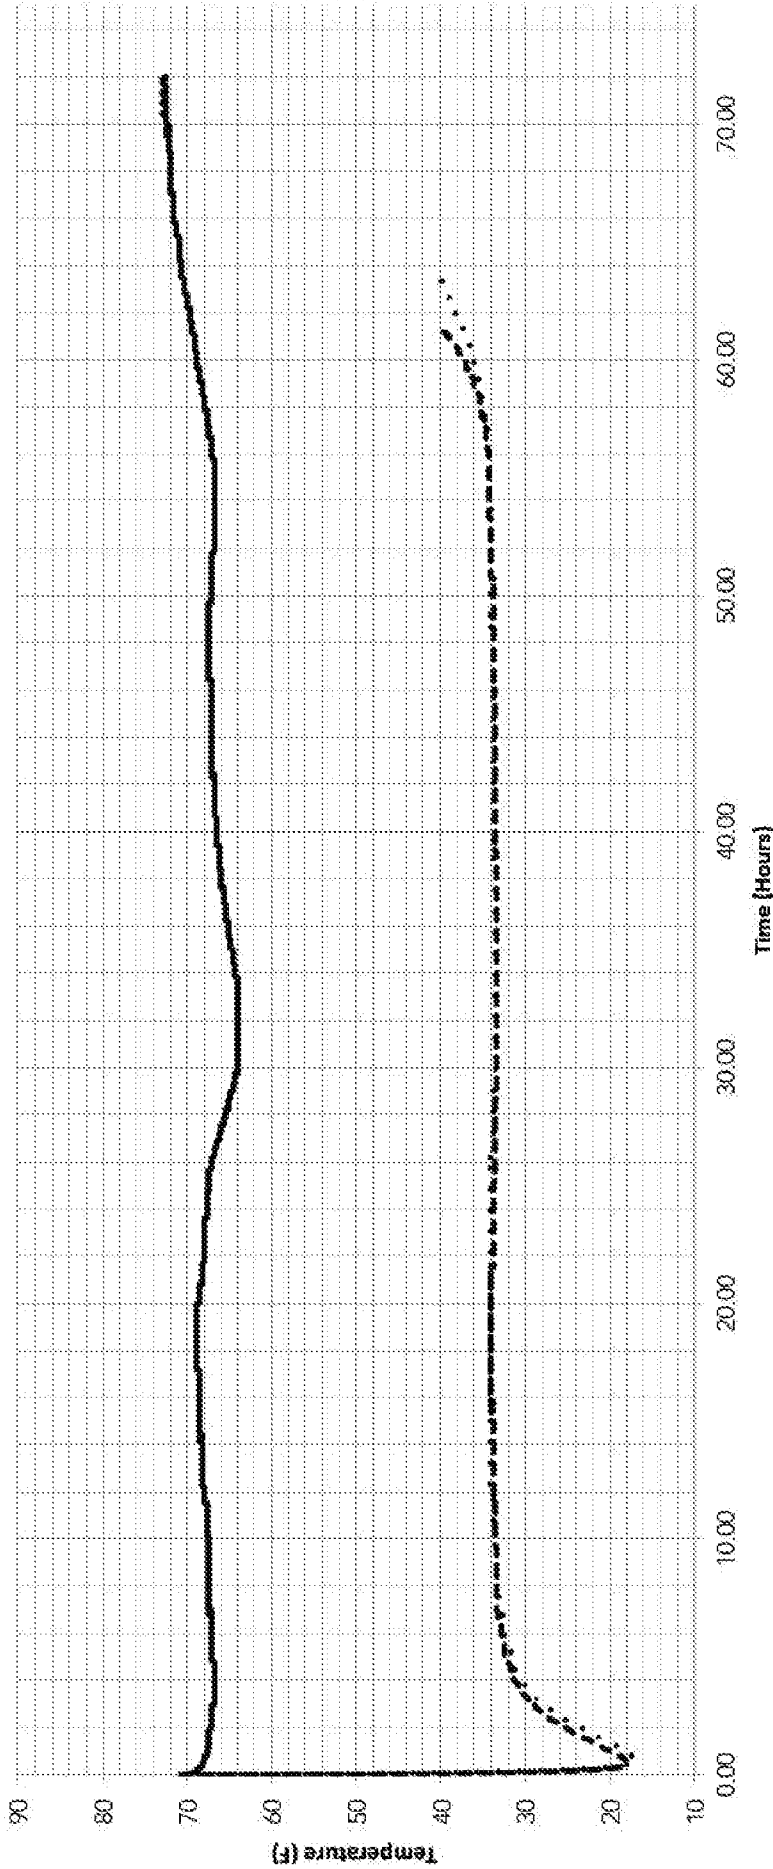


FIG. 15

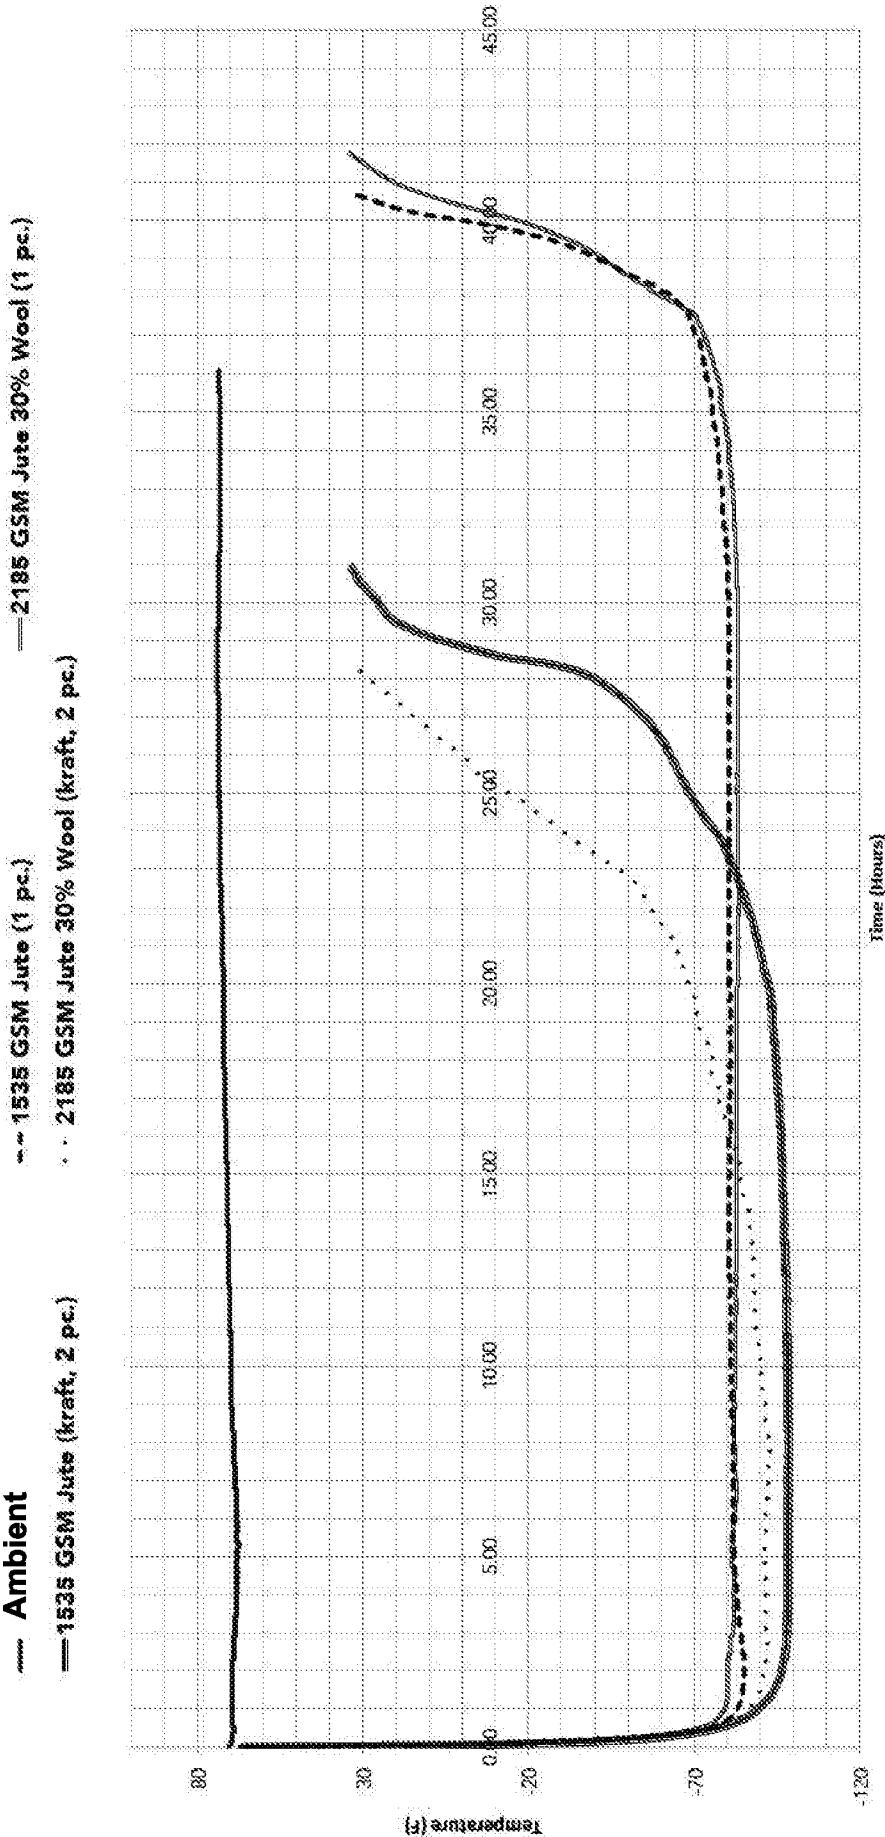


FIG. 16

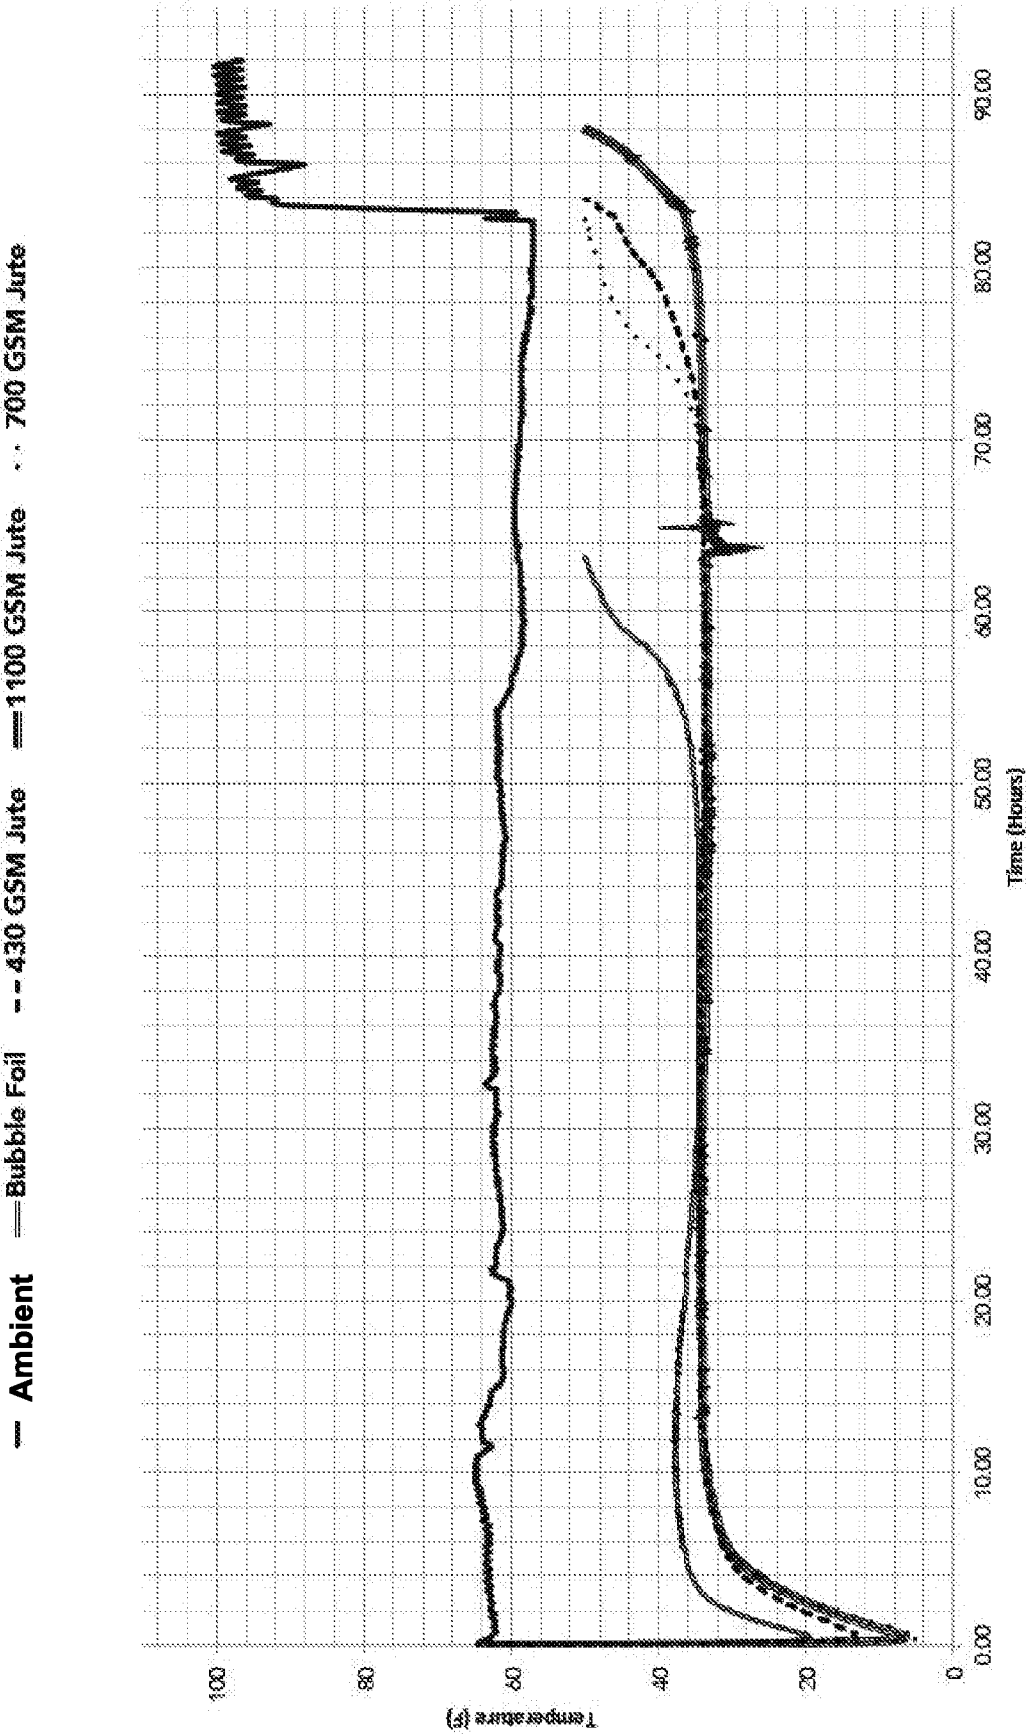


FIG. 17

— Ambient    — PUR Foam    ··· 1275 GSM Jute    --- 700 GSM Jute (2 layers)

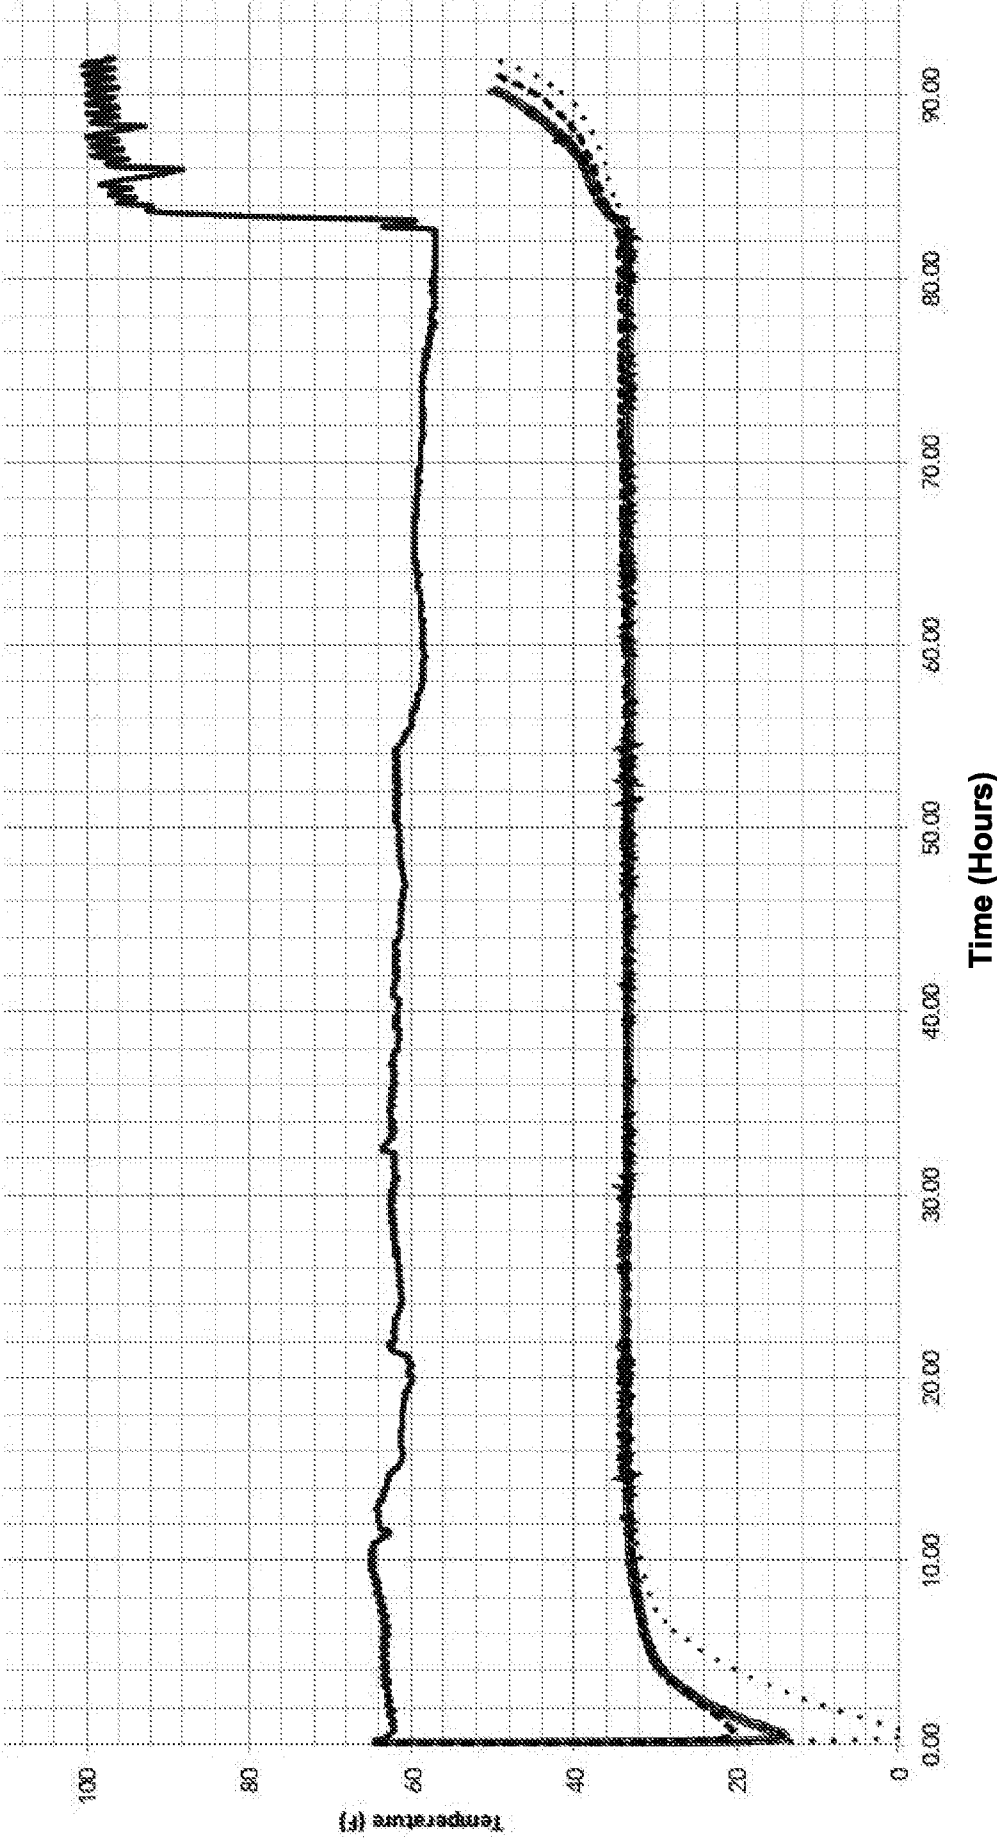


FIG. 18

— Ambient    • •1.0" EPS Foam    -- 1500 GSM Jute

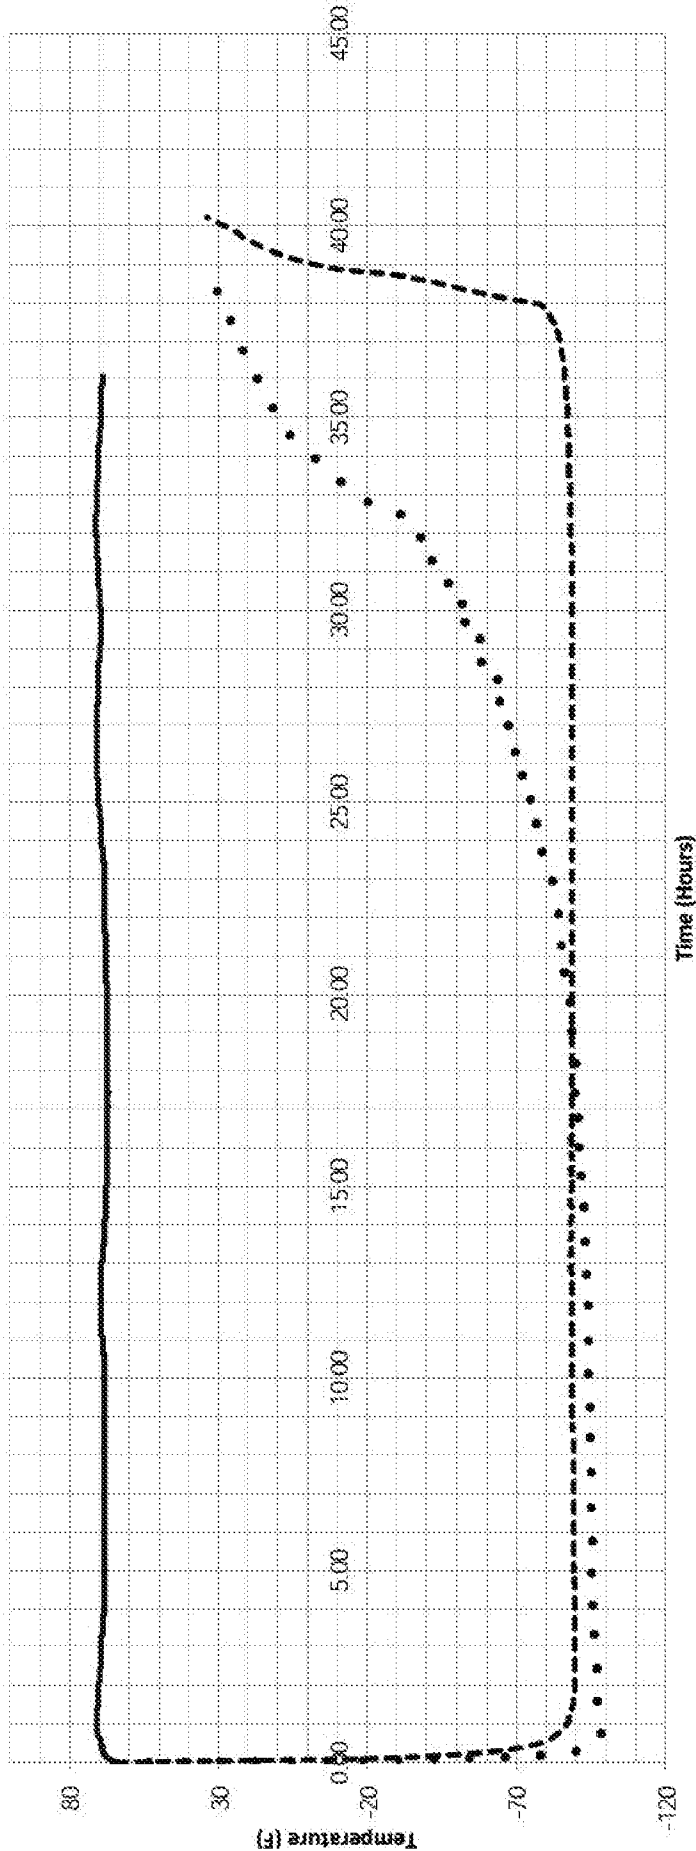


FIG. 19

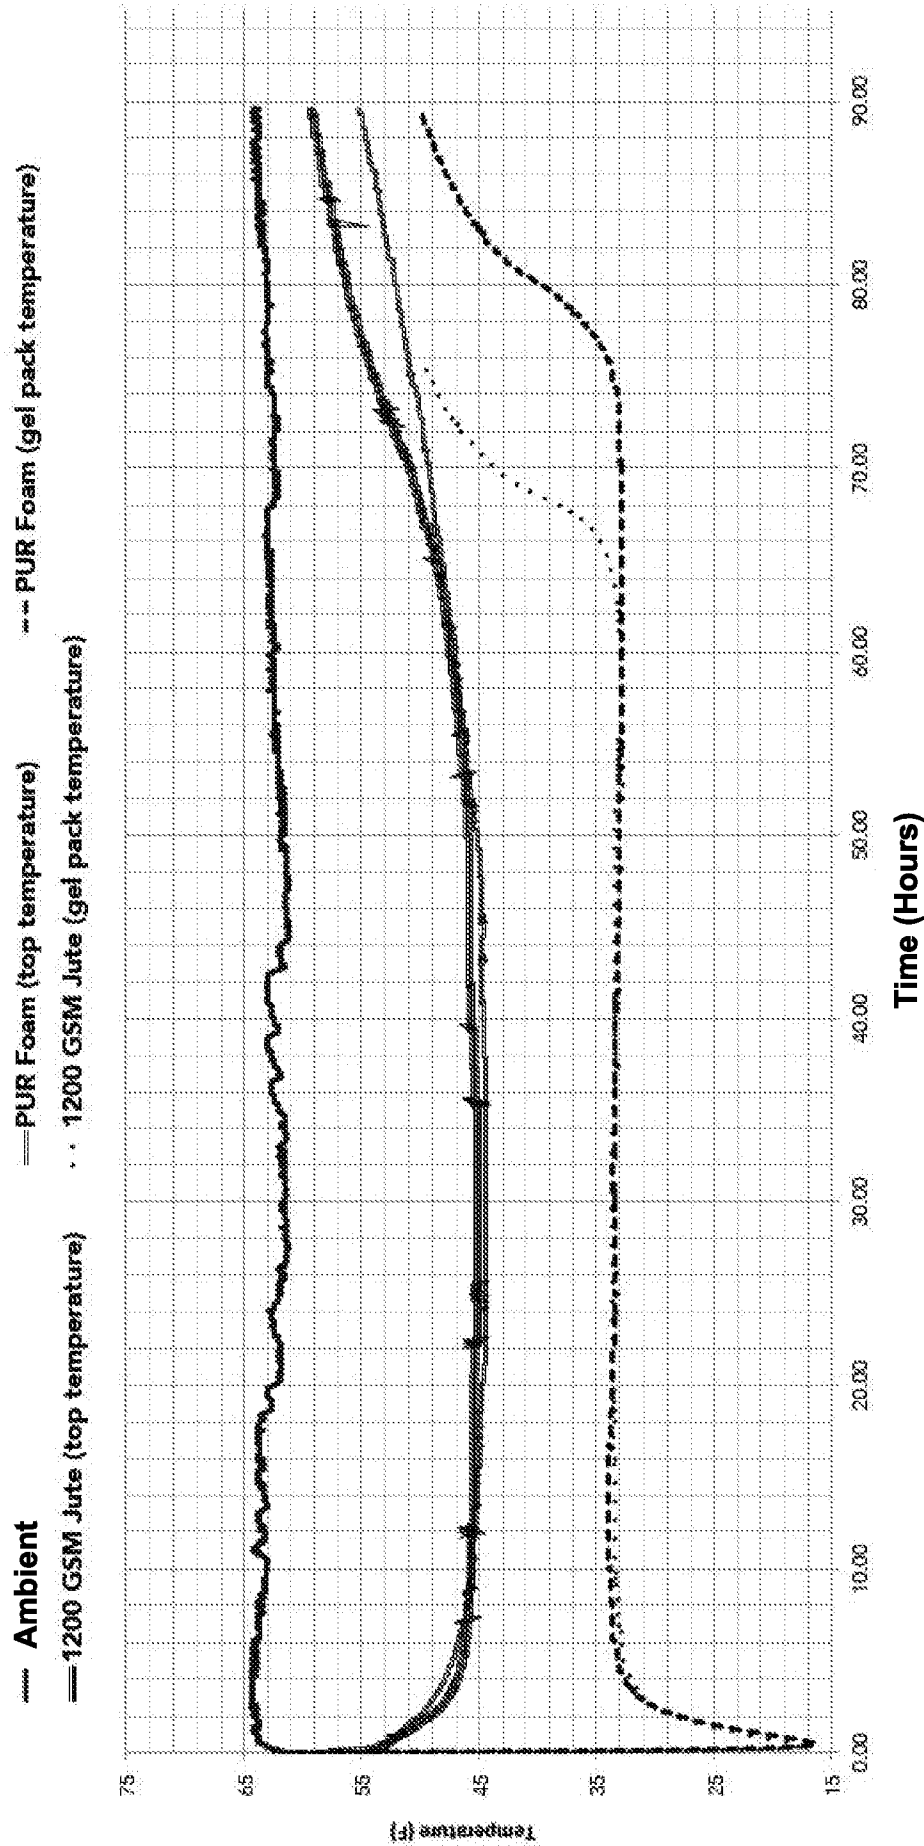


FIG. 20

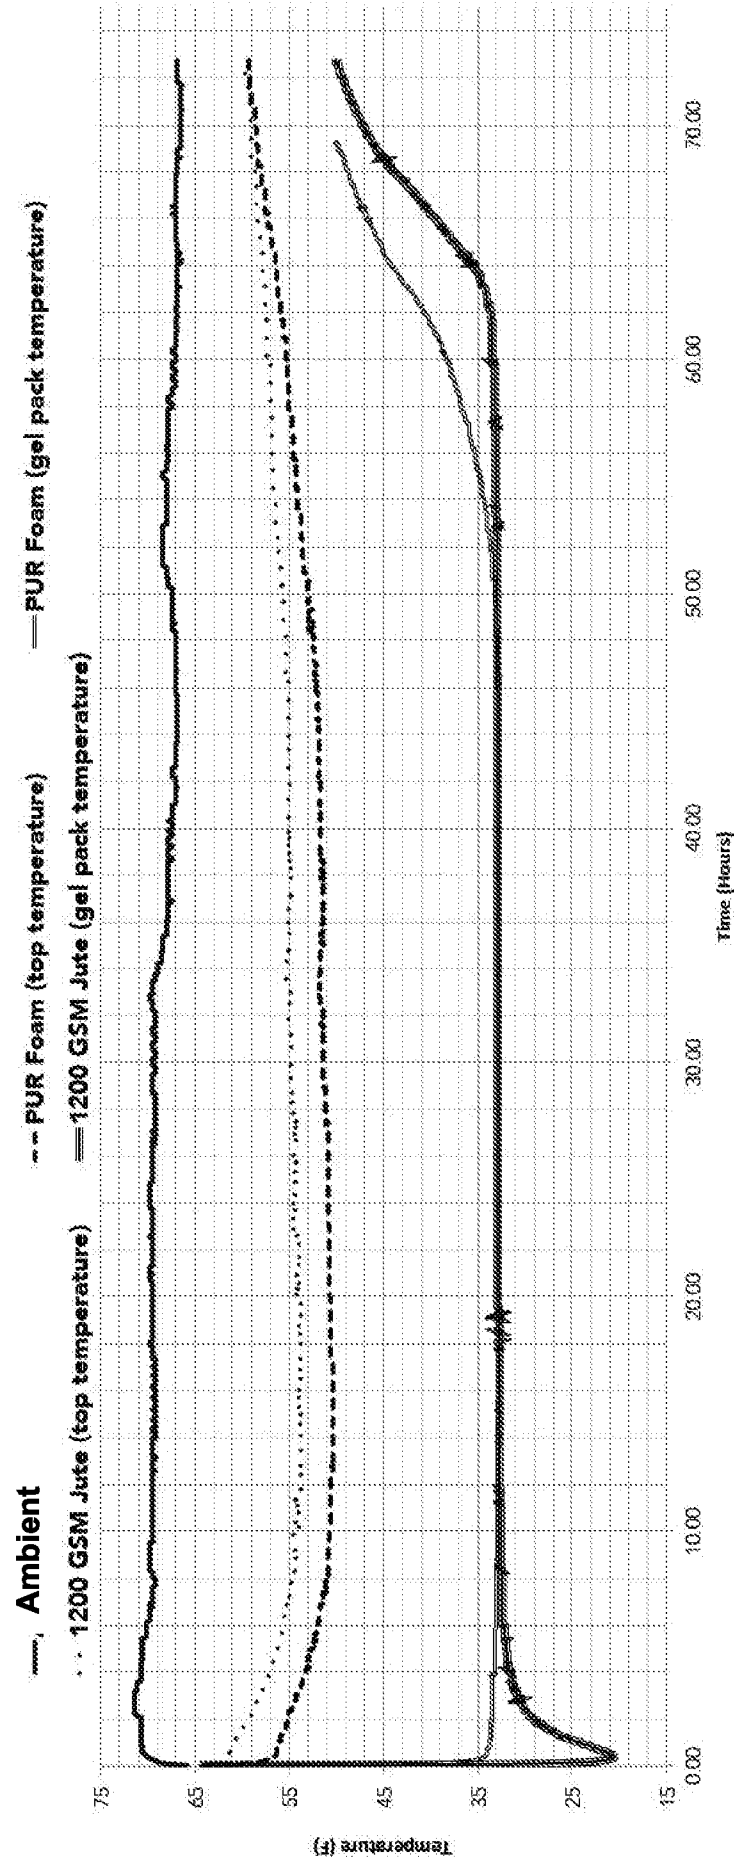


FIG. 21

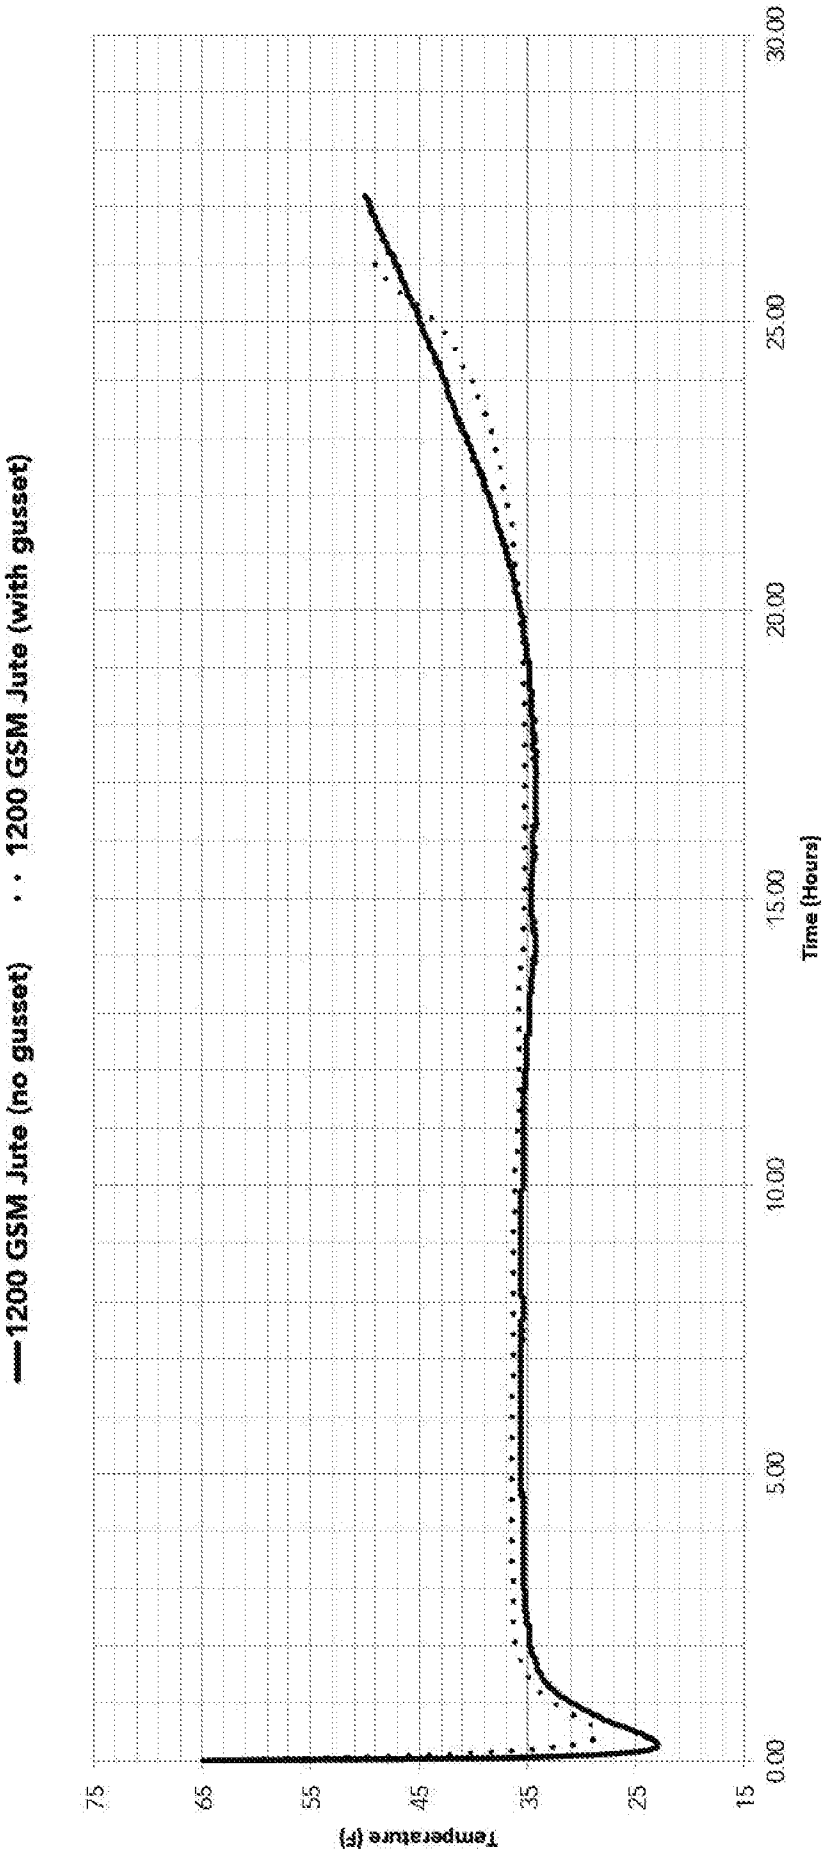


FIG. 22

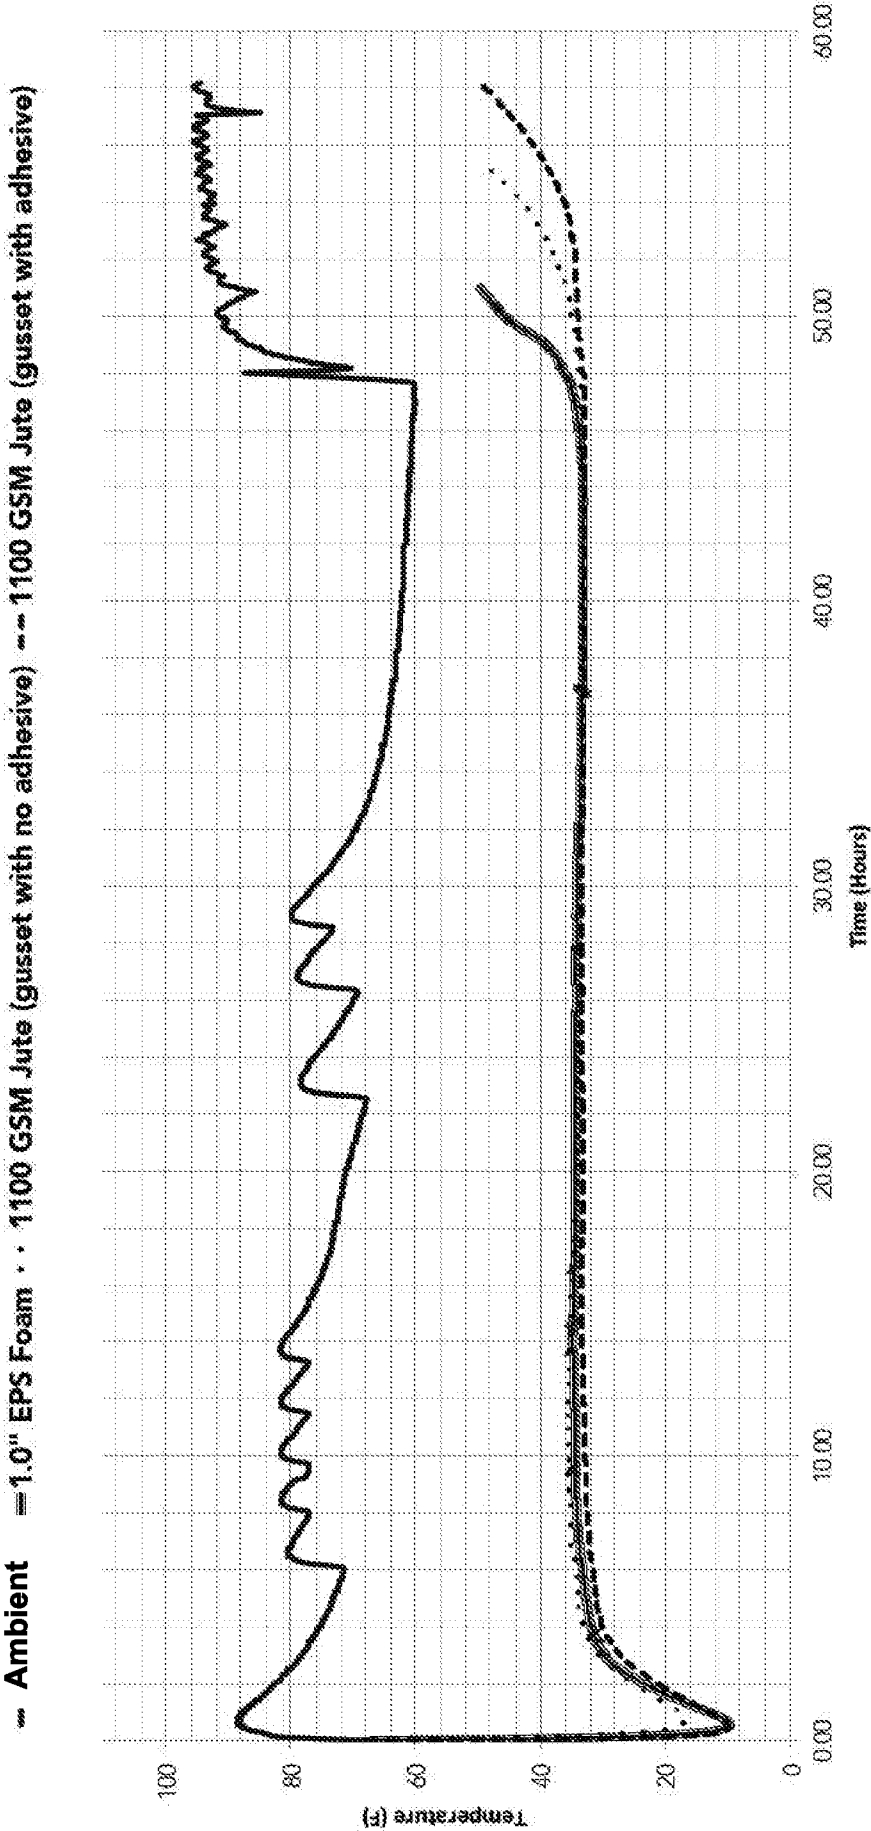


FIG. 23

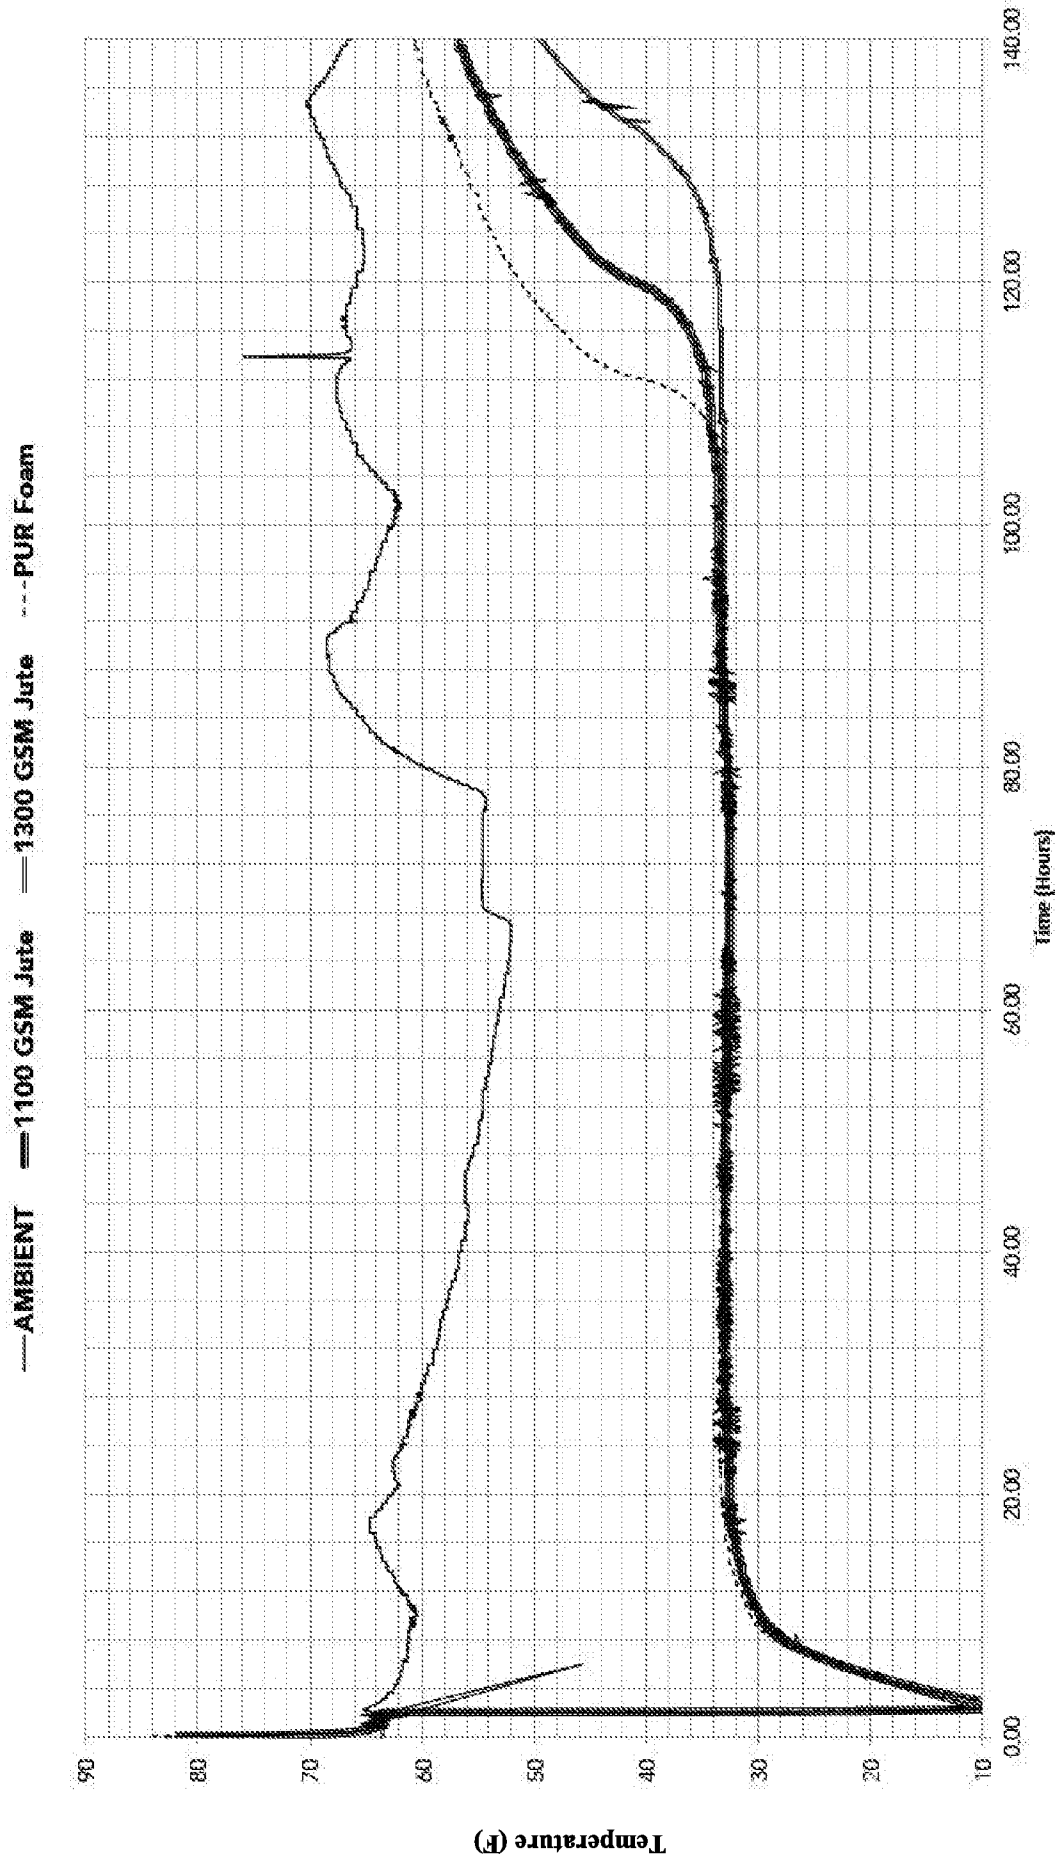


FIG. 24

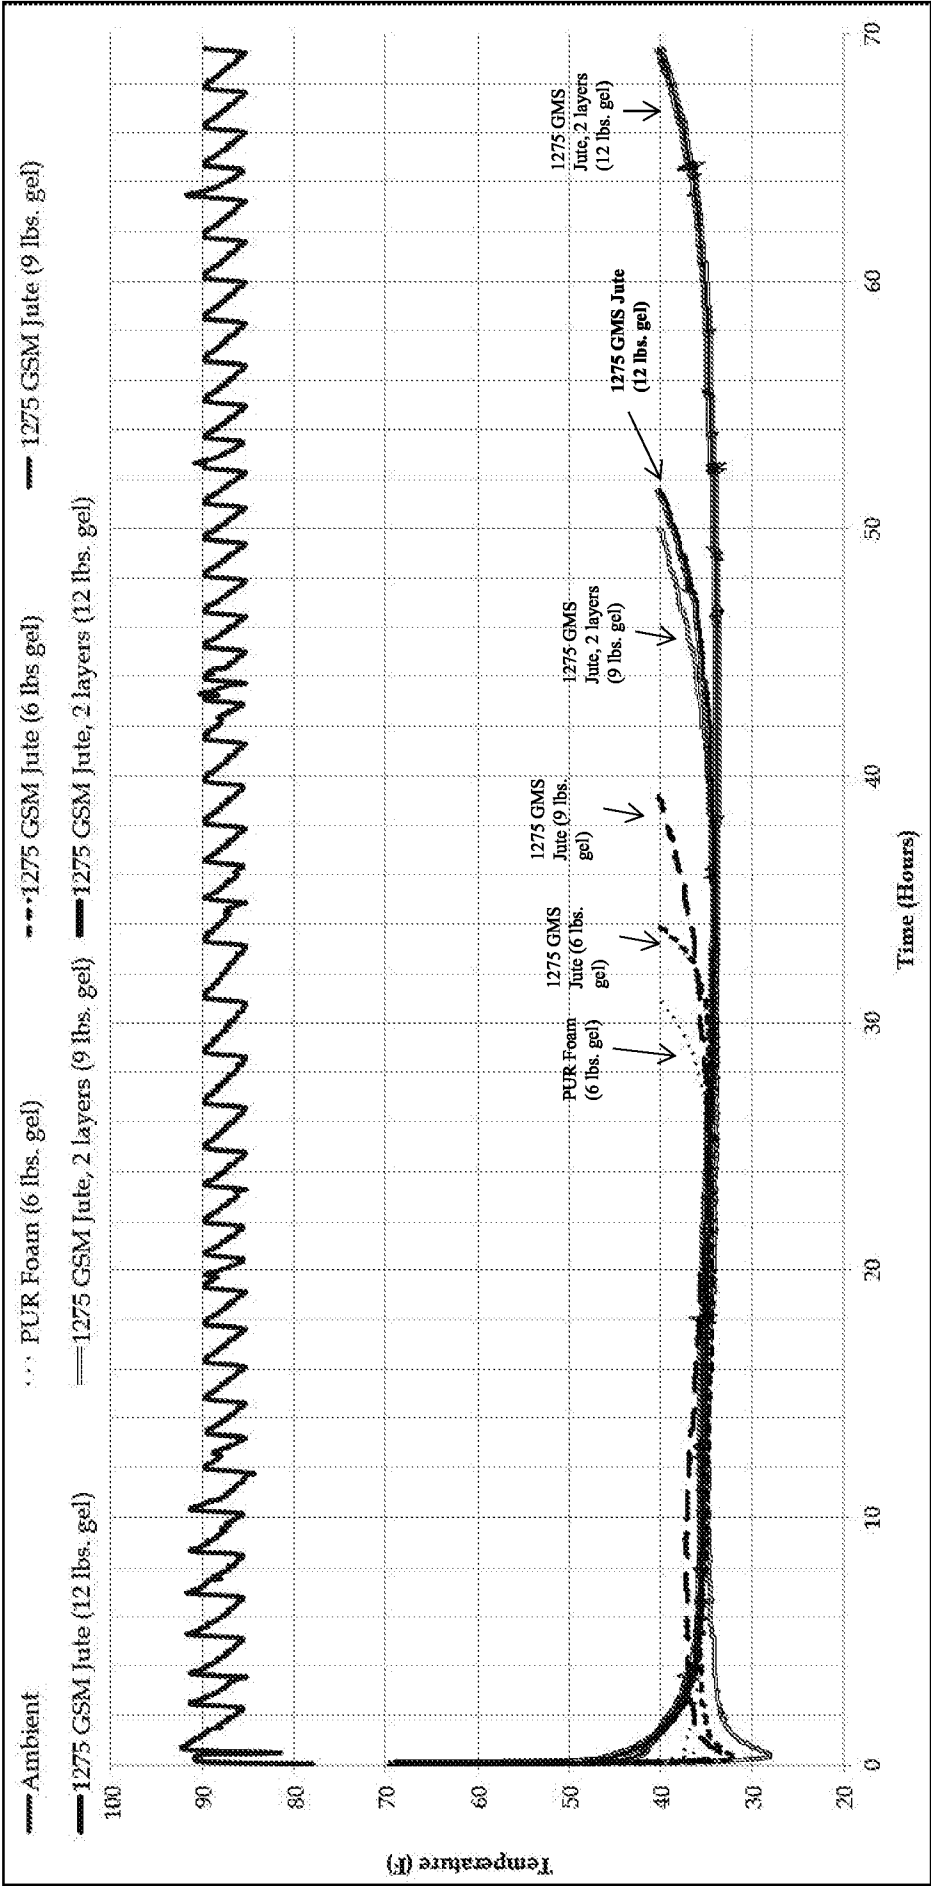


FIG. 25

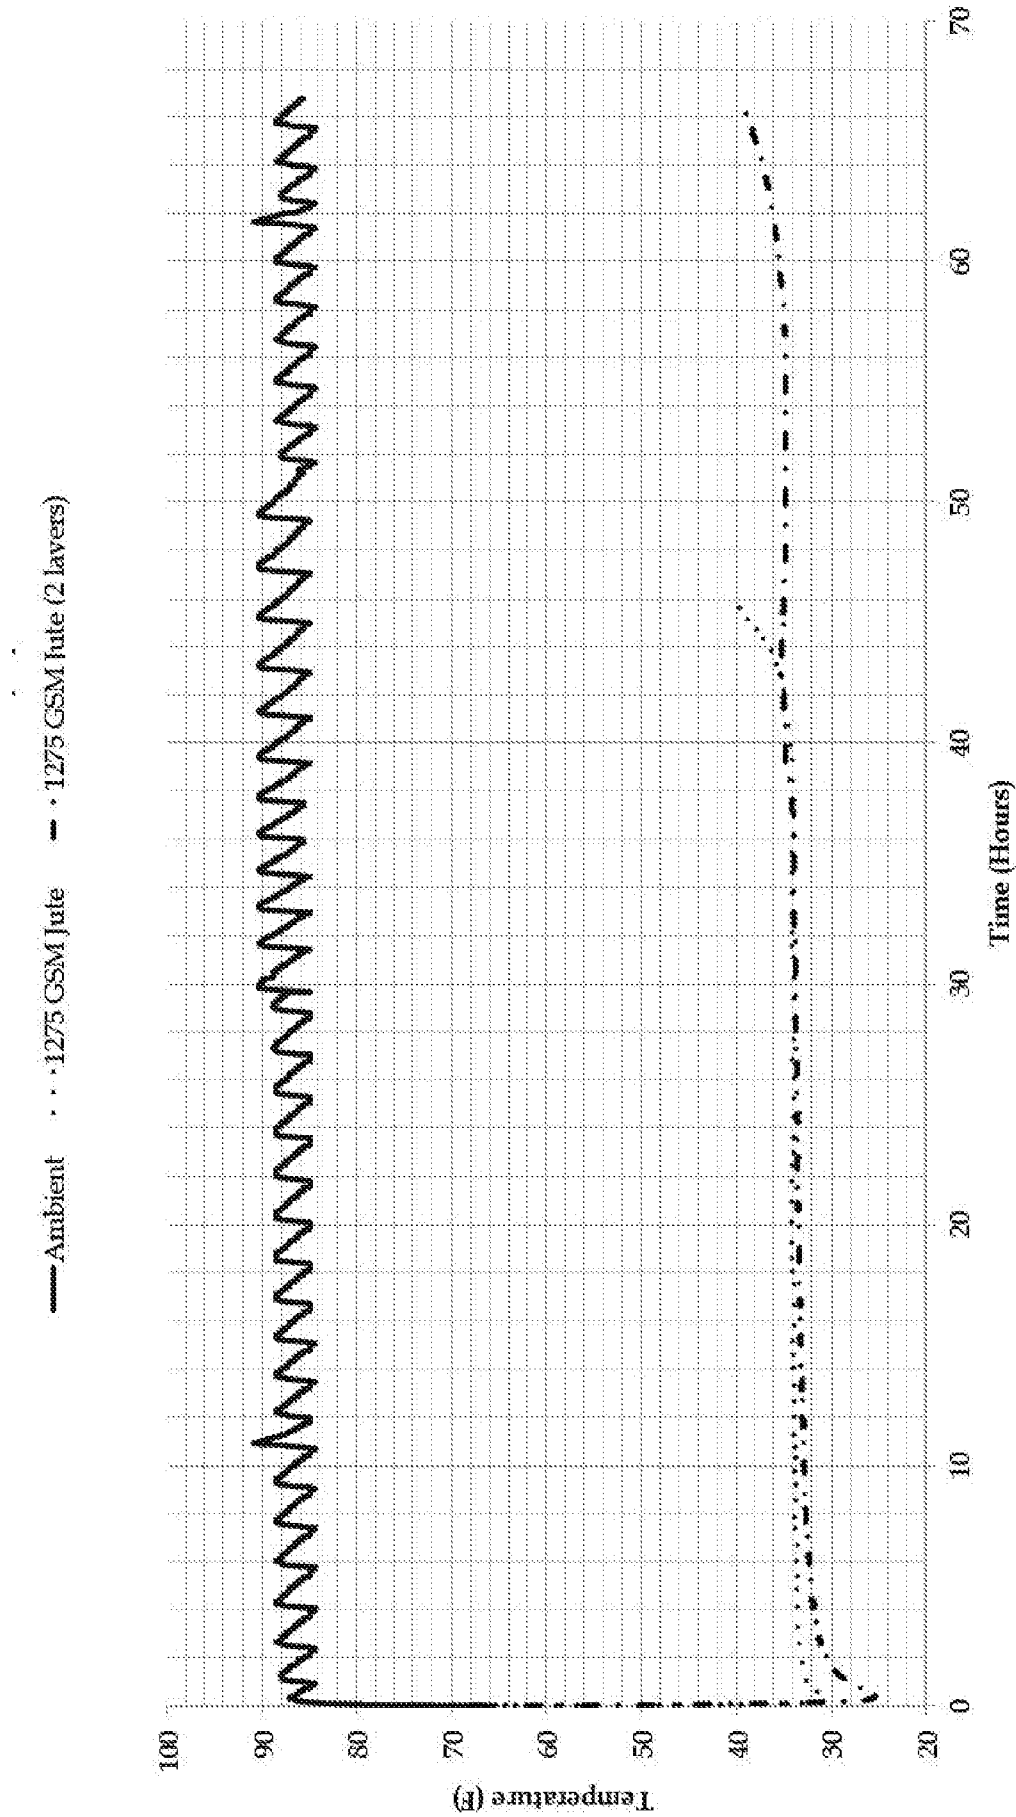
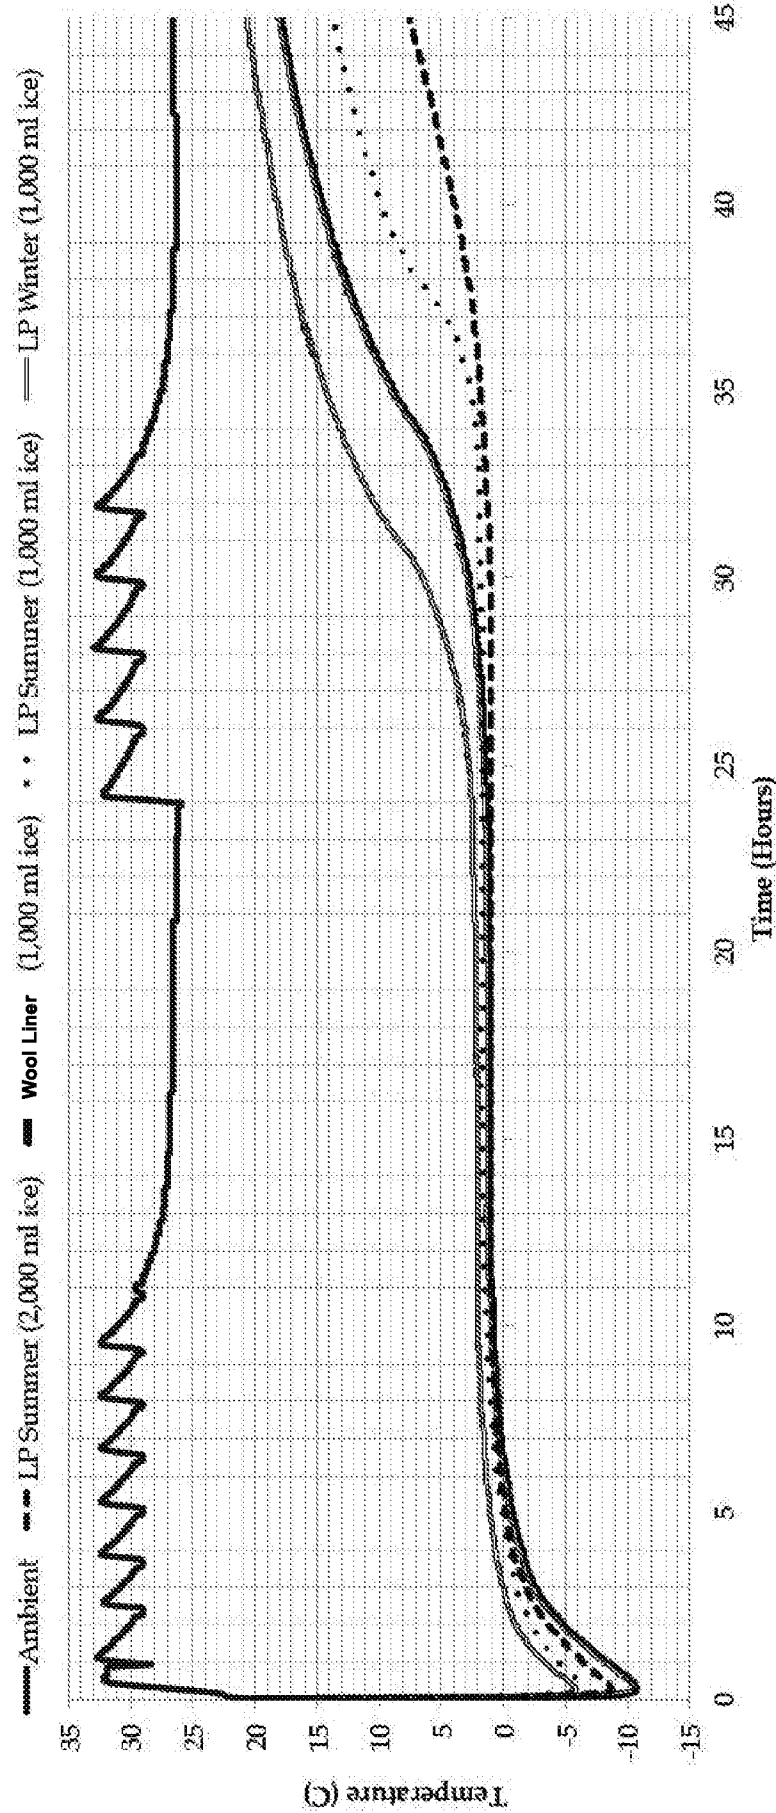


FIG. 26



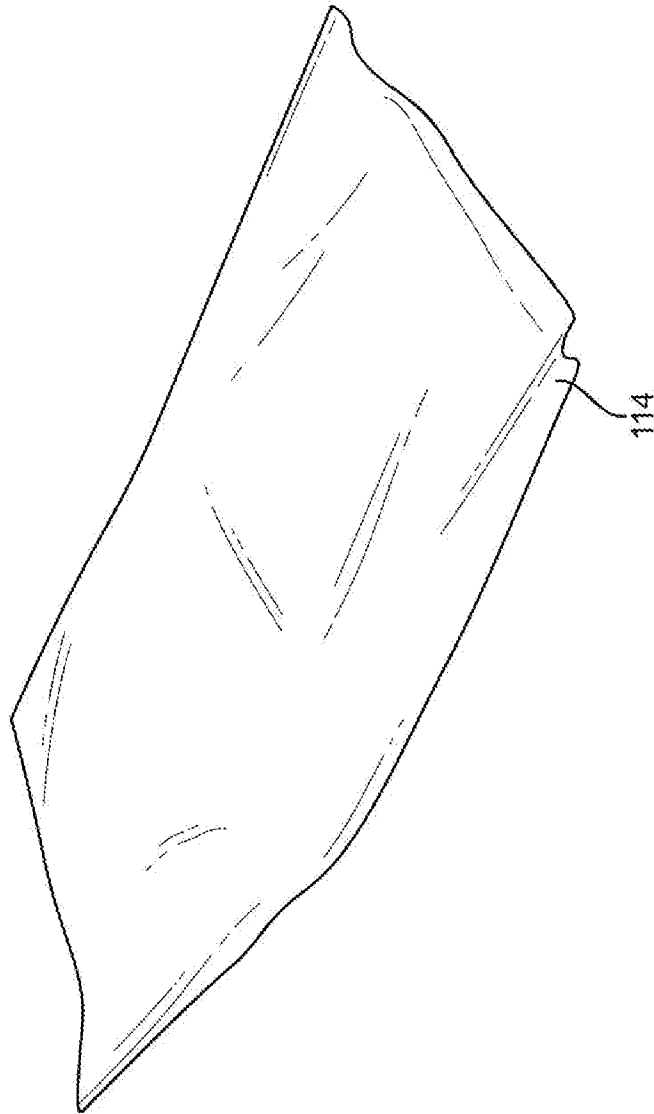


FIG. 27

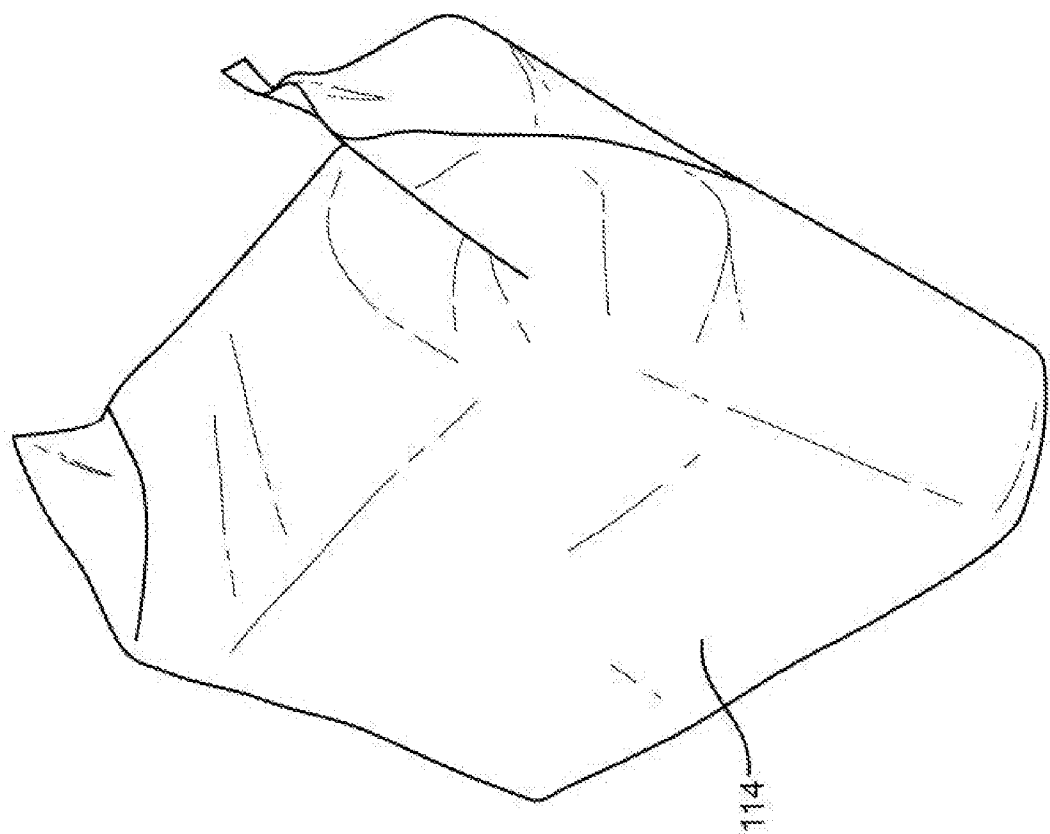


FIG. 28

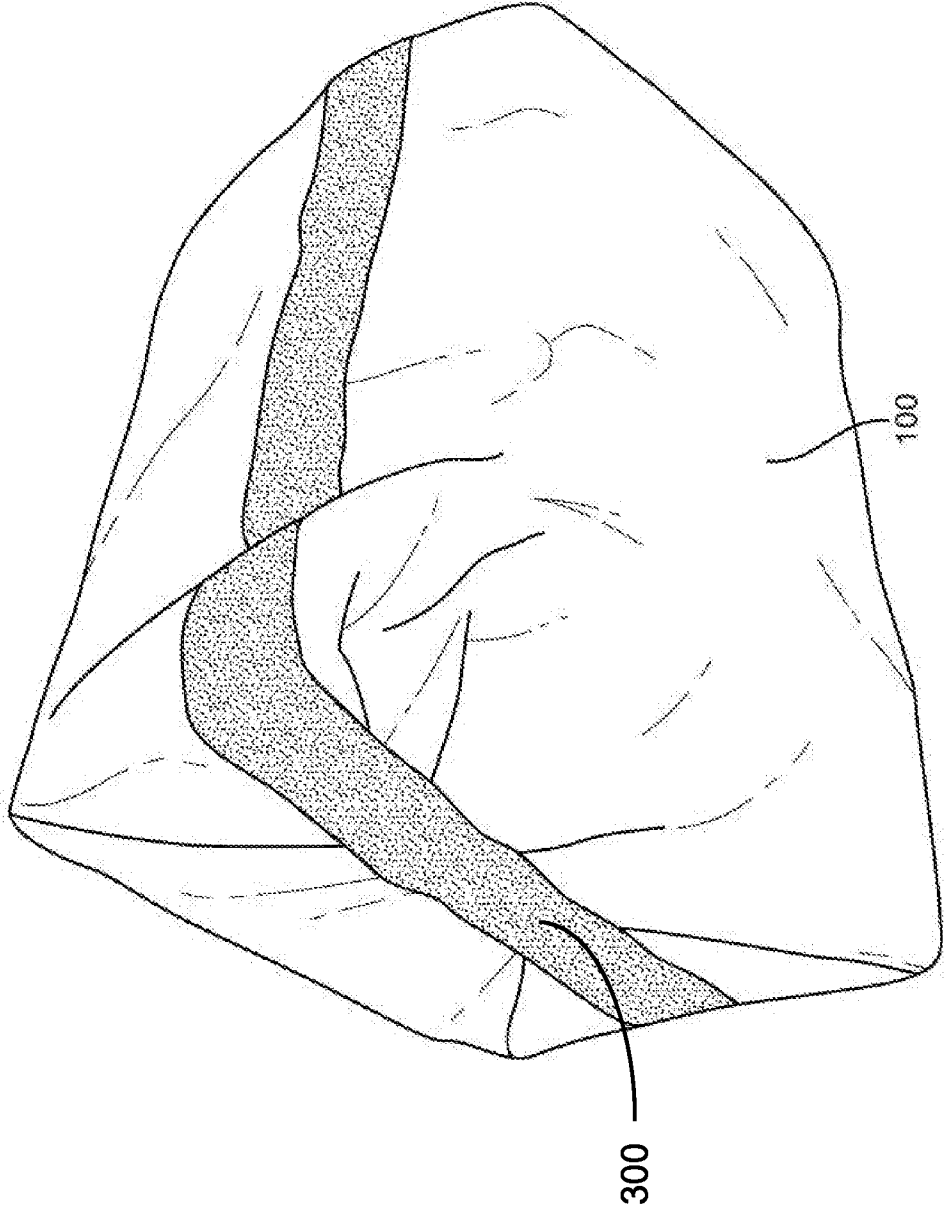


FIG. 29

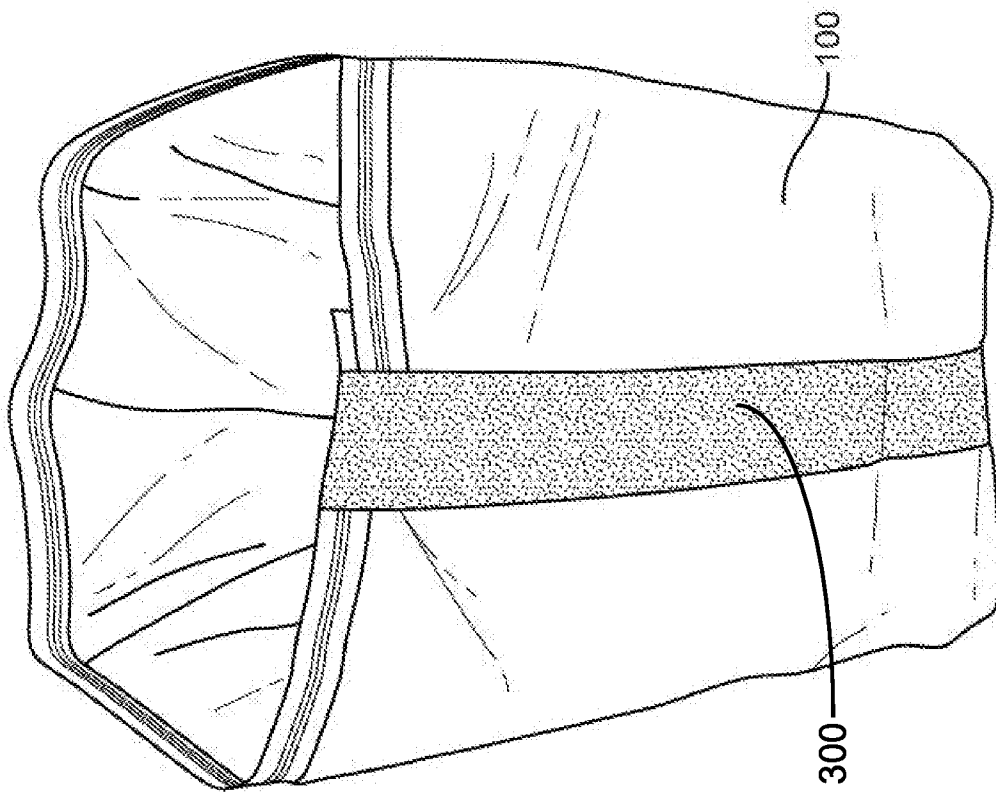


FIG. 30

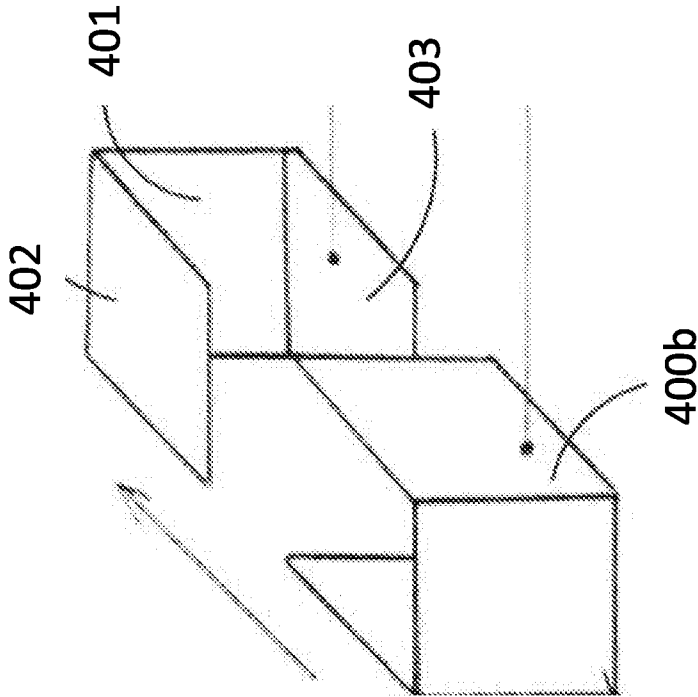


FIG. 31A

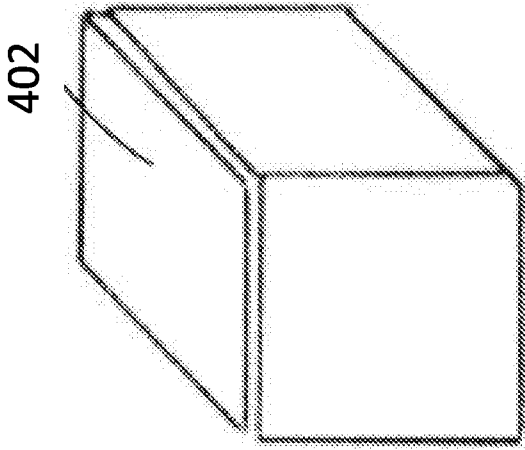


FIG. 31B

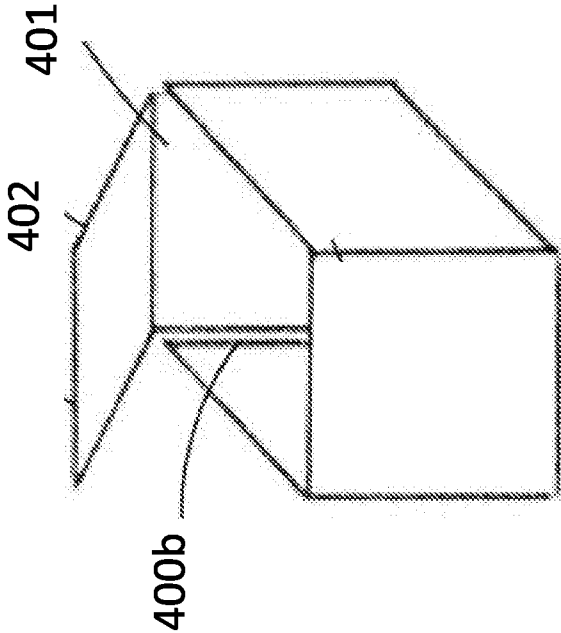


FIG. 31C

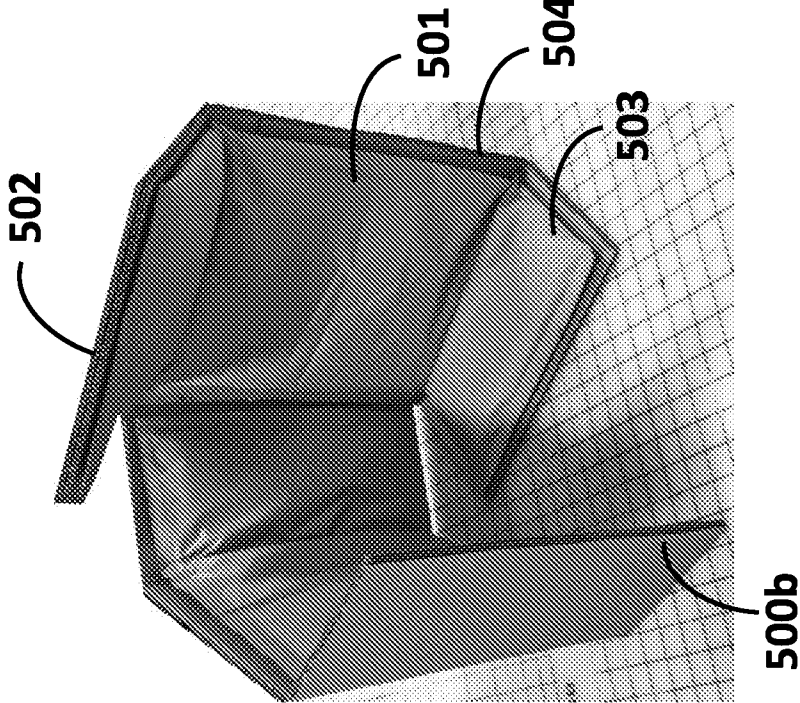


FIG. 32A

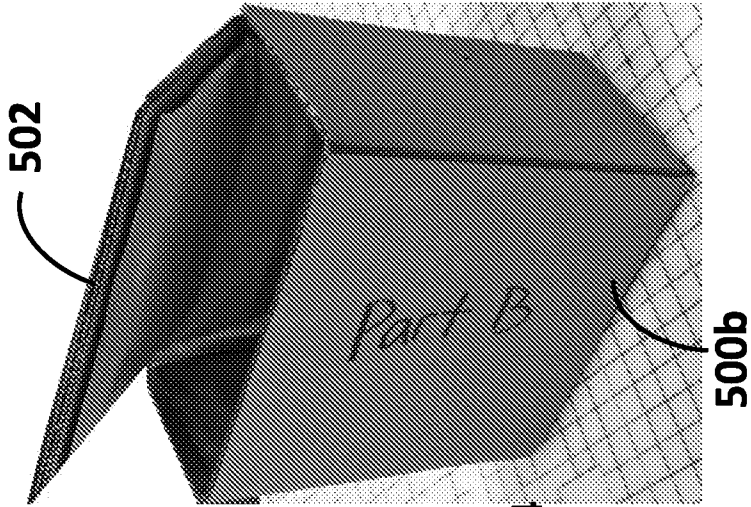


FIG. 32B

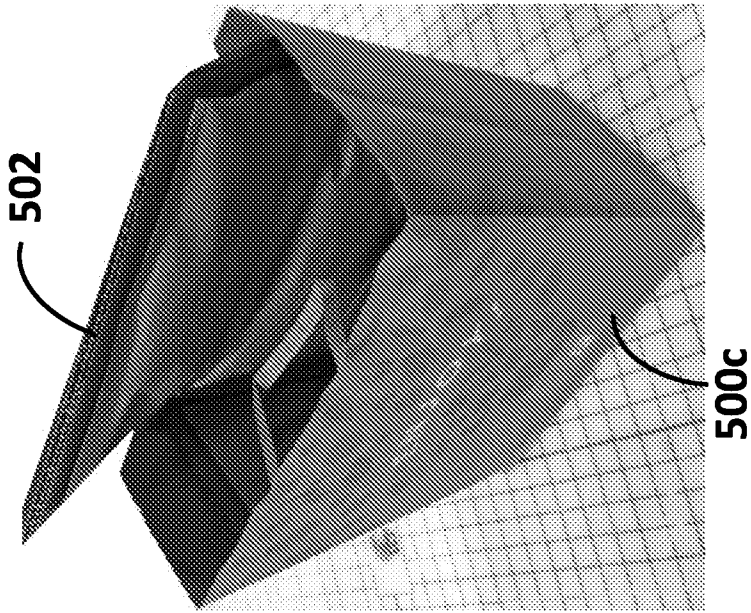


FIG. 32C

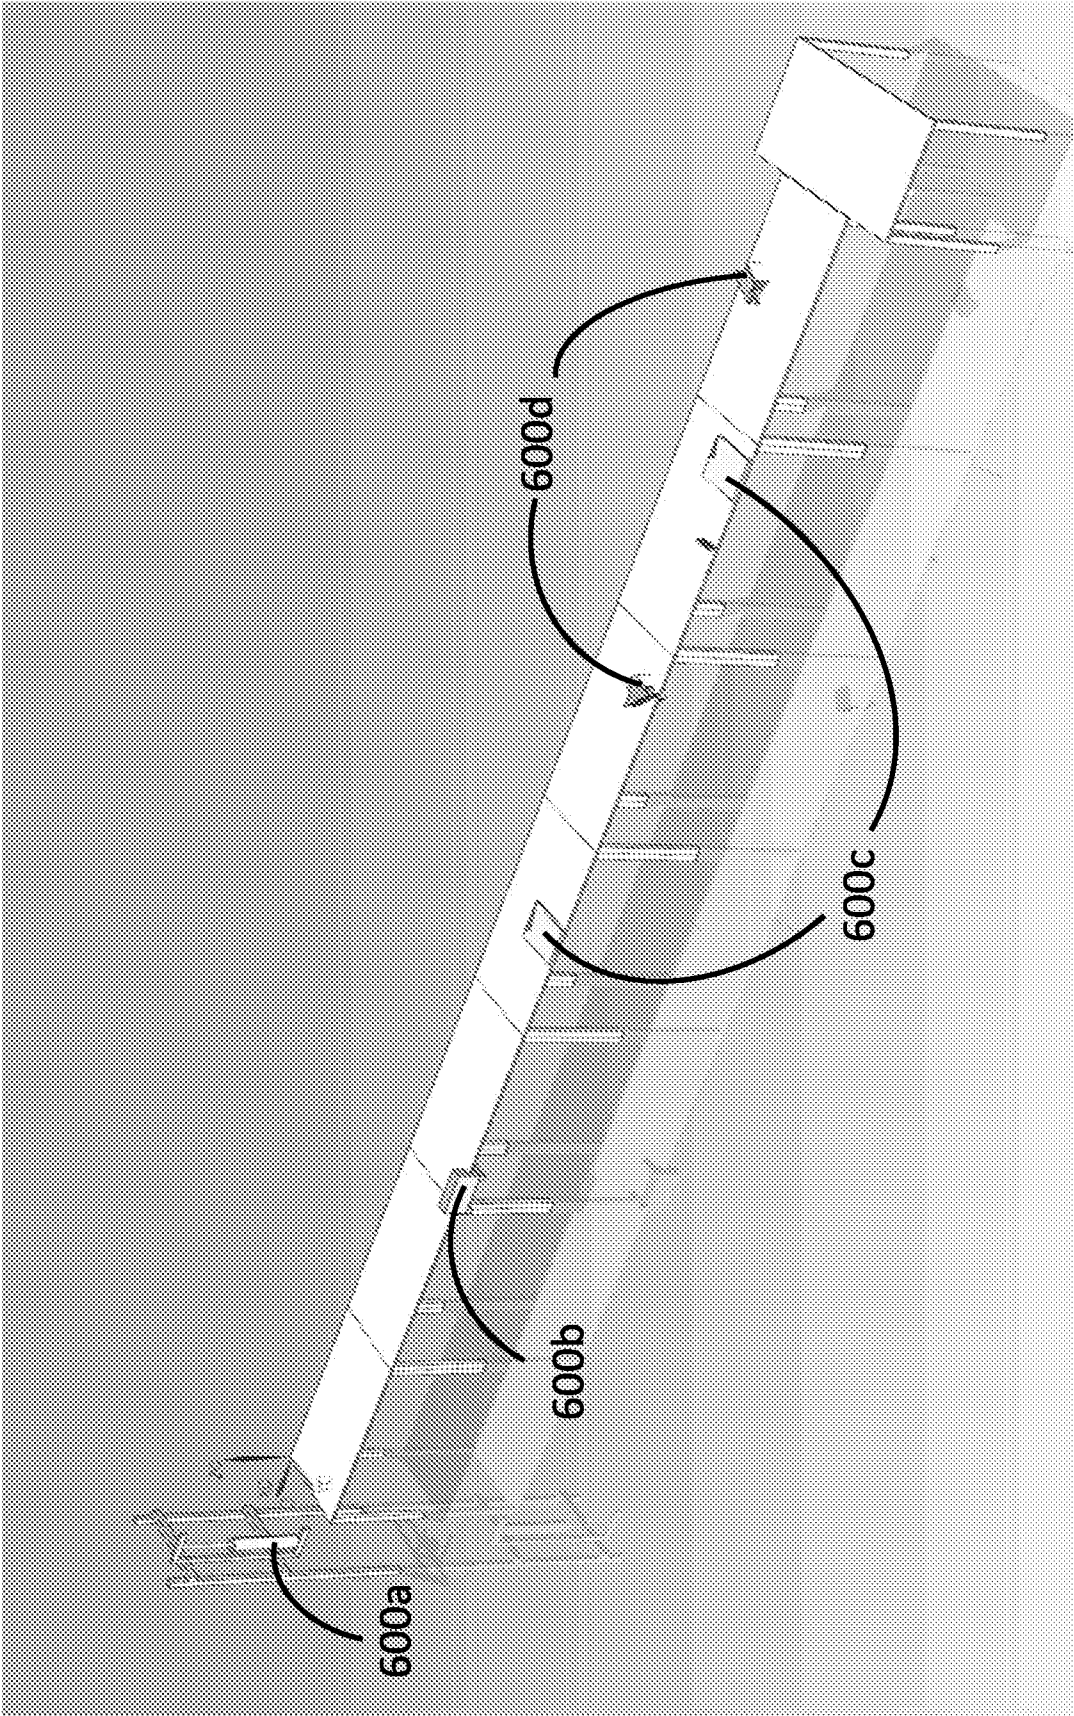


**FIG. 33**

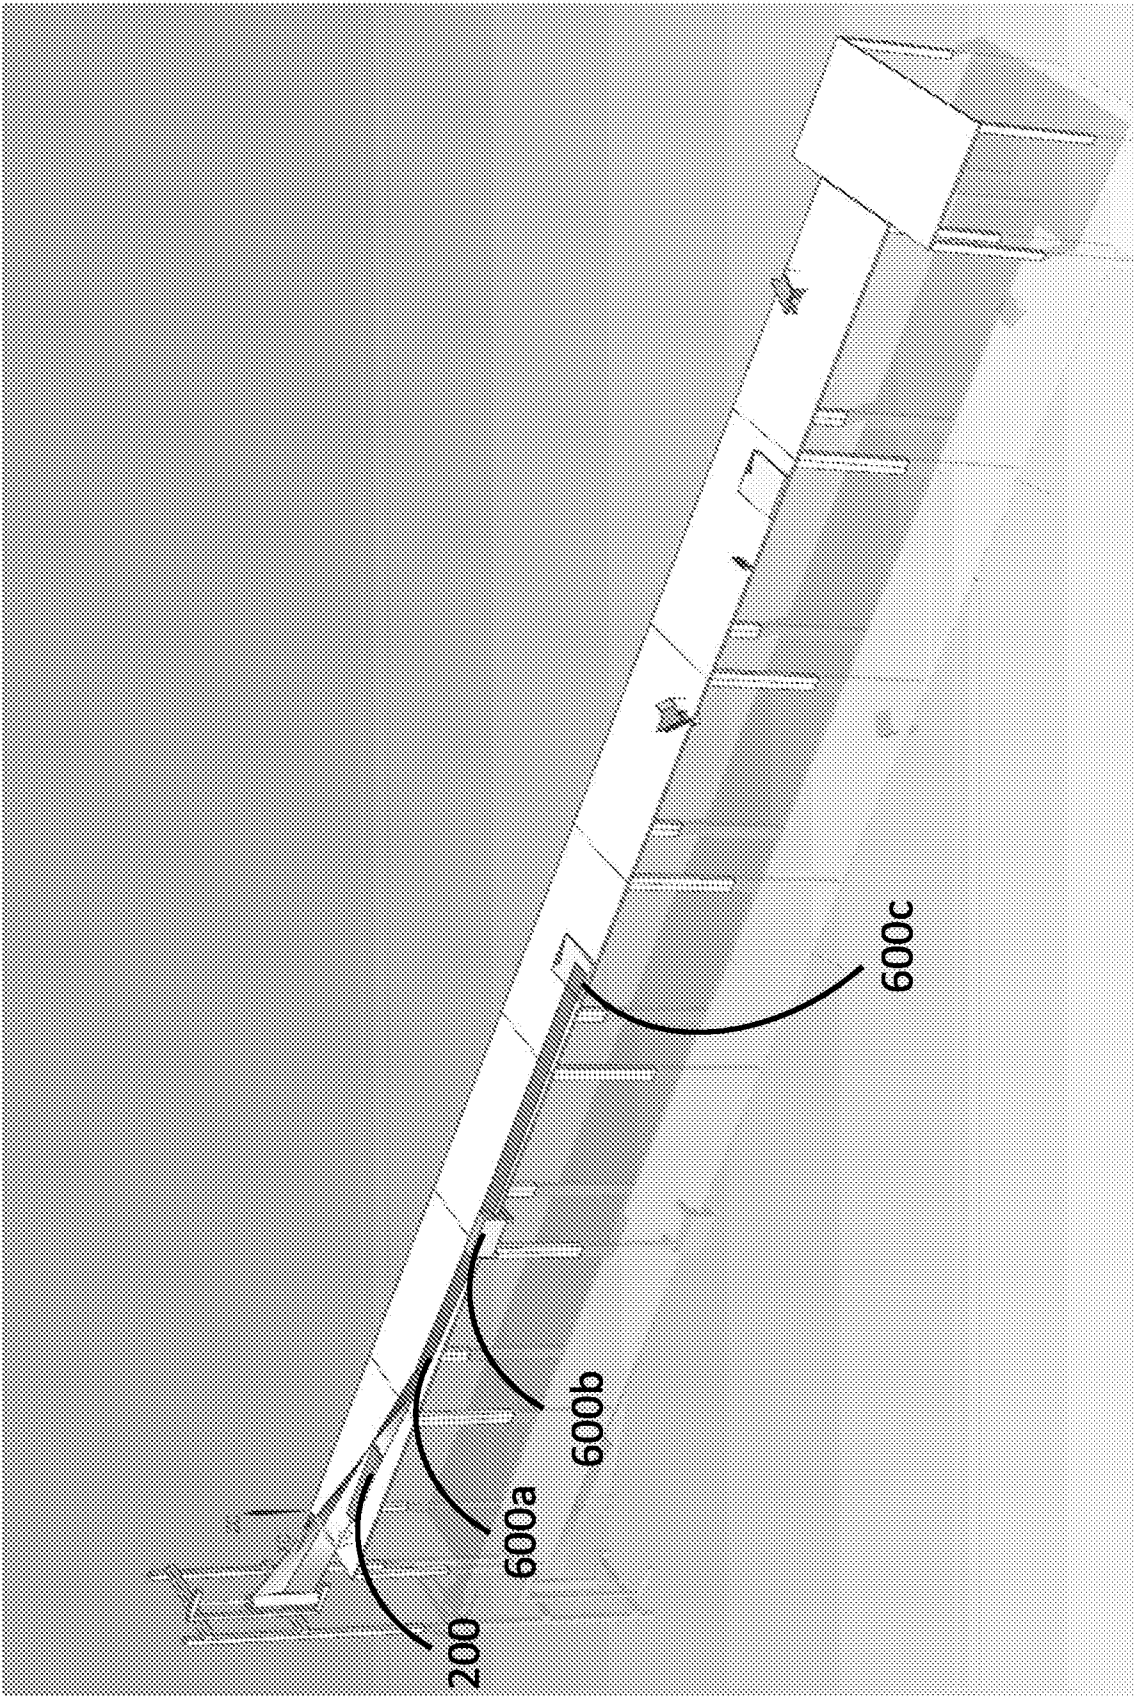


**FIG. 34**

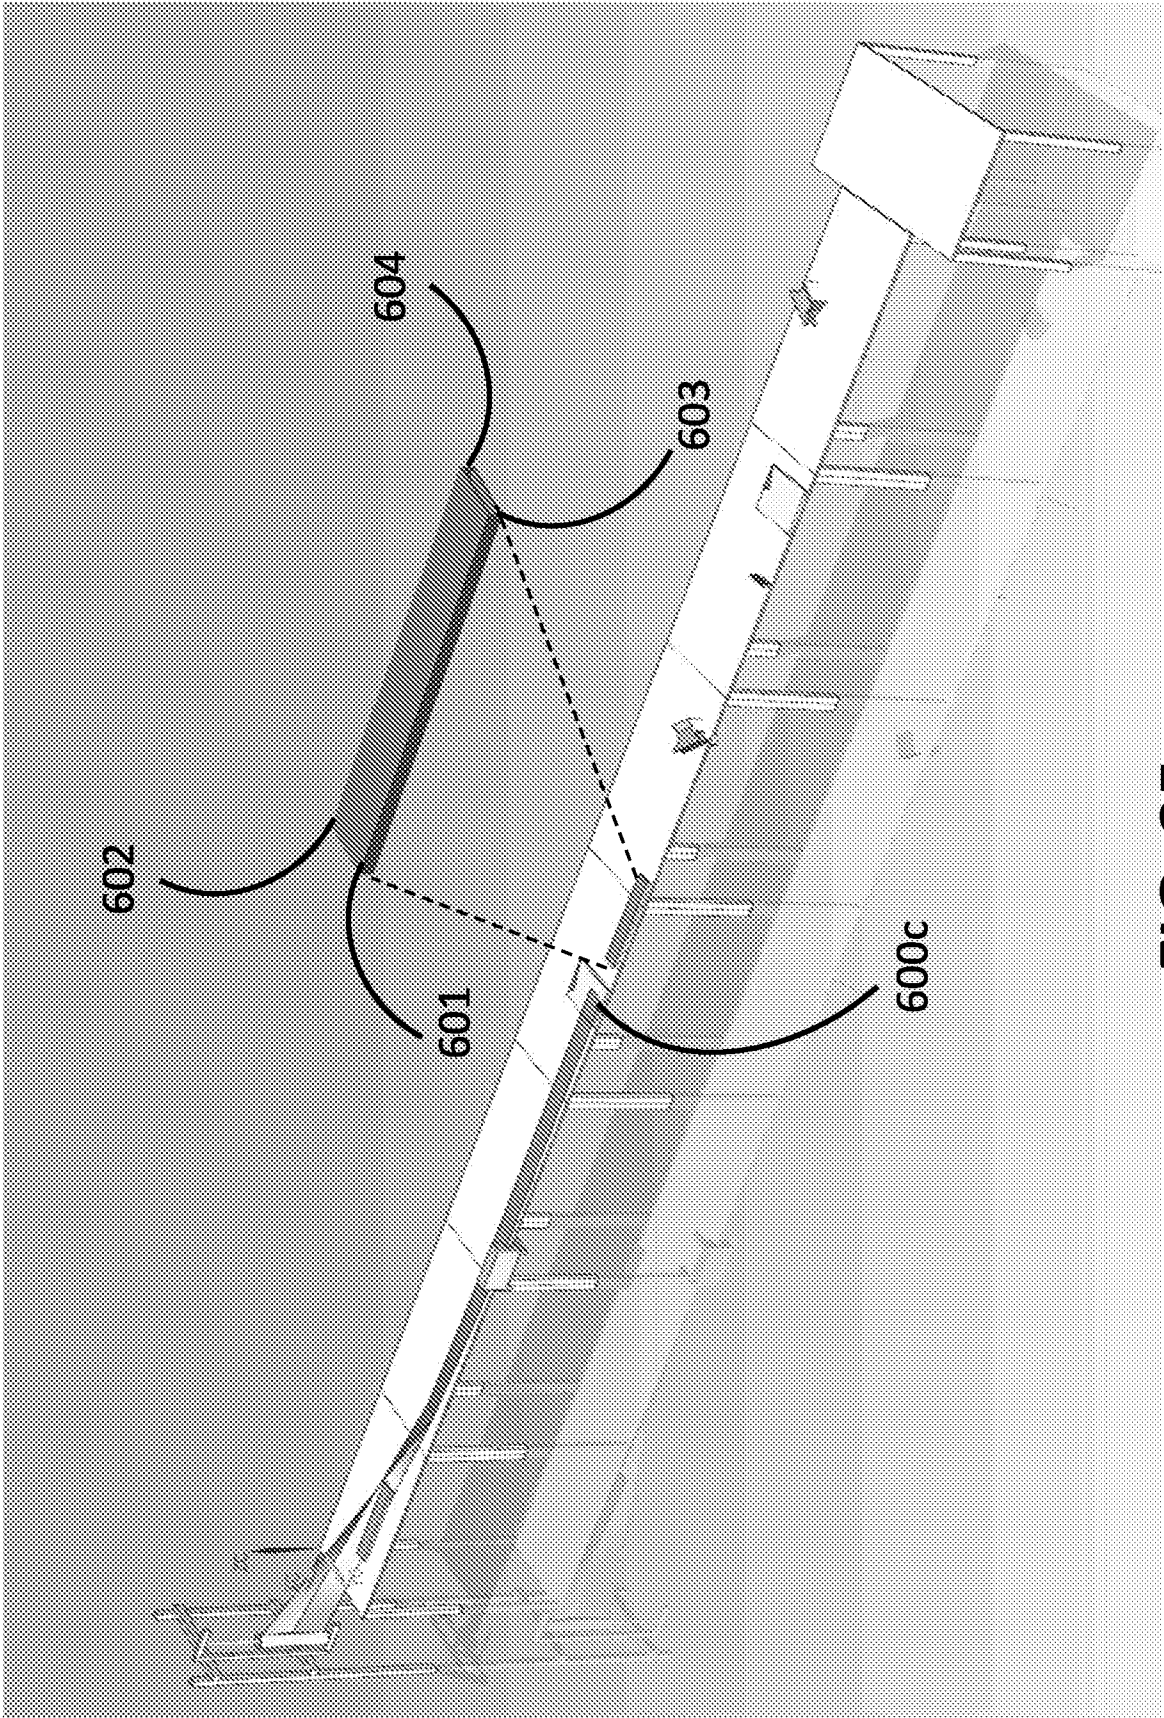


**FIG. 35**

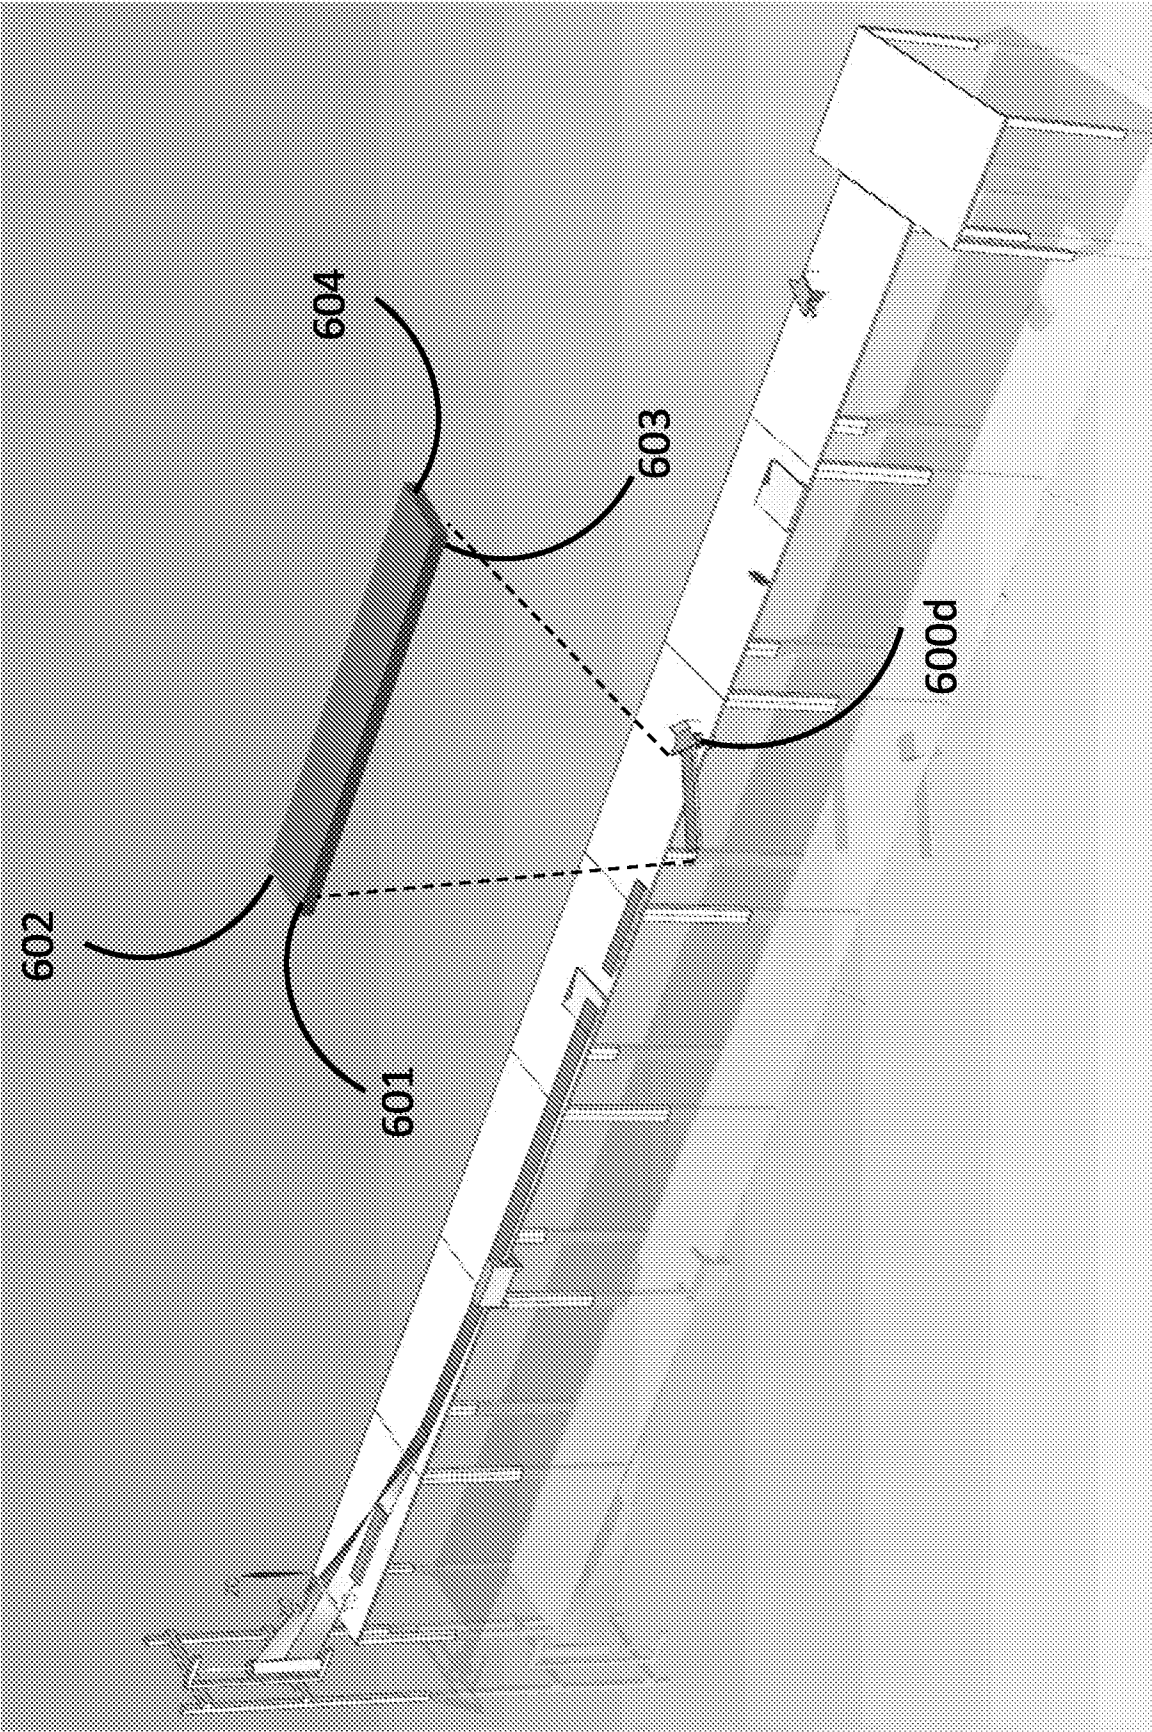


**FIG. 36**

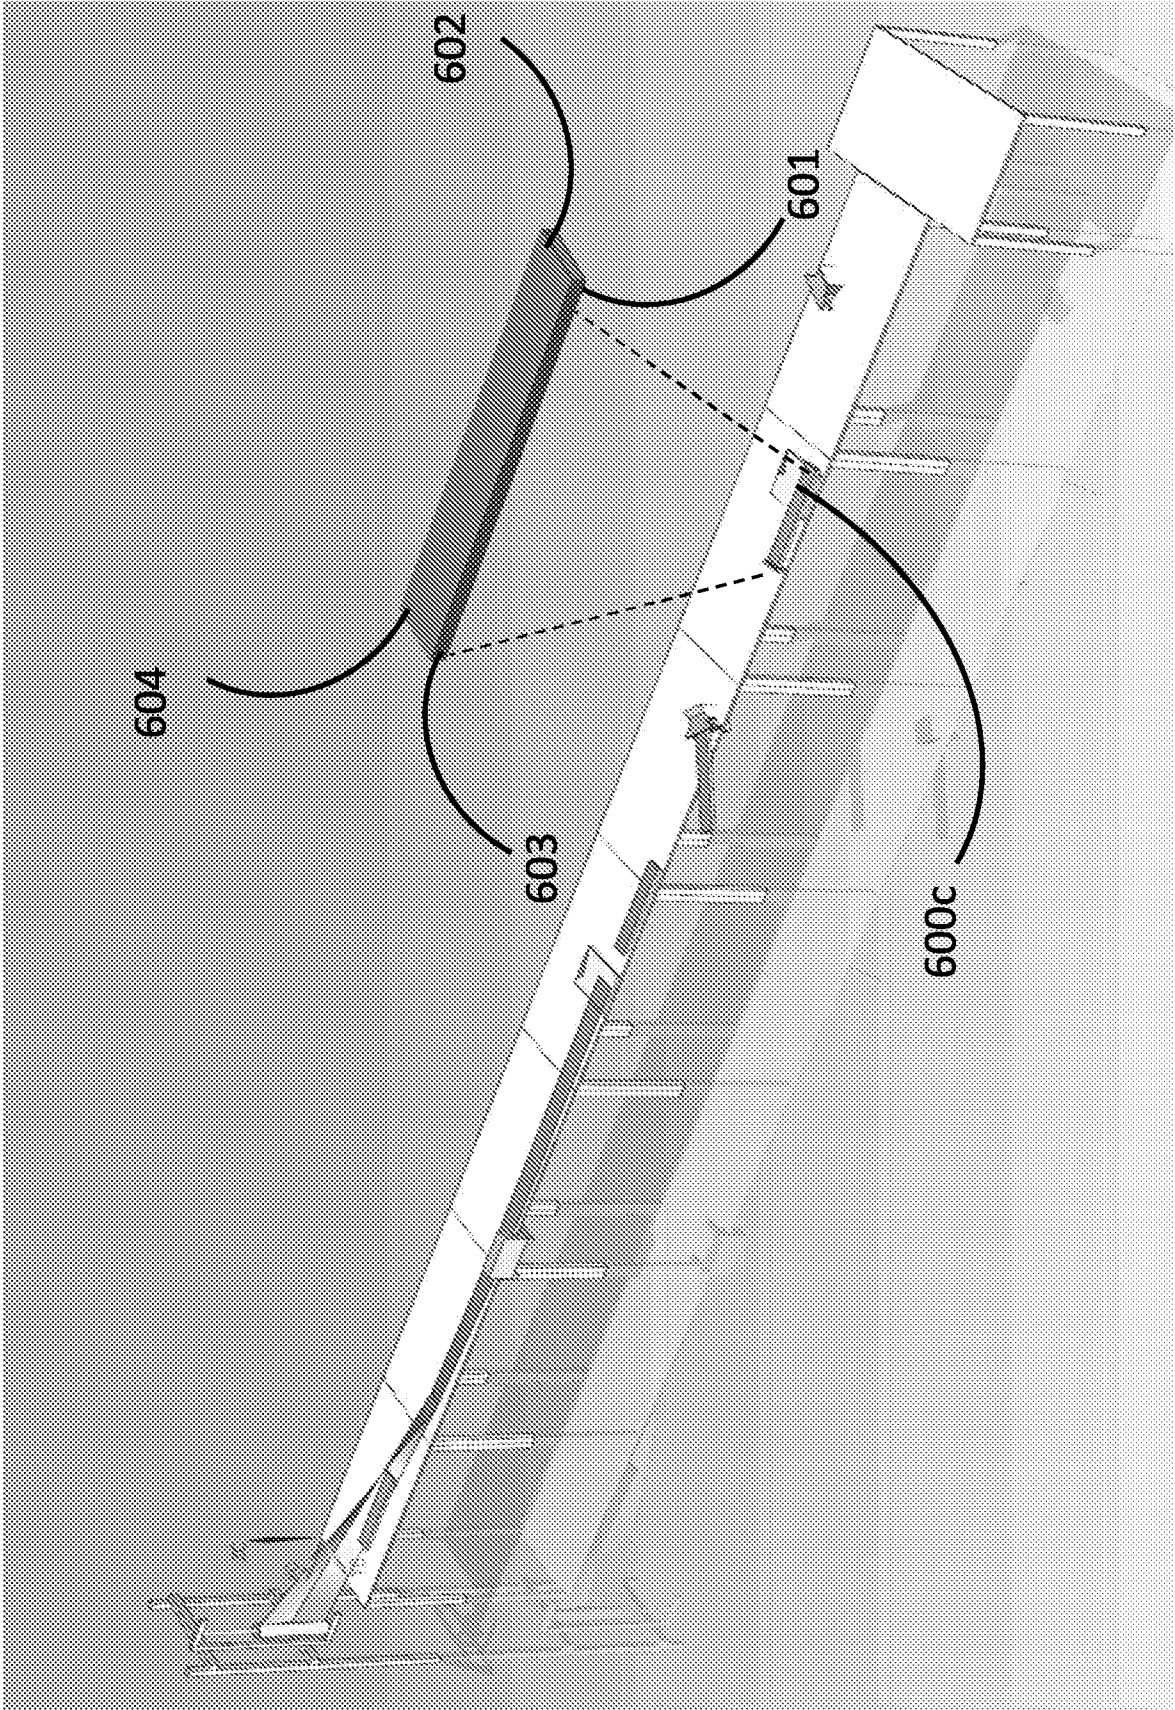


**FIG. 37**

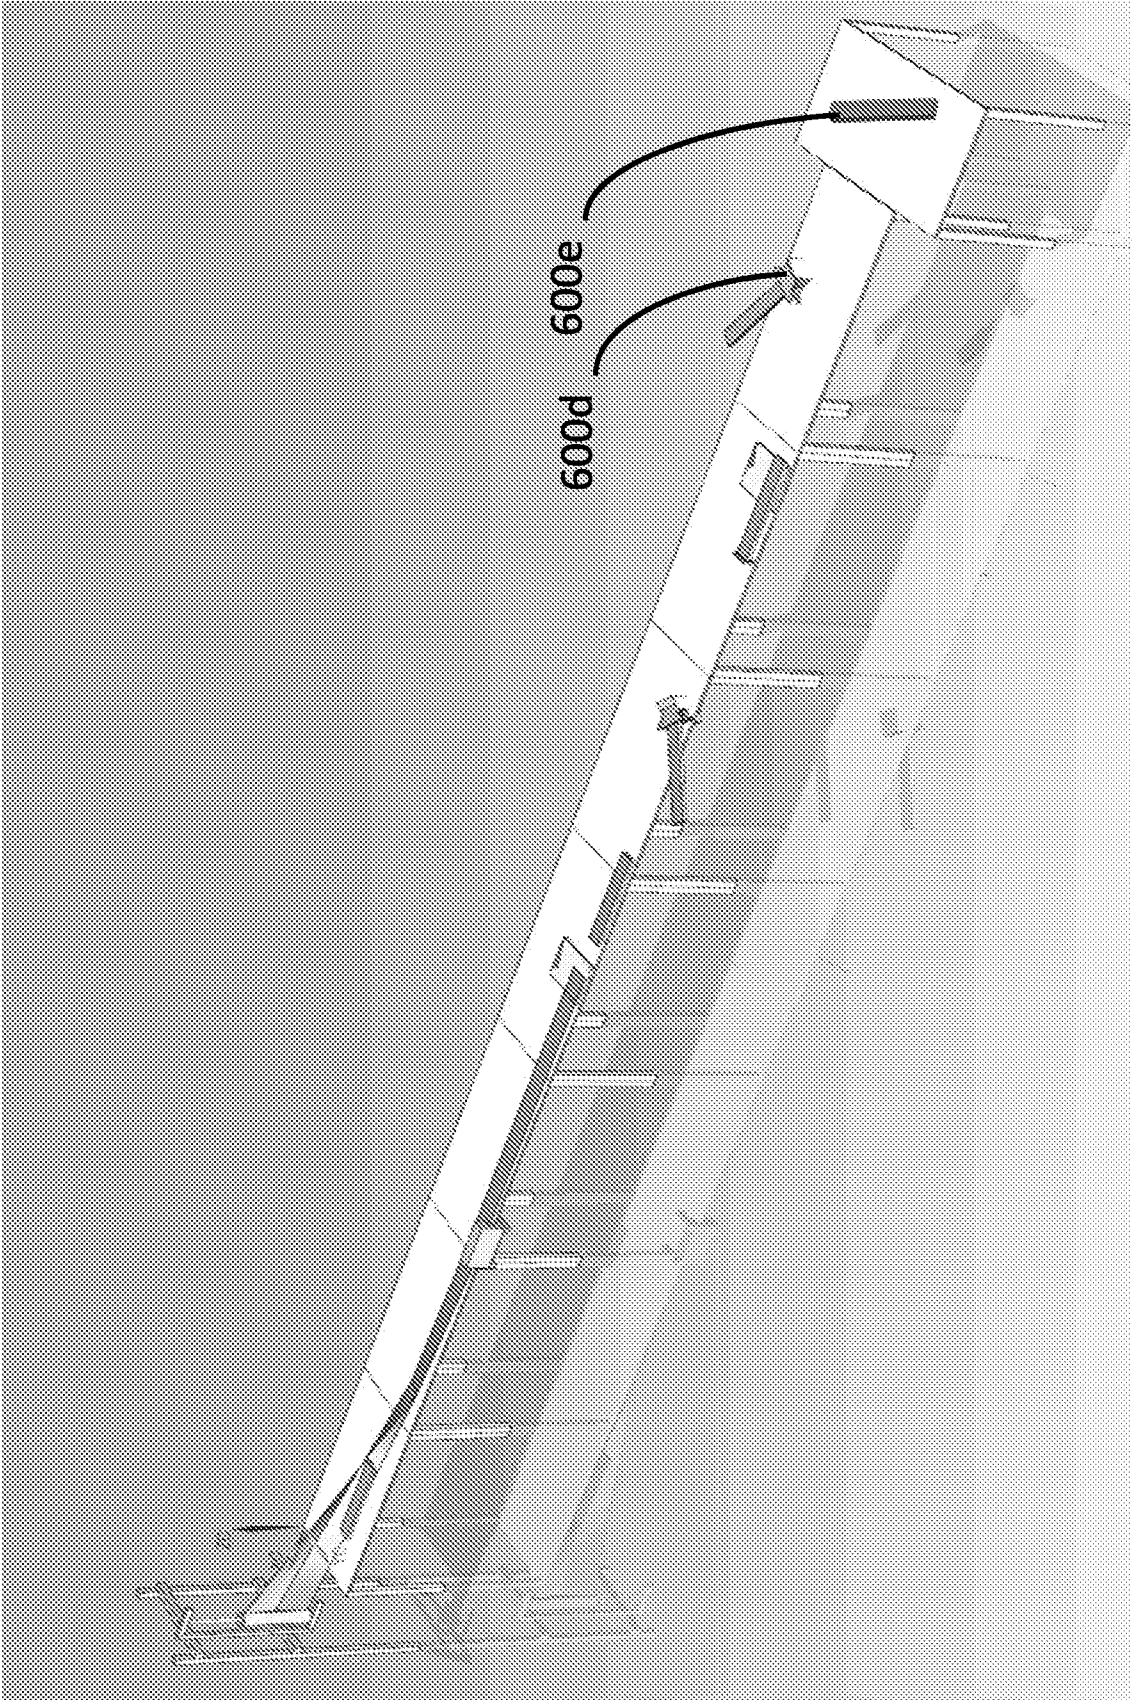


**FIG. 38**