



(51) International Patent Classification:
F21S 45/33 (2018.01)

(21) International Application Number:
PCT/EP2019/083871

(22) International Filing Date:
05 December 2019 (05.12.2019)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
18214731.4 20 December 2018 (20.12.2018) EP

(71) Applicant: VALEO VISION [FR/FR]; 34 rue Saint-André, 93012 BOBIGNY Cedex (FR).

(72) Inventors: MENN, Thibaut; c/o Valeo Vision, 34 Rue Saint-André, 93012 BOBIGNY Cedex (FR). MERLIN, Cedric; c/o Valeo Vision, 34 Rue Saint-André, 93012 BOBIGNY Cedex (FR). ROUCOULES, Christine; c/o Valeo Vision, 34 Rue Saint-André, 93012 BOBIGNY Cedex (FR).

(74) Agent: BRILLET-DE-CANDE, Rémi; Valeo Vision, 34 Rue Saint-André, 93012 BOBIGNY Cedex (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: AUTOMOTIVE LIGHTING DEVICE AND METHOD FOR CONTROLLING AN ELEMENT THEREOF

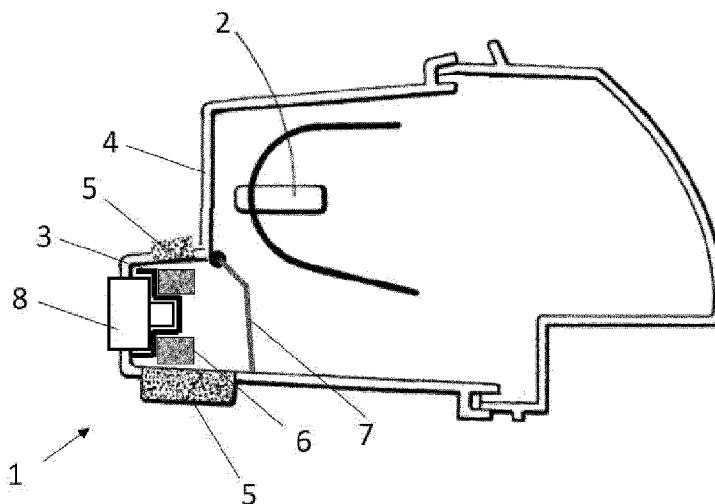


Fig. 1

(57) Abstract: The invention provides an automotive lighting device (1) comprising a light source (2), a driver arranged to control the operation of the light source (2), a housing (4), a desiccant salt (6) and a separating element (7). The driver comprises a driver cover (3) arranged to dissipate the heat generated by the driver. The housing (4) comprises a housing wall and a ventilation element (5) located in the housing wall, the ventilation element (5) being configured to allow water vapour to exit the housing (4). The desiccant salt (6) is arranged in thermal contact with the driver cover (3). The separating element (7) is provided between the desiccant salt (6) and the light source (2). A method for controlling the operation of the separating element (7) is also provided.

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

**AUTOMOTIVE LIGHTING DEVICE AND METHOD FOR CONTROLLING AN ELEMENT
THEREOF**

TECHNICAL FIELD

5 The present invention belongs to the field of lamps for automotive vehicles, and more specifically, to the design of headlamps to avoid fogging in the outer glass.

STATE OF THE ART

Current headlamps have to fulfil different requirements which sometimes involve
10 contradictory design paths. One example of this is related to demisting problems.

Misting is caused when water vapour condenses on the internal surface of a glass. Micro-drops are unaesthetic and affect the light behaviour, so great efforts are put to solve this problem. However, in order to design modern and efficient lighting devices, walls of opaque
15 materials must surround the light source, to avoid light leakage. But these opaque walls are an obstacle for a free path of dry air to reach the glass surface and avoid condensation.

Hence, the better a solution is for avoiding light leakage, the worse for avoiding glass condensation because these opaque walls create a tortuous defogging air path that will have
20 a very low flow rate and, consequently, a very slow defogging velocity.

Some solutions use a desiccant salt which absorbs moisture in the interior of the housing and then is heated to evacuate this water vapour outside the housing. Examples are found in
25 US 2016/363331 A1, which discloses a device for removing moisture from the interior of a housing.

DESCRIPTION OF THE INVENTION

The invention provides a solution for this problem by the provision of an automotive lighting device according to claim 1. Preferred embodiments of the invention are defined in
30 dependent claims.

Unless otherwise defined, all terms (including technical and scientific terms) used herein are to be interpreted as is customary in the art. It will be further understood that terms in common usage should also be interpreted as is customary in the relevant art and not in an idealised or
35 overly formal sense unless expressly so defined herein.

In this text, the term “comprises” and its derivations (such as “comprising”, etc.) should not

be understood in an excluding sense, that is, these terms should not be interpreted as excluding the possibility that what is described and defined may include further elements, steps, etc.

- 5 In a first inventive aspect, the invention provides an automotive lighting device comprising
- a light source intended to emit light;
 - a driver arranged to control the operation of the light source, the driver comprising a driver cover arranged to dissipate the heat generated by the driver;
 - a housing comprising a housing wall and a ventilation element located in the housing
- 10 wall, the ventilation element being configured to allow water vapour to exit the housing;
- a desiccant salt arranged in thermal contact with the driver cover;
 - a separating element provided between the desiccant salt and the light source.

The desiccant salt does not need a dedicated heat source to release the moisture, but the

15 driver which is used to manage the operation of the light source generates enough heat to activate the desiccant salt and cause the desorption of the humidity.

In some particular embodiments, the desiccant salt is arranged in direct contact with the driver cover.

20

Direct contact between the salt and the driver cover allows a better transfer of the heat generated by the driver, thus increasing the drying rate.

In some particular embodiments, the driver is located in contact with the housing wall.

25

This location allows the desiccant salt to be also close to the housing wall and to the ventilation elements, so that the humidity may exit the housing quickly after being released by the salt.

- 30 In some particular embodiments, the driver comprises a heatsink arranged to cover a hole in the housing.

This location ensures an easy replacement of the driver and/or the salt, and reduces the space dedicated to this drying element.

35

In some particular embodiments, the automotive lighting device comprises more than one driver which are grouped in a driver assembly which comprises a protrusion.

A driver assembly has a greater heat exchange surface, so that the desiccant salt may be distributed on the assembly to increase the desiccant amount, thus increasing the drying rate.

5

In some particular embodiments, the ventilation element comprises a porous material configured to allow water vapour to exit the housing but prevents liquid water to enter the housing.

- 10 This configuration provides a watertight housing, which is useful for some lighting device which must fulfil this type of requirements.

In some particular embodiments, one ventilation element with the porous material is arranged in the bottom part of the housing and the desiccant salt is arranged in contact or at

- 15 less than 1 cm from the driver cover.

Due to thermodynamics, at bottom of the headlamp, the temperature is theoretically lower, so the air is drier. When heating up the desiccant salt, the humidity rate will increase in the zone surrounding the desiccant salt. As the humidity rate is lower in the engine compartment

20 surrounding the housing, there will be a higher driving force for diffusion from the desiccant zone to the outside of the housing.

In some particular embodiments, the automotive lighting device further comprises channels to dissipate water vapour, wherein the channels are located in the side parts of the

25 protrusion.

In those lighting devices which do not require a complete watertight configuration, the presence of a pipe or channel is used to speed up the dissipation of water vapour.

- 30 In some particular embodiments, the separating element is a hatch with an actuator, the actuator being controlled by the driver.

The hatch is a good element to avoid the water vapour being sent back to the interior of the housing when the desiccant salt is activated by heat.

35

In some particular embodiments, the desiccant salt is one of silica gel, molecular sieves or activated alumina.

These are common examples of desiccant salt, which are useful to trap the vapour molecules and then release them when it is heated.

- 5 In some particular embodiments, the driver is arranged vertically.

A vertical location makes it easy for the driver to be part of a vertical heatsink.

- 10 The expressions "lower, higher, vertical" are referred to the position of the lighting device in operation. The person skilled in the art identifies these positions and orientations, since the lighting devices may only be installed in one position with respect to the horizontal plane of the ground.

- 15 In a second inventive aspect, the invention provides a method of controlling the operation of a separating element comprised in an automotive lighting device according to the first inventive aspect, the method comprising the step of opening the hatch when the lighting device is not being operated.

- 20 An intelligent management of the position of the hatch will improve the drying rate. When the lighting device is not operated, there is no need to heat the desiccant salt to expel the humidity from the interior of the lighting device, so the hatch may be open, so that the salt may absorb humidity.

- 25 In some particular embodiments, the method further comprises the steps of closing the hatch when the lighting device is starting operation and following a pattern of opening and closing the hatch depending on the speed of an automotive vehicle where the lighting device is installed.

- 30 When the vehicle is turned on, the automotive lighting device starts operation, and the mere operation of the DRL generates enough heat in the driver to heat the desiccant salt. A pattern depending on the vehicle speed may take advantage of natural convection cooling due to air speed. At high speed the engine compartment is cooled, so the hatch may be open to catch the humidity inside the headlamp. At low speed, the engine compartment is warm, so the hatch is closed to expel de humidity.

35

In some particular embodiments, the method further comprises the steps of closing the hatch when the lighting device is starting operation and following a pattern of opening and closing

the hatch depending on the ambient temperature.

At rapid drop of external temperature, it is more advantageous to open the hatch to catch the humidity inside the headlamp.

5

In some particular embodiments, the method further comprises the steps of closing the hatch when the lighting device is starting operation and following a pattern of opening and closing the hatch according to a predetermined cycle.

10 This saves energy dedicated to control the hatch, since a timer may be installed easily.

In some particular embodiments, the light source is a solid-state light source.

The term "solid state" refers to light emitted by solid-state electroluminescence, which uses
15 semiconductors to convert electricity into light. Compared to incandescent lighting, solid state lighting creates visible light with reduced heat generation and less energy dissipation. The typically small mass of a solid-state electronic lighting device provides for greater resistance to shock and vibration compared to brittle glass tubes/bulbs and long, thin filament wires. They also eliminate filament evaporation, potentially increasing the life span of the
20 illumination device. Some examples of these types of lighting comprise semiconductor light-emitting diodes (LEDs), organic light-emitting diodes (OLED), or polymer light-emitting diodes (PLED) as sources of illumination rather than electrical filaments, plasma or gas.

BRIEF DESCRIPTION OF THE DRAWINGS

25 To complete the description and in order to provide for a better understanding of the invention, a set of drawings is provided. Said drawings form an integral part of the description and illustrate an embodiment of the invention, which should not be interpreted as restricting the scope of the invention, but just as an example of how the invention can be carried out. The drawings comprise the following figures:

30

Figure 1 shows a side scheme of an automotive lighting device according to the invention, when the elements are in a first position.

Figure 2 shows a side scheme of the automotive lighting device of figure 1, when the
35 elements are in a second position.

Figure 3 shows a side scheme of an alternative embodiment of an automotive lighting device

according to the invention, when the elements are in a second position.

Elements of the example embodiments are consistently denoted by the same reference numerals throughout the drawings and detailed description where appropriate:

5

- 1 Automotive lighting device
- 2 Light source
- 3 Driver cover
- 4 Housing
- 10 5 Ventilation element
- 6 Desiccant salt
- 7 Hatch
- 8 Driver heat sink

15 DETAILED DESCRIPTION OF THE INVENTION

The example embodiments are described in sufficient detail to enable those of ordinary skill in the art to embody and implement the systems and processes herein described. It is important to understand that embodiments can be provided in many alternate forms and should not be construed as limited to the examples set forth herein.

20

Accordingly, while embodiment can be modified in various ways and take on various alternative forms, specific embodiments thereof are shown in the drawings and described in detail below as examples. There is no intent to limit to the particular forms disclosed. On the contrary, all modifications, equivalents, and alternatives falling within the scope of the
25 appended claims should be included. Elements of the example embodiments are consistently denoted by the same reference numerals throughout the drawings and detailed description where appropriate.

Figure 1 shows a scheme of an automotive lighting device 1 according to the invention in a
30 first operation mode. This lighting device comprises the following elements:

- a light source 2 intended to emit light;
- a driver assembly arranged to control the operation of the light source 2;
- a housing 4 comprising a housing wall;
- two ventilation elements 5 located in the housing wall;
- 35 a desiccant salt 6; and
- a hatch 7.

The driver assembly comprises a driver cover 3 arranged to dissipate the heat generated by the driver assembly. In this case, it is a metallic layer with a good thermal conductivity, which transfers the heat generated in the driver to the desiccant salt 6 which is located in direct contact with this cover 3. It could be also made of plastic conductive material.

5

The ventilation elements 5 are configured to allow water vapour to exit the housing 4. It is a porous membrane, so that water vapour is allowed from the housing to the exterior but liquid water may not enter.

10 The hatch 7 is provided between the desiccant salt 6 and the light source 2, to separate the interior of the housing in two regions, one small region at one side of the hatch 7, which comprises the driver assembly and the desiccant salt 6, and another region which is the rest of the lighting device, comprising the lighting source and the optical and thermal elements.

15 In this embodiment, the driver assembly also comprises a heatsink 8 arranged to cover a hole in the housing 4. In other embodiments, it is located in contact with the housing wall, so that the region with the driver assembly and the desiccant salt is limited.

The driver assembly comprises a protrusion, to maximize the contact surface between the
20 driver cover 3 and the desiccant salt 6, thus improving the drying rate.

The opening and closing movements of the hatch 7 are driven by an actuator, which is controlled by a dedicated micro-controller. In other embodiments, it is the driver assembly which controls this operations

25

In this figure 1, the hatch is open, and therefore the water vapour particles may accede to the zone of the lighting device where the desiccant salt 6 is. The desiccant salt 6 is configured to absorb these particles, so that the humidity inside of the lighting device decreases, and the risk of mist decreases as well.

30

Figure 2 shows this lighting device 1 in a second position, where the hatch 7 is closed and the desiccant salt 6 is expelling the vapour particles to the exterior of the lighting device through the ventilation means. Some vapour particles exit through the upper ventilation element by convection because they are hotter than the air outside the lighting device, and
35 some of the vapour particles exit the lighting device through the lower ventilation element by diffusion, since the air outside the lighting device is drier in this zone.

Figure 3 shows an alternative arrangement of the element of this lighting device 1. In this case, the driver assembly has a different shape and the desiccant salt is located in the lower portion of the housing. In particular embodiments, the desiccant salt is arranged in contact or at less than 1 cm from the driver cover.

5

Due to thermodynamics, at bottom of the headlamp, the temperature is theoretically lower, so the air is drier. When heating up the desiccant salt, the humidity rate will increase in the zone surrounding the desiccant salt. As the humidity rate is lower in the engine compartment surrounding the housing, there will be a higher driving force for diffusion from the desiccant zone to the outside of the housing. Diffusion expelling of the water vapour is emphasized with respect to the convection expelling.

10

As a consequence, the hatch may be controlled according to many different strategies.

15

When the lighting device is not operated, there is no need to heat the desiccant salt to expel the humidity from the interior of the lighting device, so the hatch may be open, so that the salt may absorb humidity.

20

When the vehicle is turned on, the automotive lighting device starts operation, and the mere operation of the DRL generates enough heat in the driver to heat the desiccant salt. A pattern depending on the vehicle speed may take advantage of natural convection cooling due to air speed. At high speed the engine compartment is cooled, so the hatch may be open to catch the humidity inside the headlamp. At low speed, the engine compartment is warm, so the hatch is closed to expel de humidity.

25

As an independent circumstance, this pattern may also depend on ambient conditions. For example, at rapid drop of external temperature, it is more advantageous to open the hatch to catch the humidity inside the headlamp, since the external temperature also affects the temperature inside the housing.

30

A predetermined cycle may also be used, without taking into account either the humidity or the car speed conditions. This is a cheaper way of controlling, but it is less efficient.

CLAIMS

1.- Automotive lighting device (1) comprising

a light source (2) intended to emit light;

5 a driver arranged to control the operation of the light source (2), the driver comprising a driver cover (3) arranged to dissipate the heat generated by the driver;

a housing (4) comprising a housing wall and a ventilation element (5) located in the housing wall, the ventilation element (5) being configured to allow water vapour to exit the housing (4);

10 a desiccant salt (6) arranged in thermal contact with the driver cover (3);

a separating element (7) provided between the desiccant salt (6) and the light source (2).

2.- Automotive lighting device (1) according to claim 1, wherein the desiccant salt (6) is
15 arranged in direct contact with the driver cover (3).

3.- Automotive lighting device (1) according to any of the preceding claims, wherein the driver cover (3) is located in contact with the housing wall.

20 4.- Automotive lighting device (1) according to claim 3, wherein the driver comprises a heatsink (8) arranged to cover a hole in the housing (4).

5.- Automotive lighting device (1) according to any of the preceding claims, comprising more than one driver which are grouped in a driver assembly which comprises a protrusion.

25

6.- Automotive lighting device (1) according to any of the preceding claims, wherein the ventilation element (5) comprises a porous material configured to allow water vapour to exit the housing (4) but prevents liquid water to enter the housing (4).

30 7.- Automotive lighting device (1) according to claim 6 when depends on claim 5, further comprising channels to dissipate water vapour, wherein the channels are located in the side parts of the protrusion.

8.- Automotive lighting device (1) according to claim 6, wherein one ventilation element with
35 the porous material is arranged in the bottom part of the housing and the desiccant salt is arranged in contact or at less than 1 cm from the driver cover (3).

9.- Automotive lighting device (1) according to any of the preceding claims, wherein the separating element is a hatch with an actuator, the actuator being controlled by the driver.

5 10.- Automotive lighting device (1) according to any of the preceding claims, wherein the desiccant salt is one of silica gel, molecular sieves or activated alumina.

11.- Automotive lighting device (1) according to any of the preceding claims, wherein the driver is arranged vertically.

10

12.- Method for controlling the operation of a separating element comprised in an automotive lighting device according to any of the preceding claims, the method comprising the step of opening the hatch when the lighting device is not being operated.

15 13.- Method according to claim 12, further comprising the steps of closing the hatch when the lighting device is starting operation and following a pattern of opening and closing the hatch depending on the speed of an automotive vehicle where the lighting device is installed.

20 14.- Method according to claim 12, further comprising the steps of closing the hatch when the lighting device is starting operation and following a pattern of opening and closing the hatch depending on the ambient temperature.

25 15.- Method according to claim 12, further comprising the steps of closing the hatch when the lighting device is starting operation and following a pattern of opening and closing the hatch according to a predetermined cycle.

DRAWINGS

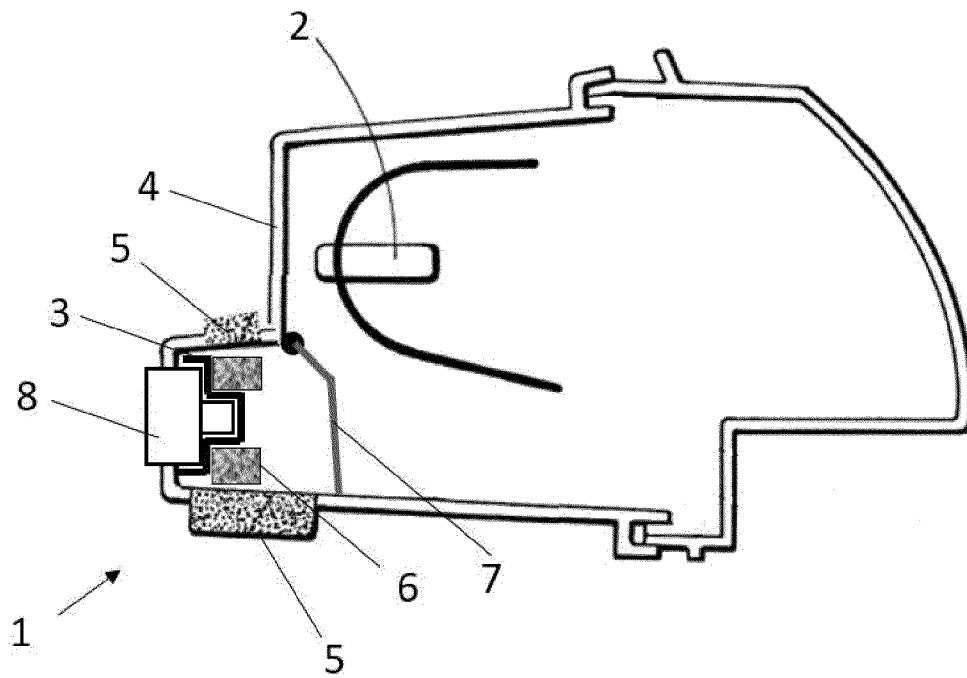


Fig. 1

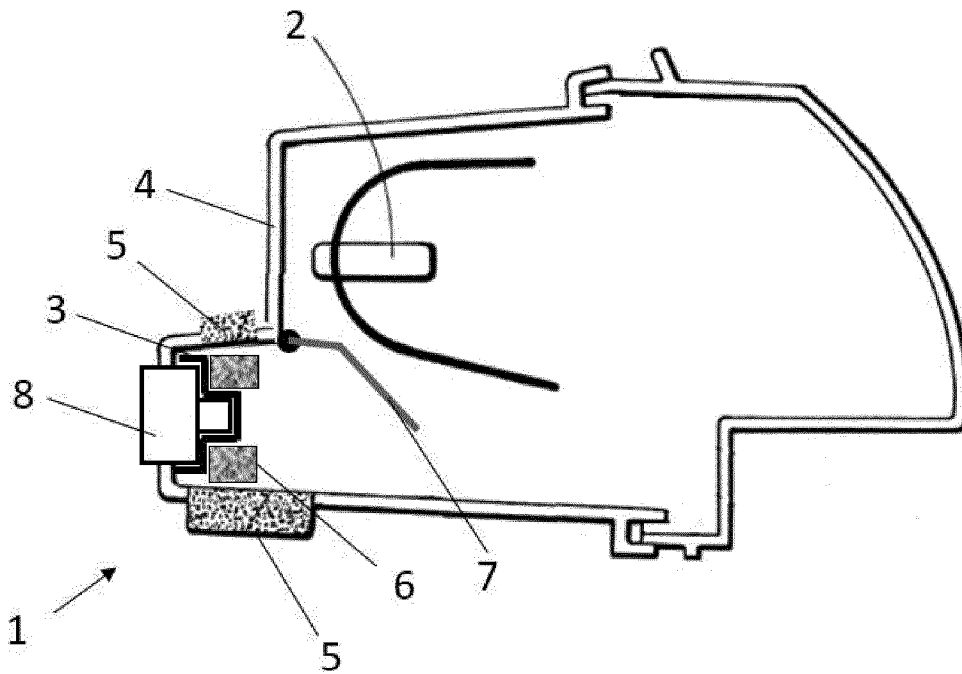


Fig. 2

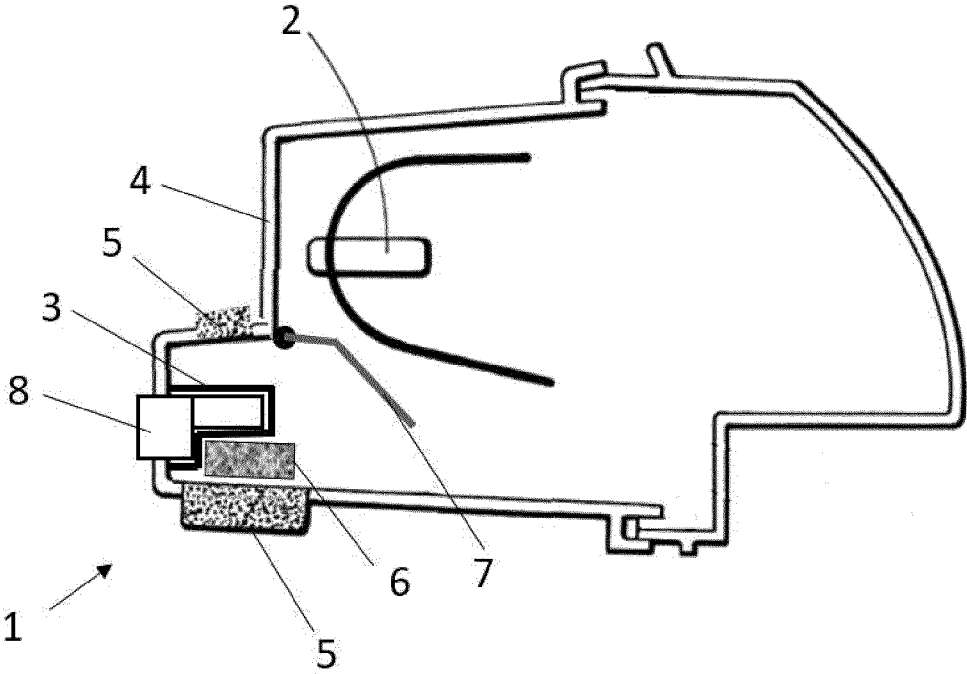


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/083871

A. CLASSIFICATION OF SUBJECT MATTER
INV. F21S45/33
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F21S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	EP 2 306 084 A2 (VALEO VISION [FR]) 6 April 2011 (2011-04-06) paragraph [0035] - paragraph [0046] figures 2,5,6,8	1-8,10, 11 9,12-15
X	----- US 2018/073701 A1 (SHIN JIK SOO [KR] ET AL) 15 March 2018 (2018-03-15) paragraph [0042] - paragraph [0050] figures 2,3	1-8,10, 11
A	----- US 2005/157514 A1 (BRINKMANN DIRK [DE]) 21 July 2005 (2005-07-21) paragraph [0014] - paragraph [0017] figure 1	1-15
	----- -/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

6 February 2020

Date of mailing of the international search report

14/02/2020

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Schulz, Andreas

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/083871

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 10 2017 105816 A1 (AUTOMOTIVE LIGHTING REUTLINGEN GMBH [DE]) 20 September 2018 (2018-09-20) paragraph [0032] - paragraph [0055] -----	1-15
A	JP H08 195104 A (STANLEY ELECTRIC CO LTD) 30 July 1996 (1996-07-30) abstract figure 1 -----	1-15
A	DE 11 2012 006405 T5 (MITSUBISHI ELECTRIC CORP [JP]) 26 February 2015 (2015-02-26) paragraph [0123] - paragraph [0134] figure 18 -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2019/083871

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
EP 2306084	A2	06-04-2011	EP	2306084 A2		06-04-2011
			FR	2950674 A1		01-04-2011

US 2018073701	A1	15-03-2018	CN	108302500 A		20-07-2018
			KR	20180030345 A		22-03-2018
			US	2018073701 A1		15-03-2018

US 2005157514	A1	21-07-2005	DE	10359748 A1		28-07-2005
			US	2005157514 A1		21-07-2005

DE 102017105816	A1	20-09-2018	NONE			

JP H08195104	A	30-07-1996	NONE			

DE 112012006405	T5	26-02-2015	CN	104334406 A		04-02-2015
			DE	112012006405 T5		26-02-2015
			JP	5705377 B2		22-04-2015
			JP	W02013175538 A1		12-01-2016
			US	2015070927 A1		12-03-2015
			WO	2013175538 A1		28-11-2013
