

(51) International Patent Classification:
F21S 19/00 (2006.01) *F21V 14/00* (2006.01)(21) International Application Number:
PCT/IB2014/058135(22) International Filing Date:
9 January 2014 (09.01.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/758,388 30 January 2013 (30.01.2013) US(71) Applicant: KONINKLIJKE PHILIPS N.V. [NL/NL];
High Tech Campus 5, NL-5656 AE Eindhoven (NL).(72) Inventors: BAAIJENS, Johannes Petrus Wilhelmus; c/o
High Tech Campus, Building 5, NL-5656 AE Eindhoven
(NL). LENSSEN, Kars-Michiel Hubert; c/o High Tech
Campus, Building 5, NL-5656 AE Eindhoven (NL). VER-
MEULEN, Arend Jan Wilhelmus Abraham; c/o High
Tech Campus, Building 5, NL-5656 AE Eindhoven (NL).(74) Agents: VAN EEWIJK, Alexander Henricus Walterus
et al.; High Tech Campus Building 5, NL-5656 AE Eind-
hoven (NL).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: LIGHTING DEVICE FOR A LIGHT GUIDING ASSEMBLY

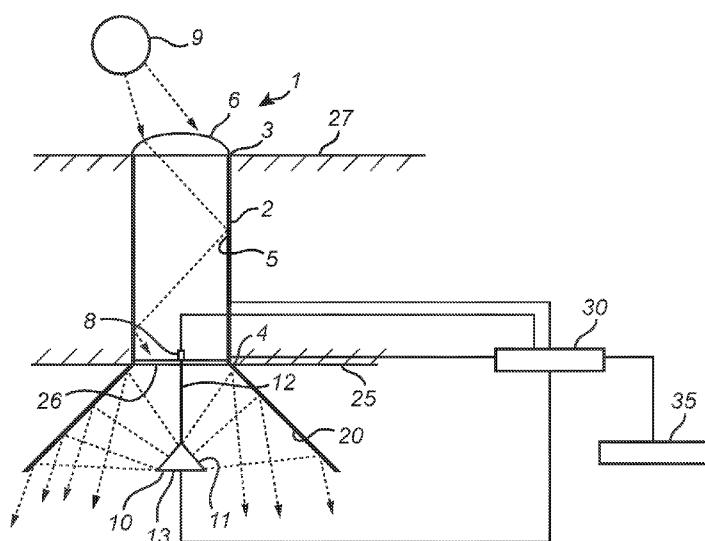


Fig. 1

(57) Abstract: According to an aspect, a lighting device (10) for a light guiding assembly (1) is provided. The lighting device is adapted to be arranged at an output end (4) of a tubular member (2) of the light guiding assembly. The lighting device comprises a light source (13), and a layer (11) adjustable at least with respect to reflection of light impinging thereon and with respect to the extent of light allowed to be transmitted through the layer. The layer is arranged to reflect light outputted from the output end of the tubular member when the layer has been adjusted so as to be at least partially reflective, and transmit light emitted by the light source through the layer when the layer has been adjusted so as to be at least partially light transmitting. The light redirected by the layer may be part of the illumination output by the light guiding assembly.



— as to the applicant's entitlement to claim the priority of
the earlier application (Rule 4.17(iii))

Published:

— with international search report (Art. 21(3))

Lighting device for a light guiding assembly

FIELD OF THE INVENTION

The present invention generally relates to the field of lighting devices for light guiding assemblies. In particular, the present invention relates to lighting devices for light guiding assemblies having a tubular member adapted to guide light from an input end of the 5 tubular member to an output end of the tubular member.

BACKGROUND OF THE INVENTION

Light guiding assemblies, such as skylights, enable use of daylight for indoor illumination. Light is guided from an input end to an output end of a tubular member of the 10 light guiding assembly. Light guiding assemblies are normally arranged e.g. in a ceiling or wall for guiding light there through, such as from an exterior of a building towards an interior of the building. Such light guiding assemblies provide more energy efficient indoor illumination compared to conventional indoor luminaries. An example of a lighting system 15 utilizing daylight is shown in EP2028410. The lighting system comprises a light tube with a highly reflective internal coating. Light enters the light tube and is reflected along the light tube to a delivery point. The lighting system comprises artificial light means for additional lighting in case of cloudy weather or during night time.

SUMMARY OF THE INVENTION

20 It would be advantageous to achieve an alternative lighting device for a light guiding assembly. It would be desirable to achieve a lighting device enabling a higher light output of a light guiding assembly. To better address one or more of these concerns, a lighting device for light guiding assembly having the features defined in the independent claims is provided. Preferable embodiments are defined in the dependent claims.

25 According to an aspect, a lighting device for a light guiding assembly is provided. The light guiding assembly has a tubular member adapted to guide light from an input end of the tubular member to an output end of the tubular member. The lighting device is adapted to be arranged at the output end of the tubular member. The lighting device comprises a light source and a layer adjustable at least with respect to reflection of light

impinging thereon and with respect to the extent of light allowed to be transmitted through the layer. The layer is arranged to reflect light outputted from the output end of the tubular member when the layer has been adjusted so as to be at least partially reflective, and transmit light emitted by the light source through the layer when the layer has been adjusted so as to 5 be at least partially light transmitting.

When the layer has been adjusted so as to be at least partially light transmitting (i.e. when the layer is set in an at least partially light transmitting mode), the layer allows transmission of light emitted by the light source. This mode may preferably be used when the light source is switched on, such as when the light input into the tubular 10 member is not sufficient for illumination, such as during dusk, dawn, night time and/or cloudy weather. When the layer has been adjusted so as to be at least partially reflective (i.e. when the layer is set in an at least partially reflective mode), a portion of light output from the tubular member may be redirected instead of being absorbed at the lighting device. The redirected light may be part of the illumination output by the light guiding assembly, thereby 15 increasing the light output by the light guiding assembly. The at least partially reflective mode may preferably be used when the light source is switched off, such as when the light input into the tubular member provides sufficient illumination, such as during day time (or in any other relatively bright conditions).

According to an embodiment, the layer may be arranged to, when the layer has 20 been adjusted so as to be at least partially reflective, reflect light outputted from the output end of the tubular member towards a secondary reflective surface, which is arranged to redirect the light reflected by the layer and impinging on the secondary reflective surface towards a space to be illuminated by the light guiding assembly. The secondary reflective surface may e.g. be a ceiling surrounding the light guiding assembly or a reflector arranged at 25 the light guiding assembly. With the present embodiment, the light redirected at the layer may be utilized for illuminating the space. Hence, reflection of light output by the tubular member back into the tubular member is reduced. The layer may instead redirect light towards the secondary reflective surface for providing indirect illumination of the space.

According to an embodiment, the light source may be arranged to emit light in 30 direction towards the secondary reflective surface. Hence, light emitted by the light source may be redirected by the secondary surface towards the space, thereby providing indirect illumination, which reduces glare from the light source.

According to an embodiment, the layer may be arranged on a tapered structure of the lighting device arranged so as to be tapered in direction towards the output end of the

tubular member. Hence, light impinging at the layer on the tapered structure may be reflected towards the secondary surface. With the present embodiment, a reduced amount of light impinging at the layer on the tapered structure is reflected back into the tubular member. The tapered structure may be a part of the light source, such as the exit surface of the light source, 5 or a separate structure arranged to support the layer.

According to an embodiment, the layer may comprise electrically controllable particles, wherein the reflectivity of the layer and the extent to which light is allowed to be transmitted through the layer are adjustable by electrically controlling the particles. The particles may e.g. be controlled by means of electrodes. The particles may be reflective (e.g. 10 opaque, such as white) for effecting the amount of light reflected by the layer. The layer may comprise an electronic skin (e-skin), wherein the electrically controllable particles are arranged in compartments. The particles may be electrically charged and controllable by selectively applying an electrical field substantially parallel to the e-skin surface (which may be referred to as in-plane electrophoresis). By selectively applying a voltage to electrodes of 15 the e-skin, the particles are caused to be spread in the compartment, whereby the e-skin is reflective, or concentrate at a concentration site of the compartment, such as at the edges of the compartment, whereby the e-skin is light transmitting, or at least less reflective, such as transparent or translucent). Such e-skin technology is described in more detail in the publications “Bright e-skin technology and applications: simplified grayscale e-paper”, 20 Lenssen et al., Journal of SID 19/4 (2011) pp. 1-7, ”Novel concept for full-color electronic paper”, Lenssen et al., Journal of SID 17/4 (2009) pp. 383-388, WO2009153709, WO2009153713 and WO2009153701, which are hereby incorporated by reference in their entirety.

According to an embodiment, the reflectivity of the layer may be diffuse or 25 specular. The layer may e.g. be mirror-like (i.e. specular) or white diffuse.

According to an embodiment, the lighting device may further comprise a controller configured to control the layer based on input data being one or more of: data input by a user, data received from a light sensor, and predetermined data received from a memory. For example, a light setting (which optionally may be predetermined) may be selected, 30 whereby the controller may adjust the layer and/or the light source of the lighting device accordingly. The lighting device may alternatively, or in addition, be controlled based on the lighting conditions sensed by the sensor at the input side or the output side of the tubular member (such as outdoors or indoors).

According to an embodiment, a light guiding assembly is provided. The light guiding assembly may comprise a tubular member adapted to guide light from an input end of the tubular member to an output end of the tubular member, and a lighting device as defined in any one of the preceding embodiments. The lighting device may be arranged at the 5 output end of the tubular member.

According to an embodiment, the light guiding assembly may further comprise a reflector arranged at the output end of the tubular member so as to redirect light reflected by the layer of the lighting device and impinging on the reflector towards the space to be illuminated by the light guiding assembly. Hence, the reflector may comprise the secondary 10 reflective surface. Light reflected by the layer of the lighting device may thus be part of the illumination provided by the light guiding assembly. Preferably, the light source and the reflector may be arranged such that light emitted by the light source is reflected by the reflector towards the space to be illuminated by the light guiding assembly.

According to an embodiment, the reflector may be flared (or diverged) in 15 direction away from the tubular member for reflecting light towards the space to be illuminated by the light guiding assembly.

According to an embodiment, the light guiding assembly may further comprise a window arranged so as to transmit light which has been guided in the tubular member. The window may be arranged at the output end of the tubular member or inside the tubular 20 member. The window may reduce the risk of dust (or other undesired foreign matter) to enter the light guiding assembly, thereby facilitating keeping the light guiding assembly clean. Optionally, the window may be adapted to, preferably adjustably, effect change of color of light transmitted through the window and/or the extent of light transmitted through the window. In alternative or in addition, the window may be adjustable e.g. with respect to 25 reflection of light impinging on the window. For example, the window may be configured so as to reflect all or substantially all of the light which has been emitted by the lighting device and which impinges on the window during e.g. night time. According to another example, the window may be configured so as to change color of e.g. daylight input into the input end of the tubular member of the light guiding assembly and guided in the tubular member, e.g. 30 when a relatively low color temperature is desired or required.

It is noted that the invention relates to all possible combinations of features recited in the claims. Further objectives of, features of, and advantages with, the present invention will become apparent when studying the following detailed disclosure, the drawings and the appended claims. Those skilled in the art realize that different features of

the present invention can be combined to create embodiments other than those described in the following.

BRIEF DESCRIPTION OF THE DRAWINGS

5 This and other aspects of the present invention will now be described in more detail, with reference to the appended drawings showing embodiments.

Fig. 1 is a cross-section view of a light guiding assembly according to an embodiment.

10 Fig. 2 shows the light guiding assembly shown in Figure 1 from an output side of the light guiding assembly.

Figs. 3 and 4 are enlarged views of a portion of an inner wall of a tubular member of a light guiding assembly according to an embodiment.

Fig. 5 is an enlarged view of a portion of an inner wall of a tubular member of a light guiding assembly according to another embodiment.

15 Fig. 6 shows an enlarged view of an electronic skin according to an embodiment.

Fig. 7 is a cross-section view of a light guiding assembly according to another embodiment.

20 All the figures are schematic, not necessarily to scale, and generally only show parts which are necessary in order to elucidate the invention, wherein other parts may be omitted or merely suggested.

DETAILED DESCRIPTION

25 With reference to Figures 1 and 2, a light guiding assembly 1 according to an embodiment will be described. Figure 1 is a cross-section of the light guiding assembly 1 and Figure 2 shows the light guiding assembly 1 from an output side of the light guiding assembly 1 (i.e. the light guiding assembly 1 seen from a space to be illuminated by the light guiding assembly 1). The light guiding assembly 1 may e.g. be included in or constitute a skylight for guiding daylight into a building, whereby daylight may be used for indoor 30 illumination.

The light guiding assembly 1 comprises a tubular member 2 arranged to guide light from an input end 3 to an output end 4 of the tubular member 2. The tubular member 2 may e.g. be arranged in a wall or roof 25 of a building for guiding light (such as daylight) from an exterior of the building to an interior of the building. The cross-section of the tubular

member 2 (taken perpendicular to a longitudinal direction of the tubular member 2) may have any desired shape, such as circular or rectangular (as shown in Figure 2). The length of the tubular member 2 may be equal or longer than the thickness of the wall or roof 25. The longitudinal extension of the tubular member 25 may be straight, angled or curved.

5 The light guiding assembly 1 may further comprise a lens 6 for directing (preferably focusing) light into the tubular member 2. The lens 6 may be arranged at the input end 3 of the tubular member 2.

The light guiding assembly 1 may further comprise an artificial lighting device 10. The light output of the lighting device 10 may be used as a complement to the daylight 10 output of the tubular member 2. The lighting device 10 may be connected to the tubular member 2 via a frame 12. The light guiding assembly 1 may further comprise a reflector 20 arranged to reflect light emitted by (and/or reflected at) the lighting device 10 towards the space to be illuminated by the light guiding assembly 1. Alternatively (or as a complement), the lighting device 10 may be arranged to emit (and/or reflect) light towards a portion of the 15 ceiling (or wall) 25 surrounding the output end 4 of the tubular member 2. In the present specification, such portion of the ceiling (or wall) 25 and the reflective surface of the reflector 20 may be referred to as a secondary reflective surface. The reflector 20 comprises a divergent structure, whereby the reflector 20 is flared in direction away from the output end 4 of the tubular member 2 (i.e. towards the space to be illuminated by the light guiding 20 assembly 1). The reflector 20 may be arranged at the rim of the output end 4 of the tubular member 2.

The lighting device 10 comprises one or more light sources 13, such as light emitting diodes (LEDs), arranged to emit light at least in direction towards the secondary reflective surface (e.g. towards the reflector 11). Optionally, the light source 13 may be 25 arranged to further emit light in directions towards the space to be illuminated by the light guiding assembly 1 (i.e. in a main forward illumination direction of the light guiding assembly 1).

The lighting device 10 may further comprise a layer 11 adjustable with respect to reflection and to the extent of light allowed to be transmitted through the layer 11. Hence, 30 the layer 11 is switchable (or tunable) between a (at least partly) reflective mode and a light transmitting mode. The layer 11 may comprise electrodes and reflective particles arranged in compartments and being controllable by the electrodes. For example, the layer 11 may comprise an e-skin. By selectively applying a voltage to the electrodes of the e-skin, the particles are caused to be spread in the compartment (whereby the e-skin is reflective) or hide

at the edges of the compartment (whereby the e-skin is light transmitting, or at least less reflective, such as transparent or translucent). Optionally, the layer 11 may further be adjustable with respect to color. Hence, the layer 11 may be arranged to adjustably effect change of color of light being reflected by and/or transmitted through the layer 11. The layer 5 11 may then comprise colored particles, preferably arranged in an e-skin.

The lighting device 10 may comprise a tapered structure on which the layer 11 may be arranged (or coupled), such that light output from the tubular member 2 and impinging at the layer 11 is redirected towards the secondary reflective surface (e.g. the reflector 20 or ceiling 25). For example, the tapered structure may be a tapered exit surface of 10 the light source or a separate structure (such as a sheet) for supporting the layer 11. The tapered structure is arranged to be tapered in direction towards the output end 4 of the tubular member 2. In the present example, the tapered structure is shaped as a triangular prism. However, the tapered structure may have any desired tapered shape, such as a convex shape, in order to reflect light output from the tubular member 2 towards the secondary reflective 15 surface.

The light guiding assembly 1 may further comprise at least a first layer and a second layer arranged on an inner wall 5 of the tubular member 2. The first and second layers will be described in more detail with reference to Figures 3 and 4 in the following.

The first layer 51 may be applied as a coating on the inner wall 50 of the 20 tubular member. In the present example illustrated in Figures 3 and 4, the first layer 51 is adapted to effect change of color of light impinging at the first layer 51 (which may be referred to as a first optical characteristic in the present example). For example, the first layer 51 may comprise a colored layer of paint. Preferably, the first layer 51 may have a warm color for effecting change of the color temperature of light impinging at the first layer 51 to a 25 color temperature within the range 2000 to 4000 K, preferably 2700 to 3800 K, and most preferably 3000 to 3500 K. For example, the first layer 51 may be red, orange or yellow for tuning daylight typically having a color temperature of up to 5000 K to a lower color temperature. The second layer 52 is adjustable with respect to reflection (which may be referred to as a second optical characteristic in the present example) and the extent of light 30 allowed to be transmitted through the second layer 52. Hence, the second layer 52 is adjustable (such as tunable) between a (at least partly) reflective mode and a (at least partly) light transmitting mode. When the second layer 52 is in the light transmitting mode (as illustrated in Figure 3), light is allowed to be transmitted through the second layer 52 and reflected by the first layer 51. As the light is reflected by the colored first layer 51, the color

of the light is changed. When the second layer 52 is in the reflective mode (as illustrated in Figure 4) light is reflected by the second layer 52 before it reaches the first layer 51, whereby the color of the light remains unchanged. Accordingly, the color of the light propagating in the tubular member may be tuned by adjusting the reflective and light transmission
5 characteristics of the second layer 52.

According to another example illustrated in Figure 5, the first layer 61 is reflective (which may be referred to as a first optical characteristic in the present example). The first layer 61 may be specular reflective or (diffuse) white (such as a layer of white paint). Further, the second layer 62 is adapted to adjustably effect change of color of light
10 transmitted through (or reflected by) the second layer 62. Hence, the second layer 62 is adjustable (such as tunable) between a (at least partly) colored mode and a (at least almost) non-colored mode. When the second layer 62 is in the colored mode, the color of light transmitted through the second layer 62 is changed. When the second layer 62 is in the non-colored mode, the color of light transmitted through the second layer 62 remains un-changed.
15 The light transmitted by the second layer 62 is reflected by the reflective first layer 61, as illustrated in Figure 5. Accordingly, the color of the light traveling or propagating in the tubular member may be tuned by adjusting the color characteristics of the second layer 62. The color of the second layer 62 in the present example may be equal to the color of the second layer 52 according to the preceding example.

20 In both of the above examples described with reference to Figures 3 to 5, the second layer 52, 62 may comprise electrodes and (reflective, e.g. white, or colored) particles arranged in compartments and being controllable by the electrodes. For example, the second layer 52, 62 may comprise an e-skin. By selectively applying a voltage to the electrodes of the e-skin, the particles are caused to be spread in the compartment (whereby the e-skin is reflective or colored) or hide at the edges of the compartment (whereby the e-skin is non-, or at least less, reflective or colored, such as transparent or translucent).
25

Referring again to Figure 1, the light guiding assembly 1 may further comprise a window 26 arranged to substantially cover the output end 4 of the tubular member 2 so as to transmit light which has been guided in the tubular member 2. The window 26 may be a
30 plain non-colored glass (or plastic) window for covering and protecting the interior of the tubular member 2. Alternatively, the window 26 may be adapted to, preferably adjustably, effect changing of color of light transmitted through the window 26 and/or the extent of light allowed to be transmitted through the window 26.

The window 26 may be adapted to controllably effect changing of color temperature of light transmitted through the window 110, preferably to a color temperature below 4000 K, preferably below 3400 K, and most preferably below 2700 K. The window 26 may be adjustable with respect to colors enabling tuning the color of the window 26 from 5 yellow via orange to red for achieving relatively warm colors of the light transmitted through the window 26. These colors and color temperatures may be provided by mixing yellow and magenta. For achieving cooler color temperatures, cyan may be added to the mixing. Black may be used for blocking light. For the purpose of effecting change of color of light transmitted through the window 26, the window 26 may comprise electronically controllable 10 colored particles. For example an electronic skin (e-skin) may be coupled to a surface of the window.

An example of an e-skin, which may be comprised in the layer of the lighting device, arranged at the inner wall of the tubular member and/or in the window will be described with reference to Figure 6 showing an enlarged view of an electronic skin 115. The 15 e-skin 115 may comprise one or more layers, each layer having a plurality of compartments (or cells) 111, 112, as illustrated in Figure 2. In the present example, the e-skin 115 comprises a first layer and a second layer overlapping each other. A first compartment 111 of the first layers is arranged on (such as coupled to) a second compartment 112 of the second layer. The first compartment 111 encloses positively charged cyan particles 117 and 20 negatively charged yellow particles 116, and the second compartment 112 encloses negatively charged magenta particles 118 and positively charged black particles 119. By adjusting an in-plane electrical field applied between the electrodes 113 of the first compartment 111, the yellow particles 116 can be caused to spread in the first compartment 111 and the cyan particles can be caused to concentrate at a relatively small region, such as at 25 the edge of the first compartment 111, whereby the first compartment portion of the first layer turns yellow. Similarly, by adjusting an in-plane electrical field applied between the electrodes 113 of the second compartment 112, the magenta particles 118 can be caused to spread in the second compartment 112 and the black particles 119 can be caused to concentrate at a relatively small region, such as at the edge of the second compartment 112, 30 whereby the second compartment portion of the second layer turns magenta. As the two layers overlap, a mix of yellow and magenta occurs in the e-skin 115. According to the same principle, the cyan and black particles 117, 119 can be caused to spread and the yellow and magenta particles 116, 118 to concentrate at the edges in the compartments 111, 112. Hence,

the particles of a certain color are independently controllable with respect to the particles of other colors.

Turning again to Figure 1, operation of the light guiding assembly 1 will be described. During daytime, daylight (from the sun 9, as schematically illustrated in Figure 1) is directed by the lens 6 into the input end 3 of the tubular member 2. The daylight is reflected at the inner wall 5 (and the first and/or second layer applied thereon) towards the output end 4 of the tubular member 2. Dependent on the setting (or configuration) of the second layer, the light guided in the tubular member may change color. The daylight exits the tubular member 2 through the window 26, which dependent on its setting (or configuration) may change the color of and/or block (at least a portion of) the light. Some of the light exiting the tubular member 2 may impinge on the lighting device 10. Dependent on the setting (or configuration) of the layer 11 of the lighting device 10, (at least a portion of) the light impinging on the layer 11 is redirected towards the reflector 20, which in turn reflects the light towards the space illuminated by the light guiding assembly 1.

The light guiding assembly 1 may further comprise a control unit (or controller) 30 for controlling one or more of: the second layer at the inner wall 5 of the tubular member 2, the window 26, the layer 11 of the lighting device 10 and the light source 13 of the lighting device 10. The light guiding assembly 1 may further comprise a user interface 35 communicatively coupled to the control unit 30. The light guiding assembly 1 may further comprise at least one sensor 8 configured to sense, and transmit a signal indicative of, the color (and/or color temperature) and/or brightness (and/or any other light characteristic) of light. Optionally, two (or more) separate sensors 8 may be provided, such as one for sensing color and one for sensing brightness. Alternatively, one sensor 8 may be provided for sensing both color and brightness. The sensor 8 may be located at the window 26 (as illustrated in Figure 1), or at any position at the inside or outside of the wall or roof 27 or in the tubular member 2 for sensing light, which is to be and/or has been output by the light guiding assembly 1.

The control unit 30 may be configured to control the light guiding assembly 1 based on one or more of: the signal from the sensor 8 indicative of color and/or brightness, data input via the user interface 35 and predetermined data (e.g. stored in a memory). For example, a user may select a predetermined light setting for the light guiding assembly 1 (e.g. specified in illumination brightness and/or color). The control unit 30 may then control the light guiding assembly 1 to provide the selected light setting based on the sensed lighting conditions.

For example, a light setting with a brightness of 500 lux and a color temperature of 3000 K may be selected when the sensor 8 senses a brightness of 3000 lux and a color temperature of 4000 K. The control unit 30 may then control the light guiding assembly 1 (based on a signal from the sensor 8), for example by adjusting: the second layer 5 at the inner surface 5 for effecting change of color of light guided in the tubular member 2, and/or the color of the window 26 for effecting change of color of light transmitted through the window 26, such that light output from the light guiding assembly 1 has a color temperature of about 3000 K. Further, the control unit 30 may control the degree of light transmission of the window 26, such that the brightness of light which has been transmitted 10 through the window 26 is about 500 lux. Hence, the window 26 is controlled to block some of the light input. Further, as the light output from the tubular member 2 has a proper brightness (i.e. 500 lux after passing the window 26), the control unit 26 may control the light source 13 to be switched off and the layer 11 of the lighting device 10 to be in a reflective mode, such that light exiting the tubular member 2 and impinging on layer 11 is reflected 15 towards the reflector 20, which in turn reflects the light towards the space illuminated by the light guiding assembly 1.

According to another example, a light setting with a brightness of 500 lux and a color temperature of 3000 K (i.e. the same light setting as in the previous example) may be selected when the sensor 8 senses zero brightness (and consequently no color temperature). 20 The control unit 30 may then control the light guiding assembly 1 (based on a signal from the sensor 8), for example by switching on and adjusting the brightness of the lighting device 10 to 500 lux and the layer 11 of the lighting device 10 to be in a light transmitting mode (i.e. a non-reflective mode), such that light emitted by the light source 13 impinges at the reflector 20, which in turn reflects the light towards the space illuminated by the light guiding 25 assembly 1.

A light guiding assembly according to another embodiment will be described with reference to Figure 7.

Figure 7 shows a light guiding assembly 70, which may be equally configured as the lighting guiding assembly described with reference to Figures 1 to 6, except that the 30 light guiding assembly 70 may comprise a (artificial) lighting device 71 arranged to emit light into the tubular member 75 towards the output end 74 of the tubular member 75. The lighting device 71 may be mounted to the input end 73 of the tubular member 75 by a frame 72. In the present embodiment, the characteristics (such as the color and/or brightness) of the

light from the lighting device 71 may be adjusted by controlling the second layer of the inner wall 76 of the tubular member 75 and/or the window 77.

While embodiments have been illustrated and described in detail in the drawings and foregoing description, such illustration and description are to be considered 5 illustrative or exemplary and not restrictive; the invention is not limited to the disclosed embodiments.

For example, even though a light guiding assembly for guiding daylight into a building is described as an exemplifying embodiment in the present specification, it will be appreciated that the light guiding assembly may as well be used for other applications where 10 it is desirable to guide light from an input end to an output end of a tubular member.

Further, it will be appreciated that more than two layers with different optical characteristics may be applied to the inner surface of the tubular member.

Further, even though a window, an adjustable layer of the lighting device and a second layer at the inner wall of the tubular member comprising e-skins are described as 15 exemplifying embodiments in the present specification, it will be appreciated that the change of color and/or reflection and/or amount of light transmitted may as well be achieved by other techniques, such as electrophoresis, electrokinetic, electrowetting, suspended particles devices, liquid crystal or electro chromic techniques.

Other variations to the disclosed embodiments can be understood and effected 20 by those skilled in the art in practicing the claimed invention, from a study of the drawings, the disclosure, and the appended claims. In the claims, the word "comprising" does not exclude other elements or steps, and the indefinite article "a" or "an" does not exclude a plurality. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measured cannot be used to advantage.

25 Any reference signs in the claims should not be construed as limiting the scope.

CLAIMS:

1. A lighting device (10) for a light guiding assembly (1) having a tubular member (2) adapted to guide light from an input end (3) of the tubular member to an output end (3) of the tubular member, the lighting device being adapted to be arranged at the output end of the tubular member, the lighting device comprising:

5 a light source (13), and
a layer (11) adjustable at least with respect to reflection of light impinging thereon and with respect to the extent of light allowed to be transmitted through the layer,
wherein the layer is arranged to:
reflect light outputted from the output end of the tubular member when the
10 layer has been adjusted so as to be at least partially reflective, and
transmit light emitted by the light source through the layer when the layer has
been adjusted so as to be at least partially light transmitting.

2. The lighting device as defined in claim 1, wherein the layer is arranged to,
15 when the layer has been adjusted so as to be at least partially reflective, reflect light outputted from the output end of the tubular member towards a secondary reflective surface (20, 25), which is arranged to redirect the light reflected by the layer and impinging on the secondary reflective surface towards a space to be illuminated by the light guiding assembly.

20 3. The lighting device as defined in claim 2, wherein the light source is arranged to emit light in direction towards the secondary reflective surface.

4. The lighting device as defined in any one of the preceding claims, wherein the layer is arranged on a tapered structure of the lighting device arranged so as to be tapered in
25 direction towards the output end of the tubular member.

5. The lighting device as defined in any one of the preceding claims, wherein the layer comprises electrically controllable particles, wherein the reflectivity of the layer and the

extent to which light is allowed to be transmitted through the layer are adjustable by electrically controlling the particles.

6. The lighting device as defined in any one of the preceding claims, wherein the
5 reflectivity of the layer is diffuse or specular.

7. The lighting device as defined in any one of the preceding claims, further
comprising a controller (30) configured to control the layer based on input data being one or
more of: data input by a user, data received from a light sensor (8), and predetermined data
10 received from a memory.

8. A light guiding assembly (1) comprising:
a tubular member (2) adapted to guide light from an input end (3) of the
tubular member to an output end (4) of the tubular member, and
15 a lighting device (10) as defined in any one of the preceding claims, the
lighting device being arranged at the output end of the tubular member.

9. The light guiding assembly as defined in claim 8, further comprising a
reflector (20) arranged at the output end of the tubular member so as to redirect light reflected
20 by the layer of the lighting device and impinging on the reflector towards a space to be
illuminated by the light guiding assembly.

10. The light guiding assembly as defined in claim 9, wherein the reflector is
flared in direction away from the tubular member.
25

11. The light guiding assembly as defined in any one of claims 8-10, further
comprising a window (26) arranged so as to transmit light which has been guided in the
tubular member.

30 12. The light guiding assembly as defined in claim 11, wherein the window is
adjustable with respect to reflection of light impinging on the window, the color of light
transmitted through the window, and/or the extent of light allowed to be transmitted through
the window.

13. The light guiding assembly as defined in any one of claims 8-12, further comprising a lens (6) arranged at the input end of the tubular member, the lens being arranged to direct light into the tubular member.

1/3

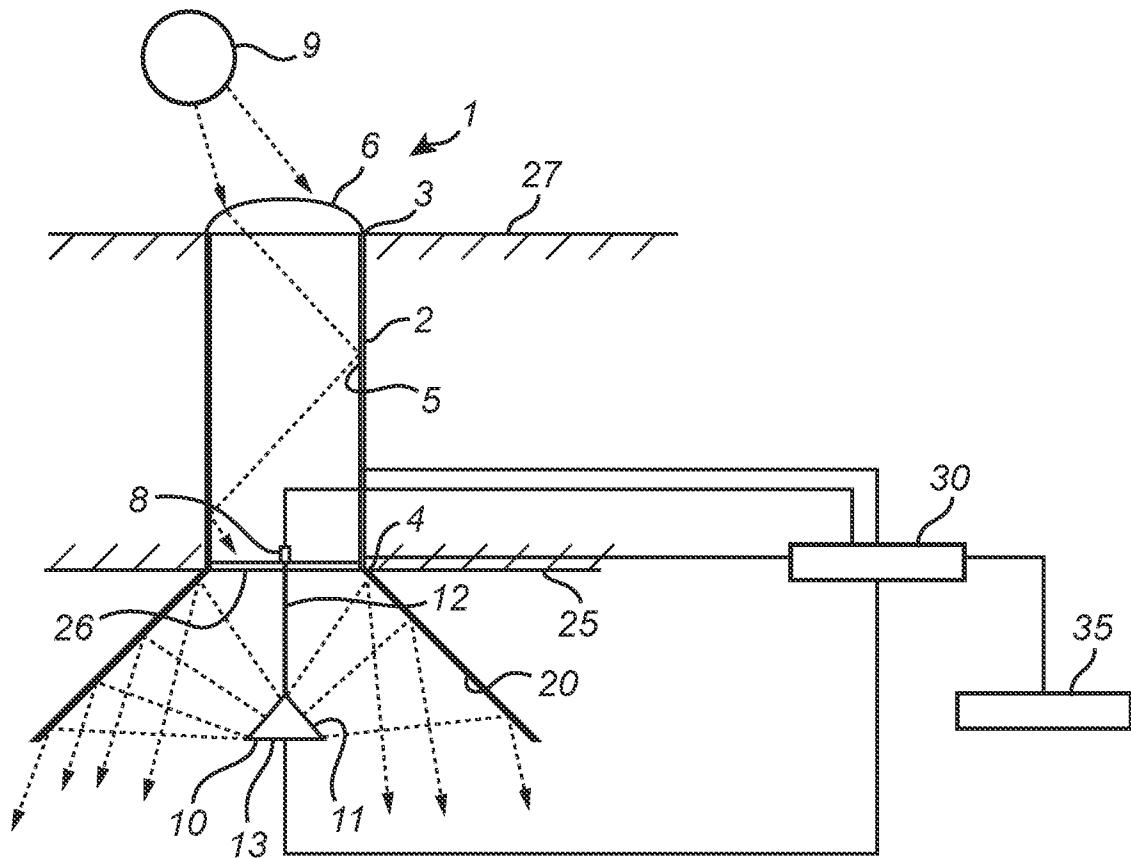


Fig. 1

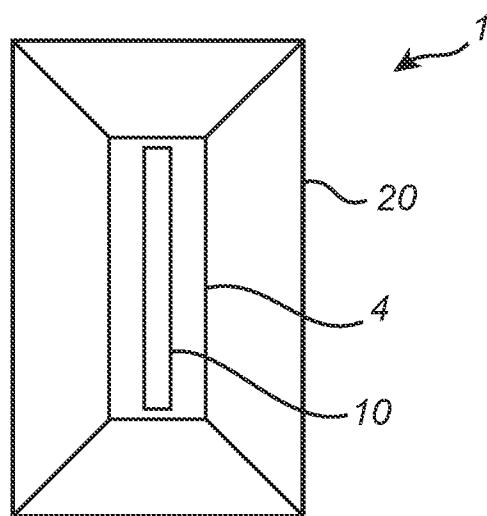


Fig. 2

2/3

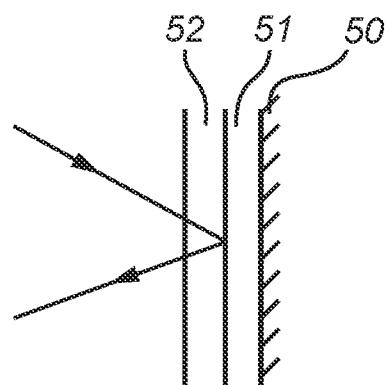


Fig. 3

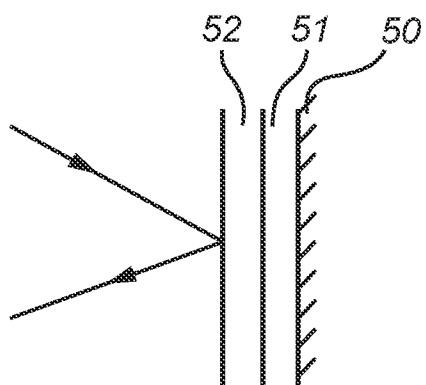


Fig. 4

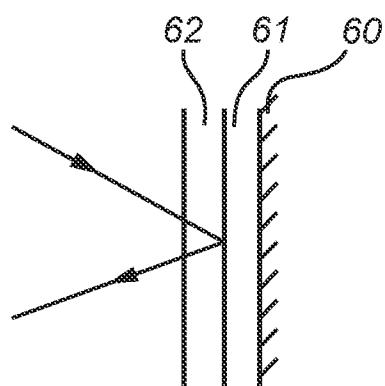


Fig. 5

3/3

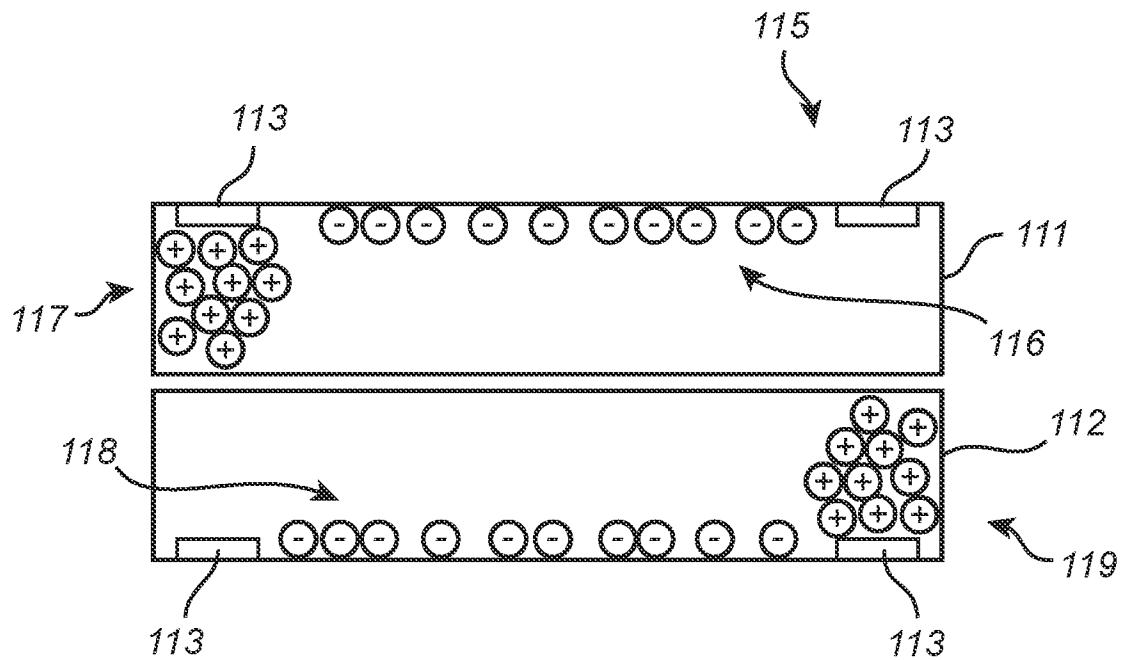


Fig. 6

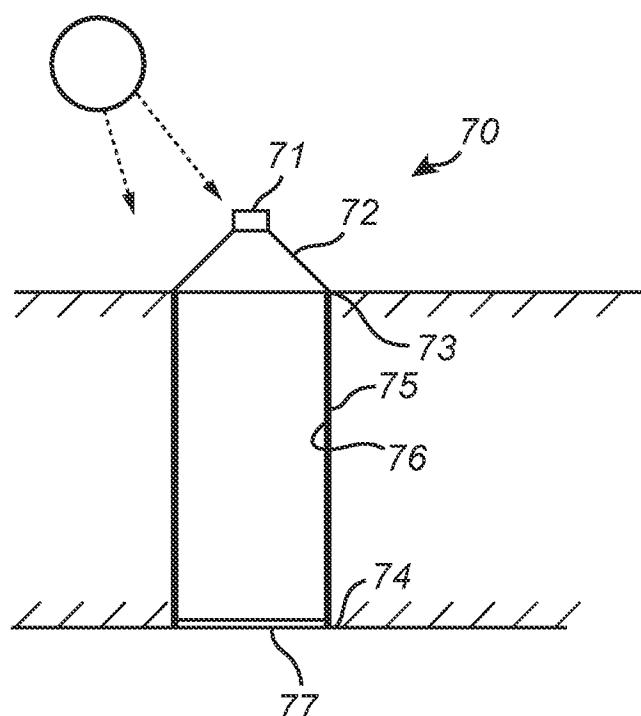


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2014/058135

A. CLASSIFICATION OF SUBJECT MATTER
INV. F21S19/00 F21V14/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F21S F21V

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2012/169953 A1 (KATAOKA SHOEI [JP] ET AL) 5 July 2012 (2012-07-05) paragraphs [0103], [0104] figures 3b, 3c	1-7
Y	----- US 2012/162964 A1 (HIKMET RIFAT ATA MUSTAFA [NL] ET AL) 28 June 2012 (2012-06-28) paragraphs [0034], [0035] figure 2b	8-13
X	----- WO 2009/087583 A1 (KONINKL PHILIPS ELECTRONICS NV [NL]; HIKMET RIFAT A M [NL]; VAN BOMMEL) 16 July 2009 (2009-07-16) page 4, lines 3-6 figure 4	1-7
Y	----- figure 2b	8-13
A	----- WO 2009/087583 A1 (KONINKL PHILIPS ELECTRONICS NV [NL]; HIKMET RIFAT A M [NL]; VAN BOMMEL) 16 July 2009 (2009-07-16) page 4, lines 3-6 figure 4	1-13
	----- - / --	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
24 February 2014	04/03/2014
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Amerongen, Wim

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2014/058135

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2011/053889 A2 (WEMMER JEFFREY M [US]) 5 May 2011 (2011-05-05)	8-13
A	paragraph [0025] figure 4 -----	1-7
Y	EP 2 369 087 A1 (SOL TECNIC ECOLOGIC 2000 S L [ES]) 28 September 2011 (2011-09-28)	8-13
A	paragraph [0020] figure 1a -----	1-7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/IB2014/058135

Patent document cited in search report	Publication date	Patent family member(s)			Publication date
US 2012169953	A1 05-07-2012	CN 102498340 A JP 5227460 B2 KR 20120062803 A US 2012169953 A1 WO 2011030578 A1			13-06-2012 03-07-2013 14-06-2012 05-07-2012 17-03-2011
US 2012162964	A1 28-06-2012	CA 2774229 A1 CN 102549335 A EP 2478291 A1 JP 2013505533 A KR 20120081153 A RU 2012115108 A TW 201116778 A US 2012162964 A1 WO 2011033431 A1			24-03-2011 04-07-2012 25-07-2012 14-02-2013 18-07-2012 27-10-2013 16-05-2011 28-06-2012 24-03-2011
WO 2009087583	A1 16-07-2009	NONE			
WO 2011053889	A2 05-05-2011	US 2011103088 A1 US 2013343078 A1 WO 2011053889 A2			05-05-2011 26-12-2013 05-05-2011
EP 2369087	A1 28-09-2011	EP 2369087 A1 ES 1069400 U US 2011242810 A1 WO 2010070169 A1			28-09-2011 16-03-2009 06-10-2011 24-06-2010